


# General Purpose Miniature Probes With Miniature Connector

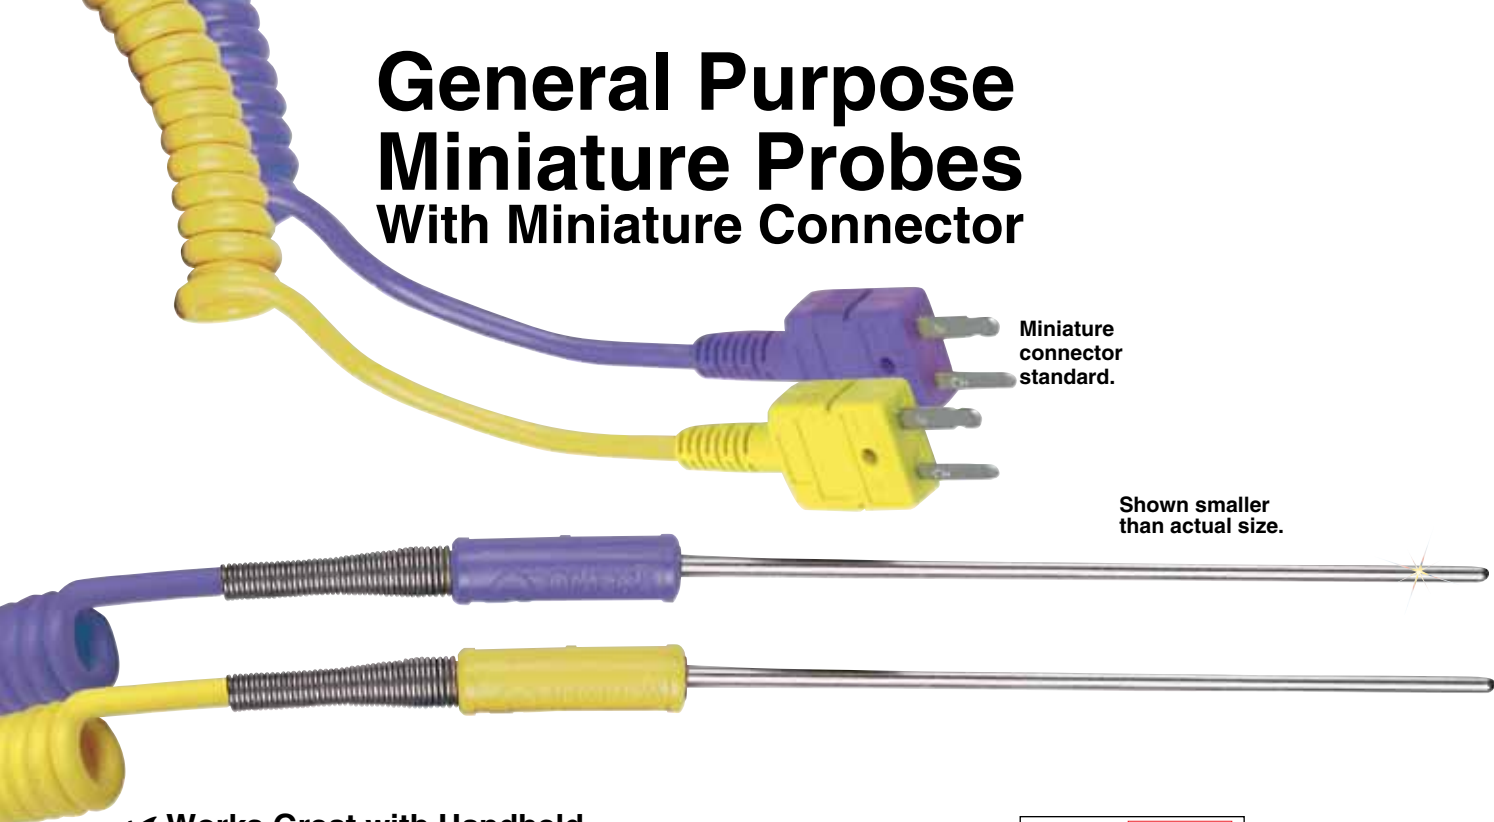

Miniature connector standard.

Shown smaller than actual size.

- ✓ Works Great with Handheld Instruments
- ✓ 150 mm (6") Length Standard†
- ✓ 3.2 mm (1/8") OD 304 Stainless Steel Sheath
- ✓ Molded Junction Rated to 220°C (425°F)
- ✓ Color-Coded to Calibration
- ✓ 300 mm (12") Retractable Cable Expands to 1.2 m (48")
- ✓ SMPW Male Connector Termination
- ✓ Grounded Junction



The molded miniature probe conveniently plugs directly in to most handheld thermocouple meters. The color-coded retractable cable will stretch from 300 mm (12") to 1.2 m (48"). Ideal for use with handheld meters, the grounded junction probes are also suited for applications with benchtop meters and with oscillating machines. Available in calibration codes J, K, T and E.

**Very Popular System Shown!**



KTSS-HH probe with the HH11B handheld digital thermometer. Please visit [omega.com/hh11b](http://omega.com/hh11b) for complete details.

To Order visit <a href="http://omega.com/jtss-hh">omega.com/jtss-hh</a> for Pricing and Details		
Thermocouple Alloy		Model No. ANSI Color Code
Iron-Constantan	J	JTSS-HH
CHROMEGA®-ALOMEGA®	K	KTSS-HH
CHROMEGA®-Constantan	E	ETSS-HH
Copper-Constantan	T	TTSS-HH

**Note:** Hot end junction grounded.

† Other lengths are available, consult Sales Department

**Ordering Example:** KTSS-HH is a Type K thermocouple probe, 150 mm (6") long, 3.2 mm (1/8") dia with 1' of RSC cable (which stretches to 5') with a molded, miniature male thermocouple connectors.