

TeSys™ IEC-Style Contactors and Starters

Catalog

04

File 8502



CONTENTS

| Description | Page |
|---|------|
| TeSys IEC Contactors and Starters Selection Guide | 3 |
| TeSys K-line Mini-contactors, Overload Relays, and Accessories | 37 |
| TeSys D-line Contactors, Enclosed Starters Overload Relays, and Accessories | 77 |
| TeSys F-line Contactors, Overload Relays, and Accessories | 179 |
| Catalog Number Index | 247 |



TeSys™ IEC-Style Contactors and Starters Selection Guide

Catalog

04

File 8502



CONTENTS

| Description | Page |
|--|------|
| Technical Information | |
| Product Standards | 4 |
| Product Approvals | 6 |
| Protective Treatment According to Climatic Environment | 10 |
| Degrees of Protection | 12 |
| Kilowatt Motor Ratings | 14 |
| Horsepower Motor Ratings | 15 |
| Contactor Selection Guide | |
| Definitions of Utilization Categories | 16 |
| Contactor Selection Guide for Utilization Category AC-3 | 18 |
| Contactor Selection Guide for Utilization Category AC-1 | 22 |
| Contactor Selection Guide for Utilization Category AC-2 and AC-4 | 24 |
| Contactor Selection Guide for Utilization Category DC-1 to DC-5 | 28 |
| Voltage Code Table | 32 |
| Definitions and Comments | 36 |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Product Standards

Conformity to Standards

The Telemecanique D-Line, F-line, and K-line contactors, overload relays and accessories satisfy most national, European, and international standards for promoting worldwide product acceptance. These product standards precisely define the performance of the designated products (such as IEC 60947 for low voltage equipment).

When used correctly, as designated by the manufacturer and in accordance with the regulations and rules of the art, these products will allow assembled equipment, machine systems or installations to conform to their appropriate standards (for example: IEC 60204, relating to electrical equipment used on industrial machines).

Telemecanique is able to provide proof of conformity of its production, in accordance with the standards selected by ourselves, due to our quality assurance system. On request, and depending on the situation, Telemecanique can provide the following:

- A declaration of conformity.
- A certificate of conformity (ASEFA/LOVAG).
- An approval certificate or agreement, in the countries where this procedure is required or for particular specifications, such as those existing in the merchant marine.

| Code | Standards Body - Name | Abbreviation | Country |
|---------|---|--------------|---------------|
| ANSI | American National Standards Institute | ANSI | USA |
| BS | British Standards Institution | BSI | Great Britain |
| CEI | Comitato Electrotecnico Italiano | CEI | Italy |
| DIN/VDE | Verband Deutscher Electrotechniker | VDE | Germany |
| EN | Comité Européen de Normalisation Electrotechnique | CENELEC | Europe |
| GOST | Gosudarstvenne Komitet Standartov | GOST | Russia |
| IEC | International Electrotechnical Commission | IEC | Worldwide |
| JIS | Japanese Industrial Standard | JISC | Japan |
| NBN | Institut Belge de Normalisation | IBN | Belgium |
| NEN | Nederlands Normalisatie Instituut | NNI | Netherlands |
| NFC | Union Technique de l'Electricité | UTE | France |
| SAA | Standards Association of Australia | SAA | Australia |
| UNE | Instituto Nacional de Racionalizacion y Normalizacion | IRANOR | Spain |

European EN Standards

This is a group of technical specifications established in conjunction with, and approval of, the relative bodies within the various CENELEC member countries (EEC and EFTA). Arrived at by the principal of consensus, the European standards are the result of a majority vote. Such adopted standards are then integrated into the national collection of standards, and contradictory national standards are withdrawn. The European standards are now incorporated within the French standards and carry the prefix NF EN. Under the "Technical Union of Electricity" (UTE), the French version of the corresponding European standard carries a double notation: European reference (NF EN ...) and classification (C ...).

In addition, the standard NF EN 60947-4-1 relating to motor contactors and starters, effectively constitutes the French version of the European standard EN 60947-4-1 and carries the UTE classification C 63-110. This standard is identical to the British standard BS EN 60947-4-1 and the German standard DIN VDE 0660 Teil 102. Whenever reasonably practical, European standards reflect international standards (IEC).

For automation system components and distribution equipment, Telemecanique supplements the requirements of the French NF standards with those necessary for all other major industrial countries.

European Directives

The opening of the European market assumes a harmonization of the regulations pertaining to each member country of the European Community. The purpose of the European Directive is the elimination of obstacles hindering the free circulation of goods within the European Community, and its application applies to each member country.

Member countries are obliged to transcribe each Directive into their national legislation and to simultaneously withdraw any contradictory regulation. The Directives, in particular those of a technical content concerning us here, only establish the objectives to be obtained and are referred to as "essential requirements."

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Product Standards

The manufacturer is obliged to ensure that all measures are taken to provide conformity to the regulations of the particular Directive applicable to his product. As a general rule, the manufacturer certifies conformity to the essential requirements of the Directive(s) for the product by affixing a CE marking. The CE marking will be affixed to Telemecanique products progressively throughout the transition period, as defined by the French and European regulations.

Significance of the CE marking:

- The CE marking is affixed to a product to signify that the manufacturer certifies that the product conforms to the relevant European Directive(s) and is obligatory for a product, subject to one or more of the European Directives, before it can be freely distributed within the European Community.
- The CE marking is intended solely for national market control authorities.
- The CE marking must not be confused with a conformity marking.

For electrical equipment, only conformity to standards signifies that the product is suitable for its designated function, and only the guarantee of an established manufacturer can provide a high level of quality assurance. For Telemecanique labelled products, one or several Directives are liable to be applied, in particular:

- The Low Voltage Directive 73/23/EEC amended by the Directive 93/68/EEC: the CE marking relating to this Directive could not be affixed before 1 January 1995 but was obligatory as of January 1, 1997.
- The Electromagnetic Compatibility Directive 89/336/EEC, amended by the Directives 92/31/EEC and 93/68/EEC: the CE marking on products covered by this Directive is obligatory from 1 January 1996.

ASEFA-LOVAG Certification

The function of ASEFA (Association des Stations d'Essais Française d'Appareils électriques — Association of French Testing Stations for Low Voltage Industrial Electrical Equipment) is to carry out tests for conformity to standards and to issue certificates and test reports. ASEFA laboratories are authorized by the National Testing Network (RNE).

ASEFA is now effectively a member of the European accord group LOVAG (Low Voltage Agreement Group). This means that any certificates issued by LOVAG/ASEFA are recognized by all the authorities forming the membership of the group and carry the same validity as those issued by any of the member authorities.

Quality Labels

When components can be used in domestic and similar applications, it is sometimes necessary to obtain a "quality label," which is a form of certification of conformity.

| Code | Quality Label | Country |
|-----------|--|-------------|
| CEBEC | Comité Electrotechnique Belge | Belgium |
| KEMA-KEUR | Keuring van Electrotechnische Materialen | Netherlands |
| NF-USE | Union Technique de l'Electricité | France |
| ÖVE | Österreichischer Verband für Electrotechnik | Austria |
| SEMKO | Svenska Elektriska Materiel Kontrollnatalten | Sweden |

Approvals



In some countries, the approval of certain electrical equipment is required by law. In this case, an approval certificate is issued by the official test authority. Each approved component must bear the relevant quality label when this is mandatory.

| Code | Approval Authority | Country |
|-------|---|-------------|
| ASE | Association Suisse des Electriciens | Switzerland |
| CSA | Canadian Standards Association | Canada |
| DEMKO | Danmarks Elektriske Materielkontrol | Denmark |
| FI | Sähkötarkastuskeskus Elinspektions Centralen (SETI) | Finland |
| NEMKO | Norges Elektriske Materielkontroll | Norway |
| UL | Underwriters Laboratories Inc. | USA |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Product Approvals

Note on approvals issued by the Underwriters Laboratories Inc. (UL) that there are two levels of approval:

| Level of Approval | Symbol | Description |
|-------------------|---|---|
| "Recognized" |  | The component is fully approved for inclusion in equipment built in a workshop, where the operating limits are known by the equipment manufacturer, and where its use within such limits is acceptable by Underwriters Laboratories Inc. The component is not approved as a "product for general use" because its manufacturing characteristics are incomplete or its application possibilities are limited. A "Recognized" component does not necessarily carry the approval symbol. |
| "Listed" |  | The component conforms to all the requirements of the classification applicable to it and may therefore be used both as a "product for general use" and as a component in assembled equipment. A "Listed" component must carry the approval symbol. |

Marine Classification Authorities



















Prior approval by certain marine classification authorities is generally required for electrical equipment which is intended for use on board merchant vessels.

| Code | Classification authority | Country |
|------|------------------------------|---------------|
| BV | Bureau Veritas | France |
| DNV | Det Norske Veritas | Norway |
| GL | Germanischer Lloyd | Russia |
| LROS | Lloyd's Register of Shipping | Great Britain |
| NKK | Nippon Kaiji Kyokai | Japan |
| RINA | Registro Italiano Navale | Italy |
| RRS | Register of Shipping | Russia |

Product Approvals

The table below shows the approvals obtained or pending with the various approvals authorities as of 5/15/1995. For more detailed information, please consult your Local Square D Field Sales Office.


















Existing and Pending Approval of Automation System Components (except control and signalling units)

| Standard Version X: Approved O: Approval pending Special Version +: Approved Ø: Approval pending | Approvals | | | | | | Marine Classification Authorities | | | | | | | | Quality Labels | | | |
|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|---|--|
| |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | |
| | Switzerland | Canada | Denmark | Finland | Norway | U.S.A.  | France | Norway | Germany | Great Britain | Japan | Italy | CIS | Netherlands | France | Austria | Sweden | |
| AB1BB, AB1BC | X | X | | X | X | X | | X | | | | | X | X | | | | |
| AB1BD | X | | | | | | | | | | | | X | | | | | |
| AB1DV | X | X | | | | X | | | | | | | X | | | | | |
| AB1FU | X | X | X | | X | X | | X | | | | | X | | | | | |
| AB1FV | X | X | | | X | X | | | | | | | X | | | | | |
| AB1NE, AB1SE | X | X | | X | X | X | | | | | | | X | | | | | |
| AB1SV | | X | | | | X | | | | | | | X | | | | | |
| AB1TP | X | X | | X | X | X | | X | X | X | | X | X | X | | | X | |
| AB1TR | X | | | | | | | | | | | | X | | | | X | |
| AB1VV | X | X | X | X | X | X | | X | X | X | | X | X | X | | X | X | |
| AB3RV | | X | | | | | | | | | | | | | | | | |
| ABA6, ABE6R | | O | | | | X | | | | | | | | | | | | |
| ABR1, ABR2 | | X | | | | X | X | X | X | | | | | | | | | |
| ABS1 | | | | | | | X | X | X | | | | | | | | | |
| ABS2 | | X | | | | X | X | X | X | | | | | | | | | |
| AK2BA01 | X | | | | | | | | | | | | | | | | | |
| AK2BA162U | | X | | | | X | | | | | | | | | | | | |
| AK2SB | X | | | | | | | | | | | | | | | | | |
| AK3JB4 (CMD) | X | X | | | | X | X | X | X | X | O | | | | | X | | |
| AK3JB8 (CMD) | X | X | | | | X | | | X | X | O | | | | | X | | |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Product Approvals


















Existing and Pending Approval of Automation System Components (except control and signalling units)

| Standard Version X: Approved O: Approval pending Special Version +: Approved Ø: Approval pending | Approvals | | | | | | | Marine Classification Authorities | | | | | | | Quality Labels | | | |
|---|---|---|---|---|---|---|--------|---|---|---|--|---|---|---|---|---|---|---|
| |  |  |  |  |  |  | |  |  |  |  |  |  |  |  |  |  |  |
| | ASE | CSA | DEMKO | FI | NEMKO | UL U.S.A. | | BV | DNV | GL | LROS | NKK | RINA | RRS | KEMA | NF | ÖVE | SEMKO |
| Switzerland | Canada | Denmark | Finland | Norway | U.S.A. | | France | Norway | Germany | Great Britain | Japan | Italy | CIS | Netherlands | France | Austria | Sweden | |
| AK5 | | X | | | X | | X | | X | | X | | | | | | | |
| ATP | | O | | | | | X | | | | | | | | | | | |
| ATS23 | | X | | | | | X | | | | | | | | | | | |
| ATV16, ATV66 | | X | | | | | X | | | | | | | | | | | |
| CA2D | X | X | X | X | X | | X | X | X | | | | X | | | | | X |
| CA2KN | X | X | X | | | | X | O | O | O | O | | O | O | | | | X |
| CA3D | X | X | X | | X | | X | X | X | | | | X | | | | | X |
| CA3KN | X | X | | | | | X | O | O | O | O | | O | O | | | | X |
| CA4D | X | X | | X | | | X | X | | | | | X | | | | | X |
| CA4KN | X | X | X | | | | X | O | O | O | O | | O | O | | | | X |
| CCX 17 | | O | | | | | X | | O | | | | | | | | | |
| DF6 | | | | | | | | | | | | | | | X | | | |
| DK1 | | | | | | | | X | | | | | X | | | | | |
| FTX 417 | | O | | | | | X | | | | | | | | | | | |
| FTX 117 | | O | | | | | O | | | | | | | | | | | |
| GB2CB | X | X | | | X | X | | | | | | | | | | | X | |
| GB2CD | | | | | X | X | | | | | | | | | | | | |
| GC1■ | | | X | | X | | | | | | | | | X | X | X | X | |
| GC3 | | | | | X | | | | | | | | | | X | | | |
| GD2 | | | | | X | | | | | | | | | | | | | |
| GV2M■ | | X | X | | X | | X | X | X | X | X | | | X | | | O | X |
| GV2P | | X | | | | | X | | | | | | | | | | | |
| GV3 | | X | | | | | X | | | | X | | | | | | X | |
| GV7R | | X | | | | | X | O | O | O | O | | O | | | | | |
| GY1■ | | | | | X | | | | | | | | | | | X | X | |
| GY3 | | | | | X | | | | | | | | | | X | | | |
| LA1D | X | X | X | | X | | X | X | X | O | O | | X | X | | | | X |
| LA1KN | | X | X | | | | X | O | O | O | O | | O | O | | | | X |
| LA1LB | | X | | | X | | X | O | X | O | O | | X | | | | | X |
| LA1LC | | X | X | X | X | | X | X | X | X | X | X | X | X | | | | |
| LA2D, LA3D | | X | X | | X | | X | X | X | O | X | | X | X | | | | X |
| LA2K, LA4K | | X | | | | | X | O | O | O | O | | O | O | | | | |
| LA4D | X | X | | | | | X | X | | O | O | | X | X | | | | |
| LA8D | X | X | | X | X | | X | X | | O | O | | X | X | | | | |
| LB•LB | X | X | X | X | X | | X | O | X | O | O | | X | O | | | X | X |
| LB•LC | | X | X | | X | | X | X | X | X | X | X | X | X | | | | |
| LB•LD | X | X | | X | | | X | X | X | X | | X | X | X | | | | |
| LC1D | X | X | X | X | X | | X | X | X | O | O | | X | X | | | | X |
| LC2D | X | X | | | | | X | X | X | O | O | | X | X | | | | |
| LC1F | X | X | | | | | X | X | X | O | O | | X | X | | | | |
| LC1K | | X | X | | | | X | X | O | O | O | | O | O | | | | X |
| LC2F | | X | | | | | X | X | X | O | O | | X | X | | | | |
| LC2K, LC7K, LC8K | | X | | | | | X | X | O | O | O | | O | O | | | | |
| LD1LB | X | X | X | X | X | | X | O | X | O | O | | X | | | | | X |
| LD1LC | X | X | X | | | | X | X | X | X | X | X | X | X | | | | |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Product Approvals

Existing and Pending Approval of Automation System Components (except control and signalling units)

| Standard Version X: Approved O: Approval pending Special Version +: Approved Ø: Approval pending | Approvals | | | | | | Marine Classification Authorities | | | | | | | | Quality Labels | | | |
|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|---|--|
| |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | |
| | ASE | CSA | DEMKO | FI | NEMKO | UL | BV | DNV | GL | LROS | NKK | RINA | RRS | KEMA | NF | ÖVE | SEMKO | |
| | Switzerland | Canada | Denmark | Finland | Norway | U.S.A. | France | Norway | Germany | Great Britain | Japan | Italy | CIS | Netherlands | France | Austria | Sweden | |
| LD1LD | X | X | | | | X | X | X | | X | X | X | X | | | | | |
| LD4LC | X | X | X | X | X | X | X | X | X | X | X | X | X | | | X | | |
| LD4LD | X | X | | X | X | X | X | X | X | X | X | X | X | | | | | |
| LD5LB | | X | | | | X | O | X | O | O | | X | O | | | | | |
| LD5LC | X | X | | | | X | | | X | X | X | X | X | | | X | | |
| LD5LD | X | X | | | | X | | | X | | X | X | X | | | | | |
| LE1D | X | X | | | | | X | | | | | | | | | | | |
| LN1D | | X | | X | | X | | | | | | | X | | | | | |
| LP1D | X | X | X | X | X | X | X | X | O | X | | | X | | | | | |
| LP1K | | X | | | | X | X | O | O | O | | O | O | | | | | |
| LP2D | X | X | | | | X | X | X | O | O | | | X | | | | | |
| LP2K | | X | | | | X | X | O | O | O | | O | O | | | | | |
| LP4D | X | X | | X | | X | X | | O | O | | | | | | | | |
| LP4K | | X | X | | | X | X | O | O | O | | O | O | | | | | |
| LP5D | X | X | | | | X | X | | O | O | | | | | | | | |
| LP5K | | X | | | | X | X | O | O | O | | O | O | | | | | |
| LR1F | X | X | | | | X | X | X | X | X | | X | X | | | | | |
| LR2D | X | X | X | X | X | X | X | X | O | O | | X | X | | | | | |
| LR2F | X | X | | | | X | X | X | O | O | | X | X | | | | | |
| LR2K | | X | | | | X | O | O | O | O | | O | O | | | | | |
| LR9F | | X | | | | X | | | | | | | | | | | | |
| LS1D | | | | | | | X | | | | | | | | | | | |
| LT2S | X | X | | | | | X | | | | | | | | | | | |
| LT7F | X | X | | | | X | | | | | | | | | | | | |
| LT8 | X | X | | | | | | X | | | | | | | | | | |
| RE1LA, RE1LC | | X | | | X | | X | | | | | | | | | | | |
| RE4, RE5 | | X | | | | X | | | X | | | | | | | | | |
| RH+ | | X | | | | X | | | X | | | | X | | | | | |
| RM1XA | | X | | | | | | | | | | | | | | | | |
| RM3 | | X | | | | X | | | X | | | | | | | | | |
| RS1, RS2 | | | | | | | | | | | | | | | | | | |
| RTV74, RTV84 | | O | | | | O | | | | | | | | | | | | |
| RXN, RUW | | O | | | | O | | | O | | | | | | | | | |
| TSX 07 | | X | | | | X | | O | | | | | | | | | | |
| TSX 1710/20 | | X | | | | X | X | X | X | | | X | X | | | | | |
| K1, K2 | | X | | | | X | | X | X | | X | | X | | | | | |
| XA2B, BV, BW | | X | | | | X | | | | | | | | | | | | |
| XACA (small hoist) | | X | X | | X | X | | | | X | X | X | | | | | | |
| XACA (all applications) | | + | X | | X | + | | | | X | X | X | | | | | | |
| XACB | | X | | | X | | | | | | | | | | | | | |
| XACM | | X | | | | | | | | | | | | | | | | |
| XALB, XALJ, XALN | | + | | X | X | + | | X | | | | | X | | | | | |
| XAPA | | + | | X | | | | X | | X | | | X | | | | | |
| XAPM | | + | | X | | + | | X | X | X | | | X | | | | | |
| XASE, XASP | | | | | X | | | | | | | | | | | | | |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Product Approvals

Existing and Pending Approval of Automation System Components (except control and signalling units)

| Standard Version X: Approved O: Approval pending Special Version +: Approved Ø: Approval pending | Approvals | | | | | | | Marine Classification Authorities | | | | | | | Quality Labels | | | |
|---|-----------|---------|---------|--------|--------|----|--------|-----------------------------------|---------|---------------|-------|-------|------|-------------|----------------|---------|--------|-------|
| | | | | | | | | | | | | | | | | | | |
| | ASE | CSA | DEMKO | FI | NEMKO | UL | | BV | DNV | GL | LROS | NKK | RINA | RRS | KEMA | NF | ÖVE | SEMKO |
| Switzerland | Canada | Denmark | Finland | Norway | U.S.A. | | France | Norway | Germany | Great Britain | Japan | Italy | CIS | Netherlands | France | Austria | Sweden | |
| XBLA | | X | | | | | X | | | | | | | | | | | |
| XBTA, XBTK, KL, KN | | X | | | | | X | X | X | | | | | | | | | |
| XBTB, XBTC | | + | | | | | + | | | | | | | | | | | |
| XBTH, XBTP, XBTE, XBTHM | | X | | | | | X | | | | | | | | | | | |
| XBTM, ML | | X | | | | | X | O | X | | | | | | | | | |
| XBTV | | + | | | | | + | | | | | | | | | | | |
| XB2B (pushbuttons) | | X | | X | X | X | X | X | X | X | X | | | X | | | | X |
| XB2BV, BW (direct) (via transformer) | | X | X | X | X | X | X | X | X | X | X | | | X | | | | X |
| XB2BV, BW (reducer) | | X | X | X | X | X | X | X | X | X | X | | | X | | | | |
| XB2EV | | X | | | | | X | | | | | | | | | | | |
| XB2M (pushbuttons) | | X | X | X | X | | X | X | | X | | | | X | | | | |
| XB2MW (direct) (via transformer) | | + | X | X | X | | + | | | X | | | | X | | | | |
| XDA, XDL | | X | | | | | X | | | | | | | | | | | |
| XD2A, XD2C, XD2E | | + | X | | | | | | | X | | | | | | | | |
| XD2PA, XD2GA | | X | | | | | X | | | | X | | | | | | | |
| XPEA | | | | X | | | | | | | | | | | | | | |
| XPEM | | + | | X | | | | | | | | | | | | | | |
| XVAC, XVAL | | X | | | | | X | | | | | | | | | | | |
| XVLA | | X | | | | | X | | | | | | | | | | | |
| XY2CB, XY2CH | | X | | | | | | | | | | | | | | | | |
| XY2CE | | + | | | | | + | | | | | | | | | | | |
| ZA2VA | | X | | | | | X | | | | | | | | | | | |
| ZB2MW (direct) (via transformer) | | + | X | X | X | | + | | | X | | | | X | | | | |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Protective Treatment / Climatic Environment

Depending on the climatic and environmental conditions in which the equipment is placed, Telemecanique can offer specially adapted products to meet your requirements.

In order to make the correct choice of protective finish, two points should be remembered:

- The prevailing climate of the country is never the only criterion.
- Only the atmosphere in the immediate vicinity of the equipment should be considered.

“TC” Treatment for All Climates

“TC” is the standard treatment for Telemecanique equipment and is suitable for the vast majority of applications. It is the equivalent of treatments described as “Klimafest,” “Climateproof,” “Total Tropicalization,” or “Super Tropicalization,” and meets the following requirements:

- Publication UTE C 63-100 (method I), successive cycles of humid heat at + 40 °C (104 °F) and 95% relative humidity.
- DIN 50016 — Variations of ambient conditions within a climatic chamber:
 - + 23 °C (73 °F) and 83% relative humidity,
 - + 40 °C (104 °F) and 92% relative humidity.

It also meets the requirements of the marine classification authority BV-LROS-GL-DNV-RINA.

Characteristics

- Steel components are usually treated with zinc chromate and, when they have a mechanical function, they may also be painted.
- Insulating materials are selected for their high electrical, dielectric and mechanical characteristics.
- Metal enclosures have a stoved paint finish, applied over a primary phosphate protective coat, or are galvanized (for example, some prefabricated busbar trunking components).

Limits for Use of “TC” (All Climates) Treatment

- “TC” treatment is suitable for the following temperatures and humidity:

| | | | |
|--------------------------|---------------|----------------|----------------|
| Temperature | 20 °C (68 °F) | 40 °C (104 °F) | 50 °C (122 °F) |
| Relative Humidity | 95% | 80% | 50% |

- It may also be used where the above limits are only exceeded accidentally or for very short periods, or where temperature variations are not sufficient or fast enough to cause heavy condensation or dripping water on the equipment. “TC” treatment is therefore suitable for all latitudes, including tropical and equatorial regions, where the equipment is mounted in normal, ventilated industrial locations. Being sheltered from external climatic conditions, temperature variations are small, the risk of condensation is minimized, and the risk of dripping water is virtually non-existent.

Extension of Use of “TC” (All Climates) Treatment

In cases where the humidity around the equipment exceeds the conditions described above, where the equipment (in tropical regions) is mounted outdoors, or where it is placed in a very humid location (laundries, sugar refineries, steam rooms, and so forth), “TC” treatment can still be used if the following precautions are taken:

- The enclosure in which the equipment is mounted must be protected with a “TH” finish (see page 11) and must be well ventilated to avoid condensation and dripping water (for example, enclosure base plate mounted on spacers).
- Components mounted inside the enclosure must have a “TC” finish.
- If the equipment is to be switched off for long periods, a heater must be provided (0.2 to 0.5 kW per square decimeter / 15.5 square inch of enclosure), switched on automatically when the equipment is turned off. This heater keeps the inside of the enclosure at a temperature slightly higher than the outside surrounding temperature, thereby avoiding any risk of condensation and dripping water (the heat produced by the equipment itself in normal running is sufficient to provide this temperature difference).

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Protective Treatment / Climatic Environment

- For pilot devices, the use of “TC” treatment can be extended to outdoor use provided the enclosure is made of light alloys, zinc alloys, or plastic material. In this case, it is essential to ensure that the degree of protection against penetration of liquids and solid objects is suitable for the applications involved.

“TH” Treatment for Hot and Humid Environments

This treatment is for hot and humid atmospheres where installations are subject to condensation, dripping water, and the risk of fungi.

Plastic insulating components are also resistant to attacks from insects such as termites and cockroaches. These properties have led to this treatment being described as “Tropical Finish,” but this does not mean that all equipment installed in tropical and equatorial regions must have undergone “TH” treatment. On the other hand, certain operating conditions in temperate climates may well require the use of “TH”-treated equipment (see the Limits for Use of “TC” Treatment section on page 10).

The following are special characteristics of “TH” treatment:

- All insulating components are made of materials which are either resistant to fungi or treated with a fungicide, having increased resistance to creepage (Standards IEC 112, NF C 26-220, DIN 5348).
- Metal enclosures receive a top-coat of baked, fungicidal paint, applied over a rust inhibiting undercoat. Components with “TH” treatment may be subject to a surcharge (a large number of Telemecanique products are “TH” treated as standard and are, therefore, not subject to a price surcharge). Please consult our local representatives or agents.

| Protective Treatment Selection Guide | | | | | | |
|--------------------------------------|--|---|---|-----------------|-------------------------|-----------|
| Location | Environmental Conditions | Duty Cycle | Internal Heating of Enclosure when Not in Use | Type of Climate | Protective Treatment of | |
| | | | | | Components | Enclosure |
| Indoors | No dripping water or condensation | Unimportant | Unnecessary | Unimportant | “TC” | “TC” |
| | Presence of dripping water or condensation | Frequent switching off for periods of more than 1 day | No | Temperate | “TC” | “TH” |
| | | | Yes | Equatorial | “TH” | “TH” |
| | | Continuous | Unimportant | Unimportant | “TC” | “TH” |
| Outdoors (sheltered) | No dripping water or dew | Unimportant | Unnecessary | Temperate | “TC” | “TC” |
| | | | | Equatorial | “TH” | “TH” |
| Exposed outdoors, or near the sea | Frequent and regular presence of dripping water or dew | Frequent switching off for periods of more than 1 day | No | Temperate | “TC” | “TH” |
| | | | Yes | Equatorial | “TH” | “TH” |
| | | Continuous | Unimportant | Unimportant | “TC” | “TH” |

These treatments cover, in particular, the applications defined by methods I and II of guide UTE C 63-100.

Special Precautions for Electronic Equipment

Electronic products always meet the requirements of “TC” treatment. A number of them are “TH”-treated as standard.

Some electronic products (for example, programmable controllers, flush-mountable controllers CCX, and flush-mountable operator terminals XBT) necessitate the use of an enclosure providing a degree of protection to at least IP 54 (as defined by the standards IEC 60664 and NF C 20 040) for use in industrial applications or in environmental conditions requiring a “TH” treatment.

These electronic products, including flush-mountable products, must have a degree of protection to at least IP 20 (either provided by the enclosure itself or following installation) for restricted access locations where the degree of pollution does not exceed 2 (a test booth not containing machinery or other dust producing activities, for example).

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Degrees of Protection

IEC Publication 60529 *Classification of Degrees of Protection Provided by Enclosures* provides a system for specifying the enclosures of electrical equipment on the basis of the degree of protection provided by the enclosure. IEC 60529 does not specify degrees of protection against mechanical damage of equipment, risk of explosions, or conditions such as moisture (produced, for example, by condensation), corrosive vapors, fungi, or vermin. NEMA Standards Publication 250, and UL 50 Standard does test for environmental conditions such as corrosion, rust, icing, oil, and coolants. For this reason, and because tests and evaluations for other characteristics are not identical, the IEC Enclosure Classification Designations cannot be exactly equated with NEMA Enclosure Type Numbers.

The IEC designation consists of the letters IP followed by, usually, two numerals (for example IP 55). The first characteristic numeral indicates the degree of protection provided by the enclosure with respect to persons and solid foreign objects entering the enclosure. The second characteristic numeral indicates the degree of protection provided by the enclosure with respect to the harmful ingress of water. See the tables below and on page 13 for what the two numbers mean.

In addition, a single-digit letter may follow the two numerals (for example, IP 20C). This letter indicates that the actual protection of personnel against direct contact with live parts is better than that indicated by the first numeral. So this example (IP 20C) indicates that the device is finger-safe (the '2') and tool-safe (the 'C') for tools 2.5 mm (or larger) in diameter. See the table on page 13 for what letters are permissible and what each indicates.

Finally, a third numeral may sometimes appear and corresponds to the degree of protection against mechanical impact. In accordance with standard NF C 20-010, the third numeral may either follow the two IP numerals (for example, IP 55-9) or be shown separately from the IP code. This numeral also corresponds to an external factor classification as defined in standard NF C 15-100. See the table on page 13 for what numbers are permissible and what each indicates.

NOTE: Any characteristic numeral which is unspecified is replaced by an X (for example, IP XXB).















IEC 60529 Classification Designations — First Characteristic Numeral

| First Characteristic Numeral | | Protection of the Equipment | Protection of Personnel |
|---|--|---|---|
| Corresponds to protection of the equipment against penetration of solid objects and protection of personnel against direct contact with live parts. | | | |
| 0 | | Not protected | Not protected |
| 1 | | Protected against the penetration of solid objects having a diameter greater than or equal to 50 mm (2"). | Protected against direct contact with the back of the hand (accidental contacts). |
| 2 | | Protected against the penetration of solid objects having a diameter greater than or equal to 12.5 mm (0.5"). | Protected against direct finger contact. |
| 3 | | Protected against the penetration of solid objects having a diameter greater than or equal to 2.5 mm (0.1"). | Protected against direct contact with a 2.5-mm (0.1") diameter tool. |
| 4 | | Protected against the penetration of solid objects having a diameter greater than 1 mm (0.04"). | Protected against direct contact with a 1mm (0.04") diameter wire. |
| 5 | | Dust-protected (no harmful deposits). | Protected against direct contact with a 1mm (0.04") diameter wire. |
| 6 | | Dust-tight. | Protected against direct contact with a 1mm (0.04") diameter wire. |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Degrees of Protection

IEC 60529 Classification Designations — Second and Third Characteristic Numerals

| Second Characteristic Numeral | | Additional Letter | Third Characteristic Numeral | | |
|---|--|--|---|---|---|
| Corresponds to protection of equipment against penetration of water with harmful effects. | | Corresponds to protection of personnel against direct contact with live parts. | Corresponds to the degree of protection against mechanical impact. This numeral also corresponds to an external factor classification as defined in standard NF C 15-100. | | |
| 0 | Non-protected | A | With the back of the hand. | 0 | Non-protected |
| 1 |  Protected against vertical dripping water (condensation). | B | With the finger. | 1 |  Impact energy: at least equal to 0.25 N·m (external classification factor AG1). |
| 2 |  Protected against dripping water at an angle of up to 15°. | C | With a 2.5-mm (0.1") diameter tool. | 2 |  Impact energy: at least equal to 0.375 N·m. |
| 3 |  Protected against rain at an angle of up to 60°. | D | With a 1mm (0.04") diameter wire. | 3 |  Impact energy: at least equal to 0.5 N·m. |
| 4 |  Protected against splashing water in all directions. | | | 5 |  Impact energy: at least equal to 0.5 N·m. |
| 5 |  Protected against water jets in all directions. | | | 7 |  Impact energy: at least equal to 6 N·m (external classification factor AG3). |
| 6 |  Protected against powerful jets of water and waves. | | | 9 |  Impact energy: at least equal to 20 N·m (external classification factor AG4). |
| 7 |  Protected against the effects of temporary immersion. | | | | |
| 8 |  Protected against the effects of prolonged immersion under specified conditions. | | | | |

The table below provides an equivalent conversion *from* NEMA Enclosure Type Numbers *to* IEC Enclosure Classification Designations. The NEMA Types meet or exceed the test requirements for the associated IEC Classifications; **for this reason this table cannot be used to convert from IEC Classifications to NEMA Types.**

Conversion of NEMA Type Numbers to IEC Classification Designations


(cannot be used to convert IEC Classification Designations to NEMA Type Numbers)

| NEMA Enclosure Type Number | IEC Enclosure Classification Designation | NEMA Enclosure Type Number | IEC Enclosure Classification Designation |
|----------------------------|--|----------------------------|--|
| 1 | IP10 | 4 and 4X | IP56 |
| 2 | IP11 | 5 | IP52 |
| 3 | IP54 | 6 and 6P | IP67 |
| 3R | IP14 | 12 and 12K | IP52 |
| 3S | IP54 | 13 | IP54 |

The comparison is based on tests specified in IEC Publication 60529, and is from NEMA Publication 250.

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Kilowatt Motor Ratings



The tables below provide the average full-load currents of squirrel cage motors in accordance with IEC conventions. These are given only as a guide — they may vary depending on the type of motor and manufacturer. Refer to the actual motor nameplate for full-load current values.

| Single-Phase Motors | | |
|---------------------|---------|---------|
| Power | 220 Vac | 240 Vac |
| Kilowatts | A | A |
| 0.37 | 3.9 | 3.6 |
| 0.55 | 5.2 | 4.8 |
| 0.75 | 6.6 | 6.1 |
| 1.1 | 9.6 | 8.8 |
| 1.5 | 12.7 | 11.7 |
| 1.8 | 15.7 | 14.4 |
| 2.2 | 18.6 | 17.1 |
| 3 | 24.3 | 22.2 |
| 4 | 29.6 | 27.1 |
| 4.4 | 34.7 | 31.8 |
| 5.2 | 39.8 | 36.5 |
| 5.5 | 42.2 | 38.7 |
| 6 | 44.5 | 40.8 |
| 7 | 49.5 | 45.4 |
| 7.5 | 54.4 | 50 |

| 3-Phase Motors, 50/60 Hz | | | | | | |
|--------------------------|---------|---------|---------|---------|---------|---------|
| Power | 230 Vac | 400 Vac | 415 Vac | 440 Vac | 500 Vac | 690 Vac |
| Kilowatts | A | A | A | A | A | A |
| 0.37 | 2 | 0.98 | – | 0.99 | 1 | – |
| 0.55 | 2.8 | 1.5 | – | 1.36 | 1.21 | – |
| 0.75 | 3.6 | 1.9 | 2 | 1.68 | 1.5 | – |
| 1.1 | 5.2 | 2.5 | 2.5 | 2.37 | 2 | – |
| 1.5 | 6.8 | 3.4 | 3.5 | 3.06 | 2.6 | – |
| 2.2 | 9.6 | 4.8 | 5 | 4.42 | 3.8 | – |
| 3 | – | 6.3 | 6.5 | 5.77 | 5 | 3.5 |
| 3.7 | 15.2 | – | – | – | – | – |
| 4 | – | 8.1 | 8.4 | 7.9 | 6.5 | 4.9 |
| 5.5 | 22 | 11 | 11 | 10.4 | 9 | 6.7 |
| 7.5 | 28 | 14.8 | 14 | 13.7 | 12 | 9 |
| 9 | – | 18.1 | 17 | 16.9 | 13.9 | 10.5 |
| 11 | 42 | 21 | 21 | 20.1 | 18.4 | 12.1 |
| 15 | 54 | 28.5 | 28 | 26.5 | 23 | 16.5 |
| 18.5 | 68 | 35 | 35 | 32.8 | 28.5 | 20.2 |
| 22 | 80 | 42 | 40 | 39 | 33 | 24.2 |
| 30 | 104 | 57 | 55 | 51.5 | 45 | 33 |
| 37 | 130 | 69 | 66 | 64 | 55 | 40 |
| 45 | 154 | 81 | 80 | 76 | 65 | 46.8 |
| 55 | 192 | 100 | 100 | 90 | 80 | 58 |
| 75 | 248 | 131 | 135 | 125 | 105 | 75.7 |
| 90 | 312 | 162 | 165 | 146 | 129 | 94 |
| 110 | 360 | 195 | 200 | 178 | 156 | 113 |
| 132 | – | 233 | 240 | 215 | 187 | 135 |
| – | 480 | 222 | 260 | 236 | 207 | – |
| 160 | – | 285 | 280 | 256 | 220 | 165 |
| – | 600 | – | – | – | – | – |
| 200 | – | 352 | 340 | 321 | 281 | 203 |
| 220 | 720 | 388 | 385 | 353 | 310 | 224 |
| 250 | 840 | 437 | 425 | 401 | 360 | 253 |
| 280 | – | – | – | – | – | – |
| 315 | – | 555 | 535 | 505 | 445 | 321 |
| – | 1080 | – | – | – | – | – |
| 355 | – | 605 | 580 | 549 | 500 | 350 |
| – | 1200 | – | – | – | – | – |
| 400 | – | 675 | 650 | 611 | 540 | 390 |
| 450 | 1440 | – | – | – | – | – |
| 500 | – | 855 | 820 | 780 | 680 | 494 |
| 560 | – | 950 | 920 | 870 | 760 | 549 |
| 630 | – | 1045 | 1020 | 965 | 850 | 605 |
| 710 | – | 1200 | 1140 | 1075 | 960 | 694 |
| 800 | – | – | 1320 | 1250 | 1100 | 790 |
| 900 | – | – | 1470 | 1390 | 1220 | 880 |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Technical Information: Horsepower Motor Ratings

The table below provides the average full-load currents of squirrel cage motors based on NEC (National Electrical Code) Tables 430-148, 149, and 150. These values are given only as a guide — they may vary depending on the type of motor and manufacturer. Refer to the actual motor nameplate for full-load current values.

| HP | 110 to 120 Vac | | | 220 to 240 Vac ♦ | | | 380 to 415 Vac | | 440 to 480 Vac | | | 550 to 600 Vac | | |
|-------|----------------|-----------|-------------|------------------|-----------|-------------|----------------|-------------|----------------|-----------|-------------|----------------|-----------|-------------|
| | Single Phase | Two Phase | Three Phase | Single Phase | Two Phase | Three Phase | Single Phase | Three Phase | Single Phase | Two Phase | Three Phase | Single Phase | Two Phase | Three Phase |
| 1/10 | 3.0 | - | - | 1.5 | - | - | 1.0 | - | - | - | - | - | - | - |
| 1/8 | 3.8 | - | - | 1.9 | - | - | 1.2 | - | - | - | - | - | - | - |
| 1/6 | 4.4 | - | - | 2.2 | - | - | 1.4 | - | - | - | - | - | - | - |
| 1/4 | 5.8 | - | - | 2.9 | - | - | 1.8 | - | - | - | - | - | - | - |
| 1/3 | 7.2 | - | - | 3.6 | - | - | 2.3 | - | - | - | - | - | - | - |
| 1/2 | 9.8 | 4.0 | 4.4 | 4.9 | 2.0 | 2.2 | 3.2 | 1.3 | 2.5 | 1.0 | 1.1 | 2.0 | 0.8 | 0.9 |
| 3/4 | 13.8 | 4.8 | 6.4 | 6.9 | 2.4 | 3.2 | 4.5 | 1.8 | 3.5 | 1.2 | 1.6 | 2.8 | 1.0 | 1.3 |
| 1 | 16.0 | 6.4 | 8.4 | 8.0 | 3.2 | 4.2 | 5.1 | 2.3 | 4.0 | 1.6 | 2.1 | 3.2 | 1.3 | 1.7 |
| 1 1/2 | 20.0 | 9.0 | 12.0 | 10.0 | 4.5 | 6.0 | 6.4 | 3.3 | 5.0 | 2.3 | 3.0 | 4.0 | 1.8 | 2.4 |
| 2 | 24.0 | 11.8 | 13.6 | 12.0 | 5.9 | 6.8 | 7.7 | 4.3 | 6.0 | 3.0 | 3.4 | 4.8 | 2.4 | 2.7 |
| 3 | 34.0 | 16.6 | 19.2 | 17.0 | 8.3 | 9.6 | 10.9 | 6.1 | 8.5 | 4.2 | 4.8 | 6.8 | 3.3 | 3.9 |
| 5 | 56.0 | 26.4 | 30.4 | 28.0 | 13.2 | 15.2 | 17.9 | 9.7 | 14.0 | 6.6 | 7.6 | 11.2 | 5.3 | 6.1 |
| 7 1/2 | 80.0 | 38.0 | 44.0 | 40.0 | 19.0 | 22.0 | 27.0 | 14.0 | 21.0 | 9.0 | 11.0 | 16.0 | 8.0 | 9.0 |
| 10 | 100.0 | 48.0 | 56.0 | 50.0 | 24.0 | 28.0 | 33.0 | 18.0 | 26.0 | 12.0 | 14.0 | 20.0 | 10.0 | 11.0 |
| 15 | 135.0 | 72.0 | 84.0 | 68.0 | 36.0 | 42.0 | 44.0 | 27.0 | 34.0 | 18.0 | 21.0 | 27.0 | 14.0 | 17.0 |
| 20 | - | 94.0 | 108.0 | 88.0 | 47.0 | 54.0 | 56.0 | 34.0 | 44.0 | 23.0 | 27.0 | 35.0 | 19.0 | 22.0 |
| 25 | - | 118.0 | 136.0 | 110.0 | 59.0 | 68.0 | 70.0 | 44.0 | 55.0 | 29.0 | 34.0 | 44.0 | 24.0 | 27.0 |
| 30 | - | 138.0 | 160.0 | 136.0 | 69.0 | 80.0 | 87.0 | 51.0 | 68.0 | 35.0 | 40.0 | 54.0 | 28.0 | 32.0 |
| 40 | - | 180.0 | 208.0 | 176.0 | 90.0 | 104.0 | 112.0 | 66.0 | 88.0 | 45.0 | 52.0 | 70.0 | 36.0 | 41.0 |
| 50 | - | 226.0 | 260.0 | 216.0 | 113.0 | 130.0 | 139.0 | 83.0 | 108.0 | 56.0 | 65.0 | 86.0 | 45.0 | 52.0 |
| 60 | - | - | - | - | 133.0 | 154.0 | - | 103.0 | - | 67.0 | 77.0 | - | 52.0 | 62.0 |
| 75 | - | - | - | - | 166.0 | 192.0 | - | 128.0 | - | 83.0 | 96.0 | - | 66.0 | 77.0 |
| 100 | - | - | - | - | 218.0 | 248.0 | - | 165.0 | - | 109.0 | 124.0 | - | 87.0 | 99.0 |
| 125 | - | - | - | - | - | 312.0 | - | 208.0 | - | 135.0 | 156.0 | - | 108.0 | 125.0 |
| 150 | - | - | - | - | - | 360.0 | - | 240.0 | - | 156.0 | 180.0 | - | 125.0 | 144.0 |
| 200 | - | - | - | - | - | 480.0 | - | 320.0 | - | 208.0 | 240.0 | - | 167.0 | 192.0 |
| 250 | - | - | - | - | - | 602.0 | - | 403.0 | - | - | 302.0 | - | - | 242.0 |
| 300 | - | - | - | - | - | - | - | 482.0 | - | - | 361.0 | - | - | 289.0 |
| 350 | - | - | - | - | - | - | - | 560.0 | - | - | 414.0 | - | - | 336.0 |
| 400 | - | - | - | - | - | - | - | 636.0 | - | - | 477.0 | - | - | 382.0 |
| 500 | - | - | - | - | - | - | - | 786.0 | - | - | 590.0 | - | - | 472.0 |

♦ To obtain full-load currents for 200 and 208 Vac motors, increase corresponding 220 to 240 Vac ratings by 15 and 10 percent, respectively.
 To obtain full-load currents for 265 and 277 Vac motors, decrease corresponding 220 to 240 Vac ratings by 13 and 17 percent, respectively.

TeSys™ IEC-Style Contactors and Starters Selection Guide

Definitions of Utilization Categories

IEC contactors should be selected according to the utilization category which is a combination of application and duty cycle rates defined by the following:

- The type of application (inductive motor loads or resistive loads)
- The conditions under which making or breaking current takes place (motor starting or running, reversing, plugging or jogging, locked rotor or stalled motor)
- Number of making and breaking operations (or cycles) required for the life of the contactor

Utilization Categories for Contactors Conforming to IEC 60947-4

| Type of Application | Utilization Category | Definition |
|---------------------|--------------------------|--|
| AC Applications | Category AC-1 | This category applies to AC loads with a power factor greater than or equal to 0.95 ($\cos \phi \geq 0.95$). Application examples: heating, distribution. |
| | Category AC-2 | This category applies to starting, plugging, and inching of slip ring motors. On closing, the contactor makes the starting current, which is about 2.5 times the rated current of the motor. On opening, it must break the starting current at a voltage less than or equal to the mains supply voltage. |
| | Category AC-3 | This category applies to squirrel cage motors with breaking during normal running of the motor. On closing, the contactor makes the starting current, which is about 5 to 7 times the rated current of the motor. On opening, it breaks the rated current drawn by the motor; at this point, the voltage at the contactor terminals is about 20% of the mains supply voltage. Breaking is light. Applications examples: all standard squirrel cage motors — lifts, escalators, conveyor belts, bucket elevators, compressors, pumps, mixers, air conditioning units, and so forth. |
| | Categories AC-4 and AC-2 | These categories cover applications with plugging and inching of squirrel cage and slip ring motors. The contactor closes at a current peak which may be as high as 5 or 7 times the rated motor current. On opening, it breaks this same current at a voltage which is higher as the motor speed lessens. This voltage can be the same as the mains voltage. Breaking is severe. Application examples: printing machines, wire drawing machines, cranes, hoists, metallurgy industry. |
| DC applications | Category DC-1 | This category applies to all types of DC load with a time constant (L/R) of less than or equal to 1 ms. |
| | Category DC-3 | This category applies to starting, counter-current braking, and inching of shunt motors. The time constant is less than or equal to 2 ms. On closing, the contactor makes the starting current, which is about 2.5 times the rated motor current. On opening, the contactor must be able to break 2.5 times the starting current at a voltage which is less than or equal to the mains voltage. The slower the motor speed, and therefore the lower its back e.m.f., the higher this voltage. Breaking is difficult. |
| | Category DC-5 | This category applies to starting, counter-current braking and inching of series wound motors. The time constant is less than or equal to 7.5 ms. On closing, the contactor makes a starting current peak which may be as high as 2.5 times the rated motor current. On opening, the contactor breaks this same current at a voltage which is higher as the motor speed lessens. This voltage can be the same as the mains voltage. Breaking is severe. |

Utilization Categories for Auxiliary Contacts and Control Relays Conforming to IEC 60947-5

| Type of Application | Utilization Category | Definition |
|---------------------|----------------------|---|
| AC Applications | Category AC-14 | This category applies to the switching of electromagnetic loads whose power drawn with the electromagnet closed is less than 72 VA. Application example: switching the operating coil of contactors and relays. |
| | Category AC-15 | This category applies to the switching of electromagnetic loads whose power drawn with the electromagnet closed is greater than 72 VA. Application example: switching the operating coil of contactors. |
| DC Applications | Category DC-13 | This category applies to the switching of electromagnetic loads for which the time taken to reach 95% of the steady state current ($T=0.95$) is equal to 6 times the power P drawn by the load (with $P \leq 50$ W). Application example: switching the operating coil of contactors without economy resistor. |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Definitions of Utilization Categories

The following tables show the results of tests performed according to standard utilization categories conforming to IEC 60947 based on rated operational current (Ie) and rated operational voltage (Ve).

Contactors

| | | Making and Breaking Conditions (normal operation) | | | | | | Making and Breaking Conditions (occasional operation) | | | | | | |
|--|--|--|---------|---------|----------|---------|---------|--|---------|---------|----------|---------|---------|------|
| AC Supply | | | | | | | | | | | | | | |
| Typical Applications | Utilization Category | Making | | | Breaking | | | Making | | | Breaking | | | |
| | | I | V | cos φ | I | V | cos φ | I | V | cos φ | I | V | cos φ | |
| Resistors, non-inductive or slightly inductive loads | AC-1 | 1 Ie | 1.05 Ve | 0.8 | 1 Ie | 1.05 Ve | 0.8 | 1.5 Ie | 1.05 Ve | 0.8 | 1.5 Ie | 1.05 Ve | 0.8 | |
| Motors | Slip ring motors: starting, breaking | AC-2 | 2 Ie | 1.05 Ve | 0.65 | 2 Ie | 1.05 Ve | 0.65 | 4 Ie | 1.05 Ve | 0.65 | 4 Ie | 1.05 Ve | 0.65 |
| | Squirrel cage motors: starting, breaking while motor running | AC-3 | | | | | | | | | | | | |
| | | Ie ≤ 100A | 2 Ie | 1.05 Ve | 0.45 | 2 Ie | 1.05 Ve | 0.45 | 10 Ie | 1.05 Ve | 0.45 | 8 Ie | 1.05 Ve | 0.45 |
| | | Ie > 100A | 2 Ie | 1.05 Ve | 0.35 | 2 Ie | 1.05 Ve | 0.35 | 10 Ie | 1.05 Ve | 0.35 | 8 Ie | 1.05 Ve | 0.35 |
| | Slip ring motors: starting, plugging, inching | AC-4 | | | | | | | | | | | | |
| Ie ≤ 100A | | 6 Ie | 1.05 Ve | 0.45 | 6 Ie | 1.05 Ve | 0.45 | 12 Ie | 1.05 Ve | 0.35 | 10 Ie | 1.05 Ve | 0.35 | |
| | Ie > 100A | 6 Ie | 1.05 Ve | 0.35 | 6 Ie | 1.05 Ve | 0.35 | 12 Ie | 1.05 Ve | 0.35 | 10 Ie | 1.05 Ve | 0.35 | |

DC Supply

| Typical Applications | Utilization Category | Making | | | Breaking | | | Making | | | Breaking | | |
|---|----------------------|--------|---------|----------|----------|---------|----------|--------|---------|----------|----------|---------|----------|
| | | I | V | L/R (ms) | I | V | L/R (ms) | I | V | L/R (ms) | I | V | L/R (ms) |
| Resistors, non inductive or slightly inductive loads | DC-1 | 1 Ie | 1 Ve | 1 | 1 Ie | 1 Ve | 1 | 1.5 Ie | 1.05 Ve | 1 | 1.5 Ie | 1.05 Ve | 1 |
| Shunt wound motors: starting, counter-current braking, inching | DC-3 | 2.5 Ie | 1.05 Ve | 2 | 2.5 Ie | 1.05 Ve | 2 | 4 Ie | 1.05 Ve | 2.5 | 4 Ie | 1.05 Ve | 2.5 |
| Series wound motors: starting, counter-current braking, inching | DC-5 | 2.5 Ie | 1.05 Ve | 7.5 | 2.5 Ie | 1.05 Ve | 7.5 | 4 Ie | 1.05 Ve | 15 | 4 Ie | 1.05 Ve | 15 |

Auxiliary Contacts and Control Relays

| | | Making and Breaking Conditions (normal operation) | | | | | | Making and Breaking Conditions (occasional operation) | | | | | | |
|---------------------|----------------------|--|-------|----------|----------|------|----------|--|--------|----------|----------|--------|----------|-----|
| AC Supply | | | | | | | | | | | | | | |
| Typical Application | Utilization Category | Making | | | Breaking | | | Making | | | Breaking | | | |
| | | I | V | cos φ | I | V | cos φ | I | V | cos φ | I | V | cos φ | |
| Electromagnets | < 72 VA | AC-14 | 6 Ie | 1 Ve | 0.3 | 1 Ie | 1 Ve | 0.3 | 6 Ie | 1.1 Ve | 0.7 | 6 Ie | 1.1 Ve | 0.7 |
| | ≥ 72 VA | AC-15 | 10 Ie | 1 Ve | 0.3 | 1 Ie | 1 Ve | 0.3 | 10 Ie | 1.1 Ve | 0.3 | 10 Ie | 1.1 Ve | 0.3 |
| DC Supply | | | | | | | | | | | | | | |
| Typical Application | Utilization Category | Making | | | Breaking | | | Making | | | Breaking | | | |
| | | I | V | L/R (ms) | I | V | L/R (ms) | I | V | L/R (ms) | I | V | L/R (ms) | |
| Electromagnets | DC-13 | 1 Ie | 1 Ve | 6 P ■ | 1 Ie | 1 Ve | 6 P ■ | 1.1 Ie | 1.1 Ve | 6 P ■ | 1 Ie | 1.1 Ve | 6 P ■ | |

■ The value 6 P (in watts) is based on practical observations and is considered to represent the majority of magnetic loads up to the maximum limit of P = 50 W, that is 6 P = 300 ms = L/R. Above this, the loads are made up of smaller loads in parallel. The value 300 ms is therefore a maximum limit whatever the value of current drawn.

TeSys™ IEC-Style Contactors and Starters Selection Guide

Contactors Selection for Utilization Category AC-3

How to Use the Electrical Life Curves

The contactor electrical life curves on the following pages may be used to estimate the number of make and break operations a contactor can achieve for a specific application. Compare the application to the utilization category definitions listed on page 16 and select the appropriate chart. Each chart shows the Number of Operations in Millions on the Y axis and the Current Broken in Amps on the X axis.

- AC-1 The current broken should be the same as the make and maintain current.
- AC-3 The current broken should be the same as the full load current rating (FLA) of the motor.
- AC-4 The current broken should be the same as the locked rotor current (LRA) or 6 times full-load current of the motor.

Once the appropriate chart is selected, find the breaking current of the application on the X axis of the chart and draw a vertical line. Draw a vertical line at this point. Find the intersection of this vertical line and the life curve of a particular contactor. At the intersection point read the number of electrical operations off the Y axis. If longer electrical life is required, continue checking the intersection points until an acceptable contactor is found.

Operational Current and Power Conforming to IEC ($\theta \leq 55^\circ\text{C}$ [131 °F]) for Category AC-3

| Contactor Size | | | LC1 LP1 | LC1 LC1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 |
|--|----------------|----|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| | | | K06 | K09 | K12 | D09 | D12 | D18 | D25 | D32 | D38 | D40 |
| Max. operational current (AC-3) | ≤ 440 Vac | A | 6 | 9 | 12 | 9 | 12 | 18 | 25 | 32 | 38 | 40 |
| | 220/240 Vac | kW | 1.5 | 2.2 | 3 | 2.2 | 3 | 4 | 5.5 | 7.5 | 9 | 11 |
| Rated operational power P (standard motor power ratings) | 380/400 Vac | kW | 2.2 | 4 | 5.5 | 4 | 5.5 | 7.5 | 11 | 15 | 18.5 | 18.5 |
| | 415 Vac | kW | 2.2 | 4 | 5.5 | 4 | 5.5 | 9 | 11 | 15 | 18.5 | 22 |
| | 440 Vac | kW | 3 | 4 | 5.5 | 4 | 5.5 | 9 | 11 | 15 | 18.5 | 22 |
| | 500 Vac | kW | 3 | 4 | 4 | 5.5 | 7.5 | 10 | 15 | 18.5 | 18.5 | 22 |
| | 660/690 Vac | kW | 3 | 4 | 4 | 5.5 | 7.5 | 10 | 15 | 18.5 | 18.5 | 30 |
| | 1000 Vac | kW | – | – | – | – | – | – | – | – | – | 22 |

Maximum Operating Rate in Operating Cycles/Hour ♦

| On-load Factor | Operational Power | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | |
|----------------|-------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------|
| | | D09 | D12 | D18 | D25 | D32 | D38 | D40 | | | |
| $\leq 85\%$ | P | – | – | – | 1200 | 1200 | 1200 | 1200 | 1000 | 1000 | 1000 |
| | 0.5 P | – | – | – | 3000 | 3000 | 2500 | 2500 | 2500 | 2500 | 2500 |
| $\leq 25\%$ | P | – | – | – | 1800 | 1800 | 1800 | 1800 | 1200 | 1200 | 1200 |

Operational Current and Power Conforming to UL, CSA ($\theta \leq 55^\circ\text{C}$ [131 °F])

| Contactor Size | | | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | |
|--|----------------|----|---------|---------|---------|---------|---------|---------|---------|---------|---------|-----|
| | | | K06 | K09 | K12 | D09 | D12 | D18 | D25 | D32 | D38● | D40 |
| Max. operational current (AC-3) | ≤ 440 Vac | A | 6 | 9 | 12 | 9 | 12 | 18 | 25 | 32 | – | 40 |
| | 200/208 Vac | HP | 1.5 | 2 | 3 | 2 | 3 | 5 | 7.5 | 10 | – | 10 |
| Rated operational power P (standard motor power ratings) 60 Hz | 230/240 Vac | HP | 1.5 | 3 | 3 | 2 | 3 | 5 | 7.5 | 10 | – | 10 |
| | 460/480 Vac | HP | 3 | 5 | 7.5 | 5 | 7.5 | 10 | 15 | 20 | – | 30 |
| | 575/600 Vac | HP | 3 | 5 | 10 | 7.5 | 10 | 15 | 20 | 30 | – | 30 |

♦ Depending on the operational power and the on-load factor ($\theta \leq 55^\circ\text{C}$ [131 °F]).

● Not UL Listed or CSA Certified.

TeSys™ IEC-Style Contactors and Starters Selection Guide


Contactors Selection for Utilization Category AC-3

Use in Category AC-3 ($V_e \leq 440$ Vac)

Control of 3-phase asynchronous squirrel cage motors with breaking while running.

The current broken (I_c) in category AC-3 is equal to the rated operational current (I_e) of the motor.

Use motor full-load current on horizontal axis for selection purposes.

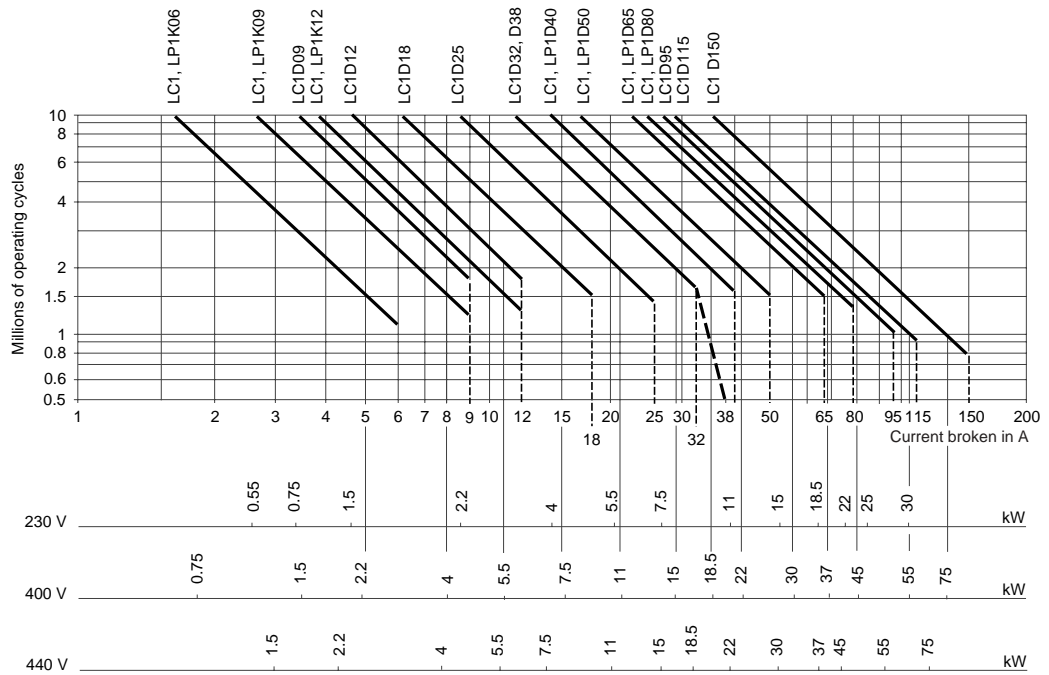

NOTE: The dotted lines relate to LC1D38 contactors only.

Operational power in kW-50 Hz.

Example: Asynchronous motor with $P = 5.5$ kW – $V_e = 400$ V – $I_e = 11$ A – $I_c = I_e = 11$ A; or
Asynchronous motor with $P = 5.5$ kW – $V_e = 415$ V – $I_e = 11$ A – $I_c = I_e = 11$ A.
3 million operating cycles required.


The above selection curves show the contactor rating needed: LC1D18 or LP1D18.

Use in Category AC-3 ($V_e = 660/690$ Vac)

Control of 3-phase asynchronous squirrel cage motors with breaking while running.

The current broken (I_c) in category AC-3 is equal to the rated operational current (I_e) of the motor.

Use motor full-load current on horizontal axis for selection purposes.

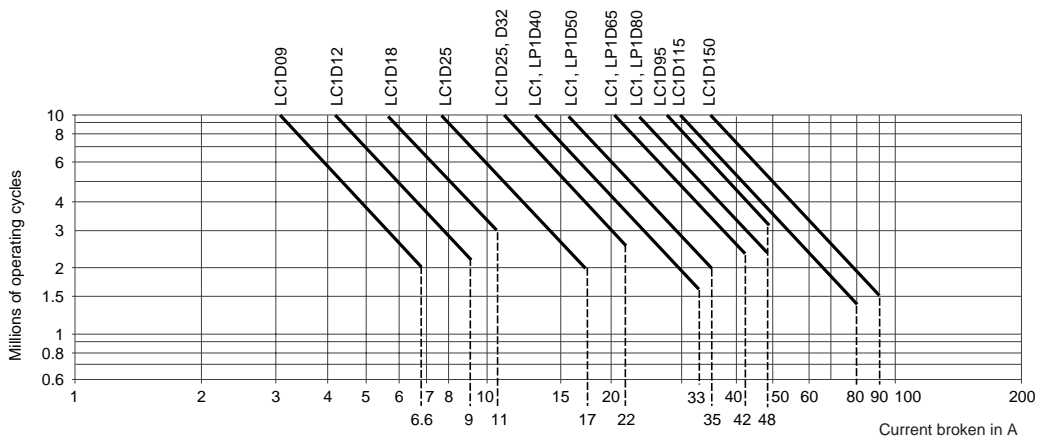

NOTE: For $V_e = 1000$ Vac, use the 660/690 Vac curves without exceeding the corresponding operational current at the operational power indicated for 1000 Vac.

TeSys™ IEC-Style Contactors and Starters Selection Guide


Contactor Selection for Utilization Category AC-3

Use in Category AC-3 (Ve < 440 Vac)

Control of 3-phase asynchronous squirrel cage motors with breaking while running.

The current broken (Ic) in category AC-3 is equal to the rated operational current (Ie) of the motor.

Use motor full-load current on horizontal axis for selection purposes.

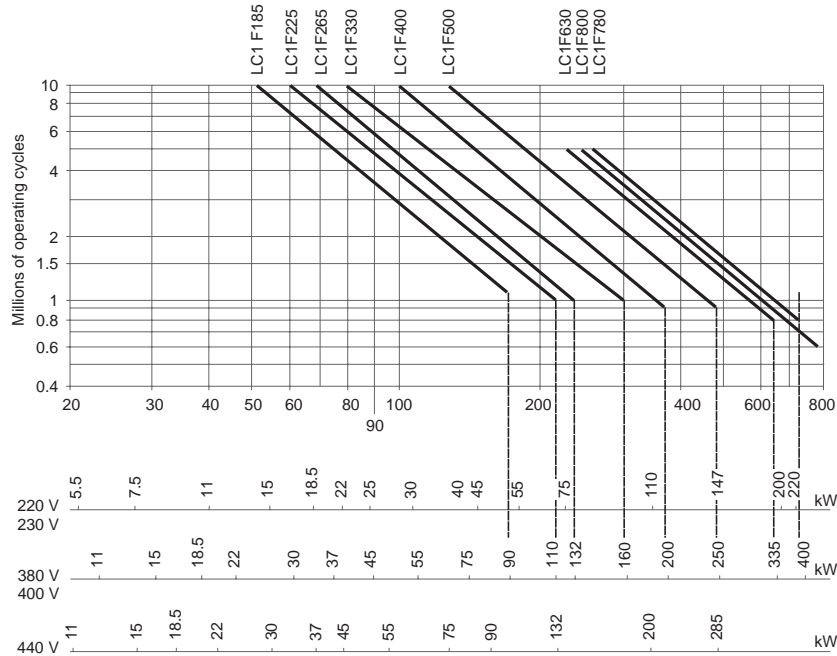

Operational power in kW-50 Hz.

Example: Asynchronous motor with P = 132 kW – Ve = 380 V – Ie = 245 A – Ic = Ie = 245 A; or Asynchronous motor with P = 132 kW – Ve = 415 V – Ie = 240 A – Ic = Ie = 240 A. 1.5 million operating cycles required.


The above selection curves show the contactor rating needed: LC1F330.

Use in Category AC-3 (Ve = 660/690 Vac)

Control of 3-phase asynchronous squirrel cage motors with breaking while running.

The current broken (Ic) in category AC-3 is equal to the rated operational current (Ie) of the motor.

Use motor full-load current on horizontal axis for selection purposes.

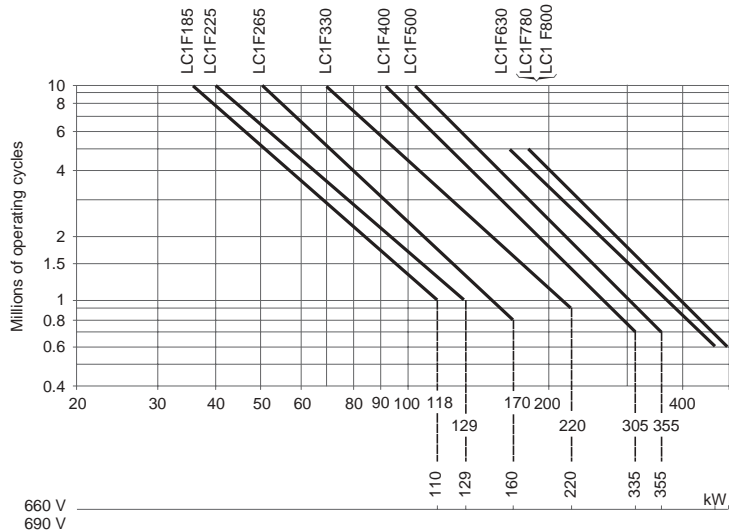

Example: Asynchronous motor with P = 132 kW – Ve = 660 V – Ie = 140 A – Ic = Ie = 140 A. 1.5 million operating cycles required.

The above selection curves show the contactor rating needed: LC1F330.

TeSys™ IEC-Style Contactors and Starters Selection Guide

Contactors Selection for Utilization Category AC-1

Maximum Operational Current (Open-mounted Device)

| Contactor Size | | | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 |
|--|------------------|-----------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| | | | LC1 | LP1 | LP1 | LP1 | LP1 | LP1 | LP1 | LP1 | LC1 |
| | | | K09 | K12 | D09 | D12 | D18 | D25 | D32 | D38 | D40 |
| Maximum operating rate operating cycles/hour | | | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 |
| Cabling to IEC 60947-1 | cable c.s.a | mm ² (AWG) | 4 (#12) | 4 (#12) | 4 (#12) | 4 (#12) | 6 (#10) | 6 (#10) | 10 (#8) | 10 (#8) | 16 (#6) |
| | bar c.s.a. | mm | – | – | – | – | – | – | – | – | – |
| Operational current in A, in AC-1 according to the ambient temperature to IEC 60947-1 | ≤ 40 °C (104 °F) | A | 20 | 20 | 25 | 25 | 32 | 40 | 50 | 50 | 60 |
| | ≤ 55 °C (131 °F) | A | 20 | 20 | 25 | 25 | 32 | 40 | 50 | 50 | 60 |
| | ≤ 70 °C (158 °F) | A (to Vc) | ♦ | ♦ | 17 | 17 | 22 | 28 | 35 | 35 | 42 |
| Maximum operational power ≤ 55°C | 220/230 Vac | kW | 8 | 8 | 9 | 9 | 11 | 14 | 18 | 18 | 21 |
| | 240 Vac | kW | 8 | 8 | 9 | 9 | 12 | 15 | 19 | 19 | 23 |
| | 380/400 Vac | kW | 14 | 14 | 15 | 15 | 20 | 25 | 31 | 31 | 37 |
| | 415 Vac | kW | 14 | 14 | 17 | 17 | 21 | 27 | 34 | 34 | 41 |
| | 440 Vac | kW | 15 | 15 | 18 | 18 | 23 | 29 | 36 | 36 | 43 |
| | 500 Vac | kW | 17 | 17 | 20 | 20 | 23 | 33 | 41 | 41 | 49 |
| | 660/690 Vac | kW | 22 | 22 | 27 | 27 | 34 | 43 | 54 | 54 | 65 |
| | 1000 Vac | kW | – | – | – | – | – | – | – | – | 70 |

♦ Please consult our local representatives or agents.

Increase in operation current by paralleling of poles: Apply the following multiplying factors to the current or power values given above. The factors take into account the often unbalanced current distribution between poles:


- 2 poles in parallel: K = 1.6
- 3 poles in parallel: K = 2.25
- 4 poles in parallel: K = 2.8

Use in Category AC-1 (Ve ≤ 440 Vac)

Control of resistive circuits (power factor ≥ 0.95).

The current broken (Ic) in category AC-1 is equal to the current (Ie) normally drawn by the load.

Use motor full-load current on horizontal axis for selection purposes.

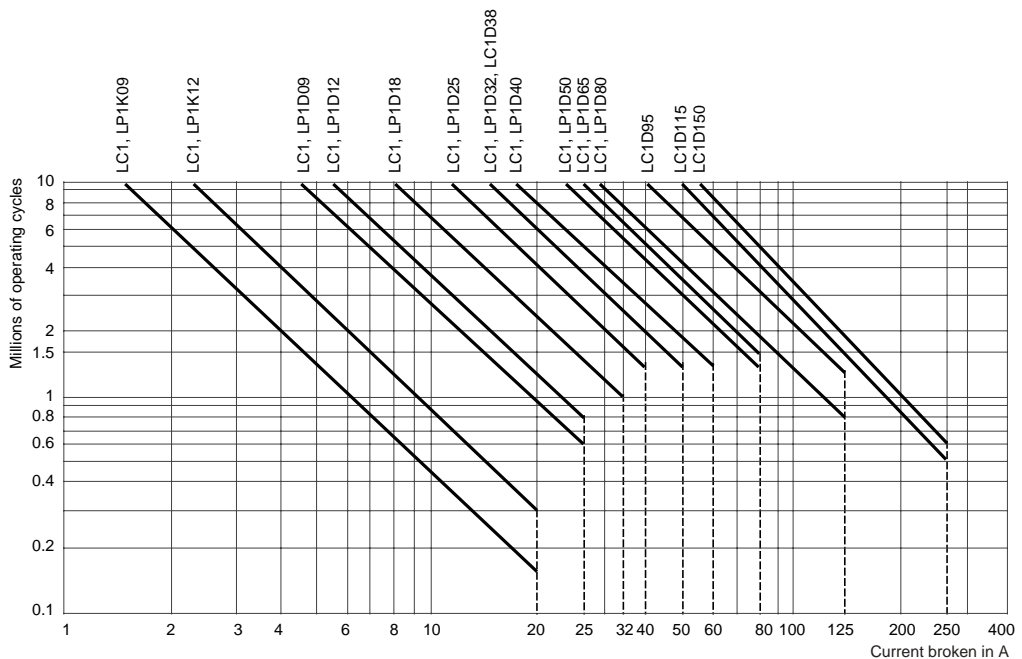

Example: Ve = 220 V – Ie = 50 A (θ ≤ 40 °C) – Ic = Ie = 50 A.

2 million operating cycles required.

The above selection curves show the contactor rating needed: LC1D50 or LP1D50.

TeSys™ IEC-Style Contactors and Starters Selection Guide

Contactor Selection for Utilization Category AC-1

Maximum Operational Current (Open-mounted Device)

| Contactor Size | | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | | |
|--|------------------|--------------------------|------------|------------|------------|------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|------------|------------|-----------|------------|------|
| | | D50 | D65 | D80 | D95 | D115 | D150 | F185 | F225 | F265 | F330 | F400 | F500 | F630 | F780 | F800 | |
| Maximum operating rate operating cycles/hour | | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | |
| Cabling to IEC 60947-1 | cable c.s.a | mm ² (AWG) | 25 (#4) | 25 (#4) | 50 (#0) | 50 (#0) | 120 (250 MCM) | 120 (250 MCM) | 150 (300 MCM) | 185 (350 MCM) | 185 (350 MCM) | 240 (500 MCM) | - | - | - | - | |
| | Number of Bars | | - | - | - | - | - | - | - | - | - | 2 | 2 | 2 | 2 | 2 | |
| | bar c.s.a. | mm | - | - | - | - | - | - | - | - | - | 30 x 5 | 40 x 5 | 60 x 5 | 100 x 5 | 60 x 5 | |
| | | inches | - | - | - | - | - | - | - | - | - | 1.18 x 0.2 | 1.57 x 0.2 | 2.36 x 0.2 | 4.0 x 0.2 | 2.36 x 0.2 | |
| Operational current in A, in AC-1 according to the ambient temperature to IEC 60947-1 | ≤ 40 °C (104 °F) | A | 80 | 80 | 125 | 125 | 250 | 250 | 275 | 315 | 350 | 400 | 500 | 700 | 1000 | 1600 | 1000 |
| | ≤ 55 °C (131 °F) | A | 80 | 80 | 125 | 125 | 200 | 200 | 275 | 280 | 300 | 360 | 430 | 580 | 850 | 1350 | 850 |
| | ≤ 70 °C (158 °F) | A (to Vc) | 56 | 56 | 80 | 80 | 160 | 160 | 180 | 200 | 250 | 290 | 340 | 500 | 700 | 1100 | 700 |
| Maximum operational power ≤ 55°C (131°F) | 220/230 Vac | kW | 29 | 29 | 45 | 45 | 80 | 80 | 90 | 100 | 120 | 145 | 170 | 240 | 350 | 550 | 350 |
| | 240 Vac | kW | 31 | 31 | 49 | 49 | 83 | 83 | 95 | 110 | 125 | 160 | 180 | 255 | 370 | 570 | 370 |
| | 380/400 Vac | kW | 50 | 50 | 78 | 78 | 135 | 135 | 165 | 175 | 210 | 250 | 300 | 430 | 600 | 950 | 600 |
| | 415 Vac | kW | 54 | 54 | 85 | 85 | 140 | 140 | 170 | 185 | 220 | 260 | 310 | 445 | 630 | 1000 | 630 |
| | 440 Vac | kW | 58 | 58 | 90 | 90 | 150 | 150 | 180 | 200 | 230 | 290 | 330 | 470 | 670 | 1050 | 670 |
| | 500 Vac | kW | 65 | 65 | 102 | 102 | 170 | 170 | 200 | 220 | 270 | 320 | 380 | 660 | 750 | 1200 | 750 |
| | 660/690 Vac | kW | 86 | 86 | 135 | 135 | 235 | 235 | 280 | 300 | 370 | 400 | 530 | 740 | 1000 | 1650 | 1000 |
| | 1000 Vac | kW | 85 | 100 | 120 | 120 | 345 | 345 | 410 | 450 | 540 | 640 | 760 | 950 | 1500 | 2400 | 1500 |

Increase in operation current by paralleling of poles: Apply the following multiplying factors to the current or power values given above.

The factors take into account the often unbalanced current distribution between poles:

2 poles in parallel: K = 1.6

3 poles in parallel:


K = 2.254 poles in parallel: K = 2.8

Use in Category AC-1 (Ve ≤ 440 Vac)

Control of resistive circuits (power factor ≥ 0.95).

The current broken (Ic) in category AC-1 is equal to the current (Ie) normally drawn by the load.

Use motor full-load current on horizontal axis for selection purposes.

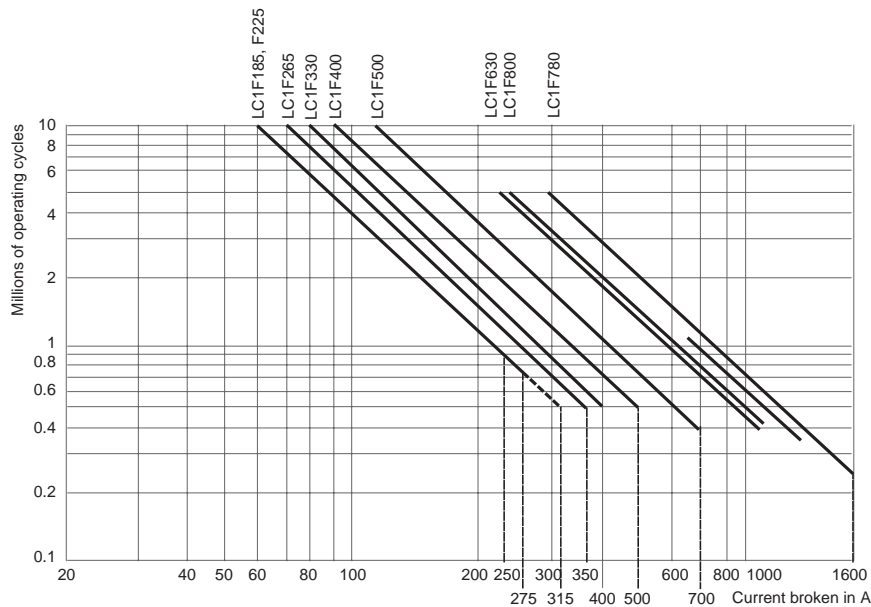

NOTE: The dotted lines relate to LC1F225 contactors only.

Example: Ve = 220 V – Ie = 500 A (θ ≤ 40 °C) – Ic = Ie = 500 A.

2 million operating cycles required.

The above selection curves show the contactor rating needed: LC1 F780.

TeSys™ IEC-Style Contactors and Starters Selection Guide

Contactors Selection for Utilization Categories AC-2 and AC-4

Utilization category AC-2 is for breaking the starting current of slip-ring motors, while utilization category AC-4 is for breaking the starting current of squirrel-cage motors.

Maximum Breaking Current for Categories AC-2 and AC-4

| Contactor Size | | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 | LC1 LP1 |
|--|---|---------|---------|---------|---------|---------|---------|---------|---------|-----|---------|
| | | K06 | K09 | K12 | D09 | D12 | D18 | D25 | D32 | D38 | D40 |
| In category AC-4 (Ie maximum) – Ve ≤ 440 Vac Ie maximum broken = 6 x I motor | A | 36 | 54 | 54 | 54 | 72 | 108 | 150 | 192 | 192 | 240 |
| – 440 Vac ≤ Ve ≤ 690 Vac Ie maximum broken = 6 x I motor | A | 26 | 40 | 40 | 40 | 50 | 70 | 90 | 105 | 105 | 150 |

Depending on the maximum operating rate ♦ and the on-load factor, $\theta \leq 55^\circ\text{C}$ [131 °F] ■

| | | | | | | | | | | | |
|------------------------------|---|----|----|----|----|----|----|----|----|----|-----|
| From 150 & 15% to 300 & 10% | A | 20 | 30 | 30 | 30 | 40 | 45 | 75 | 80 | 80 | 110 |
| From 150 & 20% to 600 & 10% | A | 18 | 27 | 27 | 27 | 36 | 40 | 67 | 70 | 70 | 96 |
| From 150 & 30% to 1200 & 10% | A | 16 | 24 | 24 | 24 | 30 | 35 | 56 | 60 | 60 | 80 |
| From 150 & 55% to 2400 & 10% | A | 13 | 19 | 19 | 19 | 24 | 30 | 45 | 50 | 50 | 62 |
| From 150 & 85% to 3600 & 10% | A | 10 | 16 | 16 | 16 | 21 | 25 | 40 | 45 | 45 | 53 |

- ♦ Do not exceed the maximum number of mechanical operating cycles.
- For temperatures higher than 55 °C (131 °F), use a maximum operating rate value equal to 80% of the actual value when selecting from the above tables.

Plugging

The current varies from the maximum plug-braking current to the rated motor current. The making current must be compatible with the rated making and breaking capacities of the contactor. As breaking normally takes place at a current value at or near the locked rotor current, the contactor can be selected using the criteria for categories AC-2 and AC-4.

Permissible AC-4 Power Rating for 200,000 Operating Cycles

| Operational Voltage | | LC• LP• | LC• LP• | LC• LP• | LC• LP• | LC• LP• | LC• LP• | LC• LP• | LC• LP• | LC• | LC• LP• |
|---------------------|----|---------|---------|---------|---------|---------|---------|---------|---------|-----|---------|
| | | K06 | K09 | K12 | D09 | D12 | D18 | D25 | D32 | D38 | D40 |
| 220/230 Vac | kW | 0.75 | 1.1 | 1.1 | 1.5 | 1.5 | 2.2 | 3 | 4 | 4 | 4 |
| 380/400 Vac | kW | 1.5 | 2.2 | 2.2 | 2.2 | 3.7 | 4 | 5.5 | 7.5 | 7.5 | 9 |
| 415 Vac | kW | 1.5 | 2.2 | 2.2 | 2.2 | 3 | 3.7 | 5.5 | 7.5 | 7.5 | 9 |
| 440 Vac | kW | 1.5 | 2.2 | 2.2 | 2.2 | 3 | 3.7 | 5.5 | 7.5 | 7.5 | 11 |
| 500 Vac | kW | 2.2 | 3 | 3 | 3 | 4 | 5.5 | 7.5 | 9 | 9 | 11 |
| 660/690 Vac | kW | 3 | 4 | 4 | 4 | 5.5 | 7.5 | 10 | 11 | 11 | 15 |

Note: Tables continue on next page.

TeSys™ IEC-Style Contactors and Starters Selection Guide

Contactor Selection for Utilization Categories AC-2 and AC-4

Maximum Breaking Current for Categories AC-2 and AC-4

| Contactor Size | | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | |
|--|---|---------|---------|---------|-----|------|------|------|------|------|------|------|------|------|------|------|
| | | D50 | D65 | D80 | D95 | D115 | D150 | F185 | F225 | F265 | F330 | F400 | F500 | F630 | F780 | F800 |
| In category AC-4 (Ie maximum) – Ve ≤ 440 Vac Ie maximum broken = 6 x I motor | A | 300 | 390 | 480 | 570 | 630 | 830 | 1020 | 1230 | 1470 | 1800 | 2220 | 2760 | 3360 | 4260 | 3690 |
| – 440 Vac ≤ Ve ≤ 690 Vac Ie maximum broken = 6 x I motor | A | 170 | 210 | 250 | 250 | 540 | 640 | 708 | 810 | 1020 | 1410 | 1830 | 2130 | 2760 | 2910 | 2910 |

Depending on the maximum operating rate ♦ and the on-load factor, $\theta \leq 55\text{ °C}$ [131 °F] ■

| | | | | | | | | | | | | | | | | |
|------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|
| From 150 & 15% to 300 & 10% | A | 140 | 160 | 200 | 200 | 280 | 310 | 380 | 420 | 560 | 670 | 780 | 1100 | 1400 | 1600 | 1600 |
| From 150 & 20% to 600 & 10% | A | 120 | 148 | 170 | 170 | 250 | 280 | 350 | 400 | 500 | 600 | 700 | 950 | 1250 | 1400 | 1400 |
| From 150 & 30% to 1200 & 10% | A | 100 | 132 | 145 | 145 | 215 | 240 | 300 | 330 | 400 | 500 | 600 | 750 | 950 | 1100 | 1100 |
| From 150 & 55% to 2400 & 10% | A | 80 | 110 | 120 | 120 | 170 | 150 | 240 | 270 | 320 | 390 | 450 | 600 | 720 | 820 | 820 |
| From 150 & 85% to 3600 & 10% | A | 70 | 90 | 100 | 100 | 125 | 145 | 170 | 190 | 230 | 290 | 350 | 500 | 660 | 710 | 710 |

- ♦ Do not exceed the maximum number of mechanical operating cycles.
- For temperatures higher than 55 °C (131 °F), use a maximum operating rate value equal to 80% of the actual value when selecting from the above tables.

Plugging

The current varies from the maximum plug-braking current to the rated motor current. The making current must be compatible with the rated making and breaking capacities of the contactor. As breaking normally takes place at a current value at or near the locked rotor current, the contactor can be selected using the criteria for categories AC-2 and AC-4.

Permissible AC-4 Power Rating for 200,000 Operating Cycles

| Operational Voltage | | LC• LP• | LC• LP• | LC• LP• | LC• | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | |
|---------------------|----|---------|---------|---------|-----|------|------|------|------|------|------|------|------|------|------|------|
| | | D50 | D65 | D80 | D95 | D115 | D150 | F185 | F225 | F265 | F330 | F400 | F500 | F630 | F780 | F800 |
| 220/230 Vac | kW | 5.5 | 7.5 | 7.5 | 9 | 9 | 11 | 22 | 25 | 30 | 37 | 40 | 45 | 55 | 63 | 63 |
| 380/400 Vac | kW | 11 | 11 | 15 | 15 | 18.5 | 22 | 40 | 45 | 55 | 63 | 75 | 80 | 100 | 110 | 110 |
| 415 Vac | kW | 11 | 11 | 15 | 15 | 18.5 | 22 | 45 | 51 | 59 | 75 | 80 | 90 | 100 | 110 | 110 |
| 440 Vac | kW | 11 | 15 | 15 | 15 | 18.5 | 22 | 45 | 51 | 63 | 75 | 80 | 100 | 110 | 132 | 132 |
| 500 Vac | kW | 15 | 18.5 | 22 | 22 | 37 | 30 | 51 | 59 | 75 | 80 | 90 | 110 | 132 | 150 | 150 |
| 660/690 Vac | kW | 18.5 | 22 | 25 | 25 | 30 | 45 | 63 | 75 | 90 | 110 | 129 | 140 | 160 | 185 | 185 |

TeSys™ IEC-Style Contactors and Starters Selection Guide


Contactors Selection for Utilization Categories AC-2 and AC-4

Use in Categories AC-2 or AC-4 ($V_e \leq 440$ Vac)

Control of 3-phase asynchronous squirrel cage (AC-4) or slip-ring (AC-2) motors with breaking while motor stalled.

The current broken (I_c) in category AC-4 is equal to 6 times I_e , where I_e is the operational current of the motor.

Use motor-locked rotor current (6 times full-load current) on horizontal axis for selection purposes.

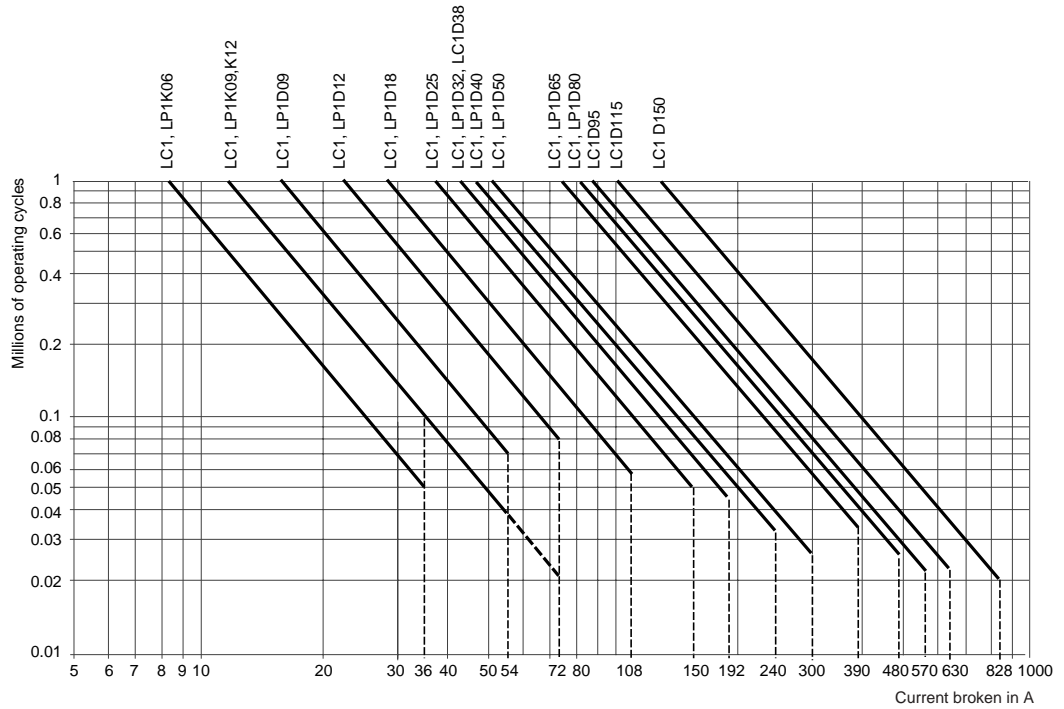

NOTE: The dotted lines relate to LC1K12 and LP1K12 contactors only.


Example: Asynchronous motor with $P = 5.5$ kW – $V_e = 400$ V – $I_e = 11$ A $I_c = 6 \times I_e = 66$ A; or
 Asynchronous motor with $P = 5.5$ kW – $V_e = 415$ V – $I_e = 11$ A $I_c = 6 \times I_e = 66$ A.
 200,000 operating cycles required.
 The above selection curves show the contactor rating needed: LC1D25 or LP1D25.

Use in Category AC-4 (440 Vac < $V_e \leq 690$ V)

Control of 3-phase asynchronous squirrel cage motors with breaking while motor stalled.

The current broken (I_c) in category AC-4 is equal to 6 times I_e , where I_e is the operational current of the motor.

Use motor-locked rotor current (6 times full-load current) on horizontal axis for selection purposes.

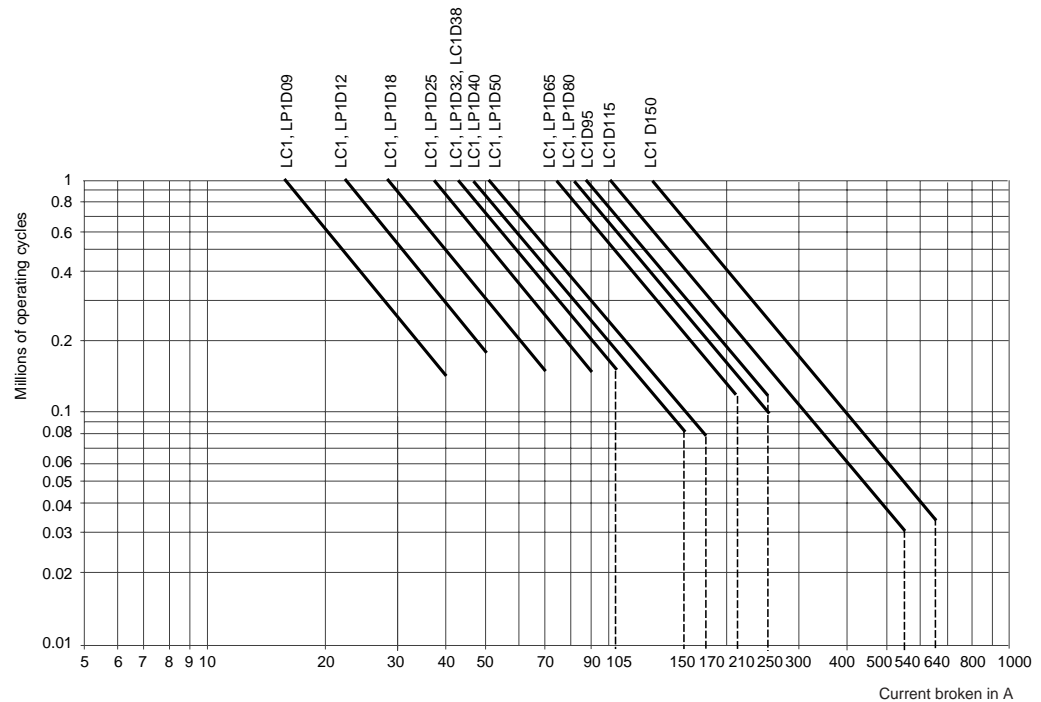

TeSys™ IEC-Style Contactors and Starters Selection Guide


Contactors Selection for Utilization Categories AC-2 and AC-4

Use in Categories AC-2 or AC-4 ($V_e \leq 440$ Vac)

Control of 3-phase asynchronous squirrel cage (AC-4) or slip-ring (AC-2) motors with breaking while motor stalled.

The current broken (I_c) in category AC-4 is equal to 6 times I_e , where I_e is the operational current of the motor.

Use motor-locked rotor current (6 times full-load current) on horizontal axis for selection purposes.

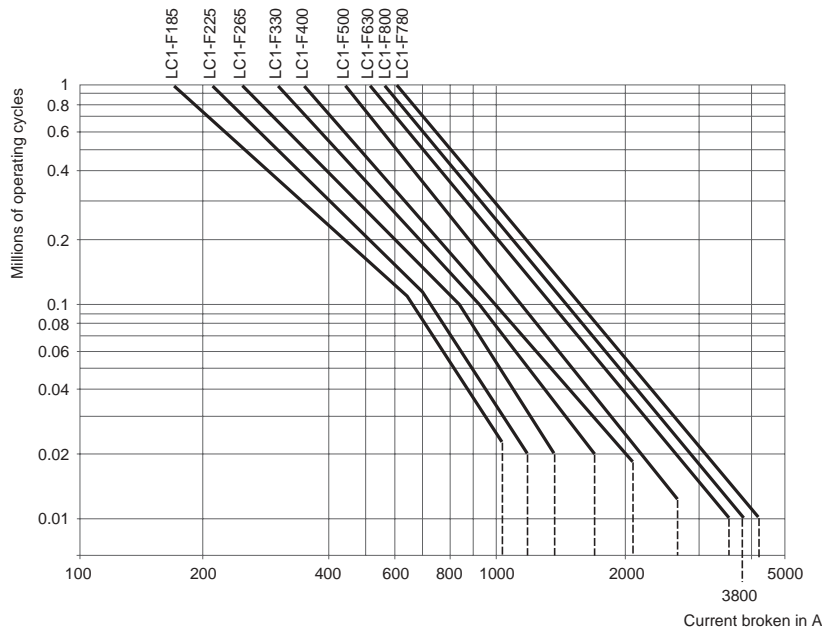


Example: Asynchronous motor with $P = 90$ kW – $V_e = 380$ V – $I_e = 170$ A $I_c = 6 \times I_e = 1020$ A; or
 Asynchronous motor with $P = 90$ kW – $V_e = 415$ V – $I_e = 165$ A $I_c = 6 \times I_e = 990$ A.
 60,000 operating cycles required.
 The above selection curves show the contactor rating needed: LC1F265.

Use in Category AC-4 (440 Vac < $V_e \leq 690$ V)

Control of 3-phase asynchronous squirrel cage motors with breaking while motor stalled.


The current broken (I_c) in category AC-4 is equal to 6 times I_e , where I_e is the operational current of the motor.

Use motor-locked rotor current (6 times full-load current) on horizontal axis for selection purposes.

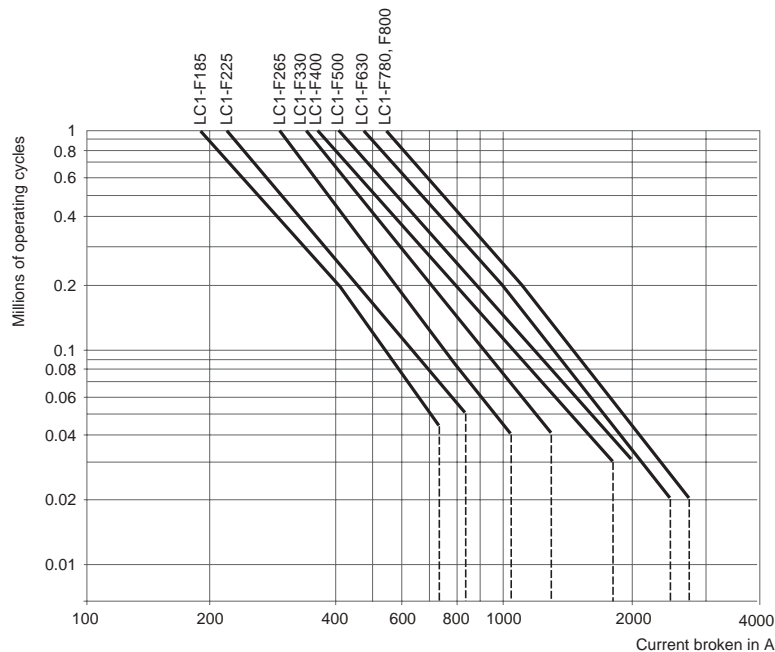

TeSys™ IEC-Style Contactors and Starters Selection Guide


Contactor Selection for Utilization Categories DC-1 to DC-5



Rated Operational Current (Ie) in Amperes for Category DC-1

Resistive loads: time constant $\frac{L}{R} \leq 1$ ms, ambient $\theta \leq 55$ °C [131 °F]

| Rated Operational Voltage Ve | Number of Poles Connected in Series | Contactor Rating ♦ | | | | | | | | | |
|------------------------------|-------------------------------------|--------------------|---------|---------|---------|---------|-----|---------|---------|---------|---------|
| | | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 |
| | | D09 | D12 | D18 | D25 | D32 | D38 | D40 | D50 | D65 | D80 |
| 24 Vdc | 1 | 15 | 15 | 15 | 30 | 30 | 30 | 40 | 50 | 50 | 70 |
| | 2 | 18 | 18 | 18 | 32 | 32 | 32 | 55 | 70 | 70 | 100 |
| | 3 | 20 | 20 | 20 | 32 | 32 | 32 | 55 | 70 | 70 | 100 |
| | 4 | - | 20 | - | 32 | - | - | 55 | - | 70 | 100 |
| 48/75 Vdc | 1 | 12 | 12 | 12 | 25 | 25 | 25 | 25 | 25 | 25 | 25 |
| | 2 | 17 | 17 | 17 | 30 | 30 | 30 | 55 | 70 | 70 | 100 |
| | 3 | 20 | 20 | 20 | 32 | 32 | 32 | 55 | 70 | 70 | 100 |
| | 4 | - | 20 | - | 32 | - | - | 55 | - | 70 | 100 |
| 125 Vdc | 1 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 2 | 12 | 12 | 12 | 25 | 25 | 25 | 40 | 50 | 60 | 80 |
| | 3 | 15 | 15 | 15 | 27 | 27 | 27 | 45 | 60 | 65 | 85 |
| | 4 | - | 17 | - | 30 | - | - | 55 | - | 70 | 100 |
| 225 Vdc | 1 | 4 | 4 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| | 2 | 8 | 8 | 8 | 15 | 15 | 15 | 35 | 40 | 40 | 45 |
| | 3 | 10 | 10 | 10 | 22 | 22 | 22 | 40 | 50 | 50 | 55 |
| | 4 | - | 12 | - | 25 | - | - | 50 | - | 60 | 70 |
| 300 Vdc | 3 | - | - | - | - | - | - | - | - | - | - |
| 4 | - | 12 | - | 25 | - | 40 | 40 | - | 60 | 70 | |
| 460 Vdc | 4 | - | - | - | - | - | - | - | - | - | - |
| 900 Vdc | 2 | - | - | - | - | - | - | - | - | - | - |
| 1200 Vdc | 3 | - | - | - | - | - | - | - | - | - | - |
| 1500 Vdc | 4 | - | - | - | - | - | - | - | - | - | - |



Rated Operational Current (Ie) in Amperes for Categories DC-2 to DC-5

Inductive loads: time constant $\frac{L}{R} \leq 15$ ms, ambient $\theta \leq 55$ °C [131 °F]

| Rated Operational Voltage Ve | Number of Poles Connected in Series | Contactor Rating ♦ | | | | | | | | | |
|------------------------------|-------------------------------------|--------------------|---------|---------|---------|---------|-----|---------|---------|---------|---------|
| | | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 | LC1 LP1 | LC1 LP1 | LC1 LP1 | LC1 LP1 |
| | | D09 | D12 | D18 | D25 | D32 | D38 | D40 | D50 | D65 | D80 |
| 24 Vdc | 1 | 12 | 12 | 12 | 20 | 20 | 20 | 25 | 35 | 35 | 40 |
| | 2 | 15 | 15 | 15 | 25 | 25 | 25 | 30 | 45 | 45 | 60 |
| | 3 | 18 | 18 | 18 | 30 | 30 | 30 | 45 | 55 | 55 | 80 |
| | 4 | - | 18 | - | 30 | - | - | 50 | - | 60 | 90 |
| 48/75 Vdc | 1 | 10 | 10 | 10 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| | 2 | 12 | 12 | 12 | 20 | 20 | 20 | 25 | 40 | 40 | 50 |
| | 3 | 15 | 15 | 15 | 30 | 30 | 30 | 40 | 50 | 50 | 70 |
| | 4 | - | 15 | - | 30 | - | - | 50 | - | 60 | 90 |
| 125 Vdc | 1 | 2 | 2 | 2 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 |
| | 2 | 8 | 8 | 8 | 15 | 15 | 15 | 20 | 25 | 25 | 40 |
| | 3 | 12 | 12 | 12 | 20 | 20 | 20 | 30 | 35 | 35 | 60 |
| | 4 | - | 15 | - | 25 | - | - | 40 | - | 50 | 72 |
| 225 Vdc | 1 | 0.75 | 0.75 | 0.75 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | 2 | 1.5 | 1.5 | 1.5 | 3 | 3 | 3 | 4 | 5 | 5 | 7 |
| | 3 | 6 | 6 | 6 | 10 | 10 | 10 | 20 | 25 | 25 | 35 |
| | 4 | - | 8 | - | 15 | - | - | 25 | - | 30 | 40 |
| 300 Vdc | 3 | - | - | - | - | - | - | - | - | - | - |
| 4 | - | 6 | - | 10 | - | - | 20 | - | 25 | 35 | |
| 460 Vdc | 1 | - | - | - | - | - | - | - | - | - | - |
| 4 | - | - | - | - | - | - | - | - | - | - | - |
| 900 Vdc | 2 | - | - | - | - | - | - | - | - | - | - |
| 1200 Vdc | 3 | - | - | - | - | - | - | - | - | - | - |
| 1500 Vdc | 4 | - | - | - | - | - | - | - | - | - | - |

♦ For rated operational currents of contactors LC1 and LP1K, please consult your Local Square D Field Sales Office.

Continued on next page.

TeSys™ IEC-Style Contactors and Starters Selection Guide

Contactor Selection for Utilization Categories DC-1 to DC-5

Rated Operational Current (Ie) in Amperes for Category DC-1

Resistive loads: time constant $\frac{L}{R} \leq 1$ ms, ambient $\theta \leq 55$ °C [131 °F]

| Rated Operational Voltage Ve | Number of Poles Connected in Series | Contactor Rating | | | | | | | | | | | |
|------------------------------|-------------------------------------|------------------|------|------|------|------|------|------|------|------|------|------|------|
| | | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 |
| | | D95 | D115 | D150 | F185 | F225 | F265 | F330 | F400 | F500 | F630 | F780 | F800 |
| 24 Vdc | 1 | 70 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 2 | 100 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 3 | 100 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 4 | – | 200 | – | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| 48/75 Vdc | 1 | 25 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 2 | 100 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 3 | 100 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 4 | – | 200 | – | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| 125 Vdc | 1 | 8 | 180 | 180 | 210 | 230 | 270 | 320 | 380 | 520 | 760 | 1180 | 760 |
| | 2 | 80 | 180 | 180 | 210 | 230 | 270 | 320 | 380 | 520 | 760 | 1180 | 760 |
| | 3 | 85 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 4 | – | 200 | – | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| 225 Vdc | 1 | 5 | 160 | 160 | – | – | – | – | – | – | – | – | – |
| | 2 | 45 | 160 | 160 | 190 | 200 | 250 | 280 | 350 | 450 | 700 | 1000 | 700 |
| | 3 | 55 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 4 | – | 200 | – | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| 300 Vdc | 3 | – | 140 | 140 | 190 | 200 | 250 | 280 | 350 | 450 | 700 | 1000 | 700 |
| | 4 | – | 180 | – | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1000 | 850 |
| 460 Vdc | 4 | – | 140 | – | 190 | 200 | 250 | 280 | 350 | 450 | 700 | 1000 | 700 |
| 900 Vdc | 2 | – | – | – | – | – | – | – | – | – | – | – | – |
| 1200 Vdc | 3 | – | – | – | – | – | – | – | – | – | – | – | – |
| 1500 Vdc | 4 | – | – | – | – | – | – | – | – | – | – | – | – |

Rated Operational Current (Ie) in Amperes for Categories DC-2 to DC-5

Inductive loads: time constant $\frac{L}{R} \leq 15$ ms, ambient $\theta \leq 55$ °C [131 °F]

| Rated Operational Voltage Ve | Number of Poles Connected in Series | Contactor Rating ♦ | | | | | | | | | | | |
|------------------------------|-------------------------------------|--------------------|------|------|------|------|------|------|------|------|------|------|------|
| | | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 | LC1 |
| | | D95 | D115 | D150 | F185 | F225 | F265 | F330 | F400 | F500 | F630 | F780 | F800 |
| 24 Vdc | 1 | 40 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 2 | 60 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 3 | 80 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 4 | – | 200 | – | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| 48/75 Vdc | 1 | 15 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 2 | 50 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 3 | 70 | 200 | 200 | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| | 4 | – | 200 | – | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| 125 Vdc | 1 | 2.5 | 100 | 100 | – | – | – | – | – | – | – | – | – |
| | 2 | 40 | 140 | 140 | 160 | 180 | 250 | 300 | 350 | 500 | 700 | 1000 | 700 |
| | 3 | 60 | 200 | 220 | 240 | 240 | 280 | 310 | 350 | 550 | 850 | 1000 | 850 |
| | 4 | – | 200 | – | 240 | 240 | 280 | 310 | 350 | 550 | 850 | 1000 | 850 |
| 225 Vdc | 1 | 1 | 100 | 100 | – | – | – | – | – | – | – | – | – |
| | 2 | 7 | 120 | 120 | 140 | 160 | 220 | 280 | 310 | 480 | 680 | 900 | 680 |
| | 3 | 35 | 140 | 140 | 160 | 180 | 250 | 300 | 350 | 500 | 700 | 1000 | 700 |
| | 4 | – | 180 | – | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| 300 Vdc | 3 | – | 100 | 100 | 140 | 160 | 220 | 280 | 310 | 480 | 680 | 900 | 680 |
| | 4 | – | 180 | – | 240 | 260 | 300 | 360 | 430 | 580 | 850 | 1300 | 850 |
| 460 Vdc | 1 | – | – | – | – | – | – | – | – | – | – | – | – |
| | 4 | – | 100 | 100 | 140 | 160 | 220 | 280 | 310 | 480 | 680 | 800 | 680 |
| 900 Vdc | 2 | – | – | – | – | – | – | – | – | – | – | – | – |
| 1200 Vdc | 3 | – | – | – | – | – | – | – | – | – | – | – | – |
| 1500 Vdc | 4 | – | – | – | – | – | – | – | – | – | – | – | – |

♦ For rated operational currents of contactors LC1 and LP1K, please consult your Local Square D Field Sales Office.

TeSys™ IEC-Style Contactors and Starters Selection Guide

Contactor Selection for Utilization Categories DC-1 to DC-5

Use in Category DC-1 to DC-5


The criteria for contactor selection are:

- The rated operational current I_e .
- The rated operational voltage V_e (see page 31).
- The utilization category and the time constant L/R (see page 31)
- The required electrical durability.


Maximum Operating Rate (Operating Cycles)

The following operating rate must not be exceeded: 120 operating cycles/hour at rated operational current I_e .

Electrical Durability

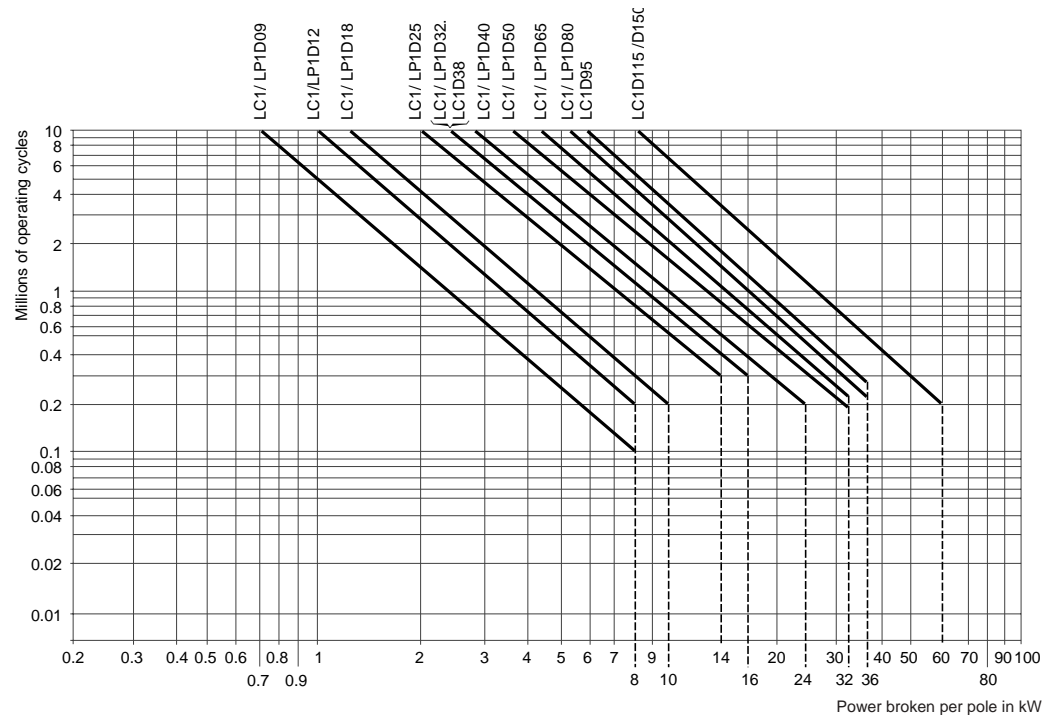

Example: Series-wound motor with $P = 1.5$ kW, $V_e = 200$ V, and $I_e = 7.5$ A.
 Application: counter-current braking and inching (utilization category DC-5).
 Select a contactor type LC1D25 or LP1D25 with 3 poles in series.
 The power broken is: $P_c \text{ total} = 2.5 \times 200 \times 7.5 = 3.75$ kW.
 The power broken per pole is: 1.25 kW.
 The electrical durability read from the curve above is ≥ 106 operating cycles.



Use of Poles in Parallel

Electrical durability can be increased by using poles connected in parallel. With N poles connected in parallel, the electrical durability becomes: electrical durability read from the curves $\times N \times 0.7$.

NOTE: Connecting the poles in parallel does not allow the maximum operational currents indicated on pages 28 and 29 to be exceeded.

NOTE: Ensure that the connections are made in such a way as to equalize the currents in each pole.

TeSys™ IEC-Style Contactors and Starters Selection Guide


Contactor Selection for Utilization Categories DC-1 to DC-5

Telemecanique offers a line of contactors for applications involving DC control circuits. It does not matter whether the power circuit is AC or DC. There are two considerations when using these contactors in applications involving a DC power circuit:


1. Voltage per pole must not be exceeded.

On D-line contactors, you can use the AC inductive/resistive rating as long as the voltage does not exceed 75 volts per pole. On F-line contactors, the voltage must not exceed 125 volts per pole. However, by wiring the contacts in **series**, you can multiply the number of poles in series by the maximum voltage allowed per pole.

Example 1: D-Line contactors (9 - 38 amps)

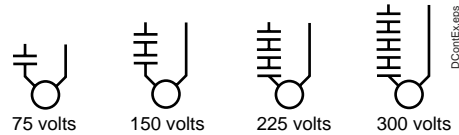

Example 2: F-Line & D115, D150 contactors

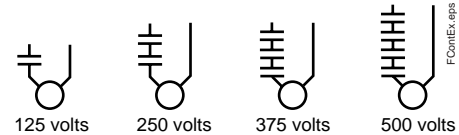

On AC power circuits, follow regular procedures.

2. $L/R \leq 15$ ms without derating.

A time constant is defined as the length of time it takes the current to rise from 0 to 63.2% of its maximum value, or to decay to 36.8% of its maximum value. Time constants are measured in seconds. The inductance (L) is measured in henries and the resistance (R) is measured in ohms.

In a pure resistive circuit, current reaches its maximum value when the circuit is energized. Because inductance opposes a change in current flow and tends to hold back current, the time constant will increase as the circuit inductance is increased. As the time constant exceeds 15 ms, the electrical life of the contactor is affected and a derating factor (normally one contactor size) is needed to compensate for this loss. In most applications this time constant will be under 15 ms. It is a good idea, however, to check with the motor manufacturer.

TeSys™ IEC-Style Contactors and Starters Selection Guide

Voltage Code Tables

Voltage Code Tables _ See notes pertaining to each product line at the end of this table.

| Voltage | Frequency | K-line | | | | D-line | | | F-line | | | | | |
|---------|----------------------|---------------------------------|-------------------------|---------------------------------|--------------|--|---|---|----------------------------------|----------------------------------|----------------------------------|------------------------|--------------------------------|---|
| | | LC1K LC2K Notes K1, K2 | LC7K LC8K Note K4 | LP1K LP2K Notes K2, K3 | LP4K LP5K | LC1D09 - D38 LC2D09 - D38 Notes D1, D3 | LC1D40 - D95 LC2D40 - D95 Note D1 | LC1D115 - D150 Note D1, D2, D4 | LC1F115 - F225 Note F1, F2 | LC1F265 - F400 Note F1, F2 | LC1F500 - F630 Note F1, F2 | LC1F780 Note F1, F2 | LC1F800 Note F1, F2, F3, | |
| 5 | Low Consump DC | - | - | - | - | AL | - | - | - | - | - | - | - | |
| 12 | 50/60 | J7 | - | - | - | J7 | - | - | - | - | - | - | - | |
| | 50 | - | - | - | - | - | J5 | - | - | - | - | - | - | |
| | DC | - | - | JD | - | JD | JD | - | - | - | - | - | - | |
| | Low Consump DC | - | - | - | JW3 | JL | - | - | - | - | - | - | - | |
| | Wide Range DC | - | - | - | - | - | JW | - | - | - | - | - | - | |
| 20 | 50/60 | Z7 | - | - | - | - | Z7 | - | - | - | - | - | - | |
| | 50 | - | - | - | - | - | Z5 | - | - | - | - | - | - | |
| | 60 | - | - | - | - | - | Z6 | - | - | - | - | - | - | |
| | DC | - | - | ZD | - | - | - | - | - | - | - | - | - | |
| | Low Consump DC | - | - | - | ZW3 | ZL | - | - | - | - | - | - | - | |
| 24 | 50/60 | B7 Note K2 | B7 | - | - | B7 | B7 | B7 | - | - | - | - | - | |
| | 50 | - | - | - | - | - | B5 | B5 | B5 | - | - | - | - | |
| | 60 | - | - | - | - | - | B6 | B6 | B6 | - | - | - | - | |
| | 40-400 | - | - | - | - | - | - | - | - | B7 Note F4 | - | - | - | |
| | DC | - | - | BD Note K2 | - | BD | BD | BD | BD | BD | BD Note F4 | - | - | - |
| | Low Consump DC | - | - | - | BW3 | BL | - | - | - | - | - | - | - | |
| | Wide Range DC | - | - | - | - | - | BW | - | - | - | - | - | - | |
| 36 | 50/60 | C7 | - | - | - | CC7 | - | - | - | - | - | - | - | |
| | DC | - | - | CD | - | CD | CD | CD | - | - | - | - | - | |
| | Wide Range DC | - | - | - | - | - | CW | - | - | - | - | - | - | |
| 42 | 50/60 | D7 | D7 | - | - | D7 | D7 | D7 | - | - | - | - | - | |
| | 50 | - | - | - | - | - | D5 | D5 | D5 | - | - | - | - | |
| | 60 | - | - | - | - | - | - | - | - | - | - | - | - | |
| 48 | 50/60 | E7 | E7 | - | - | E7 | E7 | E7 | - | - | - | - | - | |
| | 50 | - | - | - | - | - | E5 | E5 | E5 | - | - | - | - | |
| | 60 | - | - | - | - | - | E6 | E6 | E6 | - | - | - | - | |
| | 40-400 | - | - | - | - | - | - | - | - | E7 | E7 | - | - | |
| | DC | - | - | ED | - | ED | ED | ED | ED | ED | ED | ED | - | |
| | Low Consump DC | - | - | - | EW3 | EL | - | - | - | - | - | - | - | |
| | Wide Range DC | - | - | - | - | - | EW | - | - | - | - | - | - | |
| 60 | 50/60 | - | - | - | - | EE7 | - | - | - | - | - | - | - | |
| | DC | - | - | ND | - | ND | ND | ND | - | - | - | - | - | |
| 72 | DC | - | - | SD | - | SD | SD | SD | - | - | - | - | - | |
| | Low Consump DC | - | - | - | SW3 | SL | - | - | - | - | - | - | - | |
| | Wide Range DC | - | - | - | - | - | SW | - | - | - | - | - | - | |
| 96 | Low Consump DC | - | - | - | - | DL | - | - | - | - | - | - | | |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Voltage Code Tables

Voltage Code Tables (Continued) _ See notes pertaining to each product line at the end of this table.

| Voltage | Frequency | K-line | | | | D-line | | | F-line | | | | |
|---------|----------------------|---------------------------------|----------------------------|--------------------------------|--------------|--|---|---|----------------------------------|----------------------------------|----------------------------------|------------------------|--------------------------------|
| | | LC1K LC2K Notes K1, K2 | LC7K LC8K Note K4 | LP1K LP2K Note K2, K3 | LP4K LP5K | LC1D09 - D38 LC2D09 - D38 Notes D1, D3 | LC1D40 - D95 LC2D40 - D95 Note D1 | LC1D115 - D150 Note D1, D2, D4 | LC1F115 - F225 Note F1, F2 | LC1F265 - F400 Note F1, F2 | LC1F500 - F630 Note F1, F2 | LC1F780 Note F1, F2 | LC1F800 Note F1, F2, F3, |
| 100 | 50/60 | - | - | - | - | K7 | K7 | - | - | - | - | - | - |
| | DC | - | - | KD | - | - | - | - | - | - | - | - | - |
| 110 | 50/60 | F7 | F7 | - | - | F7 | F7 | F7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | F5 | F5 | F5 | - | - | - | - |
| | 60 | - | - | - | - | - | F6 | F6 | F6 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | F7 | F7 | F7 | F7 | - |
| | DC | - | - | FD | - | FD | FD | FD | FD | FD | FD | FD | FW |
| | Low Consump DC | - | - | - | FW3 | FL | - | - | - | - | - | - | - |
| | Wide Range DC | - | - | - | - | - | FW | - | - | - | - | - | - |
| 110/127 | 40-400 | - | - | - | - | - | - | - | - | - | - | - | FE7 |
| 115 | 50/60 | FE7 | FE7 | - | - | FE7 | FE7 | FE7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | FE5 | FE5 | FE5 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | FE7 | FE7 | FE7 | FE7 | - |
| 120 | 50/60 | G7 | G7 | - | - | G7 | G7 | G7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 60 | - | - | - | - | - | G6 | G6 | G6 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | G7 | G7 Note F5 | F7 | F7 | - |
| | DC | - | - | - | - | - | - | - | - | - | - | - | FW |
| | Low Consump DC | - | - | - | GW3 | - | - | - | - | - | - | - | - |
| 125 | DC | - | - | GD | - | GD | GD | GD | GD | GD | GD | GD | - |
| 127 | 50/60 | FC7 | - | - | - | FC7 | - | FC7 | - | - | - | - | - |
| | 60 | - | - | - | - | - | G5 | FC5 | G5 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | G7 | G7 | G7 | G7 | - |
| 155 | DC | - | - | PD | - | - | - | - | - | - | - | - | |
| 174 | DC | - | - | QD | - | - | - | - | - | - | - | - | |
| 200 | 50/60 | - | - | - | - | L7 | L7 | - | - | - | - | - | - |
| | DC | - | - | LD | - | - | - | - | - | - | - | - | - |
| 200/208 | 50/60 | L7 | - | - | - | - | - | - | - | - | - | - | - |
| | 60 | - | - | - | - | - | - | - | L6 | - | - | - | - |
| 208 | 40-400 | - | - | - | - | - | - | - | - | L7 | L7 | L7 | - |
| | 50/60 | - | - | - | - | LE7 | LE7 | LE7 | - | - | - | - | - |
| | 60 | - | - | - | - | - | L6 | L6 | - | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | L7 | - | - | - | - |
| 220 | 50/60 | - | M7 | - | - | M7 | M7 | M7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | - | M5 | M5 | - | - | - | - |
| | 60 | - | - | - | - | - | M6 | M6 | M6 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | M7 | M7 | M7 | M7 | - |
| | DC | - | - | MD | - | MD | MD | MD | - | MD | MD | MD | - |
| | Low Consump DC | - | - | - | - | ML | - | - | - | - | - | - | - |
| 220/230 | Wide Range DC | - | - | - | - | - | MW | - | - | - | - | - | - |
| | 50/60 | M7 | - | - | - | - | - | - | - | - | - | - | - |
| | 50 | - | - | - | - | - | M5 | - | - | - | - | - | - |
| | 60 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | - | - | - | - | - |
| 220/240 | DC | - | - | - | - | - | - | - | MD | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | - | - | - | - | P7 |
| 220/240 | DC | - | - | - | - | - | - | - | - | - | - | - | MW |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Voltage Code Tables

Voltage Code Tables (Continued) _ See notes pertaining to each product line at the end of this table.

| Voltage | Frequency | K-line | | | | D-line | | | F-line | | | | |
|---------|----------------------|---------------------------------|----------------------------|--------------------------------|--------------|--|---|---|----------------------------------|----------------------------------|----------------------------------|------------------------|--------------------------------|
| | | LC1K LC2K Notes K1, K2 | LC7K LC8K Note K4 | LP1K LP2K Note K2, K3 | LP4K LP5K | LC1D09 - D38 LC2D09 - D38 Notes D1, D3 | LC1D40 - D95 LC2D40 - D95 Note D1 | LC1D115 - D150 Note D1, D2, D4 | LC1F115 - F225 Note F1, F2 | LC1F265 - F400 Note F1, F2 | LC1F500 - F630 Note F1, F2 | LC1F780 Note F1, F2 | LC1F800 Note F1, F2, F3, |
| 230 | 50/60 | P7 | - | - | - | P7 | P7 | P7 | - | - | - | - | - |
| | 50 | - | - | - | - | U7 | P5 | P5 | P5 | - | - | - | - |
| | 60 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | P7 | P7 | P7 | P7 | - |
| | DC | - | - | MPD | - | - | - | - | - | - | - | - | - |
| 230/240 | 50/60 | U7 Note K4 | U7 | - | - | - | - | - | - | - | - | - | - |
| 240 | 50/60 | - | - | - | - | U7 | U7 | U7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | U5 | U5 | U5 | - | - | - | - |
| | 60 | - | - | - | - | - | U6 | U6 | U6 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | U7 | U7 | U7 | U7 | - |
| | DC | - | - | MUD | - | - | - | - | - | - | - | - | - |
| 250 | DC | - | - | UD | - | UD | UD | UD | UD | UD | UD | UD | - |
| | Low Consump DC | - | - | - | - | UL | - | - | - | - | - | - | - |
| 256 | 50/60 | W7 | - | - | - | - | - | - | - | - | - | - | - |
| | 50 | - | - | - | - | - | W5 | - | - | - | - | - | - |
| 277 | 50/60 | UE7 | - | - | - | W7 | - | UE7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | W6 | W6 | W5 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | - | W7 | W7 | W7 | - |
| 380 | 50/60 | - | - | - | - | Q7 | Q7 | Q7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | - | Q5 | Q5 | - | - | - | - |
| | 60 | - | - | - | - | - | Q6 | Q6 | Q6 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | Q7 | Q7 | Q7 | Q7 | - |
| 380/400 | 50/60 | Q7 Note K4 | - | - | - | - | - | - | - | - | - | - | - |
| | 50 | - | - | - | - | - | Q5 | - | - | - | - | - | - |
| | 60 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | - | - | - | - | - |
| | DC | - | - | - | - | - | - | - | - | - | - | - | QW |
| 380/440 | 40-400 | - | - | - | - | - | - | - | - | - | - | V7 | |
| 400 | 50/60 | V7 | - | - | - | V7 | V7 | V7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | V5 | V5 | V5 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | V7 | V7 | V7 | V7 | - |
| 400/415 | 50/60 | N7 | - | - | - | - | - | - | - | - | - | - | |
| 415 | 50/60 | - | - | - | - | N7 | N7 | N7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | N5 | N5 | N5 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | N7 | N7 | N7 | N7 | - |
| 415-440 | 50 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | - | - | - | - | - |
| 440 | 50/60 | R7 | - | - | - | R7 | R7 | R7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | R5 | R5 | - | - | - | - | - |
| | 60 | - | - | - | - | - | R6 | R6 | R6 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | R7 | R7 | R7 | R7 | - |
| | DC | - | - | - | - | RD | RD | RD | - | RD | RD | RD | - |
| 440/460 | DC | - | - | - | - | - | - | RD | - | - | - | - | |
| 460/480 | 60 | - | - | - | - | - | - | Q5 | - | - | - | - | |
| 480 | 50/60 | T7 | - | - | - | T7 | - | T7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 60 | - | - | - | - | - | T6 | T6 | - | - | - | N7 | - |
| | 40-400 | - | - | - | - | - | - | - | - | S7 Note F4 | - | - | - |

TeSys™ IEC-Style Contactors and Starters Selection Guide

Voltage Code Tables

Voltage Code Tables (Continued) _ See notes pertaining to each product line at the end of this table.

| Voltage | Frequency | K-line | | | | D-line | | | F-line | | | | |
|---------|-----------|---------------------------------|----------------------------|--------------------------------|--------------|--|---|---|----------------------------------|----------------------------------|----------------------------------|------------------------|--------------------------------|
| | | LC1K LC2K Notes K1, K2 | LC7K LC8K Note K4 | LP1K LP2K Note K2, K3 | LP4K LP5K | LC1D09 - D38 LC2D09 - D38 Notes D1, D3 | LC1D40 - D95 LC2D40 - D95 Note D1 | LC1D115 - D150 Note D1, D2, D4 | LC1F115 - F225 Note F1, F2 | LC1F265 - F400 Note F1, F2 | LC1F500 - F630 Note F1, F2 | LC1F780 Note F1, F2 | LC1F800 Note F1, F2, F3, |
| 500 | 50/60 | S7 | - | - | - | S7 | - | S7 | - | - | - | - | - |
| | 50 | - | - | - | - | - | S5 | S5 | S5 | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | S7 | S7 | S7 | S7 | - |
| 575 | 50/60 | SC7 | - | - | - | SC7 | - | - | - | - | - | - | - |
| | 60 | - | - | - | - | - | S6 | - | - | - | - | - | - |
| 600 | 50/60 | X7 | - | - | - | X7 | - | - | - | - | - | - | - |
| | 60 | - | - | - | - | - | X6 | - | - | - | - | - | - |
| | 40-400 | - | - | - | - | - | - | - | - | - | X7 | - | - |
| 660 | 50 | - | - | - | - | Y5 | Y5 | - | - | - | - | - | - |
| | 60 | - | - | - | - | - | - | - | Y6 | - | - | - | - |
| 660/690 | 50/60 | Y7 | - | - | - | - | - | - | - | - | - | - | - |

Notes:

K-Line:

K1 Up to and including 240 V, coil with integral suppression device (bi-directional diode): add 2 to the requested voltage code. Ex. J72

K2 For voltage codes B7 or BD, when connecting an electronic sensor or timer in series with the coil of the control relay, select a 20 V coil (Voltage code Z7 for AC or ZD for DC). This coil compensates for incurred voltage drop.

K3 Coil with integral suppression device available (bidirectional diode): add 3 to the requested voltage code. Ex JD3.

K4 For voltage codes M7, U7, Q7, N7, Y7 and all LC7K and LC8K devices, operating range is 0.85 - 1.10 of nominal. For all other LC1K and LC2K the operating range is 0.80 - 1.15 of nominal.

D line:

D1 For operating ranges refer to technical data section of the D-line contactors. Ranges vary as a function of the current rating of the contactor and type of supply (AC/DC)

D2 LC1-D150 Contactors utilize dual frequency 50/60 Hz. coils only. Single frequency coils are not available.

D3 LC1D09 -LC1D38 contactors with DC coil have integral suppression device (bi-directional diode) as standard.

D4 D115 and D150 coils have integral suppression device fitted as standard.

F-Line:

F1 For operating ranges refer to technical data section of the F-line contactors. Ranges vary as a function of the supply (AC/DC).

F2 For non-stock voltage codes, order contactor and coil separately. See page 202 - 209 for coils.


F3 Built in surge suppressor included on LC1F800 coils.

F4 For use with LC1F265 and LC1F330 only.

F5 For LC1-F400 contactor with 120VAC coil, use F7 code.

TeSys™ IEC-Style Contactors and Starters Selection Guide

Definitions and Comments

| | | | | | |
|---|--|------------------------|------------------------|------------------------|------------------------|
| Altitude | The low oxygen atmosphere at high altitudes reduces the dielectric strength of the air and hence the rated operational voltage of the contactor. It also reduces the cooling effect of the air and hence the rated operational current of the contactor (unless the temperature drops at the same time). | | | | |
| | No derating is necessary up to 3000 m (9,840 ft.). Derating factors to be applied above this altitude for main pole operational voltage and current (AC supply) are as follows. | | | | |
| | Altitude | 3500 m (11,480 ft.) | 4000 m (13,120 ft.) | 4500 m (14,760 ft.) | 5000 m (16,400 ft.) |
| | Rated operational voltage | 0.90 | 0.80 | 0.70 | 0.60 |
| | Rated operational current | 0.92 | 0.90 | 0.88 | 0.86 |
| Ambient air temperature | The temperature of the air surrounding the device, measured near to the device. The operating characteristics are given: <ul style="list-style-type: none"> • with no restriction for temperatures between -5 and +55 °C (+23 and +131 °F) • with restrictions, if necessary, for temperatures between -50 and +70 °C (-58 and +149 °F) | | | | |
| Rated operational current (Ie) | This is defined taking into account the rated operational voltage, operating rate and duty, utilization category and ambient temperature around the device. | | | | |
| Rated conventional thermal current (Ith) ♦ | The current which a closed contactor can sustain for a minimum of 8 hours without its temperature rise exceeding the limits given in the standards. | | | | |
| Permissible short time rating | The current which a closed contactor can sustain for a short time after a period of no load, without dangerous overheating. | | | | |
| Rated operational voltage (Ve) | This is the voltage value which, in conjunction with the rated operational current, determines the use of the contactor or starter, and on which the corresponding tests and the utilization category are based. For three-phase circuits it is expressed as the voltage between phases. Apart from exceptional cases such as rotor short-circuiting, the rated operational voltage Ve is less than or equal to the rated insulation voltage Vi. | | | | |
| Rated control circuit voltage (Vc) | The rated value of the control circuit voltage, on which the operating characteristics are based. For AC applications, the values are given for a near sinusoidal wave form (less than 5% total harmonic distortion). | | | | |
| Rated insulation voltage (Vi) | This is the voltage value used to define the insulation characteristics of a device and referred to in dielectric tests determining leakage paths and creepage distances. As the specifications are not identical for all standards, the rated value given for each of them is not necessarily the same. | | | | |
| Rated impulse withstand voltage (Vimp) | The peak value of a voltage surge which the device is able to withstand without breaking down. | | | | |
| Rated operational power (expressed in kW) | The rated power of the standard motor which can be switched by the contactor, at the stated operational voltage. | | | | |
| Rated breaking capacity ▲ | This is the current value which the contactor can break in accordance with the breaking conditions specified in the IEC standard. | | | | |
| Rated making capacity ▲ | This is the current value which the contactor can make in accordance with the making conditions specified in the IEC standard. | | | | |
| On-load factor (m) | <p>This is the ratio between the time the current flows (t) and the duration of the cycle (T)</p> $m = \frac{t}{T}$  <p>Cycle duration: duration of current flow + time at zero current</p> | | | | |
| Pole impedance | The impedance of one pole is the sum of the impedance of all the circuit components between the input terminal and the output terminal. The impedance comprises a resistive component (R) and an inductive component (X=Lω). The total impedance therefore depends on the frequency and is normally given for 50 Hz. This average value is given for the pole at its rated operational current. | | | | |
| Electrical durability | This is the average number of on-load operating cycles which the main pole contacts can perform without maintenance. The electrical durability depends on the utilization category, the rated operational current and the rated operational voltage. | | | | |
| Mechanical durability | This is the average number of on-load operating cycles (i.e. with zero current flow through the main poles) which the contactor can perform without mechanical failure | | | | |

♦ Conventional thermal current, in free air, conforming to IEC standards.

▲ For AC applications, the breaking and making capacities are expressed by the rms value of the symmetrical component of the short-circuit current. Taking into account the maximum asymmetry which may exist in the circuit, the contacts therefore have to withstand a peak asymmetrical current which may be twice the rms symmetrical component.

NOTE: These definitions are extracted from standard IEC 60947-1.

TeSys™ K-Line

Mini-Contactors, Overload Relays, and Accessories

Catalog

04

File 8502



CONTENTS

| Description | Page |
|---|------|
| General Information | 38 |
| Mini-contactors | |
| Characteristics | 39 |
| Selection | 43 |
| K-line Voltage Code Table | 52 |
| Auxiliary Contacts and Timers | 54 |
| Accessories | 56 |
| Dimensions and Mounting | 57 |
| Schematics | 59 |
| Overload Relays | |
| Characteristics | 61 |
| Selection | 63 |
| Dimensions, Mounting, and Schematics | 64 |
| Low-consumption Mini-contactors | |
| Characteristics | 65 |
| Selection | 68 |
| Auxiliary Contacts, Timers, and Accessories | 72 |
| Dimensions and Mounting | 73 |
| Schematics | 75 |

TeSys™ K-line Mini-Contactors and Starters

General Information







K-line Mini-contactors, and Overload Relays are ideal for general-duty applications where small size and reliability are key concerns. They feature:

- Three contactor ratings for the USA market:
 - K06 rated for 3 HP motors at 480 Vac or 600 Vac.
 - K09 rated for 5 HP motors at 480 Vac or 600 Vac.
 - K12 rated for 7.5 HP motors at 480 Vac or 10 HP at 600 Vac.
- Space savings — the special magnet and armature structure allow for a DC coil-operated device with the same physical size and panel footprint of the AC coil version.
- IP20-rated touch-safe terminals with both North American and International terminal markings
- Mountable on 35mm DIN rail or panel mount with screws
- Available in 3-pole contactor versions with built-in auxiliary contact for holding circuit or 4-pole contactor versions.
- Easily-installed accessories.
 - 2-pole or 4-pole instantaneous auxiliary contact blocks with screw clamp, slip-on, or spring terminals.
 - Transient voltage surge suppressors.
 - Electronic 1 to 30 second on-delay timers.
- Four wiring methods to reduce installation time:
 - Captive screw terminals for use with either Phillips or slotted head screwdrivers.
 - Slip-on terminals for quick installation of single 1/4" or double 1/8" tabs.
 - Terminal pins for soldering the contactor directly to a printed circuit board.
 - Spring terminals for extreme-vibration applications.
- Control circuit flexibility
All versions of the K-line mini-contactors are available with an AC, DC, or low-consumption DC operating coil. The low-consumption DC coil operating device can be energized by a low level DC signal from a computer or PLC and includes built-in transient suppression and LED "On" indicator.
- Bimetallic overload relays
The K-line Class 10 bimetallic overload relays are ambient-compensated and include single-phase sensitivity for phase unbalance and phase loss protection. Standard features include isolated N.C. trip contact and N.O. alarm contact, manual or automatic reset function, tamper resistant window for full load current settings, and Test trip button. Five pins connect to the contactor load side terminals — three for the power circuit and two for the control circuit — which eliminate customer wiring for the 3-wire control holding circuit.

TeSys™ K-line Mini-Contactors and Starters

Characteristics of Type LC•K and LP•K Contactors

Environment
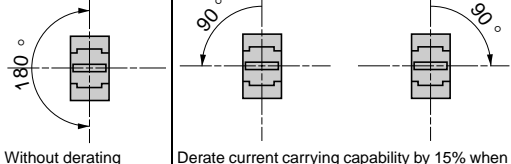
| | | | | | | |
|---|---|--|---|--|-------------------|-------------------|
| Rated insulation voltage (Vi) | Conforming to IEC 60947 | V | 690 | | | |
| | Conforming to VDE 0110 gr C | V | 750 | | | |
| | Conforming to BS 5424, NF C 20-040 | V | 690 | | | |
| | Conforming to CSA 22-2 No. 14, UL 508 | V | 600 | | | |
| Rated impulse withstand voltage (Vimp) | | kV | 8 | | | |
| Conforming to standards |  Meets the essential requirements of the LV & EMC directives | IEC 60947, NF C 63-110, VDE 0660, BS 5424, UL508, CSA 22-2 No. 14 | | | | |
| Approvals | LC•K06, LC•K09, LC•K12 LP•K06, LP•K09, LP•K12 |  E164862 NLDX (Screw Clamp) |  E164862 NLDX2 (Slip-on & Solder Pin) |  LR 43364 # 321104 | | |
| Protective treatment | Conforming to IEC 60068 (DIN 50016) | "TC" (Fungus-proof, tropicalization protection) | | | | |
| Degree of protection | Conforming to VDE 0106 | Protection against direct finger contact | | | | |
| Ambient air temperature around the device | Storage | - 50° to + 80°C (-58° to +176°F) | | | | |
| | Operation | - 25° to + 50°C (-13° to +122°F) | | | | |
| Maximum operating altitude | Without derating | 2000 m (6562 ft.) | | | | |
| Operating position | Vertical axis |  | Without derating | | | |
| | Horizontal axis |  | Without derating Derate current carrying capability by 15% when not mounted vertically | | | |
| Flame resistance | Conforming to UL 94 | Self-extinguishing material V1 | | | | |
| | Conforming to NF F 16-101 and 16-102 | Conforming to requirement 2 | | | | |
| Shock resistance (1/2 sine wave, 11 ms) | Contact open | 10 gn | | | | |
| | Contact closed | 15 gn | | | | |
| Vibration resistance 5 to 300 Hz | Contact open | 2 gn | | | | |
| | Contact closed | 4 gn | | | | |
| Safe circuit separation | Conforming to VDE 0106 and IEC 60536 | SELV ♦, up to 400 V | | | | |
| Cabling | | Min | Max | Max to IEC 60947 | | |
| | Screw-clamp terminals | Solid or stranded cable | AWG | 1 x 18 | 2 x 14 or 1 x 12 | — |
| | | Solid cable | mm ² | 1 x 1.5 | 2 x 4 | 1 x 4 + 1 x 2.5 |
| | | Stranded cable without cable end | mm ² | 1 x 0.75 | 2 x 4 | 2 x 2.5 |
| | | Stranded cable with cable end | mm ² | 1 x 0.34 | 1 x 1.5 + 1 x 2.5 | 1 x 1.5 + 1 x 2.5 |
| Slip-on connectors | Clip | 2 x 2.8mm or 1 x 6.35mm (2 x 0.110 in. or 1 x 0.250 in.) | | | | |
| Solder pins for printed circuit board | With locating device between power and control circuits | 4 mm x 35 microns | | | | |
| Tightening torque | Phillips no. 2 or 3/16" slotted head screwdriver | 0.8 N•m (7lb.-in.) | | | | |
| Terminal referencing | Conforming to standards EN 50005 and EN 50012 | Up to 5 contacts | | | | |

♦ Safety extra low voltage.

TeSys™ K-line Mini-Contactors and Starters

Characteristics of Type LC•K and LP•K Contactors

Pole Characteristics

| | | | | | | | | | |
|--|--|---|---|-----------|-----------|-----------|----------------|-----------|-----------|
| Conventional thermal current (Ith) | For ambient temperature ≤ 50 °C (122 °F) | | 20 A | | | | | | |
| Rated operational frequency | | | 50/60 Hz | | | | | | |
| Frequency limits of the operational current | | | Up to 400 Hz | | | | | | |
| Rated operational voltage (Ve) | | | 690 Vac | | | | | | |
| Rated making capacity | I rms conforming to NF C 63-110 and IEC 60947 LC•K06, LP•K06, LC•K09, LP•K09 | | 110 A | | | | | | |
| | LC•K12, LP•K12 | | 144 A | | | | | | |
| | LC•K16 | | 160 A | | | | | | |
| Rated breaking capacity | Conforming to NF C 63-110 and IEC 60947 | | 220/230 V | 380/400 V | 415 V | 440 V | 500 V | 660/690 V | |
| | LC•K06, LP•K06, LC•K09, LP•K09 I rms | | 110 A | 110 A | 110 A | 110 A | 80 A | 70 A | |
| | LC•K12, LP•K12 | | – | – | – | 110 A | 80 A | 70 A | |
| | LC•K16 | | – | – | – | 110 A | 80 A | 70 A | |
| Permissible short-time rating | In free air for a time "t" from cold state (θ ≤ 50 °C [122 °F]) | | 1 s | 5 s | 10 s | 30 s | 1 min | 3 min | ≥ 15 min |
| | LC•K06, LP•K06, LC•K09, LP•K09 | | 90 A | 85 A | 80 A | 60 A | 45 A | 40 A | 20 A |
| | LC•K12, LP•K12 LC•K16 | | 115 A | 105 A | 100 A | 75 A | 55 A | 50 A | 25 A |
| Short-circuit protection | By circuit breaker | | Select in accordance with NEC and local codes | | | | | | |
| | By fuses | | Max 400% of motor FLA | | | | | | |
| Average impedance/pole | At Ith and 50 Hz | | 3 mΩ | | | | | | |
| | At Ith and 60 Hz | | 3.6 mΩ | | | | | | |
| Utilization in category AC-1: resistive circuit, heating, lighting (Ve ≤ 440 V) | Maximum rated operational current for a temperature ≤ 50 °C (122 °F) | | 20 A | | | | | | |
| | Maximum rated operational current for a temperature ≤ 70 °C (158 °F) | | 16 A for Ve only | | | | | | |
| | Rated operational current limits in relation to on-load factor and operating frequency | | On-load factor | | 90% | 60% | 30% | | |
| | | | 300 op. cycles/hour | | 13 A | 15 A | 18 A | | |
| | | | 120 op. cycles/hour | | 15 A | 18 A | 19 A | | |
| | | | 30 op. cycles/hour | | 19 A | 20 A | 20 A | | |
| Increase in operational current by paralleling of poles | | Apply the following coefficients to the current values given above. These take into account the often unbalanced current distribution between poles | | | | | | | |
| | | 2 poles in parallel: K = 1.60 | | | | | | | |
| | | 3 poles in parallel: K = 2.25 | | | | | | | |
| | | 4 poles in parallel: K = 2.80 | | | | | | | |
| Utilization in category AC-3 Squirrel cage motors | Operational power according to the voltage | Voltage 50 or 60 Hz | 115 V | 220 V | 220/240 V | 380/415 V | 440/480 V | 500/600 V | 660/690 V |
| | | | 1-phase | | 3-phase | | | | |
| | LC•K06, LP•K06 | Motor ratings | 0.37 kW | 0.75 kW | 1.5 kW | 2.2 kW | 3 kW | 3 kW | 3 kW |
| | LC•K09, LP•K09 | Motor ratings | 0.55 kW | 1.1 kW | 2.2 kW | 4 kW | 4 kW | 4 kW | 4 kW |
| | LC•K12, LP•K12 | Motor ratings | – | – | 3 kW | 5.5 kW | 5.5/4 (480) kW | 4 kW | 4 kW |
| | LC•K16 | Motor ratings | – | – | 4 kW | 7.5 kW | 5.5/4 (480) kW | 4 kW | 4 kW |
| | Maximum operating rate (in operating cycles/hour in relation to percentage of rated power) | | Op. cycles/hour | | 600 | | 900 | 1200 | |
| | | Power | | 100% | | 75% | 50% | | |
| Utilization in category AC-3 Squirrel cage motors | Operational power according to the voltage | Voltage 50 or 60 Hz | 115 | 220 | 200/208 | 220/240 | 460/480 | 575/600 | |
| | | | 1-phase | | 3-phase | | | | |
| | LC•K06, LP•K06 | Motor ratings | 0.5 HP | 1 HP | 1.5 HP | 1.5 HP | 3 HP | 3 HP | |
| | LC•K09, LP•K09 | Motor ratings | 0.5 HP | 1.5 HP | 2 HP | 3 HP | 5 HP | 5 HP | |
| | LC•K12, LP•K12 | Motor ratings | 0.5 HP | 1.5 HP | 3 HP | 3 HP | 7.5 HP | 10 HP | |
| | LC•K16, LP•K16 | Not UL Listed or CSA Certified. | | | | | | | |

TeSys™ K-line Mini-Contactors and Starters Characteristics of Type LC•K and LP•K Contactors

Control Circuit Characteristics

| Type | | LC1 | LC2 | LC7 | LC8 | LP1 | LP2 |
|--|-----------------------------------|-----------------|-------|----------------|-------|-----------------|-----|
| Rated control circuit voltage (Vc) | | 12 to 690 Vac ♦ | | 24 to 230 Vac | | 12 to 250 Vdc ♦ | |
| Control voltage limits (≤ 50 °C [122 °F]) single voltage coil | For operation ▲ | 0.8 to 1.15 Vc | | 0.85 to 1.1 Vc | | 0.8 to 1.15 Vc | |
| | For drop-out | ≥ 0.20 Vc | | ≥ 0.10 Vc | | ≥ 0.10 Vc | |
| Average consumption at 20 °C (68 °F) and at Vc | Inrush | 30 VA | | 3 VA | | 3 W | |
| | Sealed | 4.5 VA | | 3 VA | | 3 W | |
| Heat dissipation | | 1.3 | | 3 | | 3 | |
| Operating time at 20 °C (68 °F) and at Vc | Between coil energization and: | | | | | | |
| | - opening of the N.C. contacts | 5 to 15 ms | | 25 to 35 ms | | 25 to 35 ms | |
| | - closing of the N.O. contacts | 10 to 20 ms | | 30 to 40 ms | | 30 to 40 ms | |
| | Between coil de-energization and: | | | | | | |
| - opening of the N.O. contacts | 10 to 20 ms | | 30 ms | | 10 ms | | |
| - closing of the N.C. contacts | 15 to 25 ms | | 40 ms | | 15 ms | | |
| Maximum immunity to micro-breaks | | 2 ms | | 2 ms | | 2 ms | |
| Maximum operating rate | In operating cycles per hour | 3600 | | 3600 | | 3600 | |
| Mechanical durability at Vc In millions of operating cycles | 50/60 Hz coil | 10 | 5 | 10 | 5 | – | – |
| | DC coil | – | – | – | – | 10 | 5 |

♦ For mains supplies with a high level of interference (voltage surge > 800 V), use a suppressor module LA4KE1FC (50 to 129 V) or LAFKE1UG (130 to 250 V); see page 56.

▲ LC1K16: 0.85 to 1.15 Vc.

TeSys™ K-line Mini-Contactors and Starters


Characteristics of Type LC•K and LP•K Contactors

Auxiliary Contact Characteristics and Instantaneous Contact Blocks

| | | |
|---|--|--------------|
| Number of contacts | On LC•K or LP•K | 1 |
| | On LA1K | 2 or 4 |
| Rated operational voltage (Ve) | Up to | 690 Vac |
| Rated insulation voltage (Vi) | Conforming to BS 5424 | 690 Vac |
| | Conforming to IEC 60947 | 690 Vac |
| | Conforming to VDE 0110 group C | 750 Vac |
| | Conforming to CSA C 22.2 No.14, UL 508 | 600 Vac |
| Conventional thermal current (Ith) | For ambient temperature ≤ 50 °C (122 °F) | 10 A |
| Frequency of operational current | | Up to 400 Hz |
| Minimum switching capacity | V min (DIN 19 240) | 17 Vac |
| | I min | 5 mA |
| Short-circuit protection | Conforming to IEC 60947 and VDE 0660, gl fuse | 10 A |
| Rated making capacity | Conforming to IEC 60947 | I rms 110 A |
| Overload current | Permissible for | 1 s 80 A |
| | | 500 ms 90 A |
| | | 100 ms 110 A |
| Insulation resistance | | > 10 mΩ |
| Non-overlap distance | Linked contacts conforming to INRS and BIA spec. | 0.5 mm |


| Operational power of contacts conforming to IEC 60947 | AC supply, category AC-15 | | | | | | DC supply, category DC-13 | | | | | | | |
|---|---------------------------|------|------|---------|---------|-------|---------------------------|---|-----|-----|-----|-----|-----|-----|
| | V | 24 | 48 | 110/127 | 220/230 | 440 | 600/690 | V | 24 | 48 | 110 | 220 | 440 | 600 |
| 1 million operating cycles | VA | 48 | 96 | 240 | 440 | 880 | 1200 | W | 120 | 80 | 60 | 52 | 51 | 50 |
| 2 million operating cycles | VA | 17 | 34 | 86 | 158 | 317 | 500 | W | 55 | 38 | 30 | 28 | 26 | 25 |
| 10 million operating cycles | VA | 7 | 14 | 36 | 66 | 132 | 200 | W | 15 | 11 | 9 | 8 | 7 | 6 |
| Occasional making capacity | VA | 1000 | 2050 | 5000 | 10000 | 13000 | 9000 | W | 720 | 600 | 400 | 300 | 230 | 200 |

Power in broken VA

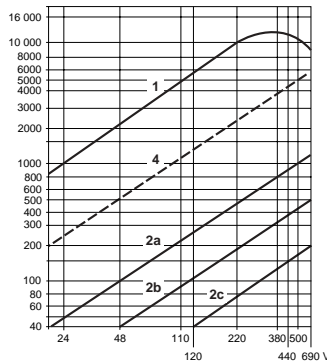

- 1 Breaking limit of contacts valid for maximum of 50 operating cycles at 10 s intervals (breaking current = making current x power factor 0.7).
- 2 Electrical durability of contacts for:
 - 1 million operating cycles (2a)
 - 3 million operating cycles (2b)
 - 10 million operating cycles (2c).
- 3 Breaking limit of contacts valid for maximum of 20 operating cycles at 10 s intervals with current passing for 0.5 s per operating cycle.
- 4 Thermal limit.

Power in broken W

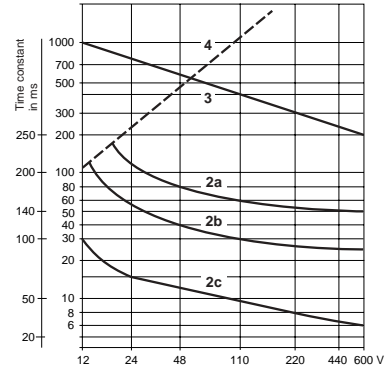

TeSys™ K-line Mini-Contactors and Starters

Selection of Contactors for Motor Control

General-Purpose Contactors for AC Control Circuits

The table below shows general-purpose contactors. The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, “ready-to-tighten” position.

For information on add-on auxiliary contact blocks and accessories, see page 54 to 58.

| Horsepower Ratings for North American Applications | | | | | | | Kilowatt Ratings for International Applications | | | | Type of Connection | Auxiliary Contacts | | Catalog Number ▼ ▲ | Weight lb. (kg) |
|---|---------------|---------------|---------------|---------------|---------------|------------------------------|--|----------------|------------------------|---|--|--------------------|-------------|-----------------------|-----------------|
| Maximum Horsepower Rating Category AC-3, 50/60 Hz | | | | | | Max. Inductive Current | Standard power ratings of 3-phase motors, 50/60 Hz in category AC-3 | | | Rated operational current, up to 440 V | | N.O. | N.C. | | |
| 1-Phase | | 3-Phase | | | | | 220 V 230 V | 380 V 415 V | 440/500 V 660/690 V | | | | | | |
| 115/ 120 V | 230/ 240 V | 200/ 208 V | 220/ 240 V | 460/ 480 V | 575/ 600 V | A | kW | kW | kW | A | | | | | |
| 0.5 | 1 | 1.5 | 1.5 | 3 | 3 | 6 | 1.5 | 2.2 | 3 | 6 | Screw clamp | 1 | – | LC1K0610•• | 0.40 (0.180) |
| | | | | | | | | | | | – | 1 | LC1K0601•• | 0.40 (0.180) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LC1K06107•• | 0.40 (0.180) |
| | | | | | | | | | | | – | 1 | LC1K06017•• | 0.40 (0.180) | |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LC1K06105•• | 0.46 (0.210) |
| – | 1 | LC1K06015•• | 0.46 (0.210) | | | | | | | | | | | | |
| Spring terminals | 1 | – | LC1K06103•• | 0.40 (0.180) | | | | | | | | | | | |
| – | 1 | LC1K06013•• | 0.40 (0.180) | | | | | | | | | | | | |
| 0.5 | 1.5 | 2 | 3 | 5 | 5 | 9 | 2.2 | 4 | 4 | 9 | Screw clamp | 1 | – | LC1K0910•• | 0.40 (0.180) |
| | | | | | | | | | | | – | 1 | LC1K0901•• | 0.40 (0.180) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LC1K09107•• | 0.40 (0.180) |
| | | | | | | | | | | | – | 1 | LC1K09017•• | 0.40 (0.180) | |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LC1K09105•• | 0.46 (0.210) |
| – | 1 | LC1K09015•• | 0.46 (0.210) | | | | | | | | | | | | |
| Spring terminals | 1 | – | LC1K09103•• | 0.40 (0.180) | | | | | | | | | | | |
| – | 1 | LC1K09013•• | 0.40 (0.180) | | | | | | | | | | | | |
| 0.5 | 1.5 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 4 (> 440) 5.5 (440) | 12 | Screw clamp | 1 | – | LC1K1210•• | 0.40 (0.180) |
| | | | | | | | | | | | – | 1 | LC1K1201•• | 0.40 (0.180) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LC1K12107•• | 0.40 (0.180) |
| | | | | | | | | | | | – | 1 | LC1K12017•• | 0.40 (0.180) | |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LC1K12105•• | 0.46 (0.210) |
| – | 1 | LC1K12015•• | 0.46 (0.210) | | | | | | | | | | | | |
| Spring terminals | 1 | – | LC1K12103•• | 0.40 (0.180) | | | | | | | | | | | |
| – | 1 | LC1K12013•• | 0.40 (0.180) | | | | | | | | | | | | |
| Not for North American applications — not UL Listed or CSA Certified | | | | | | | 3 | 7.5 | 4 (440) 5.5 (440) | 16 | Screw clamp | 1 | – | LC1K1610•• | 0.40 (0.180) |
| | | | | | | | | | | | – | 1 | LC1K1601•• | 0.40 (0.180) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LC1K16107•• | 0.40 (0.180) |
| | | | | | | | | | | | – | 1 | LC1K16017•• | 0.40 (0.180) | |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LC1K16105•• | 0.46 (0.210) |
| – | 1 | LC1K16015•• | 0.46 (0.210) | | | | | | | | | | | | |
| Spring terminals | 1 | – | LC1K16103•• | 0.40 (0.180) | | | | | | | | | | | |
| – | 1 | LC1K16013•• | 0.40 (0.180) | | | | | | | | | | | | |

▼ Use voltage codes on page 52 “Voltage Code Table” to complete catalog number.

▲ For mains supplies with a high level of interference (voltage surge > 800 V), use a suppressor module LA4KE1FC (50 to 129 V) or LA4KE1UG (130 to 250 V), see page 56.

LC1K0610••



LC1K06107••



LC1K09103••



TeSys™ K-line Mini-Contactors and Starters

Selection of Contactors for Motor Control



Sensitive-Environment Contactors for AC Control Circuits

The tables below show the kilowatt ratings (for international applications) and horsepower ratings (for North American applications) of contactors for use in sensitive environments. They are recommended for use in areas sensitive to noise, high interference mains supplies, and so forth. The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, "ready-to-tighten" position, and include a coil with a built-in rectifier and suppressor.

For information on add-on auxiliary contact blocks and accessories, see page 54 to 58.

LC7K06105••

| Horsepower Ratings for North American Applications | | | | | | Kilowatt Ratings for International Applications | | | | | Type of connection | Auxiliary Contacts | | Catalog Number ▼ | Weight lb. (kg) |
|--|---------------|---------------|---------------|---------------|---------------|---|--|----------------|------------------------|---|--------------------|--------------------|-------------|---------------------|--------------------|
| Maximum Horsepower Rating Category AC-3, 50/60 Hz | | | | | | Max. Inductive Current | Standard power ratings of 3-phase motors, 50/60 Hz in category AC-3 | | | Rated operational current, 440V up to: | | N.O. | N.C. | | |
| 1-Phase | | 3-Phase | | | | | 220 V 230 V | 380 V 415 V | 440/500 V 660/690 V | | | | | | |
| 115/ 120 V | 230/ 240 V | 200/ 208 V | 220/ 240 V | 460/ 480 V | 575/ 600 V | A | kW | kW | kW | A | 1 | – | – | 1 | |
| HP | HP | HP | HP | HP | HP | A | kW | kW | kW | A | 1 | – | – | 1 | |
| 0.5 | 1 | 1.5 | 1.5 | 3 | 3 | 6 | 1.5 | 2.2 | 3 | 6 | Screw clamp | 1 | – | LC7K0610•• | 0.50 (0.225) |
| | | | | | | | | | | | – | 1 | LC7K0601•• | 0.50 (0.225) | |
| | | | | | | | | | | | 1 | – | LC7K06107•• | 0.50 (0.225) | |
| | | | | | | | | | | | – | 1 | LC7K06017•• | 0.50 (0.225) | |
| | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LC7K06105•• | 0.50 (0.225) | |
| | | | | | | | | | | | – | 1 | LC7K06015•• | 0.50 (0.225) | |
| 0.5 | 1.5 | 2 | 3 | 5 | 5 | 9 | 2.2 | 4 | 4 | 9 | Screw clamp | 1 | – | LC7K0910•• | 0.50 (0.225) |
| | | | | | | | | | | | – | 1 | LC7K0901•• | 0.50 (0.225) | |
| | | | | | | | | | | | 1 | – | LC7K09107•• | 0.50 (0.225) | |
| | | | | | | | | | | | – | 1 | LC7K09017•• | 0.56 (0.255) | |
| | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LC7K09105•• | 0.56 (0.255) | |
| | | | | | | | | | | | – | 1 | LC7K09015•• | 0.50 (0.225) | |
| 0.5 | 1.5 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 4 (> 440) 5.5 (440) | 12 | Screw clamp | 1 | – | LC7K1210•• | 0.50 (0.225) |
| | | | | | | | | | | | – | 1 | LC7K1201•• | 0.50 (0.225) | |
| | | | | | | | | | | | 1 | – | LC7K12107•• | 0.50 (0.225) | |
| | | | | | | | | | | | – | 1 | LC7K12017•• | 0.50 (0.225) | |
| | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LC7K12105•• | 0.56 (0.255) | |
| | | | | | | | | | | | – | 1 | LC7K12015•• | 0.56 (0.255) | |

▼ Use voltage codes on page 52 "Voltage Code Table" to complete catalog number.

TeSys™ K-line Mini-Contactors and Starters

Selection of Contactors for Motor Control

Three-Pole Contactors for DC Control Circuits

The table below shows the kilowatt ratings (for international applications) and horsepower ratings (for North American applications) for three-pole contactors for DC control circuits. The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, “ready-to-tighten” position.

For information on add-on auxiliary contact blocks and accessories, see page 54 to 58.

| Horsepower Ratings for North American Applications | | | | | | | Kilowatt Ratings for International Applications | | | | Type of Connection | Auxiliary Contacts | | Catalog Number ▼ | Weight lb. (kg) | |
|--|---------------|----------------------------|---------------|---------------|---------------|-----|---|--|----------------|------------------------|--------------------|--|------|---------------------|--------------------|--------------|
| Maximum Horsepower Rating Category AC-3, 50/60 Hz | | | | | | | Max. Inductive Current | Standard power ratings of 3-phase motors, 50/60 Hz in category AC-3 | | | | Rated operationa l current, 440V up to: | N.O. | | | N.C. |
| 1-Phase | | 3-Phase | | | | | | 220 V 230 V | 380 V 415 V | 440/500 V 660/690 V | | | | | | |
| 115/ 120 V | 230/ 240 V | 200/ 208 V | 220/ 240 V | 460/ 480 V | 575/ 600 V | HP | A | kW | kW | kW | A | 1 | 1 | | | |
| HP | HP | HP | HP | HP | HP | HP | A | kW | kW | kW | A | 1 | 1 | | | |
| 1.5 | 2.2 | 3 | 6 | 0.5 | 1 | 1.5 | 1.5 | 3 | 3 | 6 | 6 | Screw clamp | 1 | – | LP1K0610•• | 0.50 (0.225) |
| | | | | | | | | | | | | – | 1 | LP1K0601•• | 0.50 (0.225) | |
| | | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LP1K06107•• | 0.50 (0.225) |
| | | | | | | | | | | | | – | 1 | LP1K06017•• | 0.50 (0.225) | |
| | | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LP1K06105•• | 0.56 (0.255) |
| – | 1 | LP1K06015•• | 0.56 (0.255) | | | | | | | | | | | | | |
| Spring terminals | 1 | – | LP1K06103•• | 0.50 (0.225) | | | | | | | | | | | | |
| – | 1 | LP1K06013•• | 0.50 (0.225) | | | | | | | | | | | | | |
| 2.2 | 4 | 4 | 9 | 0.5 | 1.5 | 2 | 3 | 5 | 5 | 9 | 9 | Screw clamp | 1 | – | LP1K0910•• | 0.50 (0.225) |
| | | | | | | | | | | | | – | 1 | LP1K0901•• | 0.50 (0.225) | |
| | | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LP1K09107•• | 0.50 (0.225) |
| | | | | | | | | | | | | – | 1 | LP1K09017•• | 0.50 (0.225) | |
| | | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LP1K09105•• | 0.50 (0.225) |
| – | 1 | LP1K09015•• | 0.56 (0.255) | | | | | | | | | | | | | |
| Spring terminals | 1 | – | LP1K09103•• | 0.50 (0.225) | | | | | | | | | | | | |
| – | 1 | LP1K09013•• | 0.50 (0.225) | | | | | | | | | | | | | |
| 3 | 5.5 | 4 (> 440 V) 5.5 (440 V) | 12 | 0.5 | 1.5 | 3 | 3 | 7.5 | 10 | 12 | 12 | Screw clamp | 1 | – | LP1K1210•• | 0.50 (0.225) |
| | | | | | | | | | | | | – | 1 | LP1K1201•• | 0.50 (0.225) | |
| | | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LP1K12107•• | 0.50 (0.225) |
| | | | | | | | | | | | | – | 1 | LP1K12017•• | 0.50 (0.225) | |
| | | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LP1K12105•• | 0.56 (0.255) |
| – | 1 | LP1K12015•• | 0.56 (0.255) | | | | | | | | | | | | | |
| Spring terminals | 1 | – | LP1K12103•• | 0.50 (0.225) | | | | | | | | | | | | |
| – | 1 | LP1K12013•• | 0.50 (0.225) | | | | | | | | | | | | | |

▼ Use voltage codes on page 52 “Voltage Code Table” to complete catalog number.

LP1K0610••



LP1K06107••



TeSys™ K-line Mini-Contactors and Starters

Selection of Contactors for Resistive Loads

Three- and Four-Pole Contactors for AC Control Circuits

The tables below show general-purpose and sensitive-environment three- and four-pole contactors for AC control circuits. (The sensitive-environment contactors are recommended for use in areas sensitive to noise, high interference mains supplies, and so forth.) The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, "ready-to-tighten" position. In addition, the sensitive-environment contactors include a coil with a built-in rectifier and suppressor.

For information on add-on auxiliary contact blocks and accessories, see page 54 to 58.

General-Purpose Contactors ♦



LC1K09004**

| Non-inductive loads Category AC-1 Maximum current at ≤ 50 °C (122 °F) | Type of Connection | Power Poles | | Auxiliary Contacts | | Catalog Number ▼ | Weight lb. (kg) |
|--|---------------------------------------|-------------|------|--------------------|------|---------------------|-----------------|
| | | N.O. | N.C. | N.O. | N.C. | | |
| A | Screw clamp | 3 | – | 1 | – | LC1K0910** | 0.56 (0.255) |
| | | 3 | – | – | 1 | LC1K0901** | 0.56 (0.255) |
| | | 4 | – | – | – | LC1K09004** | 0.40 (0.180) |
| | | 2 | 2 | – | – | LC1K09008** | 0.40 (0.180) |
| | Slip-on 1 x 0.25 in. or 2 x 0.11 in. | 3 | – | 1 | – | LC1K09107** | 0.56 (0.255) |
| | | 3 | – | – | 1 | LC1K09017** | 0.56 (0.255) |
| | | 4 | – | – | – | LC1K090047** | 0.40 (0.180) |
| | | 2 | 2 | – | – | LC1K090087** | 0.40 (0.180) |
| | Solder pins for printed circuit board | 3 | – | 1 | – | LC1K09105** | 0.56 (0.255) |
| | | 3 | – | – | 1 | LC1K09015** | 0.56 (0.255) |
| | | 4 | – | – | – | LC1K090045** | 0.46 (0.210) |
| | | 2 | 2 | – | – | LC1K090085** | 0.46 (0.210) |
| | Spring terminals | 3 | – | 1 | – | LC1K09103** | 0.56 (0.255) |
| | | 3 | – | – | 1 | LC1K09013** | 0.56 (0.255) |
| | | 4 | – | – | – | LC1K090043** | 0.46 (0.210) |
| | | 2 | 2 | – | – | LC1K090083** | 0.46 (0.210) |

Sensitive-environment Contactors



LC7K090047**

| | | | | | | | |
|----|---------------------------------------|---|---|---|---|--------------|--------------|
| 20 | Screw clamp | 3 | – | 1 | – | LC7K0910** | 0.56 (0.255) |
| | | 3 | – | – | 1 | LC7K0901** | 0.56 (0.255) |
| | | 4 | – | – | – | LC7K09004** | 0.56 (0.255) |
| | | 2 | 2 | – | – | LC7K09008** | 0.56 (0.255) |
| | Slip-on 1 x 0.25 in. or 2 x 0.11 in. | 3 | – | 1 | – | LC7K09107** | 0.56 (0.255) |
| | | 3 | – | – | 1 | LC7K09017** | 0.56 (0.255) |
| | | 4 | – | – | – | LC7K090047** | 0.56 (0.255) |
| | | 2 | 2 | – | – | LC7K090087** | 0.56 (0.255) |
| | Solder pins for printed circuit board | 3 | – | 1 | – | LC7K09105** | 0.56 (0.255) |
| | | 3 | – | – | 1 | LC7K09015** | 0.56 (0.255) |
| | | 4 | – | – | – | LC7K090045** | 0.56 (0.255) |
| | | 2 | 2 | – | – | LC7K090085** | 0.56 (0.255) |

♦ For mains supplies with a high level of interference (voltage surge > 800 V), use a suppressor module LA4KE1FC (50 to 129 V) or LAFKE1UG (130 to 250 V), see page 56.

▼ Use voltage codes on page 52 "Voltage Code Table" to complete catalog number.

TeSys™ K-line Mini-Contactors and Starters Selection of Contactors for Resistive Loads

Three- and Four-Pole Contactors for DC Control Circuits

The table below shows three- and four-pole contactors for DC control circuits. The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, “ready-to-tighten” position.

For information on add-on auxiliary contact blocks and accessories, see page 54 to 58.



LP1K09004••

| Non-inductive loads Category AC-1 Maximum current at ≤ 50 °C (122 °F) | Type of Connection | Power Poles | | Auxiliary Contacts | | Catalog Number ▼ | Weight lb. (kg) |
|--|---------------------------------------|-------------|------|--------------------|------|---------------------|-----------------|
| | | N.O. | N.C. | N.O. | N.C. | | |
| A | Screw clamp | 3 | – | 1 | – | LP1K0910•• | 0.56 (0.225) |
| | | 3 | – | – | 1 | LP1K0901•• | 0.56 (0.225) |
| | | 4 | – | – | – | LP1K09004•• | 0.56 (0.225) |
| | | 2 | 2 | – | – | LP1K09008•• | 0.56 (0.225) |
| | Slip-on 1 x 0.25 in. or 2 x 0.11 in. | 3 | – | 1 | – | LP1K09107•• | 0.56 (0.225) |
| | | 3 | – | – | 1 | LP1K09017•• | 0.56 (0.225) |
| | | 4 | – | – | – | LP1K090047•• | 0.56 (0.225) |
| | | 2 | 2 | – | – | LP1K090087•• | 0.56 (0.225) |
| | Solder pins for printed circuit board | 3 | – | 1 | – | LP1K09105•• | 0.56 (0.225) |
| | | 3 | – | – | 1 | LP1K09015•• | 0.56 (0.225) |
| | | 4 | – | – | – | LP1K090045•• | 0.56 (0.225) |
| | | 2 | 2 | – | – | LP1K090085•• | 0.56 (0.225) |
| | Spring terminals | 3 | – | 1 | – | LC1K09103•• | 0.56 (0.225) |
| | | 3 | – | – | 1 | LC1K09013•• | 0.56 (0.225) |
| | | 4 | – | – | – | LC1K090043•• | 0.46 (0.210) |
| | | 2 | 2 | – | – | LC1K090083••v | 0.46 (0.210) |

▼ Use voltage codes on page 52 “Voltage Code Table” to complete catalog number.

TeSys™ K-line Mini-Contactors and Starters

Selection of Reversing Contactors for Motor Control

Three-Pole Reversing Contactors for AC Control Circuits

The table below shows three-pole reversing contactors with integrated mechanical interlock. The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, "ready-to-tighten" position. Customer wiring is required to connect coil terminations to electrical interlock; see page 60 (top row, center wiring diagram).

For information on add-on auxiliary contact blocks and accessories, see page 54 to 58.

| Horsepower Ratings for North American Applications | | | | | | | Kilowatt Ratings for International Applications | | | | Type of Connection | Auxiliary Contacts | | Catalog Number ▼ ■ | Weight lb. (kg) |
|---|---------------|---------------|---------------|---------------|---------------|------------------------------|--|----------------|------------------------|---|--|--------------------|-------------|-----------------------|--------------------|
| Maximum Horsepower Rating Category AC-3, 50/60 Hz | | | | | | Max. Inductive Current | Standard power ratings of 3-phase motors, 50/60 Hz in category AC-3 | | | Rated Operational Current, up to 440 V | | N.O. | N.C. | | |
| 1-Phase | | 3-Phase | | | | | 220 V 230 V | 380 V 415 V | 440/500 V 660/690 V | | | | | | |
| 115/ 120 V | 230/ 240 V | 200/ 208 V | 220/ 240 V | 460/ 480 V | 575/ 600 V | A | kW | kW | kW | A | | | | | |
| 0.5 | 1 | 1.5 | 1.5 | 3 | 3 | 6 | 1.5 | 2.2 | 3 | 6 | Screw clamp ▲ | 1 | — | LC2K0610** | 0.86 (0.390) |
| | | | | | | | | | | | — | 1 | LC2K0601** | 0.86 (0.390) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | — | LC2K06107** | 0.81 (0.370) |
| | | | | | | | | | | | — | 1 | LC2K06017** | 0.81 (0.370) | |
| 0.5 | 1.5 | 2 | 3 | 5 | 5 | 9 | 2.2 | 4 | 4 | 9 | Solder pins for printed circuit board | 1 | — | LC2K06105** | 0.95 (0.430) |
| | | | | | | | | | | | — | 1 | LC2K06015** | 0.95 (0.430) | |
| | | | | | | | | | | | Spring terminals | 1 | — | LC2K06103** | 0.86 (0.390) |
| | | | | | | | | | | | — | 1 | LC2K06013** | 0.86 (0.390) | |
| 0.5 | 1.5 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 4 (> 440) 5.5 (440) | 12 | Screw clamp ▲ | 1 | — | LC2K0910** | 0.86 (0.390) |
| | | | | | | | | | | | — | 1 | LC2K0901** | 0.86 (0.390) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | — | LC2K09107** | 0.86 (0.390) |
| | | | | | | | | | | | — | 1 | LC2K09017** | 0.86 (0.390) | |
| 0.5 | 1.5 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 4 (> 440) 5.5 (440) | 12 | Solder pins for printed circuit board | 1 | — | LC2K09105** | 0.95 (0.430) |
| | | | | | | | | | | | — | 1 | LC2K09015** | 0.95 (0.430) | |
| | | | | | | | | | | | Spring terminals | 1 | — | LC2K09103** | 0.86 (0.390) |
| | | | | | | | | | | | — | 1 | LC2K09013** | 0.86 (0.390) | |
| Not for North American applications — not UL Listed or CSA Certified | | | | | | | 3 | 7.5 | 4 (440) 5.5 (440) | 16 | Screw clamp ▲ | 1 | — | LC2K1210** | 0.86 (0.390) |
| — | 1 | LC2K1201** | 0.86 (0.390) | | | | | | | | | | | | |
| Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | — | LC2K12107** | 0.86 (0.390) | | | | | | | | | | | |
| — | 1 | LC2K12017** | 0.86 (0.390) | | | | | | | | | | | | |
| Not for North American applications — not UL Listed or CSA Certified | 1.5 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 4 (> 440) 5.5 (440) | 12 | Solder pins for printed circuit board | 1 | — | LC2K12105** | 0.95 (0.430) |
| | | | | | | | | | | | — | 1 | LC2K12015** | 0.95 (0.430) | |
| | | | | | | | | | | | Spring terminals | 1 | — | LC2K12103** | 0.86 (0.390) |
| | | | | | | | | | | | — | 1 | LC2K12013** | 0.86 (0.390) | |
| Not for North American applications — not UL Listed or CSA Certified | 1.5 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 4 (> 440) 5.5 (440) | 12 | Screw clamp ▲ | 1 | — | LC2K1610** | 0.86 (0.390) |
| | | | | | | | | | | | — | 1 | LC2K1601** | 0.86 (0.390) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | — | LC2K16107** | 0.86 (0.390) |
| | | | | | | | | | | | — | 1 | LC2K16017** | 0.86 (0.390) | |
| Not for North American applications — not UL Listed or CSA Certified | 1.5 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 4 (> 440) 5.5 (440) | 12 | Solder pins for printed circuit board | 1 | — | LC2K16105** | 0.95 (0.430) |
| | | | | | | | | | | | — | 1 | LC2K16015** | 0.95 (0.430) | |
| | | | | | | | | | | | Spring terminals | 1 | — | LC2K16103** | 0.86 (0.390) |
| | | | | | | | | | | | — | 1 | LC2K16013** | 0.86 (0.390) | |

▼ Use voltage codes on page 52 "Voltage Code Table" to complete catalog number.


■ For mains supplies with a high level of interference (voltage surge > 800 V), use a suppressor module **LA4KE1FC** (50 to 129 V) or **LA4KE1UG** (130 to 250 V), see page 56.

▲ Pre-wired power circuit connections are standard on screw clamp versions.

LC2K0610**



LC2K06107**



LC2K09103**



TeSys™ K-line Mini-Contactors and Starters

Selection of Reversing Contactors for Motor Control



LC8K06105••

Sensitive-Environment Reversing Contactors for AC Control Circuits

The tables below show the kilowatt ratings (for international applications) and horsepower ratings (for North American applications) for reversing contactors with mechanical interlock for use in sensitive environments. They are recommended for use in areas sensitive to noise, high interference mains supplies, and so forth. A coil with incorporated rectifier and suppressor is standard.

The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, "ready-to-tighten" position. Customer wiring is required to connect coil terminations to electrical interlock; see page 60 (top row, center wiring diagram).

For information on add-on auxiliary contact blocks and accessories, see page 54 to 58.

| Horsepower Ratings for North American Applications | | | | | | Kilowatt Ratings for International Applications | | | | | Type of Connection | Auxiliary Contacts | | Catalog Number ▼ | Weight lb. (kg) | |
|--|---------------|---------------|---------------|---------------|---------------|---|--|----------------|------------------------|---|--|--------------------|-------------|---------------------|--------------------|------|
| Maximum Horsepower Rating Category AC-3, 50/60 Hz | | | | | | Max. Inductive Current | Standard power ratings of 3-phase motors, 50/60 Hz in category AC-3 | | | Rated Operational Current, up to 440 V | | Type of Connection | N.O. | | | N.C. |
| 1-Phase | | 3-Phase | | | | | 220 V 230 V | 380 V 415 V | 440/500 V 660/690 V | | | | | | | |
| 115/ 120 V | 230/ 240 V | 200/ 208 V | 220/ 240 V | 460/ 480 V | 575/ 600 V | A | kW | kW | kW | A | | | | | | |
| HP | HP | HP | HP | HP | HP | | | | | | | | | | | |
| 0.5 | 1 | 1.5 | 1.5 | 3 | 3 | 6 | 1.5 | 2.2 | 3 | 6 | Screw clamp ▲ | 1 | – | LC8K0610•• | 1.05 (0.480) | |
| | | | | | | | | | | | – | 1 | LC8K0601•• | 1.05 (0.480) | | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LC8K06107•• | 1.00 (0.460) | |
| | | | | | | | | | | | – | 1 | LC8K06017•• | 1.00 (0.460) | | |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LC8K06105•• | 1.14 (0.520) | |
| | | | | | | | | | | | – | 1 | LC8K06015•• | 1.14 (0.520) | | |
| 0.5 | 1.5 | 2 | 3 | 5 | 5 | 9 | 2.2 | 4 | 4 | 9 | Screw clamp ▲ | 1 | – | LC8K0910•• | 1.05 (0.480) | |
| | | | | | | | | | | | – | 1 | LC8K0901•• | 1.05 (0.480) | | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LC8K09107•• | 1.00 (0.460) | |
| | | | | | | | | | | | – | 1 | LC8K09017•• | 1.00 (0.460) | | |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LC8K09105•• | 1.14 (0.520) | |
| | | | | | | | | | | | – | 1 | LC8K09015•• | 1.14 (0.520) | | |
| 0.5 | 1.5 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 4 (> 440) 5.5 (440) | 12 | Screw clamp ▲ | 1 | – | LC8K1210•• | 1.05 (0.480) | |
| | | | | | | | | | | | – | 1 | LC8K1201•• | 1.05 (0.480) | | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LC8K12107•• | 1.00 (0.460) | |
| | | | | | | | | | | | – | 1 | LC8K12017•• | 1.00 (0.460) | | |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LC8K12105•• | 1.14 (0.520) | |
| | | | | | | | | | | | – | 1 | LC8K12015•• | 1.14 (0.520) | | |

▼ Use voltage codes on page 52 "Voltage Code Table" to complete catalog number.
▲ Pre-wired power circuit connections are standard on screw clamp versions.

TeSys™ K-line Mini-Contactors and Starters

Selection of Reversing Contactors for Motor Control

Three-Pole Reversing Contactors for DC Control Circuits

The table below show the kilowatt ratings (for international applications) and horsepower ratings (for North American applications) for three-pole reversing contactors with integrated mechanical interlock for DC control circuits. The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, "ready-to-tighten" position. Customer wiring is required to connect coil terminations to electrical interlock; see page 60 (top row, center wiring diagram).


For information on add-on auxiliary contact blocks and accessories, see page 54 to 58.

| Horsepower Ratings for North American Applications | | | | | | Kilowatt Ratings for International Applications | | | Rated Operational Current in AC-3 up to 400 V | Type of Connection | Auxiliary Contacts | | Catalog Number | Weight lb. (kg) | |
|--|-----------|-------------------|--------------|--------------|-----------|---|--|-------------|---|---------------------|---------------------------------------|------|----------------|-----------------|--------------|
| Maximum Horsepower ratings | | | | | | Maximum Inductive Current in AC-3 Category | Standard power ratings of 3-phase motors 50/60 Hz in category AC-3 | | | | N.O. | N.C. | | | |
| 1- phase 50/60 HZ | | 3- phase 50/60 HZ | | | | | A | 220 V 230 V | 380 V 415 V | 440/500 V 660/690 V | | | A | | |
| 115/120 V | 230/240 V | 200/208 V | 220/240 V | 460/480 V | 575/600 V | kW | | kW | kW | | | | | | |
| HP | HP | HP | HP | HP | HP | A | kW | kW | kW | A | | | | | |
| 0.5 | 1 | 1.5 | 1.5 | 3 | 3 | 6 | 1.5 | 2.2 | 3 | 6 | Screw clamp ▲ | 1 | – | LP2K0610●● | 1.05 (0.480) |
| | | | | | | | | | | | – | 1 | LP2K0601●● | 1.05 (0.480) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in. or 2 x 0.11 in. | 1 | – | LP2K06107●● | 1.00 (0.460) |
| | | | | | | | | | | | – | 1 | LP2K06017●● | 1.00 (0.460) | |
| | | | | | | | | | | | Solder pins for printed circuit board | – | 1 | LP2K06105●● | 1.14 (0.520) |
| 1 | – | LP2K06015●● | 1.14 (0.520) | | | | | | | | | | | | |
| Spring terminal | 1 | – | LP2K06103●● | 1.05 (0.480) | | | | | | | | | | | |
| – | 1 | LP2K06013●● | 1.05 (0.480) | | | | | | | | | | | | |
| 0.5 | 1.5 | 2 | 3 | 5 | 5 | 9 | 2.2 | 4 | 4 | 9 | Screw clamp ▲ | – | 1 | LP2K0910●● | 1.05 (0.480) |
| | | | | | | | | | | | 1 | – | LP2K0901●● | 1.05 (0.480) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in. or 2 x 0.11 in. | – | 1 | LP2K09107●● | 1.00 (0.460) |
| | | | | | | | | | | | 1 | – | LP2K09017●● | 1.00 (0.460) | |
| | | | | | | | | | | | Solder pins for printed circuit board | – | 1 | LP2K09105●● | 1.14 (0.520) |
| 1 | – | LP2K09015●● | 1.14 (0.520) | | | | | | | | | | | | |
| Spring terminal | 1 | – | LP2K09103●● | 1.14 (0.520) | | | | | | | | | | | |
| – | 1 | LP2K09013●● | 1.14 (0.520) | | | | | | | | | | | | |
| 0.5 | 1.5 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 4 (> 440) 5.5 (440) | 12 | Screw clamp ▲ | – | 1 | LP2K1210●● | 1.05 (0.480) |
| | | | | | | | | | | | 1 | – | LP2K1201●● | 1.05 (0.480) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in. or 2 x 0.11 in. | – | 1 | LP2K12107●● | 1.00 (0.460) |
| | | | | | | | | | | | 1 | – | LP2K12017●● | 1.00 (0.460) | |
| | | | | | | | | | | | Solder pins for printed circuit board | – | 1 | LP2K12105●● | 1.14 (0.520) |
| 1 | – | LP2K12015●● | 1.14 (0.520) | | | | | | | | | | | | |
| Spring terminal | 1 | – | LP2K12103●● | 1.14 (0.520) | | | | | | | | | | | |
| – | 1 | LP2K12013●● | 1.14 (0.520) | | | | | | | | | | | | |


▼ Use voltage codes on page 52 "Voltage Code Table" to complete catalog number.

▲ Pre-wired power circuit connections are standard on screw clamp versions.

LP2K0610●●



LP2K06107●●



TeSys™ K-line Mini-Contactors and Starters

Selection of Contactors for Resistive Loads

Three- and Four-Pole Contactors for AC Control Circuits

The tables below show general purpose and sensitive-environment three-pole reversing and four-pole change over contactors for AC control circuits. The sensitive-environment contactors are recommended for use in areas sensitive to noise, high interference mains supplies, and so forth. The contactors incorporate an integrated mechanical interlock.

Both types of contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, "ready-to-tighten" position. In addition, the sensitive-environment contactors include a coil with a built-in rectifier and suppressor. Customer wiring is required to connect coil terminations to the electrical interlock; see page 60 (top row, center wiring diagram).

For information on add-on auxiliary contact blocks and accessories, see page 54 to 58.


General-Purpose Contactors ♦



LC2K09004♦♦

| Non-inductive loads Category AC-1 Maximum current at ≤ 50 °C (122 °F) | Type of Connection | Power Poles | | Auxiliary Contacts | | Catalog Number ▼ | Weight lb. (kg) |
|---|--------------------------------------|-------------|------|--------------------|------|---------------------|-----------------|
| | | N.O. | N.C. | N.O. | N.C. | | |
| A | Screw clamp ▲ | 3 | – | 1 | – | LC2K0910♦♦ | 0.86 (0.390) |
| | | 3 | – | – | 1 | LC2K0901♦♦ | 0.86 (0.390) |
| | | 4 | – | – | – | LC2K09004♦♦ | 0.84 (0.380) |
| | Slip-on 1 x 0.25 in. or 2 x 0.11 in. | 3 | – | – | 1 | LC2K09107♦♦ | 0.81 (0.370) |
| | | 3 | – | 1 | – | LC2K09017♦♦ | 0.81 (0.370) |
| | | 4 | – | – | – | LC2K090047♦♦ | 0.81 (0.370) |
| | Solder pins for circuit board | 3 | – | 1 | 1 | LC2K09105♦♦ | 0.95 (0.430) |
| | | 3 | – | – | – | LC2K09015♦♦ | 0.95 (0.430) |
| | | 4 | – | – | – | LC2K090045♦♦ | 0.95 (0.430) |
| | Spring terminals | 3 | – | 1 | 1 | LC2K09103♦♦ | 0.86 (0.390) |
| | | 3 | – | – | – | LC2K09013♦♦ | 0.86 (0.390) |
| | | 4 | – | – | – | LC2K090043♦♦ | 0.86 (0.390) |

Sensitive-Environment Contactors



LC8K09105♦♦

| | | | | | | | |
|----|--------------------------------------|---|---|---|---|--------------|--------------|
| 20 | Screw clamp ▲ | 3 | – | 1 | – | LC8K0910♦♦ ♦ | 1.05 (0.480) |
| | | 3 | – | – | 1 | LC8K0901♦♦ ♦ | 1.05 (0.480) |
| | | 4 | – | – | – | LC8K09004♦♦ | 1.03 (0.470) |
| | Slip-on 1 x 0.25 in. or 2 x 0.11 in. | 3 | – | – | 1 | LC8K09107♦♦ | 1.01 (0.460) |
| | | 3 | – | 1 | – | LC8K09017♦♦ | 1.01 (0.460) |
| | | 4 | – | – | – | LC8K090047♦♦ | 1.01 (0.460) |
| | Solder pins for circuit board | 3 | – | 1 | 1 | LC8K09105♦♦ | 1.14 (0.520) |
| | | 3 | – | – | – | LC8K09015♦♦ | 1.14 (0.520) |
| | | 4 | – | – | – | LC8K090045♦♦ | 1.14 (0.520) |

♦ For mains supplies with a high level of interference (voltage surge > 800 V), use a suppressor module LA4KE1FC (50 to 129 V) or LAFKE1UG (130 to 250 V), see page 56.

▼ Use voltage codes on page 52 "Voltage Code Table" to complete catalog number.

▲ Pre-wired power circuit connections are standard on screw clamp versions.

TeSys™ K-line Mini-Contactors and Starters

Voltage Code Table

Three- and Four-Pole Contactors for DC Control Circuits

The table below shows general-purpose three-pole reversing and four-pole change over contactors for DC control circuits. The contactors incorporate an integrated mechanical interlock.

The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, "ready-to-tighten" position. Customer wiring is required to connect coil terminations to the electrical interlock; see page 60 (top row, center wiring diagram).

For information on add-on auxiliary contact blocks and accessories, see page 54 to 58.



LC2K09004**

| Non-inductive loads Category AC-1 Maximum current at ≤ 50 °C (122 °F) | Type of Connection | Power Poles | | Auxiliary Contacts | | Catalog Number ▼ | Weight lb. (kg) |
|--|--------------------------------------|-------------|------|--------------------|------|---------------------|-----------------|
| | | N.O. | N.C. | N.O. | N.C. | | |
| A | Screw clamp ▲ | 3 | - | 1 | - | LP2K0910** | 1.05 (0.480) |
| | | 3 | - | - | 1 | LP2K0901** | 1.05 (0.480) |
| | | 4 | - | - | - | LP2K09004** | 1.05 (0.480) |
| | | 3 | - | - | 1 | LP2K09107** | 1.01 (0.460) |
| | | 3 | - | 1 | - | LP2K09017** | 1.01 (0.460) |
| | | 4 | - | - | - | LP2K090047** | 1.01 (0.460) |
| | Slip-on 1 x 0.25 in. or 2 x 0.11 in. | 3 | - | 1 | 1 | LP2K09105** | 1.14 (0.520) |
| | | 3 | - | - | - | LP2K09015** | 1.14 (0.520) |
| | | 4 | - | - | - | LP2K090045** | 1.14 (0.520) |
| | | 3 | - | 1 | 1 | LP2K09105** | 1.14 (0.520) |
| | | 3 | - | - | - | LP2K09015** | 1.14 (0.520) |
| | | 4 | - | - | - | LP2K090045** | 1.14 (0.520) |

- ▼ Use voltage codes below to complete the catalog number.
- ▲ Pre-wired power circuit connections are standard on screw clamp versions.

K-line Voltage Code

| Voltage | Frequency | K-line (see notes at end of table) | | | |
|---------|-------------------|------------------------------------|-------------------------|---------------------------------|--------------|
| | | LC1K LC2K Notes K1, K2 | LC7K LC8K Note K4 | LP1K LP2K Notes K2, K3 | LP4K LP5K |
| 5 | Low Consump DC | - | - | - | - |
| | 50/60 | J7 | - | - | - |
| 12 | 50 | - | - | - | - |
| | DC | - | - | JD | - |
| | Low Consump DC | - | - | - | JW3 |
| | Wide Range DC | - | - | - | - |
| 20 | 50/60 | Z7 | - | - | - |
| | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| | DC | - | - | ZD | - |
| | Low Consump DC | - | - | - | ZW3 |
| 24 | 50/60 | B7 Note K2 | B7 | - | - |
| | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | DC | - | - | BD Note K2 | - |
| | Low Consump DC | - | - | - | BW3 |
| 36 | 50/60 | C7 | - | - | - |
| | DC | - | - | CD | - |
| | Wide Range DC | - | - | - | - |

K-line Voltage Code (Continued)

| Voltage | Frequency | K-line (see notes at end of table) | | | |
|---------|-------------------|------------------------------------|-------------------------|---------------------------------|--------------|
| | | LC1K LC2K Notes K1, K2 | LC7K LC8K Note K4 | LP1K LP2K Notes K2, K3 | LP4K LP5K |
| 42 | 50/60 | D7 | D7 | - | - |
| | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| 48 | 50/60 | E7 | E7 | - | - |
| | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | DC | - | - | ED | - |
| | Low Consump DC | - | - | - | EW3 |
| 60 | 50/60 | - | - | - | - |
| | DC | - | - | ND | - |
| 72 | 50/60 | - | - | - | - |
| | DC | - | - | SD | - |
| | Low Consump DC | - | - | - | SW3 |
| 96 | 50/60 | - | - | - | - |
| | DC | - | - | - | - |
| 100 | 50/60 | - | - | - | - |
| | DC | - | - | KD | - |
| | 50/60 | F7 | F7 | - | - |
| | 50 | - | - | - | - |
| 110 | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | DC | - | - | FD | - |
| | Low Consump DC | - | - | - | FW3 |
| | 50/60 | - | - | - | - |
| | Wide Range DC | - | - | - | - |

TeSys™ K-line Mini-Contactors and Starters Voltage Code Table

K-line Voltage Code (Continued)

| Voltage | Frequency | K-line (see notes at end of table) | | | |
|---------|-------------------|------------------------------------|-------------------------|---------------------------------|--------------|
| | | LC1K LC2K Notes K1, K2 | LC7K LC8K Note K4 | LP1K LP2K Notes K2, K3 | LP4K LP5K |
| 110/127 | 40-400 | - | - | - | - |
| | 50/60 | FE7 | FE7 | - | - |
| 115 | 50 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | 50/60 | G7 | G7 | - | - |
| | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| 120 | 40-400 | - | - | - | - |
| | DC | - | - | - | - |
| | Low Consump DC | - | - | - | GW3 |
| 125 | DC | - | - | GD | - |
| | 50/60 | FC7 | - | - | - |
| 127 | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| 155 | DC | - | - | PD | - |
| 174 | DC | - | - | QD | - |
| 200 | 50/60 | - | - | - | - |
| | DC | - | - | LD | - |
| | 50/60 | L7 | - | - | - |
| 200/208 | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | 50/60 | - | - | - | - |
| 208 | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | 50/60 | - | M7 | - | - |
| | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| 220 | DC | - | - | MD | - |
| | Low Consump DC | - | - | - | - |
| | Wide Range DC | - | - | - | - |
| | 50/60 | M7 | - | - | - |
| 220/230 | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | DC | - | - | - | - |
| 220/240 | 40-400 | - | - | - | - |
| | DC | - | - | - | - |
| | 50/60 | P7 | - | - | - |
| 230 | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | DC | - | - | MPD | - |
| 230/240 | 50/60 | U7 Note K4 | U7 | - | - |
| | 50/60 | - | - | - | - |
| 240 | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | DC | - | - | MUD | - |
| | DC | - | - | UD | - |
| 250 | Low Consump DC | - | - | - | - |
| | 50/60 | W7 | - | - | - |
| 256 | 50 | - | - | - | - |
| | 50/60 | UE7 | - | - | - |
| 277 | 50 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | 50/60 | - | - | - | - |
| 380 | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |

K-line Voltage Code (Continued)


| Voltage | Frequency | K-line (see notes at end of table) | | | |
|---------|-----------|------------------------------------|-------------------------|---------------------------------|--------------|
| | | LC1K LC2K Notes K1, K2 | LC7K LC8K Note K4 | LP1K LP2K Notes K2, K3 | LP4K LP5K |
| | 50/60 | Q7 Note K4 | - | - | - |
| 380/400 | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | DC | - | - | - | - |
| 380/440 | 40-400 | - | - | - | - |
| | 50/60 | V7 | - | - | - |
| 400 | 50 | - | - | - | - |
| | 40-400 | - | - | - | - |
| 400/415 | 50/60 | N7 | - | - | - |
| | 50/60 | - | - | - | - |
| 415 | 50 | - | - | - | - |
| | 40-400 | - | - | - | - |
| 415-440 | 50 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | 50/60 | R7 | - | - | - |
| | 50 | - | - | - | - |
| 440 | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | DC | - | - | - | - |
| 440/460 | DC | - | - | - | - |
| 460/480 | 60 | - | - | - | - |
| | 50/60 | T7 | - | - | - |
| 480 | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| | 50/60 | S7 | - | - | - |
| 500 | 50 | - | - | - | - |
| | 40-400 | - | - | - | - |
| 575 | 50/60 | SC7 | - | - | - |
| | 60 | - | - | - | - |
| | 50/60 | X7 | - | - | - |
| 600 | 60 | - | - | - | - |
| | 40-400 | - | - | - | - |
| 660 | 50 | - | - | - | - |
| | 60 | - | - | - | - |
| 660/690 | 50/60 | Y7 | - | - | - |

Notes:


- K1 Up to and including 240 V, coil with integral suppression device (bi-directional diode): add 2 to the requested voltage code. Ex. J72
- K2 For voltage codes B7 or BD, when connecting an electronic sensor or timer in series with the coil of the control relay, select a 20 V coil (Voltage code Z7 for AC or ZD for DC). This coil compensates for incurred voltage drop.
- K3 Coil with integral suppression device available (bidirectional diode): add 3 to the requested voltage code. Ex JD3.
- K4 For voltage codes M7, U7, Q7, N7, Y7 and all LC7K and LC8K devices, operating range is 0.85 - 1.10 of nominal. For all other LC1K and LC2K the operating range is 0.80 - 1.15 of nominal.

TeSys™ K-line Mini-Contactors and Starters


Selection of Auxiliary Contacts and Timers




LC1/LC7/LP1K




LC1/LC7/LP1K




LC1/LC7/LP1K




LA1KN●●●




LA1KN●●M



LA1KN●●



LA2KT2●



LA1 KN●●P

TeSys™ K-line Mini-Contactors and Starters

Selection of Auxiliary Contacts and Timers

Instantaneous Auxiliary Contact Blocks for Type LC•K and LP•K Contactors

Recommended for standard applications. Clip-on front mounting, 1 block per contactor

| Type of Connection | Type of Contactor | Auxiliary Contacts | | Catalog Number | Weight lb. (kg) |
|--------------------------------------|--|--------------------|------|----------------|-----------------|
| | | N.O. | N.C. | | |
| Screw Clamp | LC1, LC2 LC7, LC8 LP1, LP2 3- or 4-pole | 2 | – | LA1KN20 | 0.10 (0.045) |
| | | – | 2 | LA1KN02 | 0.10 (0.045) |
| | | 1 | 1 | LA1KN11 | 0.10 (0.045) |
| | | 4 | – | LA1KN40 | 0.10 (0.045) |
| | | 3 | 1 | LA1KN31 | 0.10 (0.045) |
| | | 2 | 2 | LA1KN22 | 0.10 (0.045) |
| | | 1 | 3 | LA1KN13 | 0.10 (0.045) |
| | | – | 4 | LA1KN04 | 0.10 (0.045) |
| Slip-on 1 x 0.25 in. or 2 x 0.11 in. | LC1, LC2 LC7, LC8 LP1, LP2 3- or 4-pole | 2 | – | LA1KN207 | 0.10 (0.045) |
| | | – | 2 | LA1KN027 | 0.10 (0.045) |
| | | 1 | 1 | LA1KN117 | 0.10 (0.045) |
| | | 4 | – | LA1KN407 | 0.10 (0.045) |
| | | 3 | 1 | LA1KN317 | 0.10 (0.045) |
| | | 2 | 2 | LA1KN227 | 0.10 (0.045) |
| | | 1 | 3 | LA1KN137 | 0.10 (0.045) |
| | | – | 4 | LA1KN047 | 0.10 (0.045) |
| Spring Terminals | LC1, LC2 LP1, LP2 3- or 4-pole | 2 | – | LA1KN203 | 0.10 (0.045) |
| | | – | 2 | LA1KN023 | 0.10 (0.045) |
| | | 1 | 1 | LA1KN113 | 0.10 (0.045) |
| | | 4 | – | LA1KN403 | 0.10 (0.045) |
| | | 3 | 1 | LA1KN313 | 0.10 (0.045) |
| | | 2 | 2 | LA1KN223 | 0.10 (0.045) |
| | | 1 | 3 | LA1KN133 | 0.10 (0.045) |
| | | – | 4 | LA1KN043 | 0.10 (0.045) |

With terminal referencing conforming to standard EN 50012. Clip-on front mounting, 1 block per contactor


| | | | | | |
|---|---|---|----------|--------------|--------------|
| Screw clamp with terminal referencing conforming to standard EN 50012 ▲ | LC1, LC2 LC7, LC8 LP1, LP2 3-pole + N.O. | – | 2 | LA1KN02M | 0.10 (0.045) |
| | | 1 | 1 | LA1KN11M | 0.10 (0.045) |
| | | 3 | 1 | LA1KN31M | 0.10 (0.045) |
| | | 2 | 2 | LA1KN22M | 0.10 (0.045) |
| | 1 | 3 | LA1KN13M | 0.10 (0.045) | |
| | LC1, LC2 LC7, LC8 LP1, LP2 4-pole | 1 | 1 | LA1KN11P | 0.10 (0.045) |
| | | 2 | 2 | LA1KN22P | 0.10 (0.045) |

▲ See pages 59 and 60 for actual terminal markings.

Electronic Time-Delay Auxiliary Contact Blocks for Type LC•K and LP•K Contactors

- Relay output, with common point changeover contact, AC or DC 240 Vac, 2 A maximum.
- Control voltage: 0.85 to 1.1 Vc.
- Maximum switching capacity: 250 VA or 150 W.
- Operating temperature: -10 to +60 °C (14 to 140 °F).
- Reset time: 1.5 s during the time delay period, 0.5 s after the time delay period.


Clip-on front mounting, 1 block per contactor

| Voltage | Type | Timing Range s | Auxiliary Contacts | Catalog Number | Weight lb. (kg) |
|-------------------|----------|----------------|--|----------------|-----------------|
| | | |  SPDT | | |
| V | | | | | |
| AC or DC 24 to 48 | On-delay | 1 to 30 | 1 | LA2KT2E | 0.09 (0.040) |
| AC 110 to 240 | On-delay | 1 to 30 | 1 | LA2KT2U | 0.09 (0.040) |

TeSys™ K-line Mini-Contactors and Starters

Selection of Accessories

Coil Suppressor Modules With an LED Indicator for Type LC•K and LP•K Contactors




LA4K••

| Mounting and connection | Type | For voltages: | Sold in lots of | Catalog Number | Weight lb. (kg) |
|---|-----------------------|------------------------|-----------------|----------------|-----------------|
| Clip-on mounting on the front of LC1 and LP1 contactors. No tools required. | Varistor ■ | AC and DC 12 to 24 V | 5 | LA4KE1B | 0.02 (0.010) |
| | | AC and DC 32 to 48 V | 5 | LA4KE1E | 0.02 (0.010) |
| | | AC and DC 50 to 129 V | 5 | LA4KE1FC | 0.02 (0.010) |
| | | AC and DC 201 to 250 V | 5 | LA4KE1UG | 0.02 (0.010) |
| | Diode + Zener diode ◆ | DC 12 to 24 V | 5 | LA4KC1B | 0.02 (0.010) |
| | | DC 32 to 48 V | 5 | LA4KC1E | 0.02 (0.010) |
| RC ▲ | AC 220 to 250 V | 5 | LA4KA1U | 0.02 (0.010) | |

- Protection by limitation of the transient voltage up to 2 Vc maximum. Maximum reduction of transient voltage peaks. Slight time delay on drop-out (1.1 to 1.5 times the normal time).
- ◆ No overvoltage or oscillation frequency. Polarized component. Slight time delay on drop-out (1.1 to 1.5 times the normal time).
- ▲ Protection by limitation of the transient voltage up to 3 Vc maximum and limitation of the oscillation frequency. Slight time delay on drop-out (1.2 to 2 times the normal time).

Mounting and Marking Accessories

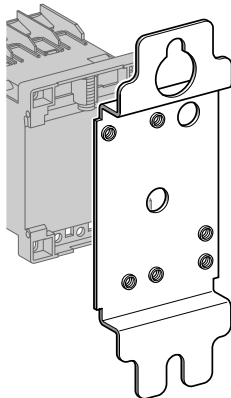


DX1AP25

| Description | Application | | Sold in lots of | Unit Catalog Number | Weight lb. (kg) |
|--|---------------------------|---|-----------------|---------------------|-----------------|
| Mounting plates ■ | For mounting on 1 ' rail | Clip-on | 1 | LA9D973 | 0.05 (0.025) |
| | For mounting on 2 ' rails | 110/120 mm mounting centers | 10 | DX1AP25 | 0.14 (0.065) |
| Marker holder | Clip-on | Onto front of contactor | 100 | LA9D90 | 0.002 (0.001) |
| Clip-in markers | 4 maximum per contactor | Strips of 10 identical numbers 0 to 9 | 25 | AB1R• ▲ | 0.004 (0.002) |
| | | Strips of 10 identical capital letters A to Z | 25 | AB1G• ▲ | 0.004 (0.002) |
| 35mm " DIN rail (7.5mm deep x 2m long) | | | 10 | AM1DP200 | 2.88 (1.310) |
| 35mm " DIN rail (15mm deep x 2m long) | | | 10 | AM1ED200 | 1.44 (0.650) |

- Order 1 mounting plate for a contactor and 2 mounting plates for a reversing contactor.
- ▲ Complete the catalog number by replacing the • with the required number or character.

Cabling Accessories




LA9E01

| Description | Application | | Sold in lots of | Unit Catalog Number | Weight kg (lb.) |
|---|---|---|-----------------|---------------------|-----------------|
| Paralleling links | For 2-poles | With screw clamp terminals | 4 | LA9E01 | 0.02 (0.010) |
| | For 4-poles | With screw clamp terminals | 2 | LA9E02 | 0.03 (0.015) |
| Power connections: 6 required per contactor | For 3-pole reversing contactors for motor control | For contactors with screw clamp terminals | 100 | LA9K0969 | 0.02 (0.010) |
| Power connections: 4 required per contactor | For 4-pole changeover contactor pairs | For contactors with screw clamp terminals | 100 | LA9K0970 | 0.02 (0.010) |


TeSys™ K-line Mini-Contactors and Starters

Dimensions and Mounting of Type LC•K and LP•K Contactors


Contactors
LC1K, LC7K, LP1K
 On panel

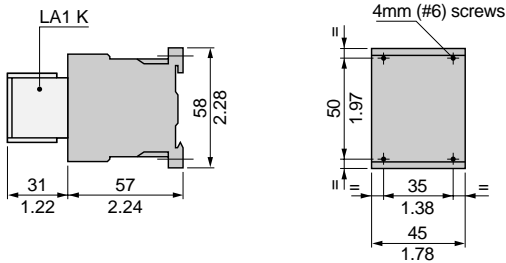


On mounting rail **AM1DP200** or **AM1DE200** 1.4 in. (35 mm) DIN rail

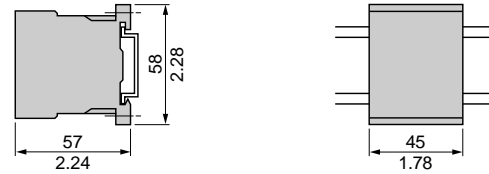


On one asymmetrical rail **DZ5MB** with clip-on mounting plate
LA9D973

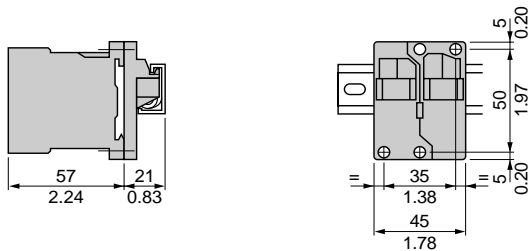

DX1AP25

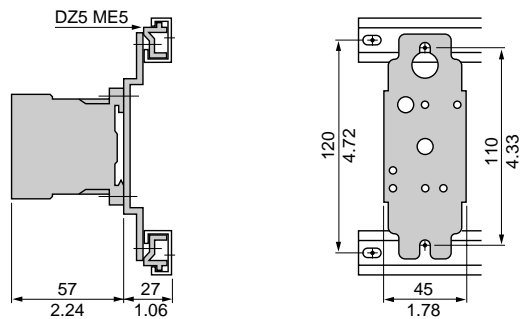




On printed circuit board



Electronic time-delay auxiliary contact blocks

LA2KT



On contactor



Suppressor modules

LA4K•

On contactor




Dimensions Inches
mm


TeSys™ K-line Mini-Contactors and Starters

Dimensions and Mounting of Type LC•K and LP•K Reversing Contactors

Reversing contactors LC2K, LC8K, LP2K
On panel

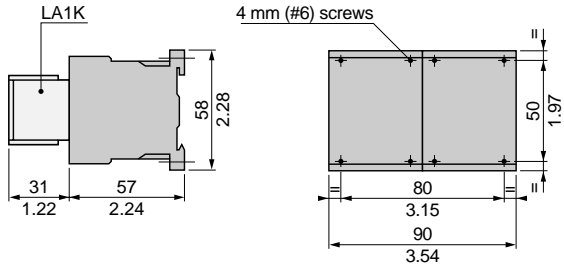



On mounting rail **AM1DP200** or **AM1DE200** 1.4 (35 mm) DIN rail

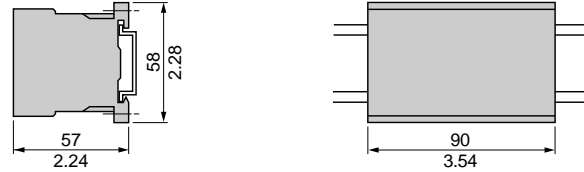


On one asymmetrical rail **DZ5MB** with 2 clip-on mounting plates **LA9D973** or on 2 mounting plates **DX1AP25**.

2 x **LA9D973**

2 x **DX1AP25**

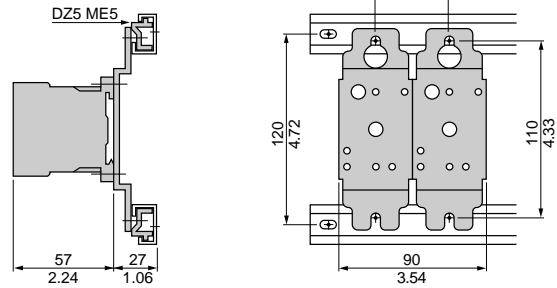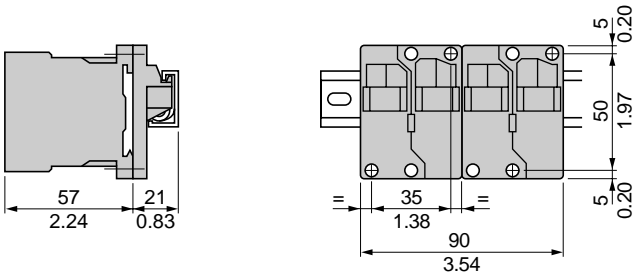




On printed circuit board for reversing contactors or 2 contactors mounted side by side

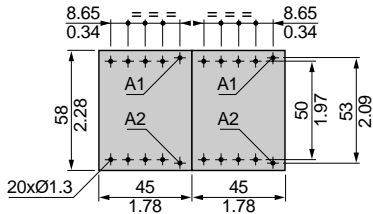

Electronic time delay auxiliary contact blocks

LA2KT



On reversing contactors



Suppressor modules

LA4K•

On reversing contactors




Dimensions inches
mm


Type LC•K and LP•K Contactors and Accessories

3-pole contactors LC1K, LC7K, LP1K


3-pole + N.O.



3-pole + N.C.




Integrated-coil suppression device LC7K




4-pole contactors LC1K, LC7K, LP1K


4-pole



2-pole N.O. + 2-pole N.C.




Integrated-coil suppression device LC7K




Instantaneous auxiliary contacts LA1K For contactors LC•K and LP•K


2 N.O.
LA1KN20
LA1KN207




2 N.C.
LA1KN02
LA1KN027




1 N.O. + 1 N.C.
LA1KN11
LA1KN117




4 N.O.
LA1KN40
LA1KN407




3 N.O. + 1 N.C.
LA1KN31
LA1KN317




2 N.O. + 2 N.C.
LA1KN22
LA1KN227



1 N.O. + 3 N.C.
LA1KN13
LA1KN137




4 N.C.
LA1KN04
LA1KN047




Terminal referencing conforming to standard EN 50012 For 3-pole contactors


2 N.C.
LA1KN02M




1 N.O. + 1 N.C.
LA1KN11M




3 N.O. + 1 N.C.
LA1KN31M



2 N.O. + 2 N.C.
LA1KN22M




1 N.O. + 3 N.C.
LA1KN13M




For 4-pole contactors

1 N.O. + 1 N.C.
LA1KN11P




2 N.O. + 2 N.C.
LA1KN22P




Electronic time delay auxiliary contact blocks LA2KT


For contactors LC•K and LP•K
1 C/O



Suppressor modules LA4KC



LA4KE




TeSys™ K-line Mini-Contactors and Starters Schematics

Type LC•K and LP•K Reversing Contactors and Accessories

3-pole reversing contactors LC2K, LC8K, LP2K


With screw clamp terminals

3 P + N.O.

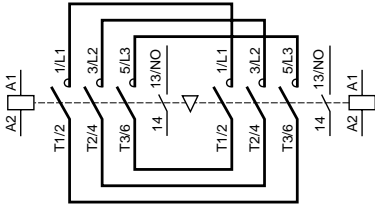


With Slip-on connectors or solder pins (printed circuit board)

3 P + N.O.

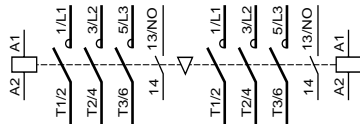


Dashed lines indicate suggested customer wiring to electrically interlock coils

3 P + N.C.

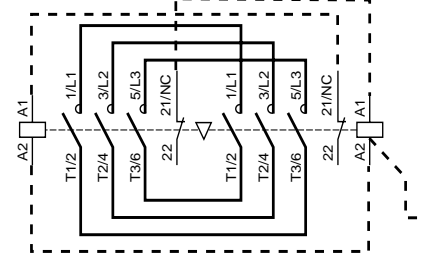


With Slip-on connectors or solder pins (printed circuit board)

3 P + N.C.

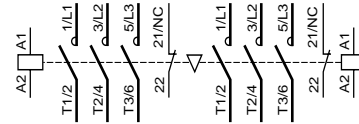


Integrated-coil suppression device
LC8K



4-pole reversing contactors LC2K, LC8K, LP2K


With screw clamp terminals

4 P




With Slip-on connectors or solder pins (printed circuit board)

4 P



Integrated-coil suppression device
LC8K



Instantaneous auxiliary contact blocks LA1K

For contactors LC•K and LP2K


2 N.O.

LA1KN20
LA1KN207



2 N.C.

LA1KN02
LA1KN027




1 N.O. + 1 N.C.

LA1KN11
LA1KN117



Terminal referencing conforming to standard EN 50012


1 N.O. + 1 N.C.
LA1KN11P



For contactors LC•K, LP2K


4 N.O.

LA1KN40
LA1KN407




3 N.O. + 1 N.C.

LA1KN31
LA1KN317




2 N.O. + 2 N.C.

LA1KN22
LA1KN227




1 N.O. + 3 N.C.

LA1KN13
LA1KN137



4 N.C.

LA1KN04
LA1KN047




For auxiliary contacts with terminal referencing conforming to standard EN 50012 see page 55.


Electronic time delay contact blocks LA2KT

For contactors LC•K and LP•K


1 C/O



Suppressor modules
LA4KC








LA4KE



TeSys™ K-line Mini-Contactors and Starters

Characteristics of Type LR•K Overload Relays

Environment

| | | | | | |
|---|--|---|--|----------------------|-------------------|
| Conforming to standards |  Meets the essential requirements of the LV & EMC directives | IEC 60947, NF C 63-650, VDE 0660, BS 4941, UL 508, CSA 22.2 No. 14 | | | |
| Product certifications | |  E164353 NKCR |  LR43364 3211 03 | | |
| Protective treatment | Conforming to IEC 60068 (DIN 50016) | "TC" (Fungus-proof, tropicalization protection) | | | |
| Degree of protection | Conforming to VDE 0106 | Protection against direct finger contact | | | |
| Ambient air temperature around the device | Storage | -40° to +70° C (-40 to +158° F) | | | |
| | For normal operation (IEC 60947) | -20 to +55° C (-4 to +131° F) without derating | | | |
| | Operating limit | -30 to +60° C (-22 to +140° F) with derating ■ | | | |
| Maximum operating altitude | Without derating | 2000 m (6562 ft.) | | | |
| Operating positions | Vertical axis | Horizontal axis | | | |
| |  Without derating |  With derating ■ | | | |
| Flame resistance | Conforming to UL 94 | Self-extinguishing material V1 | | | |
| | Conforming to NF F 16-101 and 16-102 | Conforming to requirement 2 | | | |
| Shock resistance, hot state (1/2 sine wave, 11 ms) | Conforming to IEC 60068, N.C. contact | 10 gn | | | |
| | Conforming to IEC 60068, N.O. contact | 10 gn | | | |
| Vibration resistance, hot state 5 to 300 Hz | Conforming to IEC 60068, N.C. contact | 2 gn | | | |
| | Conforming to IEC 60068, N.O. contact | 2 gn | | | |
| Safe separation of circuits | Conforming to VDE 0106 and IEC 60536 | SELV, up to 400 V ▲ | | | |
| Cabling | | Minimum | Maximum | Maximum to IEC 60947 | |
| Screw clamp terminals | Solid or stranded cable | AWG | 1 x 18 | 2 x 14 or 1 x 12 | – |
| | Solid cable | mm ² | 1 x 1.5 | 2 x 4 | 1 x 4 + 1 x 2.5 |
| | Stranded cable without cable end | mm ² | 1 x 0.75 | 2 x 4 | 2 x 2.5 |
| | Stranded cable with cable end | mm ² | 1 x 0.34 | 1 x 1.5 + 1 x 2.5 | 1 x 1.5 + 1 x 2.5 |
| Tightening torque | Phillips no. 2 or 3/16" slotted head | 0.8 N•m (7 lb.-in.) | | | |
| Mounting | Directly under the contactor or reversing contactor | | | | |
| Connections | Made automatically when mounted under the contactor, as follows: - contactor terminal A2 connected to overload relay terminal 96 on all products, - contactor terminal 14 connected to overload relay terminal 95 on products with 3 P + N.O. When using 3 P + N.C., or 4 P contactors, or the N.O. auxiliary contact marked 13-14, at a voltage other than the coil voltage, break off the link marked 14. (See page 64 for additional information.) | | | | |

■ Please consult your Local Field Sales Office.

▲ Safe extra low voltage.

Auxiliary Contact Characteristics

| | | | | | | | | | | |
|--|---|-----------------|--------|-----|-----|---------|-----|---------|---------|--|
| Number of contacts | | 1 N.C. + 1 N.O. | | | | | | | | |
| Conventional thermal current | A | 6 | | | | | | | | |
| Short-circuit protection ● | Conforming to IEC 60947, VDE 0660. gl fuse or supplementary protector GB2CB●● | A | 6 max. | | | | | | | |
| Maximum power of the controlled contactor coils (sealed) (Occasional operating cycles of contact 95-96) | AC | V | 24 | 48 | 110 | 220/230 | 400 | 415/440 | 600/690 | |
| | | VA | 100 | 200 | 400 | 600 | 600 | 600 | 600 | |
| | DC | V | 24 | 48 | 110 | 220 | 250 | – | – | |
| | | W | 100 | 100 | 50 | 45 | 35 | – | – | |
| Maximum operational voltage | AC, category AC-15 | V | 690 | | | | | | | |
| | DC, category DC-13 | V | 250 | | | | | | | |

● Select short circuit protection to meet the National Electrical Code or other local codes and standards.

TeSys™ K-line Mini-Contactors and Starters

Characteristics of Type LR•K Overload Relays

Electrical Characteristics of the Power Circuit



| | | | |
|---|---------------------------------------|----|---|
| Rated operational voltage (Ve) | Up to | V | 690 |
| | Conforming to BS 4941 | V | 690 |
| Rated insulation voltage (Vi) | Conforming to IEC 60947 | V | 690 |
| | Conforming to VDE 0110 group C | V | 750 |
| | Conforming to UL 508, CSA 22.2 No. 14 | V | 600 |
| Rated impulse withstand voltage (Vimp) | | kV | 6 |
| Frequency limits of the operational current | | Hz | Up to 400 |
| Power dissipated per pole | | W | 2 |
| Short-circuit protection and coordination | By circuit breaker | | Select in accordance with NEC and local codes |
| | By fuses | | Maximum 400% of motor FLA |

Operating Characteristics

| | | |
|------------------------------|-------------------------|--|
| Sensitivity to phase failure | Conforming to IEC 60947 | Yes |
| Reset | Manual or automatic | Selected by means of a lockable and sealable switch on the front of the relay |
| | | |
| Signalling | On front of relay | Trip indicator |
| Reset-Stop function | | Pressing the Reset-Stop button: - Actuates the N.C. contact - Has no effect on the N.O. contact |
| Test function | By pushbutton | Pressing the Test button enables: - Checking of the control circuit wiring - Simulation of overload tripping (actuation of both N.C. and N.O. contacts, and of the trip indicator) |

Tripping curves

Average operating time related to multiples of the current setting Class 10 A

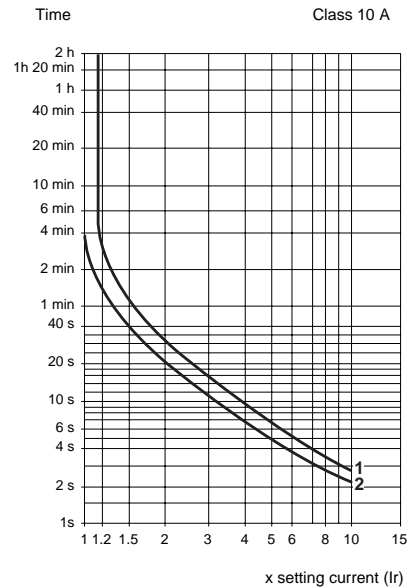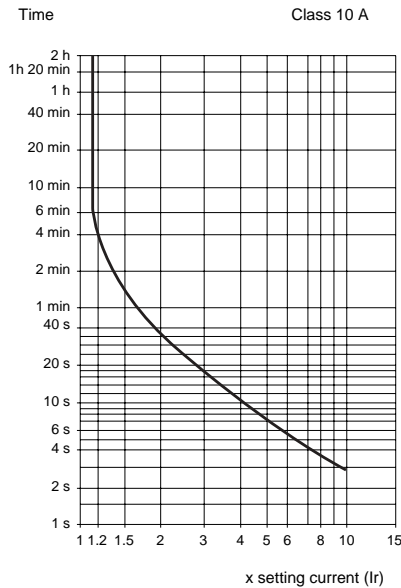

TeSys™ K-line Mini-Contactors and Starters Selection of Type LR•K Overload Relays

These overload relays are designed for the protection of motors. They are ambient-compensated and phase-failure sensitive. They may be reset either manually or automatically.

For direct mounting, the relays are placed under the contactors with screw clamp terminals only (pre-wired terminals; see page 64). For separate mounting, use terminal block LA7K0064 (see below).

The front face of the overload relay provides:

- Selection of reset mode: Manual (marked H) or Automatic (marked A).
- A red pushbutton for the Trip Test function.
- A blue pushbutton for Stop and manual reset.
- A yellow trip flag to indicate that the overload relay tripped.



LR2K0301

Three-Pole Overload Relays with Screw Clamp Terminals

| Short-circuit protection for North American applications | | By circuit breaker | | Select in accordance with NEC and local codes | |
|--|---|--------------------|------|---|-----------------|
| | | By fuses | | Maximum 400% of motor FLA | |
| Relay Setting Range | European type fuses Maximum rating Type | | | Catalog Number | Weight lb. (kg) |
| | aM | gI | BS88 | | |
| A | A | A | A | | |
| Class 10 (the standard specifies a tripping time of between 2 and 10 seconds at 7.2 In) | | | | | |
| 0.11 to 0.16 | 0.25 | 0.5 | – | LR2K0301 | 0.32 (0.145) |
| 0.16 to 0.23 | 0.25 | 0.5 | – | LR2K0302 | 0.32 (0.145) |
| 0.23 to 0.36 | 0.5 | 1 | – | LR2K0303 | 0.32 (0.145) |
| 0.36 to 0.54 | 1 | 1.6 | – | LR2K0304 | 0.32 (0.145) |
| 0.54 to 0.8 | 1 | 2 | – | LR2K0305 | 0.32 (0.145) |
| 0.8 to 1.2 | 2 | 4 | 6 | LR2K0306 | 0.32 (0.145) |
| 1.2 to 1.8 | 2 | 6 | 6 | LR2K0307 | 0.32 (0.145) |
| 1.8 to 2.6 | 4 | 8 | 10 | LR2K0308 | 0.32 (0.145) |
| 2.6 to 3.7 | 4 | 10 | 16 | LR2K0310 | 0.32 (0.145) |
| 3.7 to 5.5 | 6 | 16 | 16 | LR2K0312 | 0.32 (0.145) |
| 5.5 to 8 | 8 | 20 | 20 | LR2K0314 | 0.32 (0.145) |
| 8 to 11.5 | 10 | 25 | 20 | LR2K0316 | 0.32 (0.145) |
| 10 to 14 | 16 | 32 | 25 | LR2K0321 ♦ | 0.32 (0.145) |
| 12 to 16 | 20 | 40 | 32 | LR2K0322 ♦ | 0.32 (0.145) |

♦ Not UL Listed or CSA Certified.

Overload Relays without Single-phase Sensitivity ♦

Class 10: To order, replace the prefix **LR2** by **LR7** in the catalog numbers selected from above (only applicable to overload relays LR2K0305 to LR2K0322). Example: **LR7K0308**.

♦ Not UL Listed or CSA Certified.

Accessory

| Description | Type of Connection | Catalog Number | Weight lb. (kg) |
|--|--------------------|-----------------|-----------------|
| Terminal block for separate clip-on mounting of the overload relay on 35 mm DIN rail | Screw clamp | LA7K0064 | 0.22 (0.100) |




LA7K0064

TeSys™ K-line Mini-Contactors and Starters


Dimensions, Mounting, and Schematics for Type LR•K Overload Relays

Protection Components

LR2K
Direct mounting beneath the contactor

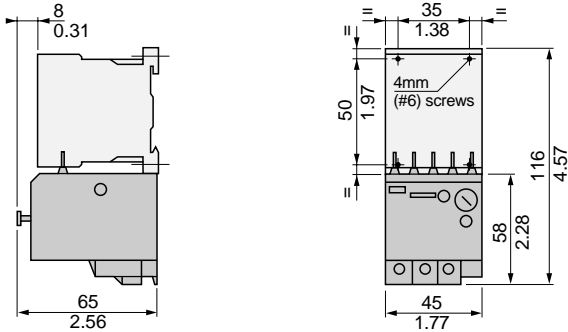


Separate mounting with terminal block **LA7K0064** on 1.4 in. (35 mm) DIN rail
(**AM1DP200** or **AM1DE200**)

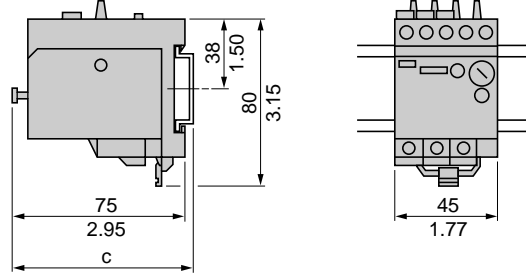


| AM1- | c |
|-------|-------------------|
| DP200 | 3.09 in. / 78.5mm |
| DE200 | 3.38 in. / 86mm |



LR2K



LR2K + LC•K
Built-in wiring schematic

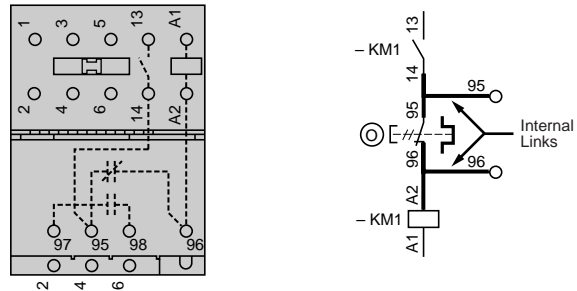

LR2K Overload Relays feature built-in wiring to save time and materials when all five links of the overload relay are connected to a K-line contactor with an integrated N.O. (normally-open) auxiliary contact. Terminal 96 of the N.C. (normally-closed) overload relay contact (95-96) will be internally linked in series with terminal A2 of the contactor operating coil. Terminal 95 of the N.C. overload relay contact (95-96) will be internally linked in series with terminal 14 of N.O. coil holding contact (13-14) of the contactor. These internal links help to eliminate additional wiring when using a conventional 3-wire control circuit similar to the diagram shown.

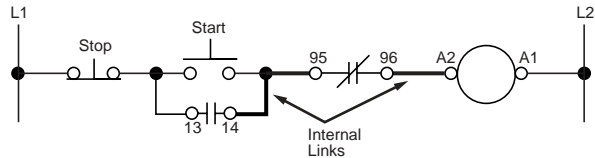







If integrated wiring between contactor and overload relay is not desired, break off the two links on the overload relay as indicated.

TeSys™ K-line Mini-Contactors and Starters

Characteristics of Type LP•K Low-consumption Contactors

Environment
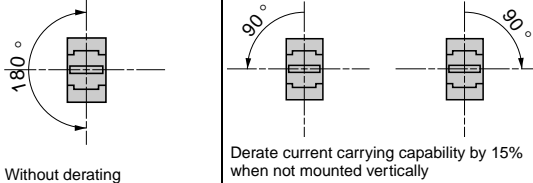
| | | | | | |
|---|---|--|--|--|-------------------|
| Rated insulation voltage (Vi) | Conforming to IEC 60947 | V | 690 | | |
| | Conforming to VDE 0110 gr C | V | 750 | | |
| | Conforming to BS 5424, NF C 20-040 | V | 690 | | |
| | Conforming to CSA 22.2 No. 14, UL 508 | V | 600 | | |
| Rated impulse withstand voltage (Vimp) | | kV | 8 | | |
| Conforming to standards |  Meets the essential requirements of the LV & EMC directives | | IEC 60947, NF C 63-110, VDE 0660, BS 5424, UL 508, CSA 22.2 No. 14 | | |
| Approvals | LP•K06, LP•K09, LP•K12 |  E164862 NLDX (screw clamp) |  LR43364 3211 04 |  E164862 NLDX2 (Slip-on & solder pin) | |
| Protective treatment | Conforming to IEC 60068 (DIN 50016) | | "TC" (Fungus-proof, Tropicalization protection) | | |
| Degree of protection | Conforming to VDE 0106 | | Protection against direct finger contact | | |
| Ambient air temperature around the device | Storage | | - 50 to + 80 °C (-58 to +176 °F) | | |
| | Operation | | - 25 to + 50 °C (-13 to +122 °F) | | |
| Maximum operating altitude | Without derating | | 2000 m (6562 ft) | | |
| Operating positions | Vertical axis |  | | | |
| | Horizontal axis |  | | | |
| Flame resistance | Conforming to UL 94 | | Self-extinguishing materials V1 | | |
| | Conforming to NF F 16-101 and 16-102 | | Conforming to requirement 2 | | |
| Shock resistance (1/2 sine wave, 11 ms) | Contactors open | | 10 g | | |
| | Contactors closed | | 15 g | | |
| Vibration resistance 5 to 300 Hz | Contactors open | | 2 g | | |
| | Contactors closed | | 4 g | | |
| Safe separation of circuits | Conforming to VDE 0106 and IEC 60536 | | SELV, up to 400 V ▲ | | |
| Cabling | | Min | Max | Max to IEC 60947 | |
| | Screw clamp terminals | Solid or stranded cable | AWG 1 x 18 | 2 x 14 or 1 x 12 | - |
| | | Solid cable | mm ² 1 x 1.5 | 2 x 4 | 1 x 4 + 1 x 2.5 |
| | | Stranded cable without cable end | mm ² 1 x 0.75 | 2 x 4 | 2 x 2.5 |
| | | Stranded cable with cable end | mm ² 1 x 0.34 | 1 x 1.5 + 1 x 2.5 | 1 x 1.5 + 1 x 2.5 |
| Slip-on connectors | Clip | 2 x 2.8mm or 1 x 6.35mm (2 x 0.110 in. or 1 x 0.250 in.) | | | |
| Solder pins for printed circuit board | With locating device between power and control circuits | 4 mm x 35 microns | | | |
| Tightening torque | Phillips no. 2 or 3/16" slotted head screwdriver | | 0.8 to 1.3 N•m (7 to 11.5 lb.-in) | | |
| Terminal referencing | Conforming to standards EN 50005 and EN 50012 | | Up to 3 contacts | | |

▲ Safe extra low voltage.

TeSys™ K-line Mini-Contactors and Starters

Characteristics of Type LP•K Low-consumption Contactors

Pole Characteristics

| | | | | | | | | | | |
|--|--|---|---|---------------------|--------------|-------------|-------------|----------------|-------------|-------------|
| Conventional rated thermal current (Ith) | For ambient temperature ≤ 50 °C (122°F) | | A | 20 | | | | | | |
| Rated operational frequency | | | Hz | 50/60 | | | | | | |
| Frequency limits of the operational current | | | Hz | Up to 400 | | | | | | |
| Rated operational voltage (Ve) | | | V | 690 | | | | | | |
| Rated making capacity | I rms conforming to NF C 63-110 and IEC 60947 | | A | | | | | | | |
| | LP•K06, LP•K09 LP•K12 | | | 110 144 | | | | | | |
| Rated breaking capacity | Conforming to NF C 63-110 and IEC 60947 | | V | 220/ 230 | 380/ 400 | 415 | 440 | 500 | 660/ 690 | |
| | LP•K06, LP•K09 LP•K12 | I rms | A | 110 – | 110 – | 110 – | 110 120 | 80 80 | 70 70 | |
| Permissible short time rating | Open mounted, for a time "t" from cold state (θ ≤ 50 °C [122 °F]) | | | 1 s | 5 s | 10 s | 30 s | 1 min | 3 min | ≥15 min |
| | LP•K06, LP•K09 LP•K12 | | A | 90 115 | 85 105 | 80 100 | 60 75 | 45 55 | 40 50 | 20 25 |
| Short-circuit protection | By circuit breaker | | Select in accordance with NEC and local codes | | | | | | | |
| | By fuses | | Max 400% of motor FLA | | | | | | | |
| Average impedance per pole | At Ith and 50 Hz | | mΩ | 3 | | | | | | |
| Utilization in category AC-1 resistive circuits, heating, lighting (Ve ≤ 440 V) | Maximum rated operational current for a temperature ≤ 50 °C (122 °F) | | A | 20 | | | | | | |
| | Rated operational current limits in relation to on-load factor and operating frequency | | A | On-load factor | | 90% | 60% | 30% | | |
| | | | | 300 op. cycles/hour | | 13 | 15 | 18 | | |
| | | | | 120 op. cycles/hour | | 15 | 18 | 19 | | |
| | | | | 30 op. cycles/hour | | 19 | 20 | 20 | | |
| Increase in operational current by paralleling poles | | Apply the following coefficients to the current values given above. These take into account the often unbalanced current distribution between poles | | | | | | | | |
| | | 2 poles in parallel: K = 1.60 | | | | | | | | |
| | | 3 poles in parallel: K = 2.25 | | | | | | | | |
| | | 4 poles in parallel: K = 2.80 | | | | | | | | |
| Utilization in category AC-3 Squirrel cage motors | Operational power according to the voltage | Voltage 50 or 60Hz | V | 115 | 220 | 220/ 240 | 380/ 415 | 440/ 480 | 500/ 600 | 660/ 690 |
| | LP•K06 | Motor ratings | kW | 0.37 | 0.75 | 1.5 | 2.2 | 3 | 3 | 3 |
| | LP•K09 | Motor ratings | kW | 0.55 | 1.1 | 2.2 | 4 | 4 | 4 | 4 |
| | LP•K12 | Motor ratings | kW | – | – | 3 | 5.5 | 5.5 4 (480) | 4 | 4 |
| | Percent utilization of operational power in relation to the maximum operating rate | | | | Op. cycles/h | | 600 | 900 | 1200 | |
| | | | | Power | | 100% | 75% | 50% | | |
| Utilization in category AC-3 Squirrel cage motors | Operational power according to the voltage | Voltage 50 or 60Hz | V | 115 | 220 | 200/ 208 | 220/ 240 | 460/ 480 | 575/ 600 | |
| | LC•K06, LP•K06 | Motor ratings | HP | 0.5 | 1 | 1.5 | 1.5 | 3 | 3 | |
| | LC•K09, LP•K09 | Motor ratings | HP | 0.5 | 1.5 | 2 | 3 | 5 | 5 | |
| | LC•K12, LP•K12 | Motor ratings | HP | 1 | 2 | 3 | 3 | 7.5 | 10 | |
| | LC•K16, LP•K16 | Not for North American Applications. Not UL Listed or CSA Certified. | | | | | | | | |

TeSys™ K-line Mini-Contactors and Starters

Characteristics of Type LP•K Low-consumption Contactors

Control Circuit Characteristics

| Type | | LP4 | LP5 |
|--|---|----------------|----------------------|
| Rated control circuit voltage (Vc) | V | DC 12 to 72 | |
| Control voltage limits (≤ 50 °C [122 °F]) single-voltage coil | For operation | 0.7 to 1.30 Vc | |
| | For drop-out | ≥ 0.10 Vc | |
| Average consumption at 20 °C (68 °F) and at Vc | Inrush | W | 1.8 |
| | Sealed | W | 1.8 |
| Heat dissipation | W | 1.8 | |
| Operating time at 20 °C (68 °F) and at Vc | Between coil energization and: - opening of the N.C. contacts - closing of the N.O. contacts | ms ms | 25 to 35 30 to 40 |
| | Between coil de-energization and: - opening of the N.O. contacts - closing of the N.C. contacts | ms ms | 10 to 20 15 to 25 |
| Maximum immunity to micro breaks | ms | 2 | |
| Maximum operating rate | In operating cycles per hour | 3600 | |
| Mechanical durability at Vc In millions of operating cycles | Wide range DC coil | 30 | 5 |

Auxiliary Contact Characteristics of Contactors and Instantaneous Contact Blocks

| | | | |
|--|---|--------|---|
| Number of contacts | On LP4, LP5K | | 1 |
| | On LA1K | | 2 max. |
| Rated operational voltage (Ve) | Up to | V | 690 |
| Rated insulation voltage (Vi) | Conforming to BS 5424 | V | 690 |
| | Conforming to IEC 60947 | V | 690 |
| | Conforming to VDE 0110 group C | V | 750 |
| | Conforming to CSA 22.2 No. 14, UL 508 | V | 600 |
| Conventional rated thermal current (Ith) | For ambient temperature ≤ 50 °C (122 °F) | A | 10 |
| Frequency of operational current | | Hz | Up to 400 |
| Minimum switching capacity | V min (DIN 19 240) | V | 17 (reliability <10 ⁻⁸ at 24V) |
| | I min | mA | 5 |
| Short-circuit protection | Conforming to IEC 60947 and VDE 0660, gl fuse | A | 10 |
| Rated making capacity | Conforming to IEC 60947 | I rms | A 110 |
| | | 1 s | A 80 |
| | | 500 ms | A 90 |
| Overload current | Permissible for | 100 ms | A 110 |
| | | | |
| Insulation resistance | | MΩ | > 10 |
| Non-overlap distance | Linked contacts conforming to INRS and BIA specs. | mm | 0.5 (0.02") |

Operational power of contacts
conforming to IEC 60947

AC supply, category AC-15


Electrical durability (valid up to 3600 operating cycles per hour) on an inductive load such as the coil of an electromagnet: making current (power factor 0.7) = 10 times the breaking current (power factor 0.4).

DC supply, category DC-13

Electrical durability (valid up to 1200 operating cycles per hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the load.


| | V | 24 | 48 | 110/127 | 220/230 | 380/400 | 400 | 600/690 | V | 24 | 48 | 110 | 220 | 440 | 600 |
|------------------------------------|----|------|------|---------|---------|---------|-------|---------|---|-----|-----|-----|-----|-----|-----|
| 1 million operating cycles | VA | 48 | 96 | 240 | 440 | 800 | 880 | 1200 | W | 120 | 80 | 60 | 52 | 51 | 50 |
| 3 million operating cycles | VA | 17 | 34 | 86 | 158 | 288 | 317 | 500 | W | 55 | 38 | 30 | 28 | 26 | 25 |
| 10 million operating cycles | VA | 7 | 14 | 36 | 66 | 120 | 132 | 200 | W | 15 | 11 | 9 | 8 | 7 | 6 |
| Occasional making capacity | VA | 1000 | 2050 | 5000 | 10000 | 14000 | 13000 | 9000 | W | 720 | 600 | 400 | 300 | 230 | 200 |

Power in broken VA

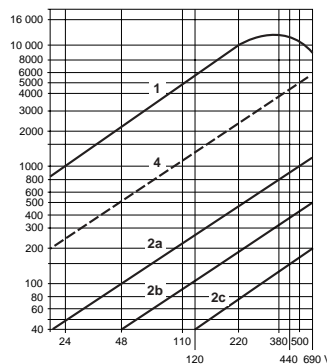

- 1 Breaking limit of contacts valid for maximum of 50 operating cycles at 10 s intervals (breaking current = making current x power factor 0.7).
- 2 Electrical durability of contacts for:
 - 1 million operating cycles (2a)
 - 3 million operating cycles (2b)
 - 10 million operating cycles (2c).
- 3 Breaking limit of contacts valid for maximum of 20 operating cycles at 10 s intervals with current passing for 0.5 s per operating cycle.
- 4 Thermal limit.

Power in broken W

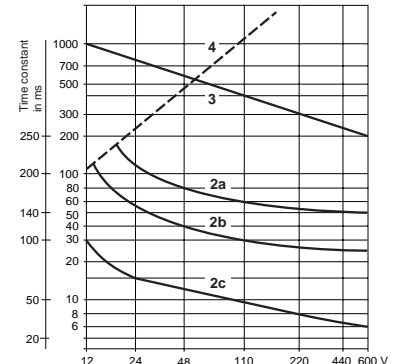

TeSys™ K-line Mini-Contactors and Starters

Selection of Low-consumption Contactors for Motor Control

The table below shows three-pole contactors with low-consumption coils for DC control circuits. They are compatible with programmable controller outputs, and incorporate an LED indicator. For wide-range coils (0.7 to 1.3 Vc), a suppressor (zener diode) is fitted as standard (consumption is 1.8 W).

The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, "ready-to-tighten" position.

For information on add-on auxiliary contact blocks and accessories, see page 72.

Three-Pole Contactors with Low-consumption Coils for DC Control Circuits

| Horsepower Ratings for North American Applications | | | | | | Kilowatt Ratings for International Applications | | | | Type of Connection | Auxiliary Contacts | | Catalog Number ◆ ▼ | Weight lb. (kg) | |
|--|---------------|---------------|---------------|---------------|---------------|---|--|----------------|------------------------|--------------------|---|------|-----------------------|--------------------|--------------|
| Maximum Horsepower Rating Category AC-3, 50/60 Hz | | | | | | Max. Inductive Current | Standard power ratings of 3-phase motors, 50/60 Hz in category AC-3 | | | | Rated Operational Current, up to 440 V | N.O. | | | N.C. |
| 1-Phase | | 3-Phase | | | | | 220 V 230 V | 380 V 415 V | 440/500 V 660/690 V | | | | | | |
| 115/ 120 V | 230/ 240 V | 200/ 208 V | 220/ 240 V | 460/ 480 V | 575/ 600 V | A | kW | kW | kW | A | | | | | |
| HP | HP | HP | HP | HP | HP | | | | | | | | | | |
| 0.5 | 1 | 1.5 | 1.5 | 3 | 3 | 6 | 1.5 | 2.2 | 3 | 6 | Screw clamp | 1 | – | LP4K0610◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | – | – | 1 | LP4K0601◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LP4K06107◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | – | – | 1 | LP4K06017◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LP4K06105◆◆◆ | 0.265 (0.58) |
| | | | | | | | | | | | – | – | 1 | LP4K06015◆◆◆ | 0.58 (0.265) |
| Spring terminals | 1 | – | LP4K06103◆◆◆ | 0.52 (0.235) | | | | | | | | | | | |
| – | – | – | – | – | – | – | – | – | – | – | – | – | – | – | |
| 0.5 | 1.5 | 2 | 3 | 5 | 5 | 9 | 2.2 | 4 | 4 | 9 | Screw clamp | 1 | – | LP4K0910◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | – | – | 1 | LP4K0901◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LP4K09107◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | – | – | 1 | LP4K09017◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LP4K09105◆◆◆ | 0.58 (0.265) |
| | | | | | | | | | | | – | – | 1 | LP4K09015◆◆◆ | 0.58 (0.265) |
| Spring terminals | 1 | – | LP4K09103◆◆◆ | 0.52 (0.235) | | | | | | | | | | | |
| – | – | – | – | – | – | – | – | – | – | – | – | – | – | – | |
| 1 | 2 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 4 (> 440) 5.5 (440) | 12 | Screw clamp | 1 | – | LP4K1210◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | – | – | 1 | LP4K1201◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LP4K12107◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | – | – | 1 | LP4K12017◆◆◆ | 0.52 (0.235) |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LP4K12105◆◆◆ | 0.58 (0.265) |
| | | | | | | | | | | | – | – | 1 | LP4K12015◆◆◆ | 0.58 (0.265) |
| Spring terminals | 1 | – | LP4K12103◆◆◆ | 0.52 (0.235) | | | | | | | | | | | |
| – | – | – | – | – | – | – | – | – | – | – | – | – | – | – | |

◆ Standard control circuit voltages (variable delivery times, please consult your Local Square D Field Sales Office).

▼ Use voltage codes on page 52 "Voltage Code Table" to complete catalog number.



LP4K06105◆◆◆

TeSys™ K-line Mini-Contactors and Starters

Selection of Low-consumption Reversing Contactors for Motor Control

The table below shows three-pole reversing contactors with low-consumption coils for DC control circuits. They are compatible with programmable controller outputs, and incorporate an LED indicator and mechanical interlock. For wide-range coils (0.7 to 1.3 Vc), a suppressor (zener diode) is fitted as standard (consumption is 1.8 W).

The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, "ready-to-tighten" position. Customer wiring is required to connect coil terminations to the electrical interlock; see page 75 for more information.

For information on add-on auxiliary contact blocks and accessories, see page 72.


Three-Pole Reversing Contactors with Low-Consumption Coils for DC Control Circuits

| Horsepower Ratings for North American Applications | | | | | | Kilowatt Ratings for International Applications | | | | Type of Connection | Auxiliary Contacts | | Catalog Number ◆▼ | Weight lb. (kg) | |
|--|---------------|---------------|---------------|---------------|---------------|---|--|----------------|------------------------|--------------------|---|------|----------------------|--------------------|--------------|
| Maximum Horsepower Rating Category AC-3, 50/60 Hz | | | | | | Max. Inductive Current | Standard power ratings of 3-phase motors, 50/60 Hz in category AC-3 | | | | Rated Operational Current, up to 440 V | N.O. | | | N.C. |
| 1-Phase | | 3-Phase | | | | | 220 V 230 V | 380 V 415 V | 440/500 V 660/690 V | | | | | | |
| 115/ 120 V | 230/ 240 V | 200/ 208 V | 220/ 240 V | 460/ 480 V | 575/ 600 V | A | kW | kW | kW | A | | | | | |
| 0.5 | 1 | 1.5 | 1.5 | 3 | 3 | 6 | 1.5 | 2.2 | 3 | 6 | Screw clamp ▲ | 1 | – | LP5K0610◆◆◆ | 1.08 (0.490) |
| | | | | | | | | | | | – | 1 | LP5K0601◆◆◆ | 1.08 (0.490) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LP5K06107◆◆◆ | 1.03 (0.470) |
| | | | | | | | | | | | – | 1 | LP5K06017◆◆◆ | 1.03 (0.470) | |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LP5K06105◆◆◆ | 1.17 (0.530) |
| – | 1 | LP5K06015◆◆◆ | 1.17 (0.530) | | | | | | | | | | | | |
| | | | | | | | | | | | Spring terminals | 1 | – | LP5K06103◆◆◆ | 1.08 (0.490) |
| – | 1 | LP5K06013◆◆◆ | 1.08 (0.490) | | | | | | | | | | | | |
| 0.5 | 1.5 | 2 | 3 | 5 | 5 | 9 | 2.2 | 4 | 4 | 9 | Screw clamp ▲ | 1 | – | LP5K0910◆◆◆ | 1.08 (0.490) |
| | | | | | | | | | | | – | 1 | LP5K0901◆◆◆ | 1.08 (0.490) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LP5K09107◆◆◆ | 1.03 (0.470) |
| | | | | | | | | | | | – | 1 | LP5K09017◆◆◆ | 1.03 (0.470) | |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LP5K09105◆◆◆ | 1.17 (0.530) |
| – | 1 | LP5K09015◆◆◆ | 1.17 (0.530) | | | | | | | | | | | | |
| | | | | | | | | | | | Spring terminals | 1 | – | LP5K09103◆◆◆ | 1.08 (0.490) |
| – | 1 | LP5K09013◆◆◆ | 1.08 (0.490) | | | | | | | | | | | | |
| 1 | 2 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 4 (> 440) 5.5 (440) | 12 | Screw clamp ▲ | 1 | – | LP5K1210◆◆◆ | 1.08 (0.490) |
| | | | | | | | | | | | – | 1 | LP5K1201◆◆◆ | 1.08 (0.490) | |
| | | | | | | | | | | | Slip-on 1 x 0.25 in., or 2 x 0.11 in. | 1 | – | LP5K12107◆◆◆ | 1.03 (0.470) |
| | | | | | | | | | | | – | 1 | LP5K12017◆◆◆ | 1.03 (0.470) | |
| | | | | | | | | | | | Solder pins for printed circuit board | 1 | – | LP5K12105◆◆◆ | 1.17 (0.530) |
| – | 1 | LP5K12015◆◆◆ | 1.17 (0.530) | | | | | | | | | | | | |
| | | | | | | | | | | | Spring terminals | 1 | – | LP5K12103◆◆◆ | 1.08 (0.490) |
| – | 1 | LP5K12013◆◆◆ | 1.08 (0.490) | | | | | | | | | | | | |

◆ Standard control circuit voltages (variable delivery times, please consult your Local Square D Field Sales Office.).

▲ Pre-wired power circuit connections are standard on screw clamp versions.

▼ Use voltage codes on page 52 "Voltage Code Table" to complete catalog number.



LP5K06105◆◆◆

TeSys™ K-line Mini-Contactors and Starters

Selection of Low-consumption Contactors for Resistive Loads



LP4K090047**

Three- and Four-Pole Contactors with Low-consumption Coils for DC Control Circuits

The table below shows three- and four-pole contactors with low-consumption coils for DC control circuits. They are compatible with programmable controller outputs, and incorporate an LED indicator. For wide-range coils (0.7 to 1.3 Vc), a suppressor (zener diode) is fitted as standard (consumption is 1.8 W).

The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, "ready-to-tighten" position. For information on add-on auxiliary contact blocks and accessories, see page 72.

| Non-inductive loads Category AC-1 Maximum current at ≤ 50 °C (122 °F) | Type of Connection | Power Poles | | Auxiliary Contacts | | Catalog Number ◆ ▼ | Weight lb. (kg) |
|--|--|-------------|------|--------------------|------|--------------------------|--------------------|
| | | N.O. | N.C. | N.O. | N.C. | | |
| A | Screw clamp | 3 | – | 1 | – | LP4K0910*** | 0.52 (0.235) |
| | | 4 | – | – | 1 | LP4K0901*** | 0.52 (0.235) |
| | | 2 | 2 | – | – | LP4K09004*** | 0.52 (0.235) |
| | | 2 | 2 | – | – | LP4K09008*** | 0.52 (0.235) |
| | | 3 | – | 1 | – | LP4K09107*** | 0.52 (0.235) |
| | | 4 | – | – | 1 | LP4K09017*** | 0.52 (0.235) |
| | Slip-on 1 x 0.25 in. or 2 x 0.11 in. | 3 | – | – | – | LP4K09007*** | 0.52 (0.235) |
| | | 4 | – | – | – | LP4K09004*** | 0.52 (0.235) |
| | | 2 | 2 | – | – | LP4K09008*** | 0.52 (0.235) |
| | | 3 | – | 1 | – | LP4K09105*** | 0.58 (0.265) |
| | | 4 | – | – | 1 | LP4K09015*** | 0.58 (0.265) |
| | | 2 | 2 | – | – | LP4K090085*** | 0.58 (0.265) |
| | Solder pins for printed circuit board | 3 | – | – | 1 | LP4K09103*** | 0.52 (0.235) |
| | | 4 | – | – | – | LP4K090043*** | 0.52 (0.235) |
| | | 2 | 2 | – | – | LP4K090083*** | 0.52 (0.235) |
| | | 3 | – | – | – | LP4K09013*** | 0.52 (0.235) |
| | | 4 | – | – | – | LP4K090043*** | 0.52 (0.235) |
| | | 2 | – | – | – | LP4K090083*** | 0.52 (0.235) |

◆ Standard control circuit voltages (variable delivery times, please consult your Local Square D Field Sales Office.).

▼ Use voltage codes on page 52 "Voltage Code Table" to complete catalog number.

TeSys™ K-line Mini-Contactors and Starters

Selection of Low-consumption Contactors for Resistive Loads







LP5K0910...

Three- and Four-Pole Contactors with Low-Consumption Coils for DC Control Circuits

The table below shows three-pole reversing and four-pole change over contactors with low-consumption coils for DC control circuits. They are compatible with programmable controller outputs, and incorporate an LED indicator and mechanical interlock. For wide-range coils (0.7 to 1.3 Vc), a suppressor (zener diode) is fitted as standard (consumption is 1.8 W).

The contactors mount on 35 mm DIN rails or with 4 mm (# 6) screws. The wire termination screws are in the open, "ready-to-tighten" position. Customer wiring is required to connect coil terminations to the electrical interlock; see page 75 for more information.

For information on add-on auxiliary contact blocks and accessories, see page 72.

| Non-inductive loads Category AC-1 Maximum current at ≤ 50 °C (122 °F) | Type of Connection | Power Poles | | Auxiliary Contacts | | Catalog Number ♦ ▼ | Weight lb. (kg) |
|--|--|---|---|---|---|--------------------------|--------------------|
| | |  |  |  |  | | |
| A | Screw clamp | 3 | – | 1 | – | LP5K0910... ■ | 1.08 (0.490) |
| | | 3 | – | – | 1 | LP5K0901... ■ | 1.08 (0.490) |
| | | 4 | – | – | – | LP5K09004... ■ | 1.08 (0.490) |
| | Slip-on 1 x 0.25 in. or 2 x 0.11 in. | 3 | – | 1 | – | LP5K09107... ■ | 1.03 (0.470) |
| | | 3 | – | – | 1 | LP5K09017... ■ | 1.03 (0.470) |
| | | 4 | – | – | – | LP5K090047... ■ | 1.17 (0.530) |
| | Solder pins for printed circuit board | 3 | – | 1 | – | LP5K09105... ■ | 1.17 (0.530) |
| | | 3 | – | – | 1 | LP5K09015... ■ | 1.17 (0.530) |
| | | 4 | – | – | – | LP5K090045... ■ | 1.17 (0.530) |
| | Spring terminals | 3 | – | 1 | – | LP5K09103... ■ | 1.08 (0.490) |
| | | 3 | – | – | 1 | LP5K09013... ■ | 1.08 (0.490) |
| | | 4 | – | – | – | LP5K090043... ■ | 1.08 (0.490) |


♦ Standard control circuit voltages (variable delivery times, please consult your Local Square D Field Sales Office.).

■ WARNING: These reversing contactors are pre-wired for reverse motor operation

▼ Use voltage codes on page 52 "Voltage Code Table" to complete catalog number.

TeSys™ K-line Mini-Contactors and Starters

Selection of Auxiliary Contacts and Accessories for Low-consumption Contactors




LA1KN••

Instantaneous Auxiliary Contact Blocks (clip-on front mounting, 1 block per contactor)

| Type of Connection | Type of Contactor | Auxiliary Contacts | | Catalog Number | Weight lb. (kg) |
|---|-------------------|--------------------|------|----------------|-----------------|
| | | N.O. | N.C. | | |
| Screw clamp | 3- or 4-pole | 2 | – | LA1KN20 | 0.10 (0.045) |
| | | – | 2 | LA1KN02 | 0.10 (0.045) |
| | | 1 | 1 | LA1KN11 | 0.10 (0.045) |
| Slip-on 1 x 0.25 in. or 2 x 0.11 in. | 3- or 4-pole | 2 | – | LA1KN207 | 0.10 (0.045) |
| | | – | 2 | LA1KN027 | 0.10 (0.045) |
| | | 1 | 1 | LA1KN117 | 0.10 (0.045) |
| Spring terminals | 3- or 4-pole | 2 | – | LA1KN203 | 0.10 (0.045) |
| | | – | 2 | LA1KN023 | 0.10 (0.045) |
| | | 1 | 1 | LA1KN113 | 0.10 (0.045) |
| With terminal referencing conforming to EN 50012 | | | | | |
| Screw clamp • | 3-pole, 6 and 9 A | – | 2 | LA1KN02M | 0.10 (0.045) |
| | | 1 | 1 | LA1KN11M | 0.10 (0.045) |
| | | 1 | 1 | LA1KN11P | 0.10 (0.045) |

• See pages 75 and 76 for actual markings.



LA2KT2•


Electronic Time-Delay Auxiliary Contact Blocks

- Relay output, with common point changeover contact, AC or DC 240 V, 2 A maximum.
- Control voltage: 0.85 to 1.1 Vc.
- Maximum switching capacity: 250 VA or 150 W.
- Operating temperature: -10 to +60 °C (14 to 140 °F).
- Reset time: 1.5 s during the time-delay period, 0.5 s after the time delay period.

Clip-on front mounting, 1 block per contactor

| Voltage | Type | Timing Range | Auxiliary Contacts | Catalog Number | Weight lb. (kg) |
|-----------------------|----------|--------------|--------------------|----------------|-----------------|
| V | | s | SPDT | | |
| AC or DC 24 to 48 (1) | On-delay | 1 to 30 | 1 | LA2KT2E | 0.09 (0.040) |

Mounting and Marking Accessories

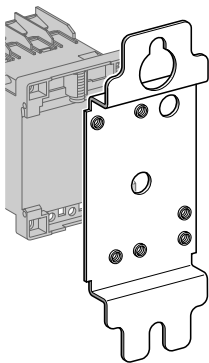


DX1AP25

| Description | Application | | Sold in lots of | Unit Catalog No. | Weight lb. (kg) |
|--|-------------------------|---|-----------------|------------------|-----------------|
| Mounting plates (order 1 for a contactor; order 2 for a reversing contactor) | For mounting on 1 rail | Clip-on | 1 | LA9D973 | 0.05 (0.025) |
| | For mounting on 2 rails | 110/120 mm mounting centers | 10 | DX1AP25 | 0.14 (0.065) |
| Marker holder | Clip-on | On to front of contactor | 100 | LA9D90 | 0.002 (0.001) |
| Clip-in markers | 4 maximum per contactor | Strips of 10 identical numbers 0 to 9 ▲ | 25 | AB1R• ▲ | 0.004 (0.002) |
| | | Strips of 10 identical capital letters A to Z ▲ | 25 | AB1G• ▲ | 0.004 (0.002) |
| 35mm " DIN rail (7.5 mm deep x 2 m long) | | | 10 | AM1DP200 | 2.88 (1.310) |
| 35mm " DIN rail (15 mm deep x 2 m long) | | | 10 | AM1ED200 | 1.44 (0.650) |

▲ Complete the catalog number by replacing the • with the required number or character.

Cabling Accessories



LA9E01

| Description | Application | | Sold in lots of | Unit Catalog No. | Weight lb. (kg) |
|----------------------------|---|---|-----------------|------------------|-----------------|
| Paralleling links | For 2-poles | With screw clamp terminals | 4 | LA9E01 | 0.02 (0.010) |
| | For 4-poles | With screw clamp terminals | 2 | LA9E02 | 0.03 (0.015) |
| Set of 6 power connections | For 3-pole reversing contactors for motor control | For contactors with screw clamp terminals | 100 | LA9K0969 | 0.02 (0.010) |
| Set of 4 power connections | For 4-pole changeover contactor pairs | For contactors with screw clamp terminals | 100 | LA9K0970 | 0.02 (0.010) |



(1) Low consumption K-line contactors are DC only.

TeSys™ K-line Mini-Contactors and Starters

Dimensions and Mounting of Low-consumption Contactors



Contactors LP4K On panel

On mounting rail **AM1DP200** or **AM1DE200** 1.4 in. (35 mm) DIN rail

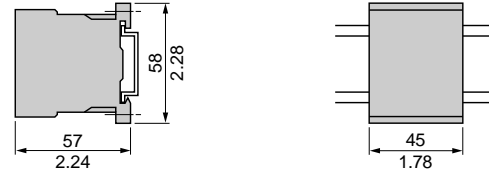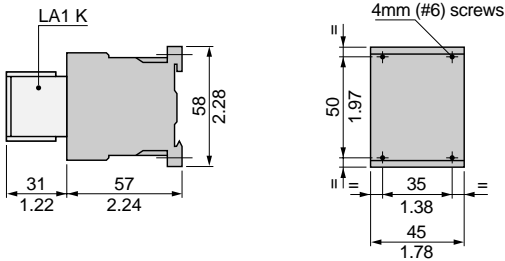


On one asymmetrical rail **DZ5MB** with clip-on mounting plate LA9D973

DX1AP25


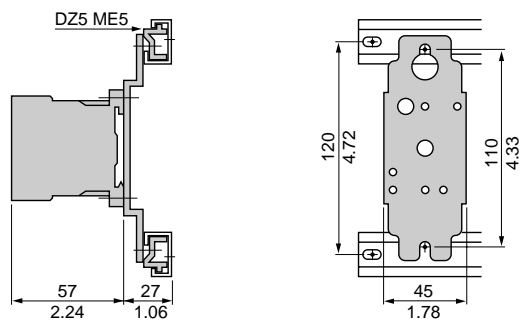
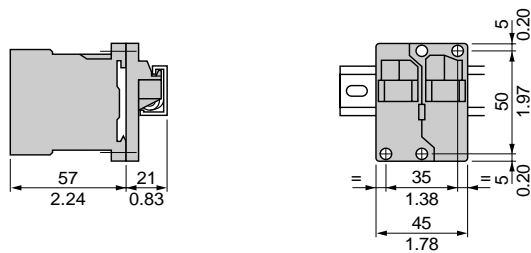


On printed circuit board



Electronic time-delay auxiliary contact blocks LA2KT

On contactor




Dimensions $\frac{\text{inches}}{\text{mm}}$


Type LP•K Three-Pole Low-Consumption Contactors, Reversing Contactors, and Accessories

3-pole contactors LP4K


3-pole + N.O.



3-pole + N.C.




Integrated-coil suppression device
LP4K



3-pole reversing contactors LP5K


With screw clamp terminals

3-pole + N.O.

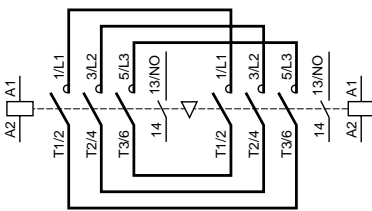


Dashed lines indicate suggested customer wiring to electrically interlock coils

3-pole + N.C.

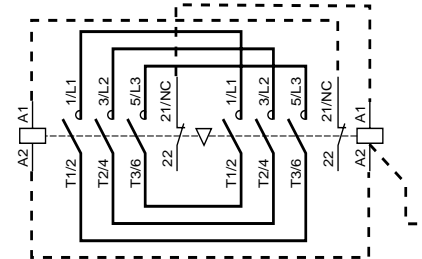


Integrated-coil suppression device
LC5K




With Slip-on connectors or solder pins for printed circuit boards

3-pole + N.O.

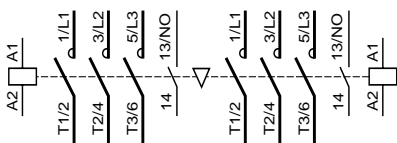

3-pole + N.O.

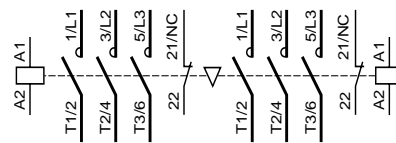

Instantaneous auxiliary contact blocks LA1K

For 3-pole contactors

2 N.O.
LA1KN20
LA1KN207



2 N.C.
LA1KN02
LA1KN027



1 N.O. + 1 N.C.
LA1KN11
LA1KN117



Terminal referencing conforming to standard EN 50012

2 N.C.
LA1KN02




1 N.O. + 1 N.C.
LA1KN11M



Electronic Time-delay Auxiliary Contact Blocks LA2KT

For 3-pole contactors LP•K

1 C/O




TeSys™ K-line Mini-Contactors and Starters

Type LP•K Schematics


Type LP•K Four-Pole Low-Consumption Contactors, Reversing Contactors, and Accessories

4-pole contactors LP4K


4-pole + N.O.



2-pole N.O. + 2-pole N.C.




Integrated-coil suppression device
LP4K




4-pole reversing contactors LP5K


With screw clamp terminals

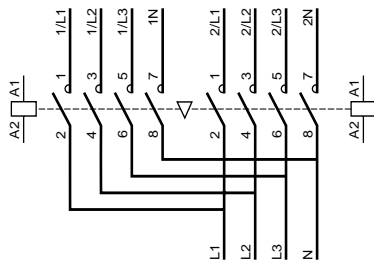

With slip-on terminals or solder pins for printed circuits boards




Integrated-coil suppression device
LP5K




Instantaneous auxiliary contact blocks LA1K

2 N.O.
LA1KN20
LA1KN207



2 N.C.
LA1KN02
LA1KN027



1 N.O. + 1 N.C.
LA1KN11
LA1KN117




Terminal referencing conforming to standard EN 50012
1 N.O. + 1 N.C.
LA1KN11P



Electronic Time-delay Auxiliary Contact Blocks

LA2KT

For 3-pole contactors LP•K
1 C/O



TeSys™ D-Line

Contactors, Enclosed Starters, Overload Relays, and Accessories

Catalog

04

File 8502



CONTENTS

| Description | Page |
|---|------|
| General Information | 79 |
| Contactors | |
| Characteristics | 80 |
| Selection | 88 |
| Auxiliary Contacts, Timers, and Accessories Characteristics | 100 |
| Auxiliary Contacts, Timers, and Accessories Selection | 106 |
| D-line Voltage Code Table | 115 |
| Replacement Coils | 117 |
| Dimensions and Mounting | 122 |
| Schematics | 126 |
| Overload Relays | |
| Characteristics | 130 |
| Selection | 134 |
| Dimensions, Mounting, and Schematics | 138 |
| Plate-mounted Starters | 144 |
| Wye-delta Starters | 146 |
| Enclosed Contactors and Starters | |
| Horsepower Rated Devices for North American Applications | 151 |
| Kilowatt Rated Devices for International Applications | 159 |
| Cross Reference List | 175 |

TeSys™ D-Line Contactors and Starters

General Information

The D-line contactors and overload relays are the largest selling line of contactors and starters in the world. They offer high reliability with long mechanical and electrical life and the most complete line of accessories in the industry.

Contactor Ratings

- D-line contactors and overload relays are available in 11 contactor ratings for the USA market for inductive motor applications up to 150 full-load amps and resistive loads up to 200 A. They offer motor control and overload protection for motors rated up to 100 hp at 480 Vac or 125 hp at 600 Vac.
- 3-pole and 4-pole contactor versions available.
- All contactors include built-in auxiliary contacts.
- All screw connections have IP20 rated touch-safe terminals with both North American and International terminal markings.
- D-line contactors can be panel mounted with screws or DIN rail mounted.

Easily Installed Accessories

- Auxiliary contact blocks with serrated wiping action
- Front mount dust tight auxiliary contact blocks
- Pneumatic time delay blocks
- Transient voltage surge suppressors
- Interface modules and electronic timers
- Mechanical latching blocks

Control Circuit Flexibility

The D-line contactors are available with ac or dc operating coils. Several devices utilize a low-consumption dc coil with built-in transient suppression for operation with a low-level dc signal from a computer or PLC without need for an interposing relay.

Overload Relays



Class 10 or Class 20 bimetallic overload relays are available up to 140 A. They are bimetallic ambient compensated and are available with or without single-phase sensitivity for phase unbalance and phase loss protection. New solid state overload relays are available for 90 to 150 A applications. Both bimetallic and solid-state overload relays include the following features:

- Isolated N.C. trip contact and N.O. alarm contacts.
- Manual or Automatic reset function (bi-metallic versions only).
- Tamper-resistant window for FLA settings.
- Test trip button.

TeSys™ D-Line Contactors and Starters

Characteristics of Type LC•D and LP•D Contactors

Environment

| Type | | | LC1D09 | LC1D12 | LC1D18 | LC1D25 | |
|--|---|--|---|-----------|-----------|-----------|-----|
| | | | LC1DT20 | LC1DT25 | LC1DT32 | LC1DT40 | |
| Rated insulation voltage (Vi) | UL/CSA | V | 690 | 690 | 690 | 690 | |
| | To IEC 60947-4-1, overvoltage category III, degree of pollution: 3 | V | 1000 | 1000 | 1000 | 1000 | |
| | Conforming to UL, CSA | V | 600 | 600 | 600 | 600 | |
| Rated impulse withstand voltage (Vimp) | Conforming to IEC 60947 | kV | 6 | 6 | 6 | 6 | |
| Conforming to standards |  Meets the essential requirements of the LV & EMC directives | | IEC 60947-1, 60947-4-1, NFC 63-110, VDE 0660, BS 5424, JEM 1038., EN 60947-1, EN 60947-4-1. | | | | |
| Approvals |  E164862 CCN NLDX |  LR43364 Class 3211 04 | ASE, UL, CSA, DEMKO, NEMKO, SEMKO, FI, Conforming to SNCF, Sichere Trennung recommendations | | | | |
| Degree of protection ♦ | Conforming to VDE 0106 | Power connections | Protection against direct finger contact IP 2X | | | | |
| | | Coil connections | Protection against direct finger contact IP 2X | | | | |
| Protective treatment | Conforming to IEC 60068 | | "TH" | | | | |
| Ambient air temperature around the device | Storage | | - 60 to + 80 °C (-76 to +176 °F) | | | | |
| | Operation at 80 to 110% nominal control voltage | | - 5 to + 60 °C (+23 to +140 °F) | | | | |
| | Permissible at nominal control voltage | | - 40 to + 70 °C (-40 to +158 °F) | | | | |
| Maximum operating altitude | Without derating | | 3000m (8900 ft.) | | | | |
| Operating positions | Without derating | | ± 30° possible, in relation to normal vertical mounting plane | | | | |
| Flame resistance | Conforming to UL 94 | | V 1 | V1 | V1 | V1 | |
| | Conforming to IEC 60695-2-1 | | 960° | 960° | 960° | 960° | |
| Shock resistance ▲ 1/2 sine wave = 11ms | Contact open | | 10 g | 10 g | 10 g | 8 g | |
| | Contact closed | | 15 g | 15 g | 15 g | 15 g | |
| Vibration resistance ▲ 5 to 300 Hz | Contact open | | 2 g | 2 g | 2 g | 2 g | |
| | Contact closed | | 4 g | 4 g | 4 g | 4 g | |
| Pole characteristics | | | | | | | |
| Number of poles | | | 3 | 3 or 4 | 3 | 3 or 4 | |
| Rated operational current (Ie) | In ac-3, θ ≤ 55°C (131°F) | A | 9 | 12 | 18 | 25 | |
| | In ac-1, θ ≤ 40°C (104°F) | A | 25 | 25 | 32 | 40 | |
| Rated operational voltage (Ve) | Up to | V | 690 | 690 | 690 | 690 | |
| Frequency limits | Of the operational current | Hz | 25 to 400 | 25 to 400 | 25 to 400 | 25 to 400 | |
| Rated thermal current (Ith) | θ ≤ 40°C (104°F) | A | 25 | 25 | 32 | 40 | |
| Rated making capacity (1 rms) | Conforming to IEC 60947-4 | A | 250 | 250 | 300 | 450 | |
| Rated breaking capacity (1 rms) | Conforming to IEC 60947 | 220-380-415-440 V | A | 250 | 250 | 300 | 450 |
| | | 500 V | A | 175 | 175 | 250 | 400 |
| | | 690 V | A | 85 | 85 | 120 | 180 |
| Permissible short time rating from cold state, no current flowing for previous 15 minutes, at θ ≤ 40 °C (104 °F) | For 1 s | A | 210 | 210 | 240 | 380 | |
| | For 10 s | A | 105 | 105 | 145 | 240 | |
| | For 1 min | A | 61 | 61 | 84 | 120 | |
| | For 10 min | A | 30 | 30 | 40 | 50 | |
| Short-circuit protection | By circuit breaker | | Select circuit breaker in accordance with NEC and local codes | | | | |
| | By fuses | | Maximum 400% of motor full load Amps | | | | |
| Average impedance per pole | A Ith and 50 Hz | mΩ | 2.5 | 2.5 | 2.5 | 2 | |
| Power dissipation per pole for the above operational currents | AC-3 | W | 0.20 | 0.36 | 0.8 | 1.25 | |
| | AC-1 | W | 1.56 | 1.56 | 2.5 | 3.2 | |




♦ Protection provided for the cable c.s.a. indicated on page 86 and for cable connections.

▲ In the least favorable direction, without change of contact state (coil supplied at Ve).

TeSys™ D-Line Contactors and Starters

Characteristics of Type LC•D and LP•D Contactors

Environment

| Type | | | LC1D32 | LC1D38 | LC1D40 | LC1D50 | LC1D65 | LC1D80 | LC1D95 | LC1D115 | LC1D150 |
|--|---|---|---|-----------|-------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| | | | | | LP1D40 | LP1D50 | LP1D65 | LP1D80 | | | |
| Rated insulation voltage (Vi) | UL/CSA | V | 690 | 690 | 690 | 690 | 690 | 690 | 690 | 690 | 690 |
| | To IEC 60947-4-1, overvoltage category III, degree of pollution: 3 | V | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| | Conforming to UL, CSA | V | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 |
| Rated impulse withstand voltage (Vimp) | Conforming to IEC 60947 | kV | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Conforming to standards |  Meets the essential requirements of the LV & EMC directives | | IEC 60947-1, 60947-4-1, NFC 63-110, VDE 0660, BS 5424, JEM 1038., EN 60947-1, EN 60947-4-1. | | | | | | | | |
| Approvals |  E164862 CCN NLDX |  LR43364 Class 3211 04 | ASE, UL, CSA, DEMKO, NEMKO, SEMKO, FI, Conforming to SNCF, Sichere Trennung recommendations | | UL 508, CSA C22.2 No.14 | | | | | | |
| Degree of protection ♦ | Conforming to VDE 0106 | Power connections | Protection against direct finger contact IP 2X | | | | | | | | |
| | | Coil connections | Protection against direct finger contact IP 2X except LP1D40 to LP1D80 | | | | | | | | |
| Protective treatment | Conforming to IEC 60068 | | "TH" | | | | | | | | |
| Ambient air temperature around the device | Storage | | - 60 to + 80 °C (-76 to +176 °F) | | | | | | | | |
| | Operation at 80 to 110% nominal control voltage | | - 5 to + 55 °C (+23 to +131 °F) | | | | | | | | |
| | Permissible at nominal control voltage | | - 40 to + 70 °C (-40 to +158 °F) | | | | | | | | |
| Maximum operating altitude | Without derating | | 3000m (8900 ft.) | | | | | | | | |
| Operating positions | Without derating | | ± 30° possible, in relation to normal vertical mounting plane | | | | | | | | |
| Flame resistance | Conforming to UL 94 | V 1 | V 1 | V 1 | V 1 | V 1 | V 1 | V 1 | V 1 | V 1 | V 1 |
| | Conforming to IEC 60695-2-1 | 960° | 960° | 960° | 960° | 960° | 960° | 960° | 960° | 960° | 960° |
| Shock resistance ▲ 1/2 sine wave = 11ms | Contacteur open | 8 g | 8 g | 8 g | 8 g | 8 g | 8 g | 8 g | 8 g | 6 g | 6 g |
| | Contacteur closed | 15 g | 10 g | 10 g | 10 g | 10 g | 10 g | 10 g | 10 g | 15 g | 15 g |
| Vibration resistance ▲ 5 to 300 Hz | Contacteur open | 2 g | 2 g | 2 g | 2 g | 2 g | 2 g | 2 g | 2 g | 2 g | 2 g |
| | Contacteur closed | 4 g | 4 g | 3 g | 3 g | 3 g | 3 g | 3 g | 3 g | 4 g | 4 g |
| Pole characteristics | | | | | | | | | | | |
| Number of poles | | | 3 | 3 | 3 or 4 | 3 | 3 or 4 | 3 or 4 | 3 | 3 or 4 | 3 |
| Rated operational current (Ie) | In ac-3, θ ≤ 55°C (131°F) | A | 32 | 38 | 40 | 50 | 65 | 80 | 95 | 115 | 150 |
| | In ac-1, θ ≤ 40°C (104°F) | A | 50 | 50 | 60 | 80 | 80 | 125 | 125 | 200 | 200 |
| Rated operational voltage (Ve) | Up to | V | 690 | 690 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| Frequency limits | Of the operational current | Hz | 25 to 400 | 25 to 400 | 25 to 400 | 25 to 400 | 25 to 400 | 25 to 400 | 25 to 400 | 25 to 400 | 25 to 400 |
| Rated thermal current (Ith) | θ ≤ 40°C (104°F) | A | 50 | 50 | 60 | 80 | 80 | 125 | 125 | 200 | 200 |
| Rated making capacity (1 rms) | Conforming to IEC 60947-4 | A | 550 | – | 800 | 900 | 1000 | 1100 | – | – | – |
| Rated breaking capacity (1 rms) | Conforming to IEC 60947 | 220-380-415-440 V | 550 | – | 800 | 900 | 1000 | 1100 | – | – | – |
| | | 500 V | 450 | – | 800 | 900 | 1000 | 1100 | – | – | – |
| | | 690 V | 180 | – | 400 | 400 | 630 | 640 | – | – | – |
| Permissible short time rating from cold state, no current flowing for previous 15 minutes, at θ ≤ 40 °C (104 °F) | For 1 s | A | 430 | 430 | 720 | 810 | 900 | 990 | 1100 | 1100 | 1400 |
| | For 10 s | A | 260 | 310 | 320 | 400 | 520 | 640 | 800 | 950 | 1200 |
| | For 1 min | A | 138 | 150 | 165 | 208 | 260 | 320 | 400 | 550 | 580 |
| | For 10 min | A | 60 | 60 | 72 | 84 | 110 | 135 | 135 | 250 | 250 |
| Short-circuit protection | By circuit breaker | | Select circuit breaker in accordance with NEC and local codes | | | | | | | | |
| | By fuses | | Maximum 400% of motor full load Amps | | | | | | | | |
| Average impedance per pole | A Ith and 50 Hz | mΩ | 2 | 2 | 1.5 | 1.5 | 1 | 0.8 | 0.8 | 0.6 | 0.6 |
| Power dissipation per pole for the above operational currents | AC-3 | W | 2 | 2 | 2.4 | 3.7 | 4.2 | 5.1 | 7.2 | 7.9 | 13.5 |
| | AC-1 | W | 5 | 5 | 5.4 | 9.6 | 6.4 | 12.5 | 12.5 | 24 | 24 |

♦ Protection provided for the cable c.s.a. indicated on page 86 and for cable connections.

▲ In the least favorable direction, without change of contact state (coil supplied at Ve).

TeSys™ D-Line Contactors and Starters

Characteristics of Type LC•D and LP•D Contactors

Control Circuit Characteristics

| Type | | | | LC1D09 | LC1D12 | LC1D18 | LC1D25 | LC1D32 | LC1D38 | | | |
|--|--|------------------------------|-----|---------------|----------|--------------------------|----------|------------|----------|----------|------|------|
| | | | | LC1DT20 | LC1DT25 | LC1DT32 | LC1DT40 | | | | | |
| Rated control circuit voltage (Vc) | | 50 or 60 Hz | | V | | | | 21 to 660 | | | | |
| Control voltage limits ($\theta \leq 55\text{ °C}$ [131 °F]) | | 50 or 60 Hz coils | | Operational | | 0.8 to 1.1 Vac | | | | | | |
| | | | | Drop-out | | 0.3 to 0.6 Vac | | | | | | |
| | | 50/60 Hz coils | | Operational | | 0.85 to 1.1 Vac at 60 Hz | | | | | | |
| | | | | Drop-out | | 0.3 to 0.6 Vac | | | | | | |
| Average consumption at 20 °C (68 °F) and at Vc | | 50 Hz ac | | Inrush | | 50 Hz coil | VA | – | – | – | – | – |
| | | | | | | Cos φ | 0.75 | 0.75 | 0.75 | 0.75 | 0.75 | 0.75 |
| | | | | 50/60 Hz coil | | VA | 70 | 70 | 70 | 70 | 70 | 70 |
| | | | | | | Cos φ | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 |
| | | | | Sealed | | 50 Hz coil | VA | – | – | – | – | – |
| | | | | | | Cos φ | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 |
| | | 60 Hz ac | | Inrush | | 60 Hz coil | VA | – | – | – | – | – |
| | | | | | | Cos φ | 0.75 | 0.75 | 0.75 | 0.75 | 0.75 | 0.75 |
| | | | | 50/60 Hz coil | | VA | 70 | 70 | 70 | 100 | 70 | 70 |
| | | | | | | Cos φ | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 |
| | | | | Sealed | | 60 Hz coil | VA | – | – | – | – | – |
| | | | | | | Cos φ | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 |
| 50/60 Hz coil | | VA | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | | | | |
| Heat dissipation | | 50/60 Hz | | W | 2 to 3 | 2 to 3 | 2 to 3 | 2.5 to 3.5 | 2 to 3 | 2 to 3 | | |
| Operating time | | Closing "C" ■ | | ms | 12 to 22 | 12 to 22 | 12 to 22 | 15 to 24 | 12 to 22 | 12 to 22 | | |
| | | Opening "O" ▲ | | ms | 4 to 19 | 4 to 19 | 4 to 19 | 5 to 19 | 4 to 19 | 4 to 19 | | |
| Mechanical durability in millions of operating cycles | | 50 or 60 Hz coil | | | – | – | – | – | – | – | | |
| | | 50/60 Hz coil at 50 Hz | | | 15 | 15 | 15 | 15 | 15 | 15 | | |
| Maximum operating rate at ambient temperature $\leq 55\text{ °C}$ (131 °F) | | In operating cycles per hour | | | 3600 | 3600 | 3600 | 3600 | 3600 | 3600 | | |

■ The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles.

▲ The opening time "O" is measured from the moment the coil supply is switched off to the moment the mains poles separate.

TeSys™ D-Line Contactors and Starters

Characteristics of Type LC•D and LP•D Contactors

Control Circuit Characteristics

| Type | | | LC1D40 | LC1D50 | LC1D65 | LC1D80 | LC1D95 | LC1D115 | LC1D150 | | |
|--|------------------------------|-------------|--------------------------|----------|----------|----------|-----------------------------|----------|----------------|---------|---------|
| Rated control circuit voltage (Vc) | 50 or 60 Hz | V | 24 to 660 | | | | | | 24 to 500 | | |
| Control voltage limits ($\theta \leq 55^\circ\text{C}$ [131°F]) | 50 or 60 Hz coils | Operational | 0.85 to 1.1 Vac | | | | | | - | | |
| | | Drop-out | 0.3 to 0.6 Vac | | | | | | 0.3 to 0.5 Vc | | |
| | 50/60 Hz coils | Operational | 0.85 to 1.1 Vac at 60 Hz | | | | 0.8 to 1.15 Vac at 50/60 Hz | | | | |
| | | Drop-out | 0.3 to 0.6 Vac | | | | | | 0.3 to 0.5 Vac | | |
| Average consumption at 20°C (68°F) and at Vc | 50 Hz ac | Inrush | 50 Hz coil | VA | 200 | 200 | 200 | 200 | 200 | 300 | - |
| | | | Cos ϕ | | 0.75 | 0.75 | 0.75 | 0.75 | 0.75 | 0.8 | 0.9 |
| | | | 50/60 Hz coil | VA | 245 | 245 | 245 | 245 | 245 | 280-350 | 280-350 |
| | | Sealed | 50 Hz coil | VA | 20 | 20 | 20 | 20 | 20 | 22 | - |
| | | | Cos ϕ | | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.9 |
| | | | 50/60 Hz coil | VA | 26 | 26 | 26 | 26 | 26 | 2 to 18 | 2 to 18 |
| | 60 Hz ac | Inrush | 60 Hz coil | VA | 220 | 220 | 220 | 220 | 220 | 300 | - |
| | | | Cos ϕ | | 0.75 | 0.75 | 0.75 | 0.75 | 0.75 | 0.8 | 0.9 |
| | | | 50/60 Hz coil | VA | 245 | 245 | 245 | 245 | 245 | 280-350 | 280-350 |
| | | Sealed | 60 Hz coil | VA | 22 | 22 | 22 | 22 | 22 | 22 | - |
| | | | Cos ϕ | | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.9 |
| | | | 50/60 Hz coil | VA | 26 | 26 | 26 | 26 | 26 | 6 | 6 |
| Heat dissipation | 50/60 Hz | W | 6 to 10 | 6 to 10 | 6 to 10 | 6 to 10 | 6 to 10 | 2 to 18 | 2 to 18 | | |
| Operating time | Closing "C" ■ | ms | 20 to 26 | 20 to 26 | 20 to 26 | 20 to 35 | 20 to 35 | 20 to 50 | 20 to 35 | | |
| | Opening "O" ▲ | ms | 8 to 12 | 8 to 12 | 8 to 12 | 6 to 20 | 6 to 20 | 6 to 20 | 40 to 75 | | |
| Mechanical durability in millions of operating cycles | 50 or 60 Hz coil | | 16 | 16 | 16 | 10 | 10 | 8 | - | | |
| | 50/60 Hz coil at 50 Hz | | 6 | 6 | 6 | 4 | 4 | 8 | 8 | | |
| Maximum operating rate at ambient temperature $\leq 55^\circ\text{C}$ (131°F) | In operating cycles per hour | | 3600 | 3600 | 3600 | 3600 | 3600 | 2400 | 1200 | | |

■ The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles.

▲ The opening time "O" is measured from the moment the coil supply is switched off to the moment the mains poles separate.

TeSys™ D-Line Contactors and Starters

Characteristics of Type LC•D and LP•D Contactors

DC Control Circuit Characteristics

| Type of contactor | | | LC1 D09 to D38 DT20 to DT40 | LP1 D12 and D25 | LC1 or LP1 D40 to D65 | LC1 or LP1D80 | LC1D115 & LC1D150 | |
|---|---------------------------------|-----------------|-------------------------------------|------------------------------------|-------------------------------------|------------------|-------------------------------------|------------|
| Rated control circuit voltage (Uc) | dc | V | 12 to 440 | | 12 to 440 | | 24 to 440 | |
| Rated insulation voltage | Conforming to IEC 60947-1 | V | 690 | | | | | |
| | Conforming to UL, CSA | V | 600 | | | | | |
| Control voltage limits | Operational | Standard coil | 0.7 to 1.25 Uc at 60 °C (140 °F) | 0.8 to 1.1 Uc @ 55 °C (131 °F) | 0.85 to 1.1 Uc at 55 °C (131 °F) | | 0.75 to 1.2 Uc at 55 °C (131 °F) | |
| | | Wide range coil | – | 0.7 to 1.25 Uc @ 55 °C (131 °F) | 0.75 to 1.2 Uc at 55 °C (131 °F) | | – | |
| | Drop-out | | 0.1 to 0.25 Uc at 60 °C (140 °F) | | 0.1 to 0.3 Uc at 55 °C (131 °F) | | 0.15 to 0.4 Uc at 55 °C (131 °F) | |
| Average consumption at 20 °C (68 °F) and at Uc | dc | Inrush | W | 5.4 | 9/11 | 22 | 22 | 270 to 365 |
| | | Sealed | W | 5.4 | 9/11 | 22 | 22 | 2.4 to 5.1 |
| Average operating time at Uc (1) | Closing | "C" | ms | 55 | 52 - 64 | 85 to 110 | 95 to 130 | 20 to 35 |
| | Opening | "O" | ms | 20 | 8 - 14 | 20 to 35 | 20 to 35 | 40 to 75 |
| Note: The arcing time depends on the circuit switched by the poles. For normal three-phase applications, the arcing time is usually less than 10 ms. The load is isolated from the supply after a time equal to the sum of the opening time and the arcing time. | | | | | | | | |
| Time constant (L/R) | | ms | 28 | 42 | 65 | 75 | 25 | |
| Mechanical life at Uc | In millions of operating cycles | | 30 | 30 | 20 | 20 | 8 | |
| Maximum operating rate at ambient temperature ≤ 60 °C (140 °F) | In operating cycles per hour | | 3600 | 3600 | 3600 | 3600 | 1200 | |

Low Consumption Control Circuit Characteristics

| | | | | | | | |
|--|---|--------|----------------|-----|--|--|--|
| Rated insulation voltage | Conforming to IEC 60947-1 | V | 690 | | | | |
| | Conforming to UL, CSA | V | 600 | | | | |
| Maximum voltage | Of the control circuit on dc | | 250 | | | | |
| Average consumption dc at 20 °C and at Uc | Wide range coil (0.7 to 1.25 Uc) | Inrush | W | 2.4 | | | |
| | | Sealed | W | 2.4 | | | |
| Operating time (1) at Uc and at 20 °C (68 °F) | Closing | "C" | ms | 70 | | | |
| | Opening | "O" | ms | 25 | | | |
| Voltage limits $\theta \leq 60$ °C (140 °F) of the control circuit | Operational | | 0.7 to 1.25 Uc | | | | |
| | Drop-out | | 0.1 to 0.3 Uc | | | | |
| Time constant (L/R) | | ms | 40 | | | | |
| Mechanical life | In millions of operating cycles | | 30 | | | | |
| Maximum operating rate | At ambient temperature ≤ 60 °C (140 °F) | ops/h | 3600 | | | | |
| Rated insulation voltage | Conforming to UL, CSA | V | 600 | | | | |
| | Conforming to IEC 60947-1 | V | 690 | | | | |

- (1) Operating times depend on the type of contactor electromagnet and its control mode.
The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles. The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.

TeSys™ D-Line Contactors and Starters

Characteristics of Type LC•D and LP•D Contactors

Contactor Integral Auxiliary Contact Characteristics

| | | | |
|---|--|-----------|--|
| Linked contacts conforming to draft standard IEC 60947-4-5 | Each contactor has two N.O. and N.C. contacts mechanically linked on the same movable contact holder. | | |
| Mirror contact | The N.C. contact on each contactor represents the state of the power contacts and can be connected to a PREVENTA safety module | | |
| Rated operational voltage (Ue) | Up to | V | 690 |
| Rated insulation voltage (Ui) | Conforming to IEC 60947-1 | V | 690 |
| | Conforming to UL, CSA | V | 600 |
| Conventional thermal current (Ith) | For ambient temperature ≤ 60 °C (140 °F) | A | 10 |
| Operating current frequency | | Hz | 25 to 400 |
| Minimum switching capacity | U min. | V | 17 |
| | I min. | mA | 5 |
| Short-circuit protection ● | Conforming to IEC 60947-5-1 | | gG fuse: 10 A |
| Rated making capacity | Conforming to IEC 60947-5-1, I rms | A | ac: 140; dc: 250 |
| Short-time rating | Permissible for | 1 s | A 100 |
| | | 500 ms | A 120 |
| | | 100 ms | A 140 |
| Insulation resistance | | MΩ | > 10 |
| Non-overlap time | Guaranteed between N.C. and N.O. contacts | ms | 1.5 on energizing and on de-energizing |

- Select short circuit protection to meet the National Electrical Code or other local codes and standards.

ac supply categories AC-14 and AC-15

Contact operating power conforming to IEC 60947-5-1


Electrical life (valid for up to 3600 operating cycles/hour) on an inductive load such as the coil of an electromagnet: making power (cos φ 0.7) = 10 times the power broken (cos φ 0.4).

dc supply category DC-13


Electrical life (valid for up to 1200 operating cycles/hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the load.

| | V | 24 | 48 | 115 | 230 | 400 | 440 | 600 | V | 24 | 48 | 125 | 250 | 440 |
|-----------------------------|-----------|----|-----|-----|-----|-----|------|------|----------|----|----|-----|-----|-----|
| 1 million operating cycles | VA | 60 | 120 | 280 | 560 | 960 | 1050 | 1440 | W | 96 | 76 | 76 | 76 | 44 |
| 3 million operating cycles | VA | 16 | 32 | 80 | 160 | 280 | 300 | 420 | W | 48 | 38 | 38 | 32 | – |
| 10 million operating cycles | VA | 4 | 8 | 20 | 40 | 70 | 80 | 100 | W | 14 | 12 | 12 | – | – |

AC-15

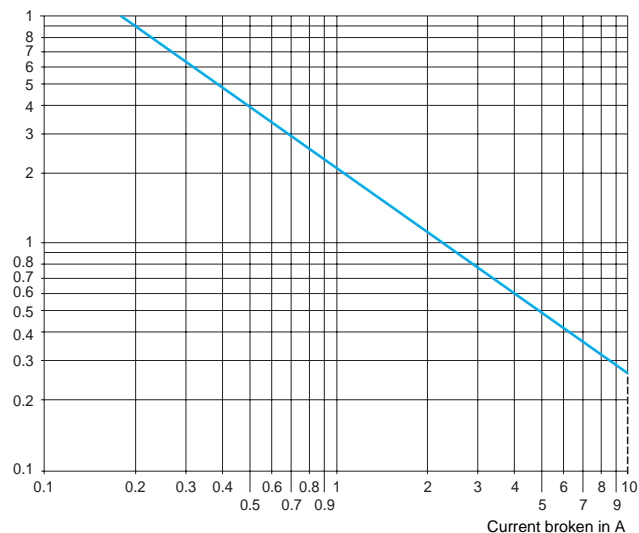

DC-13

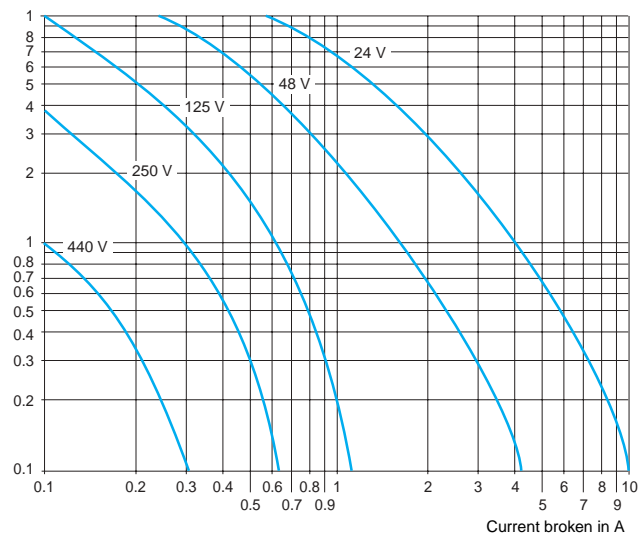

TeSys™ D-Line Contactors and Starters

Characteristics of Type LC•D and LP•D Contactors

Power Circuit Connections

| Type | | | LC1 D09, D12 DT20, DT25 | LC1D18 LC1DT32 | LC1D25 LC1DT40 | LC1D32 | LC1D38 | LC1D40 LP1D40 | LC1D50 LP1D50 | |
|--|---|-------------------|-------------------------|-----------------------|-----------------------|-----------------------|-----------------------|---------------------|---------------------|------------|
| Cabling (for screw clamp terminals) | Stranded cable without cable end | 1 conductor | AWG | 18-10 | 18-8 | 18-8 | 14-6 | – | 10-3 | 10-3 |
| | | 2 conductors | AWG | 18-10 | 18-8 | 18-8 | 14-6 | – | 10-4 | 10-4 |
| | Stranded cable with cable end | 1 conductor | mm ² | 1/4 | 1.5/6 | 1.5/10 | 2.5/10 | 2.5/10 | 2.5/25 | 2.5/25 |
| | | 2 conductors | mm ² | 1/4 | 1.5/6 | 1.5/6 | 2.5/10 | 2.5/10 | 2.5/16 | 2.5/16 |
| | Solid cable without cable end | 1 conductor | AWG | 18-10 | 18-3 | 18-3 | 18-3/0 | – | 10-4 | 10-4 |
| | | 2 conductors | AWG | 18-10 | 18-10 | 18-10 | 14-2 | – | 12-2 | 12-2 |
| | | 1 conductor | mm ² | 1/4 | 1/6 | 1/6 | 1/10 | 1/10 | 2.5/25 | 2.5/25 |
| | Phillips head type | 2 conductors | mm ² | 1/2.5 | 1/4 | 1/4 | 1.5/6 | 1.5/6 | 2.5/10 | 2.5/10 |
| | | 1 conductor | AWG | 18-8 | 18-8 | 18-8 | 14-8 | – | 10-3 | 10-3 |
| | Screwdriver Ø | 2 conductors | AWG | 18-8 | 18-8 | 18-8 | 10-8 | – | 10-6 | 10-6 |
| | | 1 conductor | mm ² | 1/4 | 1.5/6 | 1.5/6 | 1.5/10 | 1.5/10 | 2.5/25 | 2.5/25 |
| | Hexagon spanner | 2 conductors | mm ² | 1/4 | 1.5/6 | 1.5/6 | 2.5/10 | 2.5/10 | 2.5/16 | 2.5/16 |
| | | Tightening torque | | N° 2 | N° 2 | N° 2 | N° 2 | N° 2 | – | – |
| | Screwdriver Ø | | | Ø 6 | Ø 6 | Ø 6 | Ø 6 | Ø 6 | Ø 6 to Ø 8 | Ø 6 to Ø 8 |
| | | | | – | – | – | – | – | 4 mm | 4 mm |
| Tightening torque | | | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 23 lb.-in. 2.5 N•m | 23 lb.-in. 2.5 N•m | 23 lb.-in. 2.5 N•m | 45 lb.-in. 5 N•m | 45 lb.-in. 5 N•m | |
| | Connection by bus bar or ring-tongue terminals | | | | | | | | | |
| Bus bar connection (for bus bar or ring-tongue terminals) | Bar c.s.a. | | | – | – | – | – | – | – | |
| | Lug external Ø | mm | 8 | 8 | 10 | 10 | 10 | 13 | 16 | |
| | Screw Ø | mm | M3.5 | M3.5 | M4 | M4 | M4 | M5 | M6 | |
| | Phillips head type | | N° 2 | N° 2 | N° 2 | N° 2 | N° 2 | N° 2 | N° 3 | |
| | Screwdriver Ø | | Ø 6 | Ø 6 | Ø 6 | 3/16 in. Ø 6 mm | 3/16 in. Ø 6 mm | Ø 8 mm | Ø 8 mm | |
| | Hexagon spanner | | – | – | – | – | – | – | – | |
| Tightening torque | | | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 20 lb.-in. 7.5 N•m | 20 lb.-in. 7.5 N•m | 53 lb.-in. 6 N•m | 71 lb.-in. 6 N•m | |
| Flexible cabling (for spring terminals) | Spring terminals | | | | | | | | | |
| | Flexible cable without cable end | 1 conductor | AWG | 14 | 12 | 12 | 12 | 12 | – | – |
| | | 2 conductors | AWG | 14 | 12 | 12 | 12 | 12 | – | – |
| | Solid cable without cable end | 1 conductor | mm ² | 2.5 | 4 | 4 | 4 | 4 | – | – |
| | | 2 conductors | mm ² | 2.5 | 4 | 4 | 4 | 4 | – | – |

Control Circuit Connections

| Type | | | LC1 D09, D12 DT20, DT25 | LC1D18 LC1DT32 | LC1D25 LC1DT40 | LC1D32 | LC1D38 | LC1D40 LP1D40 | LC1D50 LP1D50 | |
|---|----------------------------------|--------------|-------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------|
| Connection by cable | | | | | | | | | | |
| Screw clamp terminals | | | | | | | | | | |
| Cabling | Stranded cable without cable end | 1 conductor | AWG (mm ²) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) | 1/4 | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) |
| | | 2 conductors | AWG (mm ²) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) | 1/4 | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) |
| | Stranded cable with cable end | 1 conductor | AWG (mm ²) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) | 1/4 | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) |
| | | 2 conductors | AWG (mm ²) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) |
| | Solid cable without cable end | 1 conductor | AWG (mm ²) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) | 1/4 | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) |
| | | 2 conductors | AWG (mm ²) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) | 1/4 | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) |
| Phillips head type | | | | N° 2 | N° 2 | N° 2 | N° 2 | N° 2 | N° 2 | |
| Screwdriver Ø | | | mm | Ø 6 | Ø 6 | Ø 6 | Ø 6 | Ø 6 | Ø 6 | |
| Tightening torque | | | | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 17 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | |
| Connection by bus bar or ring-tongue terminals | | | | | | | | | | |
| Lug external Ø | | | mm | 8 | 8 | 8 | 8 | 8 | 8 | |
| Screw Ø | | | mm | M3.5 | M3.5 | M3.5 | M3.5 | M3.5 | M3.5 | |
| Phillips head type | | | | N° 2 | N° 2 | N° 2 | N° 2 | N° 2 | N° 2 | |
| Screwdriver Ø | | | | 3/16 in. Ø 6 | 3/16 in. Ø 6 | 3/16 in. Ø 6 | 3/16 in. Ø 6 | 3/16 in. Ø 6 | 3/16 in. Ø 6 | |
| Tightening torque | | | | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | |

TeSys™ D-Line Contactors and Starters

Characteristics of Type LC•D and LP•D Contactors

Power Circuit Connections

| Type | | | | LC1D65 LP1D65 | LC1D80 LP1D80 | LC1D95 | LC1D115 | LC1D150 | |
|---|-------------------------------------|--------------|-----------------|---------------------|-------------------------|-------------------------|-------------------------|-------------------------|------|
| Cabling (for screw clamp terminals) | Stranded cable without cable end | 1 conductor | AWG | 10-3 | 10-2 | – | 8-250 mcm | 8-250 mcm | |
| | | 2 conductors | AWG | 10-4 | 10-4 | – | 8-1+8-250 mcm ▲ | 8-1+8-250 mcm ▲ | |
| | Stranded cable with cable end | 1 conductor | mm ² | 2.5/25 | 4/50 | 4/50 | 10/120 | 10/120 | |
| | | 2 conductors | mm ² | 2.5/16 | 4/25 | 4/25 | 10/120+ 10/50 ▲ | 10/120+ 10/50 ▲ | |
| | Stranded cable with cable end | 1 conductor | AWG | 10-4 | 10-4 | – | – | – | |
| | | 2 conductors | AWG | 12-2 | 12-2 | – | – | – | |
| | Stranded cable with cable end | 1 conductor | mm ² | 2.5/25 | 4/50 | 4/50 | 10/120 | 10/120 | |
| | | 2 conductors | mm ² | 2.5/10 | 4/16 | 4/16 | 10/120+ 10/50 ▲ | 10/120+ 10/50 ▲ | |
| | Solid cable without cable end | 1 conductor | AWG | 10-3 | 10-3 | – | 8-250 mcm | 8-250 mcm | |
| | | 2 conductors | AWG | 10-6 | 10-2 | – | 8-0+ 8-250mcm ▲ | 8-0+8-250 mcm ▲ | |
| | Solid cable without cable end | 1 conductor | mm ² | 2.5/25 | 4/50 | 4/50 | 10/120 | 10/120 | |
| | | 2 conductors | mm ² | 2.5/16 | 4/25 | 4/25 | 10/120+ 10/50 ▲ | 10/120+ 10/50 ▲ | |
| | Phillips head type | | | | – | – | – | – | – |
| | Screwdriver Ø | | | | Ø 6 to Ø 8 | Ø 6 to Ø 8 | Ø 6 to Ø 8 | – | – |
| | Hexagon spanner | | | | 4 mm | 4 mm | 4 mm | 4 mm | 4 mm |
| Tightening torque | | | | 45 lb.-in. 5 N•m | 100 lb.-in. 11.3 N•m | 100 lb.-in. 11.3 N•m | 100 lb.-in. 11.3 N•m | 100 lb.-in. 11.3 N•m | |
| Connection by bus bar or ring-tongue terminals | | | | | | | | | |
| Bar c.s.a. | | | | – | 3 x 16 | 3 x 16 | 5 x 25 | 5 x 25 | |
| Lug external Ø | | | | mm | 16 | 17 | 25 | 25 | |
| Screw Ø | | | | mm | M6 | M6 | M8 | M8 | |
| Phillips head type | | | | N° 3 | – | – | – | – | |
| Screwdriver Ø | | | | Ø 8 mm | Ø 8 mm | Ø 8 mm | – | – | |
| Hexagon spanner | | | | – | 10 mm | 10 mm | 13 mm | 13 mm | |
| Tightening torque | | | | 71 lb.-in. 6 N•m | 71 lb.-in. 8 N•m | 71 lb.-in. 8 N•m | 124 lb.-in. 14 N•m | 124 lb.-in. 14 N•m | |
| Spring terminals | | | | | | | | | |
| Flexible cabling (for spring terminals) | Flexible cable without cable end | 1 conductor | AWG | – | – | – | – | – | |
| | | 2 conductors | AWG | – | – | – | – | – | |
| | | 1 conductor | mm ² | – | – | – | – | – | |
| | | 2 conductors | mm ² | – | – | – | – | – | |

▲ One of each size range.

Control Circuit Connections

| Type | | | | LC1D65 LP1D65 | LC1D80 LP1D80 | LC1D95 | LC1D115 | LC1D150 |
|---|-------------------------------------|--------------|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Connection by cable | | | | | | | | |
| Screw clamp terminals | | | | | | | | |
| Cabling | Stranded cable without cable end | 1 conductor | AWG (mm ²) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) |
| | | 2 conductors | AWG (mm ²) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) |
| | Stranded cable with cable end | 1 conductor | AWG (mm ²) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) |
| | | 2 conductors | AWG (mm ²) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) |
| | Solid cable without cable end | 1 conductor | AWG (mm ²) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) |
| | | 2 conductors | AWG (mm ²) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 10 (1/4) | 18 - 12 (1/2.5) | 18 - 12 (1/2.5) |
| Phillips head type | | | | N° 2 | N° 2 | N° 2 | N° 2 | N° 2 |
| Screwdriver Ø | | | | mm | Ø 6 | Ø 6 | Ø 6 | Ø 6 |
| Tightening torque | | | | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m |
| Connection by bus bar or ring-tongue terminals | | | | | | | | |
| Lug external Ø | | | | mm | 8 | 8 | 8 | 8 |
| Screw Ø | | | | mm | M3.5 | M3.5 | M3.5 | M3.5 |
| Phillips head type | | | | | N° 2 | N° 2 | N° 2 | N° 2 |
| Screwdriver Ø | | | | | 3/16 in. Ø 6 | 3/16 in. Ø 6 | 3/16 in. Ø 6 | 3/16 in. Ø 6 |
| Tightening torque | | | | | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m | 15 lb.-in. 1.7 N•m |

TeSys™ D-Line Contactors and Starters

Selection of Contactors for Motor Control

The tables below show the kilowatt ratings (for international applications) and horsepower ratings (for North American applications) of contactors for motor control.

AC and DC Control Circuit — 3-pole Contactors with Touch-safe Terminals for Power Cabling (AC-3 category)

| Maximum horsepower ratings | | | | | | Maximum Inductive Current in AC-3 Category 600 V | Standard power ratings of 3-phase motors 50/60 Hz in category AC-3 | | | | | | | Rated Operating Current in AC-3 up to 440 V | Instantaneous Auxiliary Contacts | | Catalog Number ▼◆ | Weight lb (kg) | |
|---------------------------------------|---------------|------------------|---------------|---------------|----------------|--|--|----------------|-------|-------|-------|----------------|--------|---|----------------------------------|------|----------------------|-------------------|------|
| 1-phase 50/60 Hz | | 3-phase 50/60 Hz | | | | | 220 V 230 V | 380 V 400 V | 415 V | 440 V | 500 V | 660 V 690 V | 1000 V | | A | N.O. | | | N.C. |
| 115/ 120 V | 230/ 240 V | 200/ 208 V | 220/ 240 V | 460/ 480 V | 575 V 600 V | | | | | | | | | | | | | | |
| HP | HP | HP | HP | HP | HP | A | kW | kW | kW | kW | kW | kW | kW | A | | | | | |
| 0.5 | 1 | 2 | 2 | 5 | 7.5 | 9 | 2.2 | 4 | 4 | 4 | 5.5 | 5.5 | – | 9 | 1 | 1 | LC1D09•• | 0.71 (0.320) | |
| 1 | 2 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 5.5 | 5.5 | 7.5 | 7.5 | – | 12 | 1 | 1 | LC1D12•• | 0.72 (0.325) | |
| 1 | 3 | 5 | 5 | 10 | 15 | 18 | 4 | 7.5 | 9 | 9 | 10 | 10 | – | 18 | 1 | 1 | LC1D18•• | 0.73 (0.330) | |
| 2 | 3 | 7.5 | 7.5 | 15 | 20 | 25 | 5.5 | 11 | 11 | 11 | 15 | 15 | – | 25 | 1 | 1 | LC1D25•• | 0.82 (0.370) | |
| 2 | 5 | 10 | 10 | 20 | 30 | 32 | 7.5 | 15 | 15 | 15 | 18.5 | 18.5 | – | 32 | 1 | 1 | LC1D32•• | 0.83 (0.375) | |
| Not for North American applications ■ | | | | | | 38 | 9 | 18.5 | 18.5 | 18.5 | 18.5 | 18.5 | – | 38 | 1 | 1 | LC1D38•• | 0.84 (0.380) | |
| 3 | 5 | 10 | 10 | 30 | 30 | 40 | 11 | 18.5 | 22 | 22 | 22 | 30 | 22 | 40 | 1 | 1 | LC1D40•• | 3.11 (1.400) | |
| 3 | 7.5 | 15 | 15 | 40 | 40 | 50 | 15 | 22 | 25 | 30 | 30 | 33 | 30 | 50 | 1 | 1 | LC1D50•• | 3.11 (1.400) | |
| 5 | 10 | 20 | 20 | 50 | 50 | 65 | 18.5 | 30 | 37 | 37 | 37 | 37 | 37 | 65 | 1 | 1 | LC1D65•• | 3.11 (1.400) | |
| 7.5 | 15 | 25 | 30 | 60 | 60 | 80 | 22 | 37 | 45 | 45 | 55 | 45 | 45 | 80 | 1 | 1 | LC1D80•• | 3.53 (1.590) | |
| Not for North American applications ■ | | | | | | 95 | 25 | 45 | 45 | 45 | 55 | 45 | 45 | 95 | 1 | 1 | LC1D95•• | 3.58 (1.610) | |
| – | – | 30 | 40 | 75 | 100 | 115 | 30 | 55 | 59 | 59 | 75 | 80 | 75 | 115 | 1 | 1 | LC1D115•• | 5.38 (2.420) | |
| – | – | 40 | 50 | 100 | 125 | 150 | 40 | 75 | 80 | 80 | 90 | 100 | 90 | 150 | 1 | 1 | LC1D150•• | 5.42 (2.440) | |

- ◆ For LC1D09 to LC1D38: clip-on mounting on 35 mm DIN rail AM1DP or screw mounting.
For LC1D40 to LC1D95: clip-on mounting on 35 mm DIN rail AM1DE or 75 mm DIN rail AM1DL or screw mounting.
For LC1D115 and LC1D150: clip-on mounting on 2 x 35 mm DIN rails AM1DP or screw mounting.
- ▼ Use voltage codes on page 115 "Voltage Code Table" to complete catalog number.
- Devices are UL Listed at the same HP ratings as 32 and 80 amp devices, respectively.

LC1D09••



LC1D65••



LC1D150••



TeSys™ D-Line Contactors and Starters

Selection of Contactors for Motor Control

The tables below show the kilowatt ratings (for international applications) and horsepower ratings (for North American applications) of contactors for motor control.



LC1D123••

AC and DC Control Circuit — 3-pole Contactors for Spring Terminal Connections (AC-3 category)

| Maximum horsepower ratings | | | | | | Maximum Inductive Current in AC-3 Category 600 V | Standard power ratings of 3-phase motors 50/60 Hz in category AC-3 | | | | | | | Rated Operating Current in AC-3 up to 440 V | Instantaneous Auxiliary Contacts | | Catalog Number ▼◆ | Weight lb (kg) | |
|---------------------------------------|---------------|------------------|---------------|---------------|----------------|--|--|----------------|-------|-------|-------|----------------|--------|---|----------------------------------|------|----------------------|-------------------|------|
| 1-phase 50/60 Hz | | 3-phase 50/60 Hz | | | | | 220 V 230 V | 380 V 400 V | 415 V | 440 V | 500 V | 660 V 690 V | 1000 V | | A | N.O. | | | N.C. |
| 115/ 120 V | 230/ 240 V | 200/ 208 V | 220/ 240 V | 460/ 480 V | 575 V 600 V | | | | | | | | | | | | | | |
| HP | HP | HP | HP | HP | HP | A | kW | kW | kW | kW | kW | kW | kW | A | N.O. | N.C. | | | |
| 0.5 | 1 | 2 | 2 | 5 | 7.5 | 9 | 2.2 | 4 | 4 | 4 | 5.5 | 5.5 | — | 9 | 1 | 1 | LC1D093•• | 0.71 (0.320) | |
| 1 | 2 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 5.5 | 5.5 | 7.5 | 7.5 | — | 12 | 1 | 1 | LC1D123•• | 0.72 (0.325) | |
| 1 | 3 | 5 | 5 | 10 | 15 | 18 | 4 | 7.5 | 9 | 9 | 10 | 10 | — | 18 | 1 | 1 | LC1D183•• | 0.73 (0.330) | |
| 2 | 3 | 7.5 | 7.5 | 15 | 20 | 25 | 5.5 | 11 | 11 | 11 | 15 | 15 | — | 25 | 1 | 1 | LC1D253•• | 0.82 (0.370) | |
| 2 | 5 | 10 | 10 | 20 | 30 | 32 | 7.5 | 15 | 15 | 15 | 18.5 | 18.5 | — | 32 | 1 | 1 | LC1D323•• | 0.83 (0.375) | |
| Not for North American applications ■ | | | | | | 38 | 9 | 18.5 | 18.5 | 18.5 | 18.5 | 18.5 | — | 38 | 1 | 1 | LC1D383•• | 0.84 (0.380) | |

- ◆ For LC1D09 to LC1D38: clip-on mounting on 35 mm DIN rail AM1DP or screw mounting.
- ▼ Use voltage codes on page 115 "Voltage Code Table" to complete catalog number.
- Device is UL Listed at the same HP ratings as 32 amp device.

TeSys™ D-Line Contactors and Starters

Selection of Contactors for Motor Control



The tables below show the kilowatt ratings (for international applications) and horsepower ratings (for North American applications) of contactors for motor control.

LC1D1506••

AC and DC Control Circuit — 3-pole Contactors for Ring-tongue Terminals or Bus Bar Power Connections (AC-3 category)

| Maximum horsepower ratings | | | | | | Maximum Inductive Current in AC-3 Category 600 V | Standard power ratings of 3-phase motors 50/60 Hz in category AC-3 | | | | | | | Rated Operating Current in AC-3 up to 440 V | Instantaneous Auxiliary Contacts | | Catalog Number ◆ ▼ | Weight lb (kg) |
|---------------------------------------|---------------|------------------|---------------|---------------|----------------|--|--|----------------|-------|-------|-------|----------------|--------|---|----------------------------------|------|-----------------------|-------------------|
| 1-phase 50/60 Hz | | 3-phase 50/60 Hz | | | | | 220 V 230 V | 380 V 400 V | 415 V | 440 V | 500 V | 660 V 690 V | 1000 V | | N.O. | N.C. | | |
| 115/ 120 V | 230/ 240 V | 200/ 208 V | 220/ 240 V | 460/ 480 V | 575 V 600 V | | | | | | | | | | | | | |
| HP | HP | HP | HP | HP | HP | A | kW | kW | kW | kW | kW | kW | A | | | | | |
| 0.5 | 1 | 2 | 2 | 5 | 7.5 | 9 | 2.2 | 4 | 4 | 4 | 5.5 | 5.5 | — | 9 | 1 | 1 | LC1D096•• | 0.71 (0.320) |
| 1 | 2 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 5.5 | 5.5 | 7.5 | 7.5 | — | 12 | 1 | 1 | LC1D126•• | 0.72 (0.325) |
| 1 | 3 | 5 | 5 | 10 | 15 | 18 | 4 | 7.5 | 9 | 9 | 10 | 10 | — | 18 | 1 | 1 | LC1D186•• | 0.73 (0.330) |
| 2 | 3 | 7.5 | 7.5 | 15 | 20 | 25 | 5.5 | 11 | 11 | 11 | 15 | 15 | — | 25 | 1 | 1 | LC1D256•• | 0.82 (0.370) |
| 2 | 5 | 10 | 10 | 20 | 30 | 32 | 7.5 | 15 | 15 | 15 | 18.5 | 18.5 | — | 32 | 1 | 1 | LC1D326•• | 0.83 (0.375) |
| Not for North American applications ■ | | | | | | 38 | 9 | 18.5 | 18.5 | 18.5 | 18.5 | 18.5 | — | 38 | 1 | 1 | LC1D386•• | 0.84 (0.380) |
| 3 | 5 | 10 | 10 | 30 | 30 | 40 | 11 | 18.5 | 22 | 22 | 22 | 30 | 22 | 40 | 1 | 1 | LC1D406•• | 2.93 (1.320) |
| 3 | 7.5 | 15 | 15 | 40 | 40 | 50 | 15 | 22 | 25 | 30 | 30 | 33 | 30 | 50 | 1 | 1 | LC1D506•• | 2.93 (1.320) |
| 5 | 10 | 20 | 20 | 50 | 50 | 65 | 18.5 | 30 | 37 | 37 | 37 | 37 | 37 | 65 | 1 | 1 | LC1D656•• | 2.93 (1.320) |
| 7.5 | 15 | 25 | 30 | 60 | 60 | 80 | 22 | 37 | 45 | 45 | 55 | 45 | 45 | 80 | 1 | 1 | LC1D806•• | 3.55 (1.600) |
| Not for North American applications ■ | | | | | | 95 | 25 | 45 | 45 | 45 | 55 | 45 | 45 | 95 | 1 | 1 | LC1D956•• | 3.55 (1.600) |
| — | — | 30 | 40 | 75 | 100 | 115 | 30 | 55 | 59 | 59 | 75 | 80 | 75 | 115 | 1 | 1 | LC1D1156•• | 4.69 (2.110) |
| — | — | 40 | 50 | 100 | 125 | 150 | 40 | 75 | 80 | 80 | 90 | 100 | 90 | 150 | 1 | 1 | LC1D1506•• | 4.69 (2.130) |

- ◆ For LC1D09 to LC1D38: clip-on mounting on 35 mm DIN rail AM1DP or screw mounting.
- For LC1D40 to LC1D95: clip-on mounting on 35 mm DIN rail AM1DE or 75 mm DIN rail AM1DL or screw mounting.
- For LC1D115 and LC1D150: clip-on mounting on 2 x 35 mm DIN rails AM1DP or screw mounting.
- ▼ Use voltage codes on page 115 "Voltage Code Table" to complete catalog number.
- Devices are UL Listed at the same HP ratings as 32 and 80 amp devices, respectively.

AC and DC Control Circuit — 3-pole Contactors for Connection with Slip-on Connectors

For contactors LC1D09 and LC1D12 only, replace the last digit in the catalog numbers shown in the table above ("6") with a 9. For example, LC1D096•• becomes LC1D099••. These contactors include slip-on connectors: UL Recognized **E164862 NLDX2**, 2 x 6.35 mm (0.25 in.) on the power poles and 1 x 6.35 mm (0.25 in.) on the coil terminals.

TeSys™ D-Line Contactors and Starters

Selection of Contactors for Resistive Loads (AC-1) and Inductive Loads (AC-3)



LC1DT20**

AC and DC Control Circuit — 3- or 4-Pole Screw Terminal Connections (AC-1 Category)

| Maximum Current Utilization Categories | | Number of Poles | | Instantaneous Auxiliary Contacts | | Catalog Number ◆ ▼ | Weight lb (kg) |
|--|------|-----------------|------|----------------------------------|------|-----------------------|----------------|
| | | | | | | | |
| AC-1 | AC-3 | N.O. | N.C. | N.O. | N.C. | | |
| 20 | 9 | 3 | 0 | 1 | 1 | LC1D09** | 0.71 (0.320) |
| | | 4 | 0 | 1 | 1 | LC1DT20** | 0.80 (0.365) |
| | | 2 | 2 | 1 | 1 | LC1D098** | 0.80 (0.365) |
| 25 | 12 | 3 | 0 | 1 | 1 | LC1D12** | 0.75 (0.340) |
| | | 4 | 0 | 1 | 1 | LC1DT25** | 0.80 (0.365) |
| | | 2 | 2 | 1 | 1 | LC1D128** | 0.80 (0.365) |
| 32 | 18 | 3 | 0 | 1 | 1 | LC1D18** | 0.79 (0.355) |
| | | 4 | 0 | 1 | 1 | LC1DT32** | 0.93 (0.425) |
| | | 2 | 2 | 1 | 1 | LC1D188** | 0.93 (0.425) |
| 40 | 25 | 3 | 0 | 1 | 1 | LC1D25** | 0.82 (0.370) |
| | | 4 | 0 | 1 | 1 | LC1DT40** | 0.93 (0.425) |
| | | 2 | 2 | 1 | 1 | LC1D258** | 0.93 (0.425) |
| 50 | 32 | 3 | 0 | 1 | 1 | LC1D32** | 0.83 (0.375) |
| | | 3 | 0 | 1 | 1 | or ▲ LC1D38** ■ | 0.84 (0.380) |
| 60 | 40 | 3 | 0 | 1 | 1 | LC1D40** | 3.11 (1.400) |
| | | 4 | 0 | 1 | 1 | LC1D40004** | 0.93 (0.425) |
| | | 2 | 2 | 1 | 1 | LC1D40008** | 0.93 (0.425) |
| | | 4 | 0 | 1 | 1 | LP1D40004** | 0.93 (0.425) |
| | | 2 | 2 | 1 | 1 | LP1D40008** | 0.93 (0.425) |
| 80 | 65 | 3 | 0 | 1 | 1 | LC1D50** | 3.22 (1.450) |
| | | 3 | 0 | 1 | 1 | or ▲ LC1D65** | 3.11 (1.400) |
| | | 4 | 0 | 0 | 0 | LC1D65004** | 3.20 (1.440) |
| | | 4 | 0 | 0 | 0 | LP1D65004** | 4.89 (2.220) |
| | | 2 | 2 | 0 | 0 | LC1D65008** | 3.22 (1.450) |
| 125 | 80 | 2 | 2 | 0 | 0 | LP1D65008** | 4.89 (2.220) |
| | | 3 | 0 | 1 | 1 | LC1D80** | 3.53 (1.590) |
| | | 3 | 0 | 1 | 1 | or ▲ LC1D95** ■ | 3.55 (1.600) |
| | | 4 | 0 | 0 | 0 | LC1D80004** | 3.91 (1.760) |
| | | 4 | 0 | 0 | 0 | LP1D80004** | 4.87 (2.210) |
| 200 | 115 | 2 | 2 | 0 | 0 | LC1D80008** | 4.09 (1.940) |
| | | 2 | 2 | 0 | 0 | LP1D80008** | 5.84 (2.650) |
| | | 3 | 0 | 1 | 1 | LC1D115** | 5.38 (2.420) |
| 200 | 150 | 3 | 0 | 1 | 1 | or ▲ LC1D150** | 5.42 (2.440) |
| | | 4 | 0 | 0 | 0 | LC1D115004** | 6.35 (2.860) |

AC and DC Control Circuit — 3- or 4-Pole Spring Terminal Connections (AC-1 Category)

| | | | | | | | |
|----|----|---|---|---|---|--------------|---------------|
| 20 | 9 | 3 | 0 | 1 | 1 | ◆ LC1D093** | 0.710 (0.320) |
| | | 4 | 0 | 1 | 1 | ◆ LC1DT203** | 0.837 (0.380) |
| | | 2 | 2 | 1 | 1 | ◆ LC1D0983** | 0.837 (0.380) |
| 25 | 12 | 3 | 0 | 1 | 1 | ◆ LC1D123** | 0.710 (0.320) |
| | | 4 | 0 | 1 | 1 | ◆ LC1DT253** | 0.840 (0.380) |
| | | 2 | 2 | 1 | 1 | ◆ LC1D1283** | 0.840 (0.380) |
| 32 | 18 | 3 | 0 | 1 | 1 | ◆ LC1D183** | 0.730 (0.330) |
| | | 4 | 0 | 1 | 1 | ◆ LC1DT323** | 0.940 (0.425) |
| | | 2 | 2 | 1 | 1 | ◆ LC1D1883** | 0.940 (0.425) |
| 40 | 25 | 3 | 0 | 1 | 1 | ◆ LC1D253** | 0.820 (0.370) |
| | | 4 | 0 | 1 | 1 | ◆ LC1DT403** | 0.940 (0.425) |
| | | 2 | 2 | 1 | 1 | ◆ LC1D2583** | 0.940 (0.425) |

- ◆ For LC1D09 to LC1D38: clip-on mounting on 35 mm DIN rail AM1DP or screw mounting.
- ◆ For LC1D40 to LC1D95: clip-on mounting on 35 mm DIN rail AM1DE or 75 mm DIN rail AM1DL or screw mounting.
- ◆ For LC1D115 and LC1D150: clip-on mounting on 2 x 35 mm DIN rails AM1DP or screw mounting.
- ◆ For LC1D09 to LC1D25: clip-on mounting on 35 mm DIN rail AM1DP or screw mounting.
- ▲ Select between the two shown based upon the number of operating cycles; see the AC-1 graph on page 22 for further information.
- ▼ Use voltage codes on page 115 "Voltage Code Table" to complete catalog number.
- Devices are UL Listed at the same ratings as 32 and 80 amp devices, respectively.

TeSys™ D-Line Contactors and Starters

Resistive Loads (AC-1) and Inductive Loads (AC-3)



LC1D150●●

AC and DC Control Circuit — 3- or 4-pole Contactors For Ring Terminals or Bus Bar Power Connections (AC-1 category)

| Maximum Current Utilization Categories | | Number of Poles | | Instantaneous Auxiliary Contacts | | Catalog Number ♦ ▼ | Weight lb (kg) |
|--|------|-----------------|------|----------------------------------|--------------|-----------------------|----------------|
| AC-1 | AC-3 | N.O. | N.C. | N.O. | N.C. | | |
| 20 | 9 | 3 | 0 | 1 | 1 | LC1D096●● | 0.71 (0.320) |
| | | 4 | 0 | 1 | 1 | LC1DT206●● | 0.80 (0.365) |
| | | 2 | 2 | 1 | 1 | LC1D0986●● | 0.80 (0.365) |
| 25 | 12 | 3 | 0 | 1 | 1 | LC1D126●● | 0.75 (0.340) |
| | | 4 | 0 | 1 | 1 | LC1DT256●● | 0.80 (0.365) |
| | | 2 | 2 | 1 | 1 | LC1D1286●● | 0.80 (0.365) |
| 32 | 18 | 3 | 0 | 1 | 1 | LC1D186●● | 0.79 (0.355) |
| | | 4 | 0 | 1 | 1 | LC1DT326●● | 0.93 (0.425) |
| | | 2 | 2 | 1 | 1 | LC1D1886●● | 0.93 (0.425) |
| 40 | 25 | 3 | 0 | 1 | 1 | LC1D256●● | 0.82 (0.370) |
| | | 4 | 0 | 1 | 1 | LC1DT406●● | 0.93 (0.425) |
| | | 2 | 2 | 1 | 1 | LC1D2586●● | 0.93 (0.425) |
| 50 | 32 | 3 | 0 | 1 | 1 | LC1D326●● | 0.83 (0.375) |
| | | 3 | 0 | 1 | 1 | or ▲ LC1D386●● ■ | 0.84 (0.380) |
| 60 | 40 | 3 | 0 | 1 | 1 | LC1D406●● | 3.11 (1.400) |
| | | 4 | 0 | 1 | 1 | LC1D400046●● | 0.93 (0.425) |
| | | 2 | 2 | 1 | 1 | LC1D400086●● | 0.93 (0.425) |
| | | 4 | 0 | 1 | 1 | LP1D40004●● | 0.93 (0.425) |
| | | 2 | 2 | 1 | 1 | LP1D40008●● | 0.93 (0.425) |
| 80 | 80 | 3 | 0 | 1 | 1 | LC1D656●● | 3.11 (1.400) |
| | | 4 | 0 | 0 | 0 | LC1D800046●● | 3.20 (1.440) |
| | | 4 | 0 | 0 | 0 | LP1D800046●● | 4.89 (2.220) |
| | | 2 | 2 | 0 | 0 | LC1D800086●● | 3.22 (1.450) |
| | | 2 | 2 | 0 | 0 | LP1D800086●● | 4.89 (2.220) |
| 125 | 80 | 3 | 0 | 1 | 1 | LC1D806●● | 3.53 (1.590) |
| | | 4 | 0 | 0 | 0 | LC1D800046●● | 3.91 (1.760) |
| | | 4 | 0 | 0 | 0 | LP1D800046●● | 4.87 (2.210) |
| | | 2 | 2 | 0 | 0 | LC1D800086●● | 4.09 (1.940) |
| | 2 | 2 | 0 | 0 | LP1D800086●● | 5.84 (2.650) | |
| 95 | 3 | 0 | 1 | 1 | LC1D95●● ■ | 3.55 (1.600) | |
| 200 | 115 | 3 | 0 | 1 | 1 | LC1D1156●● | 5.38 (2.420) |
| | 150 | 3 | 0 | 1 | 1 | or ▲ LC1D1506●● | 5.42 (2.440) |
| | 115 | 4 | 0 | 0 | 0 | LC1D1150046●● | 6.35 (2.860) |

- ♦ For LC1D09 to LC1D38: clip-on mounting on 35 mm DIN rail AM1DP or screw mounting.
- For LC1D40 to LC1D95: clip-on mounting on 35 mm DIN rail AM1DE or 75 mm DIN rail AM1DL or screw mounting.
- For LC1D115 and LC1D150: clip-on mounting on 2 x 35 mm DIN rails AM1DP or screw mounting.
- ▲ Select between the two shown based upon the number of operating cycles and control voltage; see the AC-1 graph on page 22 for further information.
- ▼ Use voltage codes on page 115 "Voltage Code Table" to complete catalog number.
- Devices are UL Listed at the same ratings as 32 and 80 amp devices, respectively.

AC and DC Control Circuit — Contactors for Connection with Slip-on Connectors (3-pole only) AC-1 category

For contactors **LC1D09** and **LC1D12** only, replace the last digit in the catalog numbers shown in the table above ("6") with a 9. For example, **LC1D096●●** becomes **LC1D099●●**. These contactors include slip-on connectors: UL Recognized **E164862 NLDX2**, 2 x 6.35 mm (0.25 in.) on the power poles and 1 x 6.35 mm (0.25 in.) on the coil terminals.

TeSys™ D-Line Contactors and Starters

Selection of Reversing Contactors for Motor Control



The tables below show the kilowatt ratings (for international applications) and horsepower ratings (for North American applications) of contactors for motor control.

The contactors are pre-assembled, horizontally-mounted, and have pre-wired power connections. Order accessories separately. For information on auxiliary contact blocks and modules, see pages 106 to 107.

AC and DC Control Circuit — 3-pole Reversing Contactors with Touch-safe Terminals for Power Cabling (AC-3 category)

| Maximum horsepower ratings | | | | | | Maximum Inductive Current in AC-3 Category 600 V | Standard power ratings of 3-phase motors 50/60 Hz in category AC-3 | | | | | | | Rated Operating Current in AC-3 up to 440 V | Instantaneous Auxiliary Contacts | | Catalog Number ▲▼ | Weight lb (kg) |
|-------------------------------------|-----------|------------------|-----------|-----------|-------------|--|--|-------------|-------|-------|-------|-------------|--------|---|----------------------------------|------|----------------------|-------------------|
| 1-phase 50/60 Hz | | 3-phase 50/60 Hz | | | | | 220 V 230 V | 380 V 400 V | 415 V | 440 V | 500 V | 660 V 690 V | 1000 V | | A | N.O. | | |
| 115/120 V | 230/240 V | 200/208 V | 220/240 V | 460/480 V | 575 V 600 V | A | kW | kW | kW | kW | kW | kW | A | | | | | |
| 0.5 | 1 | 2 | 2 | 5 | 7.5 | 9 | 2.2 | 4 | 4 | 4 | 5.5 | 5.5 | – | 9 | 1 | 1 | LC2D09●▲● | 1.55 (0.700) |
| 1 | 2 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 5.5 | 5.5 | 7.5 | 7.5 | – | 12 | 1 | 1 | LC2D12●▲● | 1.55 (0.700) |
| 1 | 3 | 5 | 5 | 10 | 15 | 18 | 4 | 7.5 | 9 | 9 | 10 | 10 | – | 18 | 1 | 1 | LC2D18●▲● | 1.670 (0.75) |
| 2 | 3 | 7.5 | 7.5 | 15 | 20 | 25 | 5.5 | 11 | 11 | 11 | 15 | 15 | – | 25 | 1 | 1 | LC2D25●▲● | 2.44 (1.100) |
| 2 | 5 | 10 | 10 | 20 | 30 | 32 | 7.5 | 15 | 15 | 15 | 18.5 | 18.5 | – | 32 | 1 | 1 | LC2D32●▲● | 2.67 (1.200) |
| Not for North American applications | | | | | | 38 | 9 | 18.5 | 18.5 | 18.5 | 18.5 | 18.5 | – | 38 | 1 | 1 | LC2D38●▲●▶ | 2.67 (1.200) |
| 3 | 5 | 10 | 10 | 30 | 30 | 40 | 11 | 18.5 | 22 | 22 | 22 | 30 | – | 40 | 1 | 1 | LC2D40●▲▲ | 5.33 (2.400) |
| 3 | 7.5 | 15 | 15 | 40 | 40 | 50 | 15 | 22 | 25 | 30 | 30 | 33 | – | 50 | 1 | 1 | LC2D50●▲▲ | 5.33 (2.400) |
| 5 | 10 | 20 | 20 | 50 | 50 | 65 | 18.5 | 30 | 37 | 37 | 37 | 37 | – | 65 | 1 | 1 | LC2D65●▲▲ | 5.33 (2.400) |
| 7.5 | 15 | 25 | 30 | 60 | 60 | 80 | 22 | 37 | 45 | 45 | 55 | 45 | – | 80 | 1 | 1 | LC2D80●▲▲ | 7.11 (3.200) |
| Not for North American applications | | | | | | 95 | 25 | 45 | 45 | 45 | 55 | 45 | – | 95 | 1 | 1 | LC2D95●▲▶ | 7.11 (3.200) |
| – | – | 30 | 40 | 75 | 100 | 115 | 30 | 55 | 59 | 59 | 75 | 80 | 75 | 115 | 1 | 1 | LC2D115■ | 14.44 (6.500) |
| – | – | 40 | 50 | 100 | 125 | 150 | 40 | 75 | 80 | 80 | 90 | 100 | 90 | 150 | 1 | 1 | LC2D150■ | 14.44 (6.500) |

- ◆ For LC2D09 to LC2D38: clip-on mounting on 35 mm DIN rail AM1DP or screw mounting.
- ◆ For LC2D40 to LC2D95: clip-on mounting on 35 mm DIN rail AM1DE or 75 mm DIN rail AM1DL or screw mounting.
- ◆ For LC2D115 and LC2D150: clip-on mounting on 2 x 35 mm DIN rails AM1DP or screw mounting.
- ▲ Includes mechanical interlock without electrical contacts. Installer to complete wiring for electrically interlocking contactor operating coils by utilizing a N.C. auxiliary contact integrated in the contactor or optional LADN or LAD8N type auxiliary contact block.
- Included with electrical contacts integrated in mechanical interlock (type LA9D●●02).
- ▼ Use voltage codes on page 115 "Voltage Code Table" to complete catalog number.
- For reversing contactors with electrical interlocking pre-wired at the factory, add suffix V to the catalog number reflected above. Example: LC2D09●● becomes LC2D09●●V.
- ▶ Devices are UL Listed at the same HP ratings as 32 and 80 amp devices, respectively.

TeSys™ D-Line Contactors and Starters

Selection of Reversing Contactors for Motor Control



The tables below show the kilowatt ratings (for international applications) and horsepower ratings (for North American applications) of contactors for motor control.

The contactors are pre-assembled, horizontally-mounted, and have pre-wired power connections. Order accessories separately. For information on auxiliary contact blocks and modules, see pages 106 to 107.

AC and DC Control Circuit — 3-pole Reversing Contactors for Spring Terminal Connections (AC-3 category)

| Maximum horsepower ratings | | | | | | Maximum Inductive Current in AC-3 Category 600 V | Standard power ratings of 3-phase motors 50/60 Hz in category AC-3 | | | | | | | | Rated Operating Current in AC-3 up to 440 V | Instantaneous Auxiliary Contacts | | Catalog Number ◆ ▼ * | Weight lb (kg) |
|-------------------------------------|---------------|------------------|---------------|---------------|----------------|--|--|----------------|-------|-------|-------|----------------|--------|------|---|----------------------------------|---------------|-------------------------|-------------------|
| 1-phase 50/60 Hz | | 3-phase 50/60 Hz | | | | | 220 V 230 V | 380 V 400 V | 415 V | 440 V | 500 V | 660 V 690 V | 1000 V | N.O. | | N.C. | | | |
| 115/ 120 V | 230/ 240 V | 200/ 208 V | 220/ 240 V | 460/ 480 V | 575 V 600 V | A | kW | kW | kW | kW | kW | kW | kW | A | | | | | |
| 0.5 | 1 | 2 | 2 | 5 | 7.5 | 9 | 2.2 | 4 | 4 | 4 | 5.5 | 5.5 | — | 9 | 1 | 1 | LC2D093** ▲ | 1.55 (0.700) | |
| 1 | 2 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 5.5 | 5.5 | 7.5 | 7.5 | — | 12 | 1 | 1 | LC2D123** ▲ | 1.55 (0.700) | |
| 1 | 3 | 5 | 5 | 10 | 15 | 18 | 4 | 7.5 | 9 | 9 | 10 | 10 | — | 18 | 1 | 1 | LC2D183** ▲ | 1.670 (0.75) | |
| 2 | 3 | 7.5 | 7.5 | 15 | 20 | 25 | 5.5 | 11 | 11 | 11 | 15 | 15 | — | 25 | 1 | 1 | LC2D253** ▲ | 2.44 (1.100) | |
| 2 | 5 | 10 | 10 | 20 | 30 | 32 | 7.5 | 15 | 15 | 15 | 18.5 | 18.5 | — | 32 | 1 | 1 | LC2D323** ▲ | 2.67 (1.200) | |
| Not for North American applications | | | | | | 38 | 9 | 18.5 | 18.5 | 18.5 | 18.5 | 18.5 | — | 38 | 1 | 1 | LC2D383** ▲ ● | 2.67 (1.200) | |

- ◆ For LC2D09 to LC2D38: clip-on mounting on 35 mm DIN rail AM1DP or screw mounting.
- ▲ Includes mechanical interlock without electrical contacts. Installer to complete wiring for electrically interlocking contactor operating coils by utilizing a N.C. auxiliary contact integrated in the contactor or optional LADN or LAD8N type auxiliary contact block.
- ▼ Use voltage codes on page 115 "Voltage Code Table" to complete catalog number.
- * For reversing contactors with electrical interlocking pre-wired at the factory, add suffix V to the catalog number reflected above. Example: LC2D09** becomes LC2D09**V.
- LC2D38 is UL Listed at the same HP rating as the 32 amp device.

TeSys™ D-Line Contactors and Starters Selection of Reversing Contactors for Motor Control



LC2D186••

The tables below show the kilowatt ratings (for international applications) and horsepower ratings (for North American applications) of contactors for motor control.

The contactors have pre-wired power connections. Order accessories separately. For information on auxiliary contact blocks and modules, see pages 106 to 107.

AC and DC Control Circuit — 3-pole Reversing Contactors for Ring-tongue Terminals or Bus Bar Power Connections (AC-3 category)

| Maximum horsepower ratings | | | | | | | Maximum Inductive Current in AC-3 Category 600 V | Standard power ratings of 3-phase motors 50/60 Hz in category AC-3 | | | | | | | | Rated Operating Current in AC-3 up to 440 V | Instantaneous Auxiliary Contacts | | Catalog Number ◆▼ | Weight |
|-------------------------------------|-----------|------------------|-----------|-----------|-------------|-----|--|--|-------|-------|-------|-------------|--------|-----|------|---|----------------------------------|---------------|----------------------|--------|
| 1-phase 50/60 Hz | | 3-phase 50/60 Hz | | | | | | Standard power ratings of 3-phase motors 50/60 Hz in category AC-3 | | | | | | | | | Instantaneous Auxiliary Contacts | | | |
| 115/120 V | 230/240 V | 200/208 V | 220/240 V | 460/480 V | 575 V 600 V | A | 220 V 230 V | 380 V 400 V | 415 V | 440 V | 500 V | 660 V 690 V | 1000 V | A | N.O. | N.C. | | lb (kg) | | |
| 0.5 | 1 | 2 | 2 | 5 | 7.5 | 9 | 2.2 | 4 | 4 | 4 | 5.5 | 5.5 | — | 9 | 1 | 1 | LC2D096••▲ | 1.55 (0.700) | | |
| 1 | 2 | 3 | 3 | 7.5 | 10 | 12 | 3 | 5.5 | 5.5 | 5.5 | 7.5 | 7.5 | — | 12 | 1 | 1 | LC2D126••▲ | 1.55 (0.700) | | |
| 1 | 3 | 5 | 5 | 10 | 15 | 18 | 4 | 7.5 | 9 | 9 | 10 | 10 | — | 18 | 1 | 1 | LC2D186••▲ | 1.67 (0.750) | | |
| 2 | 3 | 7.5 | 7.5 | 15 | 20 | 25 | 5.5 | 11 | 11 | 11 | 15 | 15 | — | 25 | 1 | 1 | LC2D256••▲ | 2.44 (1.100) | | |
| 2 | 5 | 10 | 10 | 20 | 30 | 32 | 7.5 | 15 | 15 | 15 | 18.5 | 18.5 | — | 32 | 1 | 1 | LC2D326••▲ | 2.67 (1.200) | | |
| Not for North American applications | | | | | | 38 | 9 | 18.5 | 18.5 | 18.5 | 18.5 | 18.5 | — | 38 | 1 | 1 | LC2D386••▲● | 2.67 (1.200) | | |
| — | — | 30 | 40 | 75 | 100 | 115 | 30 | 55 | 59 | 59 | 75 | 80 | 75 | 115 | 1 | 1 | LC2D1156••■▲ | 13.22 (5.950) | | |
| — | — | 15 | 15 | 40 | 40 | 150 | 40 | 70 | 80 | 80 | 90 | 100 | 90 | 150 | 1 | 1 | LC2D1506••■▲ | 13.22 (5.950) | | |

- ◆ For **LC2D09** to **LC2D38**: clip-on mounting on 35 mm DIN rail **AM1DP** or screw mounting.
For **LC2D115** and **LC2D150**: clip-on mounting on 2 x 35 mm DIN rails **AM1DP** or screw mounting.
- ▲ Includes mechanical interlock without electrical contacts. Installer to complete wiring for electronically interlocking contactor operating coils by utilizing a N.C. auxiliary contact integrated in the contactor or optional **LADN** or **LAD8N** type auxiliary contact block.
- Included with electrical contacts integrated in mechanical interlock (type **LA9D••02**).
- ▼ Use voltage codes on page 115 "Voltage Code Table" to complete catalog number.
- LC2D386 devices are UL Listed at the same HP rating as the 32 amp device.

AC and DC Control Circuit — 3-pole Reversing Contactors for Connection with Slip-on Connectors (AC-3 category)

For contactors **LC2D09** and **LC2D12** only, replace the last digit in the catalog numbers shown in the table above ("6") with a 9. For example, **LC2D096••** becomes **LC2D099••**. These contactors include slip-on connectors: UL Recognized **E164862 NLDX2**, 2 x 6.35 mm (0.25 in.) on the power poles and 1 x 6.35 mm (0.25 in.) on the coil terminals.

Power connections are to be made by the customer.

TeSys™ D-Line Contactors and Starters


Selection of Changeover Contactors for Resistive Loads (AC-1) and Inductive Loads (AC-3)



LC2DT20**

The contactors have pre-wired power connections. Order accessories separately. For information on auxiliary contact blocks and modules, see pages 106 to 107.

AC and DC Control Circuit — 4-pole Changeover Contactors with Touch-safe Terminals for Power Cabling (AC-1 category)

| Maximum Current Utilization Categories | | Instantaneous Auxiliary Contacts  | | Catalog Number ◆ ▼ | Weight |
|--|------|---|------|-----------------------|---------------|
| AC-1 | AC-3 | N.O. | N.C. | | lb (kg) |
| 20 | 9 | 1 | 1 | LC2DT20** ▲ | 1.60 (0.730) |
| 25 | 12 | 1 | 1 | LC2DT25** ▲ | 1.55 (0.700) |
| 32 | 18 | 1 | 1 | LC2DT32** ▲ | 1.86 (0.450) |
| 40 | 25 | 1 | 1 | LC2DT40** ▲ | 2.43 (1.100) |
| 60 | 40 | 1 | 1 | LC2D40004** ▲ | 5.30 (2.400) |
| | | 1 | 1 | LP2D40004** ▲ | 5.30 (2.400) |
| 80 | 65 | – | – | LC2D65004** ▲ | 7.07 (3.200) |
| | | – | – | LP2D80004** ▲ | 7.07 (3.200) |
| 125 | 80 | – | – | LC2D80004** ▲ | 7.07 (3.200) |
| | | – | – | LP2D80004** ▲ | 7.07 (3.200) |
| 200 | 115 | – | – | LC2D115004** ■ | 16.0 (27.250) |

◆ For LC2D12 and LC2D25: clip-on mounting on 35 mm DIN rail AM1DP or screw mounting.

For LC2D40 to LC2D95: clip-on mounting on 35 mm DIN rail AM1DE or 75 mm DIN rail AM1DL or screw mounting.

For LC2D115: clip-on mounting on 2 x 35 mm DIN rails AM1DP or screw mounting.

▲ Includes mechanical interlock (type LA9**D978) without electrical contacts. Installer to complete wiring for electronically interlocking contactor operating coils by utilizing a N.C. auxiliary contact integrated in the contactor or optional LA1DN or LA8DN type auxiliary contact block.

■ Includes mechanical interlock (Type LA9D11502) with pre-wired electrical contacts for interlocking contactor operating coils.

▼ Use voltage codes on page 115 "Voltage Code Table" to complete catalog number.

Selection of Changeover Contactors for Resistive Loads (AC-1) and Inductive Loads (AC-3)


AC and DC Control Circuit— 4-pole
Changeover Contactors with Ring-tongue Terminal or Bus Bar Power Connection
(AC-1 category)

| Maximum Current Utilization Categories | | Instantaneous Auxiliary Contacts | | Catalog Number ◆ ▼ | Weight lb (kg) |
|--|------|----------------------------------|------|-----------------------|-------------------|
| AC-1 | AC-3 | N.O. | N.C. | | |
| 20 | 9 | 1 | 1 | LC2DT206** ▲ | 1.60 (0.730) |
| 25 | 12 | 1 | 1 | LC2DT256** ▲ | 1.55 (0.700) |
| 32 | 18 | 1 | 1 | LC2DT326** ▲ | 1.86 (0.450) |
| 40 | 25 | 1 | 1 | LC2DT406** ▲ | 2.43 (1.100) |
| 60 | 40 | 1 | 1 | LC2D400046** ▲ | 5.30 (2.400) |
| | | 1 | 1 | LP2D400046** ▲ | 5.30 (2.400) |
| 80 | 65 | – | – | LC2D650046** ▲ | 7.07 (3.200) |
| | | – | – | LP2D800046** ▲ | 7.07 (3.200) |
| 125 | 80 | – | – | LC2D800046** ▲ | 7.07 (3.200) |
| | | – | – | LP2D800046** ▲ | 7.07 (3.200) |
| 200 | 115 | – | – | LC2D1150046** ■ | 16.0 (27.250) |

- ◆ For LC2D12 and LC2D25: clip-on mounting on 35 mm DIN rail AM1DP or screw mounting.
For LC2D40 to LC2D95: clip-on mounting on 35 mm DIN rail AM1DE or 75 mm DIN rail AM1DL or screw mounting.
For LC2D115: clip-on mounting on 2 x 35 mm DIN rails AM1DP or screw mounting.
- ▲ Includes mechanical interlock (Type LA9**D978) without electrical contacts. Installer to complete wiring for electronically interlocking contactor operating coils by utilizing a N.C. auxiliary contact integrated in the contactor or optional LA1DN or LA8DN type auxiliary contact block.
- Includes mechanical interlock (Type LA9D11502) with pre-wired electrical contacts for interlocking contactor operating coils.
- ▼ Use voltage codes on page 115 "Voltage Code Table" to complete catalog number.

TeSys™ D-Line Contactors and Starters

Component Parts for Reversing and Two Speed Contactors



LA9D4002

For 3-pole Motor Reversing Contactors

Contactors with Screw Clamp Terminals or Connectors Horizontally Mounted, Assembled by Customer

| Using 2 Identical Contactors (1) | Set of Power Connections | | Mechanical Interlock Kit | |
|----------------------------------|--------------------------|----------------|--------------------------|----------------|
| | Catalog Number | Weight lb (kg) | Catalog Number | Weight lb (kg) |

Including mechanical interlock and an electrical interlocking kit for the contactors

Power Connections for LC1D09 to D38

Use with screw terminal versions LC1D09 - LC1D38

| | | | | |
|---------------------------------------|-------------|--------------|------------|---|
| Line Side (Parallel) Connector | LA9D9V5 | 0.037 (0.17) | LA9R1V (2) | – |
| Load Side (Reversing) Connector | LA9D9V6 | 0.037 (0.17) | LA9R1V (2) | – |
| Low Voltage Control Circuit Interlock | LA9D9V1 (3) | 0.037 (0.17) | LA9R1V (2) | – |

Use with spring terminal versions LC1D093 - LC1D383

When using Quick-Fit LAD34 and LAD33 Power Connectors

| | | | | |
|---------------------------------|----------|--------------|---------|---|
| Line Side (Parallel) Connector | LA9D9V10 | 0.037 (0.17) | LA9D9V2 | – |
| Load Side (Reversing) Connector | LA9D9V11 | 0.037 (0.17) | LA9D9V2 | – |

When using standard cable/wire

| | | | | |
|---------------------------------|----------|--------------|---------|---|
| Line Side (Parallel) Connector | LA9D9V12 | 0.037 (0.17) | LA9D9V2 | – |
| Load Side (Reversing) Connector | LA9D9V13 | 0.037 (0.17) | LA9D9V2 | – |

Including mechanical interlock with integral electrical interlocking

| | | | | |
|---------------------|-----------|--------------|-----------|--------------|
| LC1D40 to D65 | LA9D6569 | 0.290 (0.64) | LA9D4002 | 0.37 (0.170) |
| LC1D80 and D95 (ac) | LA9D8069 | 0.290 (0.64) | LA9D4002 | 0.37 (0.170) |
| LC1D80 and D95 (dc) | LA9D8069 | 0.490 (1.08) | LA9D8002 | 0.37 (0.170) |
| LC1D115 and D150 | LA9D11569 | 1.450 (3.20) | LA9D11502 | 0.63 (0.290) |

Including mechanical interlock without electrical interlocking

Power Connections for LC1D09 to D38

| | | | | |
|---------------------------------|----------|--------------|-----------|--------------|
| Line Side (Parallel) Connector | LA9D9V5 | 0.045 (0.10) | LA9R1 (2) | – |
| Load Side (Reversing) Connector | LA9D9V6 | 0.045 (0.10) | LA9R1 (2) | – |
| LC1D40 to D65 | LA9D6569 | 0.290 (0.64) | LA9D50978 | 0.37 (0.170) |
| LC1D80 and D95 (ac) | LA9D8069 | 0.490 (1.08) | LA9D50978 | 0.37 (0.170) |
| LC1D80 and D95 (dc) | LA9D8069 | 0.490 (1.08) | LA9D80978 | 0.37 (0.170) |

For Low Speed – High Speed Starter


| Description | For Contactors with Connections | Catalog Number | Weight lb (kg) |
|--|---------------------------------|----------------|----------------|
| Connection kit enabling reversing of slow and high speed directions, using a reversing contactor and a 2 N.O. + 2 N.C. main pole contactor | Screw clamps or connectors | LA9D9PVG V | 0.03 (0.016) |
| | Spring terminals | LAD3PVPG | 0.15 (0.068) |

(1) To order the 2 contactors: see pages 88, 89 and 90.


(2) Mechanical interlock kit includes line and load side power connectors, mechanical interlock, control circuit interlock (LA9R1V only), and clip. Interlock only -- LA9D9V2 (includes retaining clip). Retaining clip only -- W116430980111 (std. package of 10).

(3) There is no spring terminal equivalent for this part.


(4) Line side (parallel) connector: LA9D9V5; load side (reversing) connector: LA9D9V6.




LA9D6569



LA9D8069




LAD9R1



Characteristics: pages 80 to 87 Dimensions, Schematics: pages 128, 129

TeSys™ D-Line Contactors and Starters

Component Parts for Assembling Changeover Contactor Parts for Distribution




LA9D4002

For 4-pole Changeover Contactor Pairs (3-phase distribution + neutral)

**Contactors with Screw Clamp Terminals or Connectors
Horizontally Mounted, Assembled by Customer**

| Using 2 Identical Contactors (1) | Set of Power Connections | | Mechanical Interlock | |
|---|--------------------------|----------------|-----------------------|----------------|
| | Catalog Number | Weight lb (kg) | Catalog Number of Kit | Weight lb (kg) |
| Including mechanical interlock and an electrical interlocking kit for the contactors | | | | |
| LC1DT20 to DT40 | LADT9R1V (2) | 0.088 (0.040) | – | – |
| Including mechanical interlock with integral electrical interlocking | | | | |
| LC1D65004 | LA9D6570 | 0.33 (0.150) | LA9D4002 | 0.37 (0.170) |
| LC1D80004 | LA9D8070 | 0.62 (0.280) | LA9D4002 | 0.37 (0.170) |
| LP1D80004 | LA9D8070 | 0.62 (0.280) | LA9D8002 | 0.37 (0.170) |
| LC1D115004 | LA9D11570 | 2.43 (1.100) | LA9D11502 | 0.62 (0.280) |




LA9D50978

| | | | | |
|---|--------------|--------------|-----------|--------------|
| Including mechanical interlock without electrical interlocking | | | | |
| LC1DT20 to DT40 With screw clamp terminals or connectors | LADT9R1 (2) | 0.08 (0.035) | – | – |
| LC1DT203 to DT403 With spring terminal connections | (4) | – | – | – |
| LC1 or LP1D65004 | LA9D6570 (3) | 0.33 (0.150) | LA9D50978 | 0.34 (0.155) |
| LC1D80004 | LA9D8070 (3) | 0.62 (0.280) | LA9D50978 | 0.34 (0.155) |
| LP1D80004 | LA9D8070 (3) | 0.62 (0.280) | LA9D80978 | 0.40 (0.180) |

For 3-pole changeover contactor pairs

Including mechanical interlock with integral electrical interlocking

| | | | | |
|------------------|-----------|--------------|-----------|--------------|
| LC1D115 and D150 | LA9D11571 | 2.12 (0.960) | LA9D11502 | 0.62 (0.280) |
|------------------|-----------|--------------|-----------|--------------|



LA9D8070


- (1) To order the two contactors: see page 91.
- (2) Including mechanical interlock.
- (3) Order two contact blocks LADN•1 to obtain electrical interlocking between the contactors, see page 106.
- (4) To build a reversing contactor with spring terminal connections, the following components must be ordered in addition to the two contactors:
 - 1 mechanical interlock LAD9V2,
 - 1 downstream power connection kit LAD9V9

TeSys™ D-Line Contactors and Starters

Characteristics of Auxiliary Contacts, Timers, and Accessories

Auxiliary Contact Blocks without Dust and Damp Protected Contacts for Contactors

Environment

| Contact block type | | | LADN or C | LADT and S | LADR | LAD8 |
|---|---|-----------------|---|------------|------|------|
| Conforming to standards | CE Meets the essential requirements of the LV & EMC directives | | IEC 60947-5-1, NF C 63-140, VDE 0660, BS 4794, EN 60947-5-1 | | | |
| Product certifications |  | | UL, CSA | | | |
| Protective treatment | Conforming to IEC 60068 | | "TH" | | | |
| Degree of protection | Conforming to VDE 0106 | | Protection against direct finger contact IP 2X | | | |
| Ambient air temperature around the device | Storage | °C | - 60 to + 80 (- 140 to + 176 °F) | | | |
| | Operation | °C | - 5 to + 60 (- 41 to + 140 °F) | | | |
| | Permissible for operation at U _c | °C | - 40 to + 70 (- 104 to + 158 °F) | | | |
| Maximum operating altitude | Without derating | m | 3000 | | | |
| Cabling | Phillips N° 2 and Ø 6 mm Flexible or solid cable with or without cable end | mm ² | Min.: 1 x 1; max.: 2 x 2.5 (#10 AWG) | | | |
| Connection by spring terminals | Flexible or solid cable without cable end | mm ² | Max.: 2 x 2.5 (#10 AWG) | | | |

Instantaneous and Time Delay Contact Characteristics

| | | | | | | |
|---|---|--------|--|-------------------------------------|-------------------------------------|----|
| Number of contacts | | | 1, 2 or 4 | 2 | 2 | 2 |
| Rated operational voltage (U _e) | Up to | V | 690 | | | |
| Rated insulation voltage (U _i) | Conforming to IEC 60947-5-1 | V | 690 | | | |
| | Conforming to UL, CSA | V | 600 | | | |
| Conventional thermal current (I _{th}) | For ambient temperature ≤ 60 °C (140 °F) | A | 10 | | | |
| Frequency of operational current | | Hz | 25 to 400 | | | |
| Minimum switching capacity | U min. | V | 17 | | | |
| | I min. | mA | 5 | | | |
| Short-circuit protection ● | Conforming to IEC 60947-5-1 and VDE 0660. gG fuse | A | 10 | | | |
| Rated making capacity | Conforming to IEC 60947-5-1, I rms | A | ac: 140; dc: 250 | | | |
| Short-time rating | Permissible for: | 1 s | A | 100 | | |
| | | 500 ms | A | 120 | | |
| | | 100 ms | A | 140 | | |
| Insulation resistance | | MΩ | > 10 | | | |
| Non-overlap time | Guaranteed between N.C. and N.O. contacts | ms | 1.5 (on energizing and on de-energizing) | | | |
| Overlap time | Guaranteed between N.C. and N.O. on LADC22 | ms | 1.5 | – | – | – |
| Time delay (LADT, R and S contact blocks) Accuracy only valid for setting range indicated on the front face | Ambient air temperature for operation | °C | – | - 40 to + 70 (- 104 to + 158 °F) | - 40 to + 70 (- 104 to + 158 °F) | – |
| | Repeat accuracy | | – | ± 2% | ± 2% | – |
| | Drift up to 0.5 million operating cycles | | – | + 15% | + 15% | – |
| | Drift depending on ambient air temperature | | – | 0.25% per °C | 0.25% per °C | – |
| Mechanical durability | In millions of operating cycles | | 30 | 5 | 5 | 30 |
| Operational power of contacts | | | See page 101. | | | |

- Select short circuit protection to meet the National Electrical Code or other local codes and standards.

Catalog Number: pages 107, 108

Dimensions: pages 122, 123

Schematics: pages 126, 127

TeSys™ D-Line Contactors and Starters

Characteristics of Auxiliary Contacts, Timers, and Accessories


Auxiliary Contact Blocks with Dust and Damp Protected Contacts for Contactors

Operational Power of Contacts (conforming to IEC 60947-5-1)

AC supply, categories AC-14 and AC-15

Electrical durability (valid up to 3600 operating cycles/hour) on an inductive load such as the coil of an electromagnet: making power ($\cos \varphi 0.7$) = 10 times the power broken ($\cos \varphi 0.4$)


| | V | 24 | 48 | 115 | 230 | 400 | 440 | 600 |
|-----------------------------|----|----|-----|-----|-----|-----|------|------|
| 1 million operating cycles | VA | 60 | 120 | 280 | 560 | 960 | 1050 | 1440 |
| 3 million operating cycles | VA | 16 | 32 | 80 | 160 | 280 | 300 | 420 |
| 10 million operating cycles | VA | 4 | 8 | 20 | 40 | 70 | 80 | 100 |

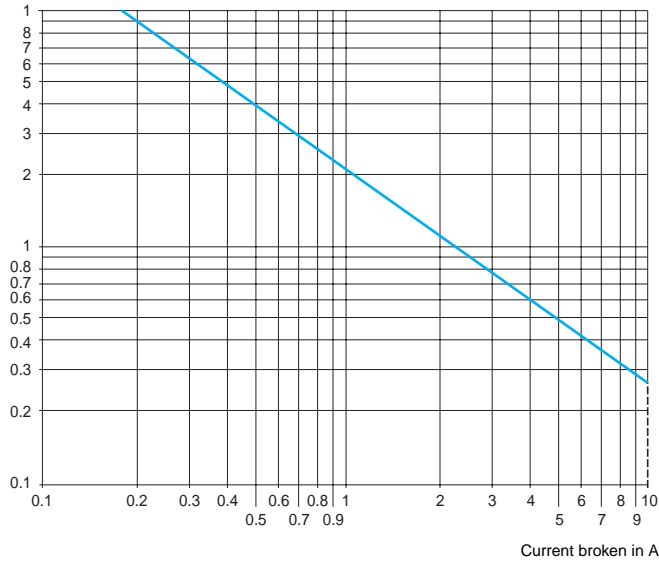

DC supply, category DC-13

Electrical durability (valid up to 1200 operating cycles/hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the power.

| | V | 24 | 48 | 125 | 250 | 440 |
|-----------------------------|---|-----|----|-----|-----|-----|
| 1 million operating cycles | W | 120 | 90 | 75 | 68 | 61 |
| 3 million operating cycles | W | 70 | 50 | 38 | 33 | 28 |
| 10 million operating cycles | W | 25 | 18 | 14 | 12 | 10 |

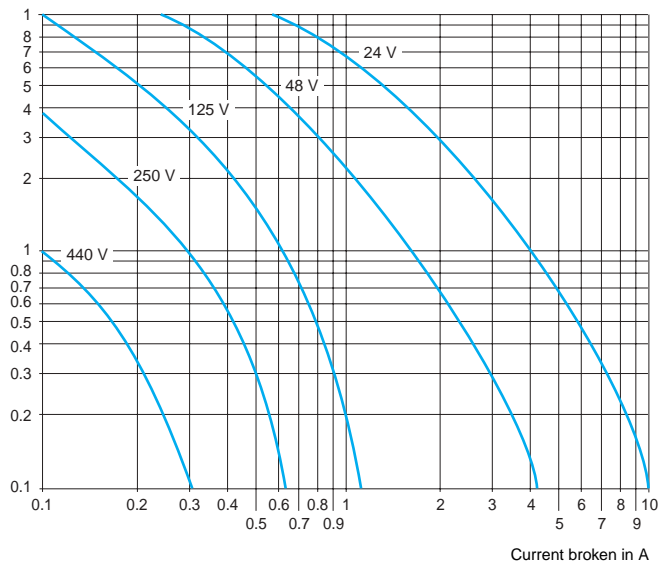

Catalog Number: pages 107, 108

Dimensions: pages 122, 123




Schematics: pages 126, 127

TeSys™ D-Line Contactors and Starters

Characteristics of Auxiliary Contacts, Timers, and Accessories

Auxiliary Contact Blocks with Dust and Damp Protected Contacts for Contactors

Environment

| Contact block type | | | LA1DX | LA1DZ | | LA1DY |
|-------------------------|---|-----------------|--|-----------|---------------|-------|
| | | | | protected | non protected | |
| Conforming to standards |  Meets the essential requirements of the LV & EMC directives | | IEC 60947-5-1, VDE 0660 | | | |
| Product certifications |   | | UL, CSA | | | |
| Protective treatment | Conforming to IEC 60068 | | "TH" | | | |
| Degree of protection | Conforming to VDE 0106 | | Protection against direct finger contact IP 2X | | | |
| Ambient air temperature | Storage and operation | °C | - 25 to + 70 (- 77 to + 158 °F) | | | |
| Cabling | Phillips N° 2 and Ø 6 mm Flexible or solid cable with or without cable end | mm ² | Min.: 1 x 1 Max.: 2 x 2.5 | | | |
| Number of contacts | | | 2 | 2 | 2 | 2 |

Contact Characteristics

| | | | | | | | |
|--|--|--------|---------------------------------------|---------------------------------------|------------------|---------------------------------------|---|
| Rated operational voltage (Ue) | Up to | V | 50 | 50 | 690 | 24 | |
| Rated insulation voltage (Ui) | Conforming to IEC 60947-5-1 | V | 250 | 250 | 690 | 250 | |
| | Conforming to UL, CSA | V | – | – | 600 | – | |
| Conventional thermal current (Ith) | For ambient temperature ≤ 40 °C (104 °F) | A | – | – | 10 | – | |
| Maximum operational current (Ie) | | mA | 50 | 50 | 10 | 50 | |
| Frequency of operational current | | Hz | – | – | 25 to 400 | – | |
| Minimum switching capacity | U min. | V | 3 | 3 | 17 | 3 | |
| | I min. | mA | 0.3 | 0.3 | 5 | 0.3 | |
| Short-circuit protection ● | Conforming to IEC 60947-5-1. gG fuse | A | – | – | 10 | – | |
| Rated making capacity | Conforming to IEC 60947-5-1, I rms | A | – | – | ac: 140; dc: 250 | – | |
| Short-time rating | Permissible for: | 1 s | A | – | – | 100 | – |
| | | 500 ms | A | – | – | 120 | – |
| | | 100 ms | A | – | – | 140 | – |
| Insulation resistance | | MΩ | > 10 | > 10 | > 10 | > 10 | |
| Mechanical durability | In millions of operating cycles | | 5 | 5 | 30 | 5 | |
| Materials and technology used for dust and damp protected contacts | | | Gold - Single break with crossed bars | Gold - Single break with crossed bars | – | Gold - Single break with crossed bars | |

- Select short circuit protection to meet the National Electrical Code or other local codes and standards.

Catalog Number: pages 107, 108

Dimensions: pages 122, 123




Schematics: pages 126, 127

TeSys™ D-Line Contactors and Starters

Characteristics of Auxiliary Contacts, Timers, and Accessories

Interface Modules for Contactors

Environment

| | | | |
|--|---|----|--|
| Conforming to standards |  Meets the essential requirements of the LV & EMC directives | | IEC 60255-5 |
| Product certifications |   | | UL, CSA |
| Protective treatment | Conforming to IEC 60068 | | "TH" |
| Degree of protection | Conforming to VDE 0106 | | Protection against direct finger contact IP 2X |
| Ambient air temperature around the device | Storage | °C | - 40 to + 80 (- 104 to + 176 °F) |
| | Operation | °C | - 25 to + 55 (- 77 to + 131 °F) |
| | Permissible for operation at Uc | °C | - 25 to + 70 (- 77 to + 158 °F) |

Other Characteristics

| Module type | | | LA4DFBQ | LA4DFB | LA4DFE | LA4DLB | LA4DLE | LA4DWB | |
|--|--|-----------------|-----------------|--------------------------------|-----------------------------|-----------------------|-------------|----------------|--------------------------------|
| | | | With relay | With relay | With relay | With relay + override | Solid state | | |
| Rated insulation voltage | Conforming to IEC 60947-1 | | V | 5 | 250 | | | | |
| Rated operational voltage | Conforming to IEC 60947-1 | | V | 415 | 250 | | | | |
| Indication of input state | By integral LED which illuminates when the contactor coil is energized | | | | | | | | |
| Input signals | Control voltage (E1-E2) | | V | dc 24 | dc 24 | dc 48 | dc 24 | dc 48 | dc 24 |
| | Permissible variation | | V | 17 to 30 | 17 to 30 | 33 to 60 | 17 to 30 | 33 to 60 | 5 to 30 |
| | Current consumption at 20 °C (68 °F) | | mA | 25 | 25 | 15 | 25 | 15 | 8.5 for 5 V 15 for 24 V |
| | State "0" guaranteed for | U | V | < 2.4 | < 2.4 | < 4.8 | < 2.4 | < 4.8 | < 2.4 |
| | | I | mA | < 2 | < 2 | < 1.3 | < 2 | < 1.3 | < 2 |
| State "1" guaranteed for | U | V | 17 | 17 | 33 | 17 | 33 | 5 | |
| Built-in protection | Against reverse polarity | | | By diode | | | | | |
| | Of the input | | | By diode | | | | | |
| Electrical durability at 220/240 V | In millions of operating cycles | | | 3 | 10 | 10 | 3 | 3 | 20 |
| Maximum immunity time to micro-breaks | | | ms | 4 | 4 | 4 | 4 | 4 | 1 |
| Power dissipated | At 20 °C (68 °F) | | W | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.4 |
| Direct mounting without contactor | With coil: | ac 24 to 250 V | | – | LC1D40 to D150 | | | | – |
| | | ac 100 to 250 V | | – | – | | | | LC1D40 to D115 |
| | | ac 380 to 415 V | | LC1D40 to D150 | – | | | | – |
| Mounting with cabling adaptor LAD-4BB | With coil: | ac 24 to 250 V | | – | LC1D09 to D38, DT20 to DT60 | | | | LC1D09 to D38, DT20 to DT60 |
| | | ac 380 to 415 V | | LC1D09 to D38, DT20 to DT40 | – | | | | – |
| Total operating time at Uc (of the contactor) | Operating times depend on the type of contactor electromagnet and its control mode. The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles. The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate. | | | | | | | | |
| | | | | LC1D09 to D38, DT20 to DT60 | | LC1D40 to D65 | | LC1D80 and D95 | |
| | With LA4DF, DL | N.O. | ms | 20 to 30 | | 28 to 34 | | 28 to 43 | |
| N.C. | | ms | 16 to 24 | | 20 to 24 | | 18 to 32 | | |
| Cabling | Phillips N° 2 and Ø 6 mm Flexible or solid cable with or without cable end | | mm ² | Min.: 1 x 1 (#12 AWG) | | | | | |
| | | | mm ² | Min.: 2 x 2.5 (#12 AWG) | | | | | |

Catalog Number: page 111

Dimensions: pages 122, 123

Schematics: pages 126, 127

TeSys™ D-Line Contactors and Starters

Characteristics of Auxiliary Contacts, Timers, and Accessories

Electronic Serial Timer Modules for Contactors

Environment

| | | | |
|--|--|---|--|
| Module type | | | LA4DT (On-delay) |
| Conforming to standards | CE | Meets the essential requirements of the LV & EMC directives | IEC 60255-5 |
| Product certifications | | | UL, CSA |
| Protective treatment | Conforming to IEC 60068 | | "TH" |
| Degree of protection | Conforming to VDE 0106 | | Protection against direct finger contact IP 2X |
| Ambient air temperature around the device | Storage | °C | - 40 to + 80 (- 104 to + 176 °F) |
| | Operation | °C | - 25 to + 55 (- 77 to + 131 °F) |
| | For operation at U _c | °C | - 25 to + 70 (- 77 to + 158 °F) |
| Rated insulation voltage (U _i) | Conforming to IEC 60947-1 | V | 250 |
| Cabling | Phillips N° 2 and Ø 6 mm Flexible or solid cable with or without cable end | mm ² | Min.: 1 x 1 Max.: 2 x 2.5 |

Control Circuit Characteristics

| | | | |
|---|--------------------------|---|----------------------------|
| Built-in protection | On input | | By varistor |
| | Suppression of contactor | | By varistor |
| Rated control circuit voltage (U _c) | | V | ac or dc 24 to 250 |
| Permissible variation | | | 0.8 to 1.1 U _c |
| Type of control | | | By mechanical contact only |

Time Delay Characteristics


| | | | |
|--------------------------|------------------------------|----|--------------------------------------|
| Timing ranges | | s | 0.1 to 2; 1.5 to 30; 25 to 500 |
| Repeat accuracy | 0 to 40 °C (104 °F) | | ± 3% (10 ms minimum) |
| Reset time | During the time delay period | ms | 150 |
| | After the time delay period | ms | 50 |
| Immunity to micro-breaks | During the time delay period | ms | 10 |
| | After the time delay period | ms | 2 |
| Indication of time delay | By LED | | Illuminates during time delay period |

Switching Characteristics (solid state type)

| | | | |
|--------------------------|---------------------------------|----|---------------|
| Maximum power dissipated | | W | 2 |
| Leakage current | | mA | < 5 |
| Residual voltage | | V | 3.3 |
| Overvoltage protection | | | 3 kV; 0.5 N.m |
| Electrical durability | In millions of operating cycles | | 30 |

Operating Diagrams

LA4DT "On-delay" electronic timers

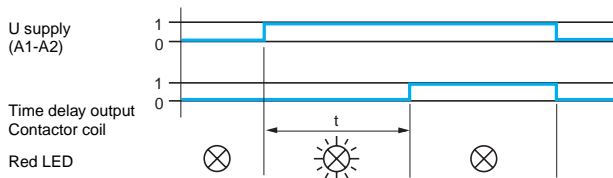

Catalog Number: page 111

Dimensions: pages 122, 123

Schematics: pages 126, 127

TeSys™ D-Line Contactors and Starters

Characteristics of Auxiliary Contacts, Timers, and Accessories

Control Modules, Coil Suppressor Modules and Mechanical Latch Blocks for Contactors

Environment

| | | | |
|---|---|----|--|
| Conforming to standards | | | IEC 60947-5-1 |
| Product certifications | | | UL, CSA |
| Protective treatment | Conforming to IEC 60068 | | "TH" |
| Degree of protection | Conforming to VDE 0106 | | Protection against direct finger contact IP 2X |
| Ambient air temperature around the device | Storage | °C | - 40 to + 80 (- 104 to + 176 °F) |
| | Operation | °C | - 25 to + 55 (- 77 to + 131 °F) |
| | Permissible for operation at U _c | °C | - 25 to + 70 (- 77 to + 158 °F) |

"Auto - Man - Stop" Control Modules

| | | | |
|---------------------------|---|----|--|
| Recommendation | The Auto - Man selector switch must only be operated with the Start - Stop ("O" "I") switch in position "O" | | |
| Rated insulation voltage | Conforming to IEC 60947-5-1 | V | 250 |
| Rated operational voltage | Conforming to IEC 60947-5-1 | V | 250 |
| Protection | Against electric shocks | kV | 2 |
| Built-in protection | Contactors coil suppression | | By varistor |
| Indication | By integral LED | | Illuminates when the contactor coil is energized |
| Electrical durability | In operating cycles | | 20,000 |

Coil Suppressor Modules

| Module type | | | LA4DA LAD4RC | LA4DB LAD4T | LA4DC | LA4DE LAD4V |
|---|-----------|----|------------------|-----------------------------------|-----------------|-----------------------|
| Type of protection | | | RC circuit | Bidirectional peak limiting diode | Diode | Varistor |
| Rated control circuit voltage (U _c) | | V | ac 24 to 415 | ac or dc 24 to 72 | dc 12 to 250 | ac or dc 24 to 250 |
| Maximum peak voltage | | | 3 U _c | 2 U _c | U _c | 2 U _c |
| Natural RC frequency | 24/48 V | Hz | 400 | – | – | – |
| | 50/127 V | Hz | 200 | – | – | – |
| | 110/240 V | Hz | 100 | – | – | – |
| | 380/415 V | Hz | 150 | – | – | – |

Mechanical Latch Blocks

| Mechanical latch block type | | | LA6DK10 | LAD6K10 | LA6DK20 |
|---|---------------------------------|----|--------------------------|--------------------------------|--------------------------------------|
| For mounting on contactor | | | LC1D40 to D65, LP1D65 | LC1D09 to D38, DT20 to DT60 | LC1D80 to D150 LP1D80 and LC1D115 |
| Certification | | | UL, CSA | | UL, CSA |
| Rated insulation voltage | Conforming to IEC 60947-5-1 | V | 690 | | 690 |
| Rated control circuit voltage | ac 50/60 Hz and dc | V | 24 to 415 | | 24 to 415 |
| Power required | For unlatching | ac | VA | 25 | |
| | | dc | W | 30 | |
| Maximum operating rate | In operating cycles/hour | | 1200 | | 1200 |
| On-load factor | | | 10% | | 10% |
| Mechanical durability at U _c | In millions of operating cycles | | 0.5 | | 0.5 |


Catalog Number: pages 108, 110 - 112

Dimensions: pages 122, 123

Schematics: pages 126, 127

TeSys™ D-Line Contactors and Starters

Selection of Auxiliary Contact Blocks

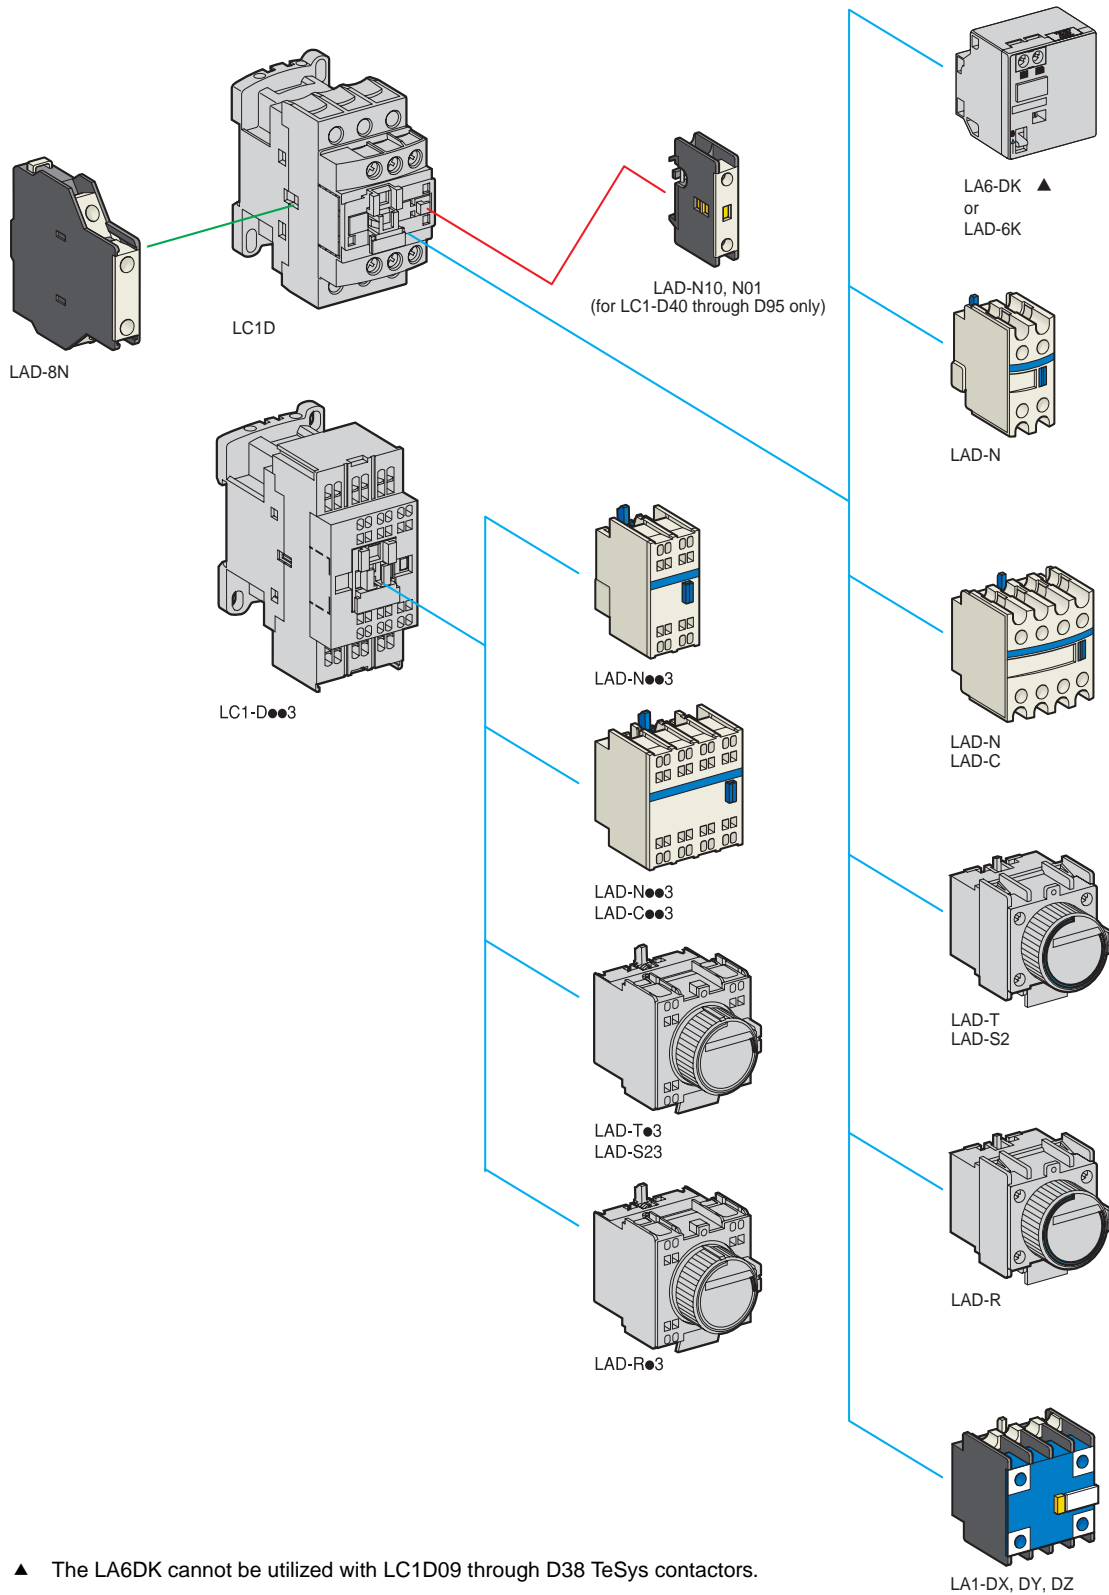






TeSys™ D-Line Contactors and Starters

Selection of Auxiliary Contact Blocks

Instantaneous Auxiliary Contact Blocks for Connection by Screw Clamp Terminals

For use in normal operating environments

| Clip-on mounting | Number of contacts per block (see table below for maximum number of contacts) | Composition | | | | | Catalog Number | Weight lb (kg) |
|--|---|---|---|---|---|---|----------------|----------------|
| | |  |  |  |  |  | | |
| Front | 1 | - | - | - | 1 | - | LADN10 ♦ | 0.04 (0.020) |
| | | - | - | - | - | 1 | LADN01 ♦ | 0.04 (0.020) |
| | 2 | - | - | - | 1 | 1 | LADN11 | 0.07 (0.030) |
| | | - | - | - | 2 | - | LADN20 | 0.07 (0.030) |
| | 4 | - | - | - | - | 2 | LADN02 | 0.07 (0.030) |
| | | - | - | - | 2 | 2 | LADN22 | 0.11 (0.050) |
| | | - | - | - | 1 | 3 | LADN13 | 0.11 (0.050) |
| | | - | - | - | 4 | - | LADN40 | 0.11 (0.050) |
| | | - | - | - | - | 4 | LADN04 | 0.11 (0.050) |
| | | - | - | - | 3 | 1 | LADN31 | 0.11 (0.050) |
| 4 includes one N.O. and one N.C. make before break | | - | - | - | 2 | 2 | LADC22 | 0.11 (0.050) |
| Side | 2 | - | - | - | 1 | 1 | LAD8N11 ● | 0.07 (0.030) |
| | | - | - | - | 2 | - | LAD8N20 ● | 0.07 (0.030) |
| | | - | - | - | - | 2 | LAD8N02 ● | 0.07 (0.030) |

For terminal referencing conforming to standard EN 50012 ◊

| | | | | | | | | |
|---|---|---|---|---|---|---|---------|--------------|
| Front, on 3P contactors & 4P contactors 20 to 60A | 2 | - | - | - | 1 | 1 | LADN11G | 0.07 (0.030) |
| | 4 | - | - | - | 2 | 2 | LADN22G | 0.11 (0.050) |
| Front, on 4P contactors 80 to 200A | 2 | - | - | - | 1 | 1 | LADN11P | 0.07 (0.030) |
| | 4 | - | - | - | 2 | 2 | LADN22P | 0.11 (0.050) |

With dust and damp protected terminals, for use in particularly harsh industrial environments

| | | | | | | | | |
|-------|---|---|---|---|---|---|-----------|--------------|
| Front | 2 | - | 2 | - | - | - | LA1DX20 | 0.09 (0.040) |
| | | 2 | - | - | - | - | LA1DX02 | 0.09 (0.040) |
| | | - | 2 | 2 | - | - | LA1DY20 ▲ | 0.09 (0.040) |
| | 4 | - | 2 | - | 2 | - | LA1DZ40 | 0.11 (0.050) |
| | | - | 2 | - | 1 | 1 | LA1DZ31 | 0.13 (0.060) |

- ♦ For LC1D40 through LC1D95 only.
- ▲ Device with 4 shield bonding terminals.
- Mount on left side only of LC●D09 through D38 with AC coils. Not allowed on LC●D09 through D38 with DC coils.
- ◊ See page 126 for actual markings.

Instantaneous auxiliary contact blocks for connection by ring-tongue connectors

This type of connection is not possible for blocks with dust and damp protected contacts. For all other instantaneous auxiliary contact blocks, add the digit 6 to the end of the references selected above. Example: LADN10 becomes LADN106.

Instantaneous auxiliary contact blocks for connection by spring terminals

This type of connection is not possible for LAD8, LADN with 1 contact or blocks with dust and damp protected contacts. For all other contact blocks, add the digit 3 to the end of the references selected above. Example: LADN11 becomes LADN113.

Instantaneous auxiliary contact blocks for connection by Faston connectors

This type of connection is not possible for LAD8, LADN with 1 contact or blocks with dust and damp protected contacts. For all other contact blocks, add the digit 9 to the end of the references selected above. Example: LADN11 becomes LADN119.

Maximum Number of Auxiliary Contacts

| Contactors | | Instantaneous auxiliary contact blocks | | | | | Time delay Front mounted | |
|------------|--------------------------|--|---------------------|---------------|------------|------------|--------------------------|------|
| Type | Number of poles and size | Side mounted | | Front mounted | | | | |
| | | | | 1 contact | 2 contacts | 4 contacts | | |
| ac | 3P | LC1D09 to D38 | 1 on left-hand side | and | - | 1 | or 1 | or 1 |
| | | LC1D40 to D95 (50/60 Hz) | 1 on each side | or | 2 | and 1 | or 1 | or 1 |
| | | LC1D40 to D95 (50 or 60 Hz) | 1 on each side | and | 2 | and 1 | or 1 | or 1 |
| | 4P | LC1D115 and D150 | 1 on left-hand side | and | - | 1 | or 1 | or 1 |
| | | LC1DT20 to DT40 | 1 on left-hand side | and | - | 1 | or 1 | or 1 |
| | | LC1D65 and D80 | 1 on each side | or | 1 | or 1 | or 1 | or 1 |
| dc | 3P | LC1D09 to D38 | - | | - | 1 | or 1 | or 1 |
| | | LC1D40 to D95 | - | | 1 | or 1 | or 1 | or 1 |
| | | LC1D115 and D150 | 1 on left-hand side | and | - | 1 | or 1 | or 1 |
| | 4P | LC1DT20 to DT40 | 1 on left-hand side | or | - | 1 | or 1 | or 1 |
| | | LP1D65 and D80 | - | | 2 | and 1 | or 1 | or 1 |
| | | LC1D115 | 1 on each side | | - | and 1 | or 1 | or 1 |
| LC (1) | 3P | LC1D09 to D38 | - | | - | 1 (2) | - | - |
| | 4P | LC1DT20 to DT40 | 1 on left-hand side | and | - | 1 | or 1 | or 1 |

(1) LC: low consumption.

(2) Except LADN02.

In order to mount on an LAD8N on an LC1D40 to D95, a set of shims must be ordered separately, see page 114.


Characteristics: page 100-102

Dimensions: pages 122, 123


Schematics: pages 126, 127

TeSys™ D-Line Contactors and Starters


Selection of Time-Delay Blocks, and Mechanical-Latch Blocks




LADT●



LA6DK●●



LADT●3



LA6DK●●



LA4SPX ▲

Time Delay Auxiliary Contact Blocks for Connection by Screw Clamp Terminals

Maximum number of auxiliary contact blocks that can be attached per contactor, see page 107.
Sealing cover to be ordered separately, see page 114.
LADT0 and LADR0: with extended scale from 0.1 to 0.6 s.
LADS2: with switching time of 40 ms ± 15 ms between opening of the N.C. contact and closing of the N.O. contact.

| Clip-on Mounting | Number of Contacts | Time Delay | | Catalog Number | Weight lb (kg) |
|------------------|--------------------|-------------|---------------|----------------|----------------|
| | | Type | Setting Range | | |
| Front | 1 N.O. + 1 N.C. | On-delay ♦ | 0.1 to 3 s | LADT0 | (0.13) 0.060 |
| | | | 0.1 to 30 s | LADT2 | (0.13) 0.060 |
| | | | 10 to 180 s | LADT4 | (0.13) 0.060 |
| | | | 1 to 30 s | LADS2 | (0.13) 0.060 |
| | | Off-delay ♦ | 0.1 to 3 s | LADR0 | (0.13) 0.060 |
| | | | 0.1 to 30 s | LADR2 | (0.13) 0.060 |
| | | 10 to 180 s | LADR4 | (0.13) 0.060 | |

♦ Also fit pre-TeSys Contactors.

Time delay auxiliary contact blocks for connection by ring-tongue connectors

Add the digit 6 to the end of the references selected above. Example: LADT0 becomes LADT06.

Time delay auxiliary contact blocks for connection by spring terminals

Add the digit 3 to the end of the references selected above. Example: LADT0 becomes LADT03.

Time delay auxiliary contact blocks for connection by Faston connectors

Add the digit 9 to the end of the references selected above. Example: LADT0 becomes LADT09.

Mechanical latch blocks (2)

| Clip-on Mounting | Unlatching Control | For use on Contactor | Basic Reference. Complete with Code Indicating Control Voltage | Standard Voltages (1) | Weight lb (kg) |
|------------------|--------------------|---|--|-----------------------|----------------|
| Front | Manual or electric | LC1D40 to D65 3P ac or dc LC1D65 4P ac LP1D65 4P dc | LA6DK10● | B E F M Q | (0.15) 0.070 |
| | | LC1D80 to D150 3P ac LC1D80 and D115 3P dc LP1D80 and LC1D115 4P dc | LA6DK20● | B E F M Q | (0.20) 0.090 |
| | | LC1D09 to D38 ac or dc LC1DT20 to DT60 ac or dc | LAD6K10● | B E F M Q | (0.15) 0.070 |

(1) Standard control circuit voltages (for other voltages please consult your Regional Sales Office).

| | | | | | | | | | |
|---------------|----|-------|-------|-------|-----|---------|---------|---------|---------|
| Vdc 50/60 Hz, | 24 | 32/36 | 42/48 | 60/72 | 100 | 110/127 | 220/240 | 256/277 | 380/415 |
| Code | B | C | E | EN | K | F | M | U | Q |

(2) The mechanical latching block must not be powered up at the same time as the contactor. The duration of the control signal for the mechanical latching block and the contactor should be ≥ 100 ms.

Characteristics: pages 100 - 102

Dimensions: pages 122, 123

Schematics: pages 126, 127

SERIPLEX® Module

| | | | | |
|----------------------------|---|--------------------------|----------------|-------------------|
| Approvals | File E114926 CCN NRAQ | LR53531 Class 2252 01 | | |
| SERIPLEX | 1 block per contactor Clip-on front mounting | Operates coils up to | Catalog Number | Weight – lb (kg.) |
| Contactor adaptor module ♦ | LC1D09 to LC1D80 | 277 Vac | LA4SPX | 0.160 (0.072) |
| | LP1D09 to LP1D80 | 24 Vdc | | |

♦ For more information, refer to SERIPLEX catalog 8330CT9601.

▲ Attaches similarly to all other accessories.

TeSys™ D-Line Contactors and Starters


Selection of Low Voltage Ride Through Module

SEMI F47 Low Voltage Ride Through Module


By ensuring SEMI F47 compliance of AC powered IEC contactors and relays, the Low Voltage Ride Through Modules can be used to increase the voltage sag immunity of semiconductor processing equipment. These modules make it possible for AC powered TELEMECANIQUE contactors and relays to exceed the requirements of SEMI F47, both in the magnitude and duration of a voltage sag event – even with accessories such as auxiliary contact blocks and pneumatic timers.

More and more wafer fabs are insisting that front-end wafer processing equipment comply with SEMI F47. Many of the contactors and pilot relays used on equipment, particularly in the EMO circuit, are not able to meet the standard. As a result, equipment can drop out during a voltage sag of 50% in magnitude and 200ms in duration, causing equipment shutdown.

The Low Voltage Ride Through Modules can be used with TELEMECANIQUE contactors from 9A through 80A, as well as the CAD series of control relays.

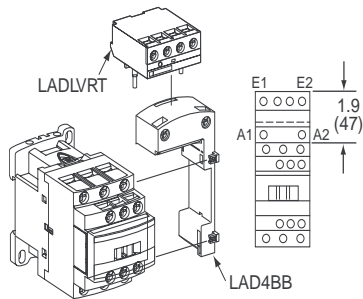


Contactors 32 A and less

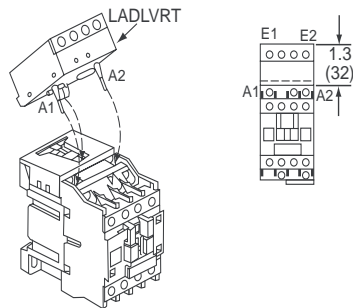


Contactors 40 A - 80 A

Dimensions

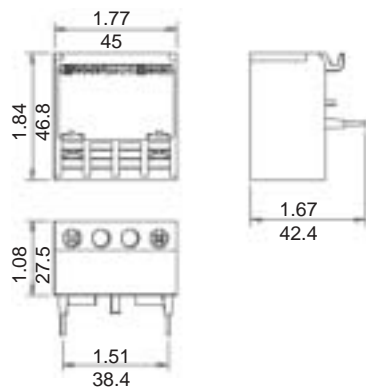

Typical Wiring Scheme for 3-Wire Control

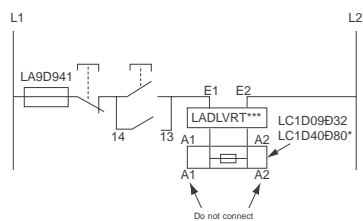

Selection


| LADLVRT24V | LADLVRT120V | LADLVRT208V | Bracket | Fuse |
|--|--|--|---------|---------|
| For use on LC1: D09B7, D12B7, D18B7, D25B7 | For use on LC1: D09G7, D12G7, D18G7, D25G7 | For use on LC1: D09LE7, D12LE7, D18LE7, D25LE7 | LAD4BB* | LA9D941 |
| D32B7, D40B7, D50B7, D65B7, D80B7 | D32G7, D40G7, D50G7, D65G7, D80B7 | D32LE7, D40L7, D50L7, D65L7, D80B7 | - | |
| CADxxxB7 | CADxxxG7 | CADxxxLE7 | - | |

* The Low Voltage Ride Through Module can be used with all TeSys control relays with 24 VAC, 120 VAC or 208 VAC dual frequency coils.

** LAD4BB must be used when the Low Voltage Ride Through Module is being used with contactors 32 A and less, and TeSys CAD Series of Control Relays.


Specifications

| | |
|---|---|
| Continuous operating voltage range and line frequency | 85–110% of the rated voltage at 47–63 Hz |
| Max. installed accessories | 1 front mount and 1 side mount auxiliary device for contactors 1 auxiliary device for TeSys Control Relays |
| Dropout time | 150 ms |
| Max. operation rate | 20 operations/min. for LC1D09–LC1D32 30 operations/min. for LC1D40–LC1D80 |
| Max. mechanical and electrical durability | 250 000 operations |
| Leakage current capability | 6 ma maximum as per IEC 61131 |
| MTBF | 100,000 hours |
| Standards | SEMI F47-0999, cULus, CE, UL 508 IEC 60947-5-1 (Control Circuit Devices and Switching Elements) IEC 60068 (Mechanical Environmental Testing) NSTA (Shipping and Handling) IEC 61000-4-2 Electrostatic Discharge IEC 61000-4-3 Electromagnetic Field IEC 61000-4-4 Fast Transient and Burst IEC 61000-4-5 Surge Immunity IEC 61000-4-6 Conducted RF IEC 60068-2-6 Operational Vibration IEC 60068-2-27 Operational Shock |
| Pickup performance | per UL508 and IEC 60947 |
| Storage temperature | -40 to +80 °C (- 104 to + 176 °F) |
| Operating temperature | 0 to 40°C (32 to 104 °F) ambient surrounding ride through module |
| Relative humidity | 5 to 95%, at 40°C (104 °F) non-condensing |
| Maximum operating altitude | 3000 meters (9842.4 ft) |

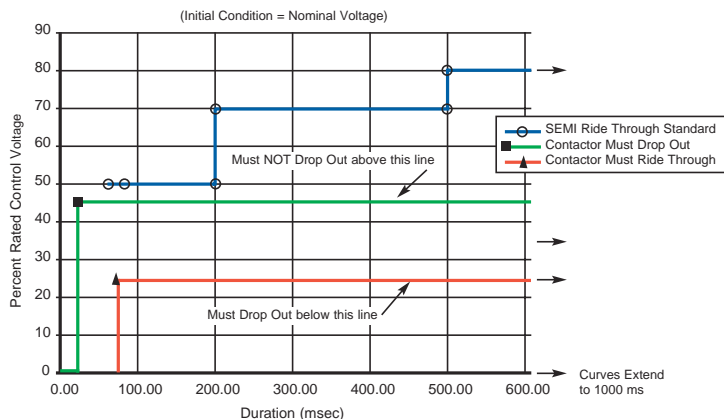

TeSys™ D-Line Contactors and Starters

Selection of Electronic Timers and Interface Modules

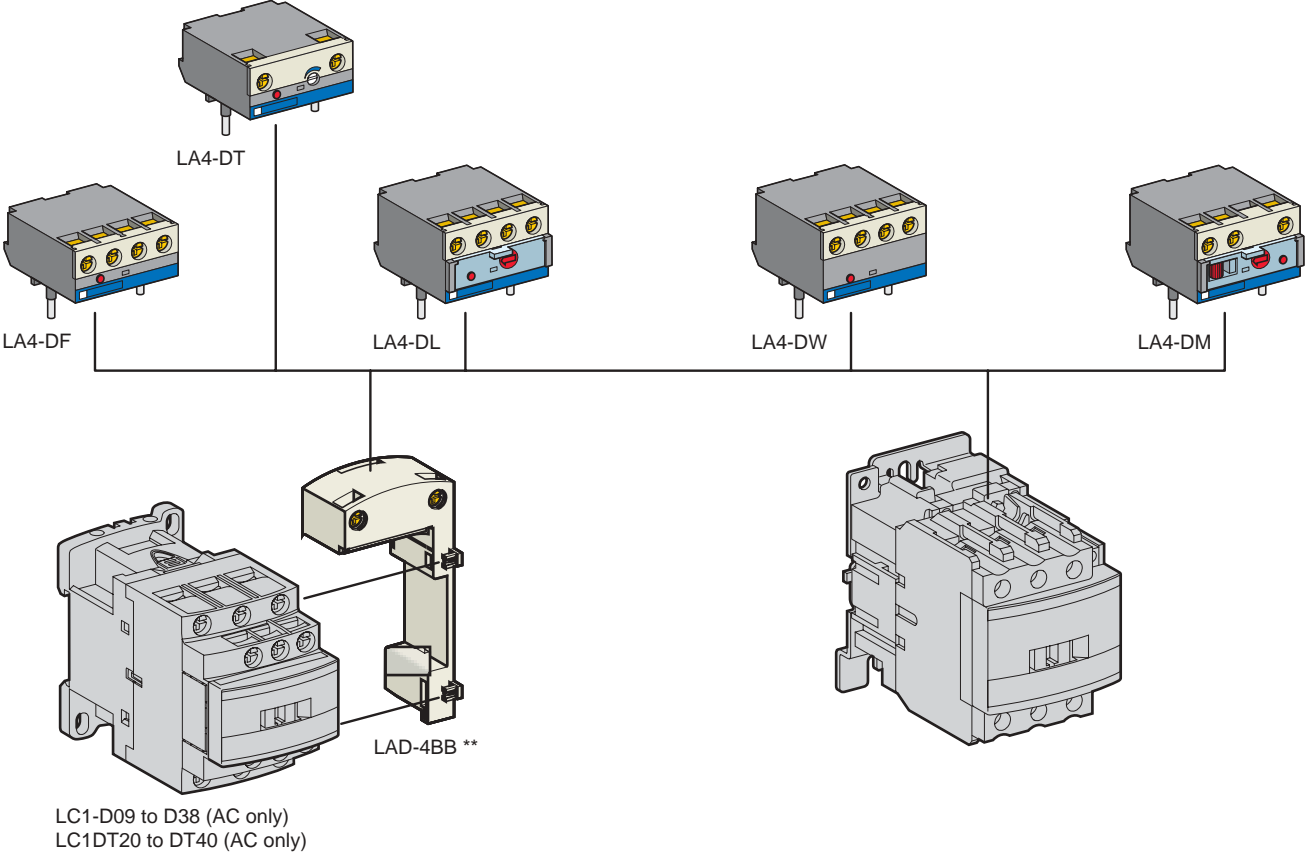

**See Cabling Accessories page 114.

TeSys™ D-Line Contactors and Starters

Selection of Electronic Timers and Interface Modules

Electronic Serial Timer Modules (1)

- 3-pole contactors LC1D40 to D150 and 4-pole contactors LC1D65 to D115: mounted directly across terminals A1 and A2 of contactor (screw mounting).

On-delay Type

| Operational Voltage | | Time | Catalog Number | Weight lb (kg) |
|---|-------------------------|-------------|----------------|----------------|
| AC 24 to 250 V | 100 to 250 V | | | |
| LC1 D09 to D38 (3P) and DT20 to DT60 (4P) | LC1 D40 to D150 (3P) | 0.1 to 2 s | LA4DT0U (2) | 0.09 (0.040) |
| | | 1.5 to 30 s | LA4DT2U (2) | 0.09 (0.040) |
| | | 25 to 500 s | LA4DT4U (2) | 0.09 (0.040) |

Interface Modules

- 3-pole contactors LC1D40 to D150 and 4-pole contactors LC1D65 to D115: mounted directly across terminals A1 and A2 of contactor (screw mounting).

Relay Interface

| Operational Voltage | | Supply voltage E1-E2 (dc) | Catalog Number | Weight lb (kg) |
|--|--|------------------------------|----------------|----------------|
| AC 24 to 250 V | AC 380 to 415 V | | | |
| – | LC1D09 to D150 (3P) and DT20 to DT60 (4P) | 24 V | LA4DFBQ (2) | 0.12 (0.055) |
| LC1D09 to D150 (3P) and DT20 to DT60 (4P) | – | 24 V | LA4DFB (2) | 0.11 (0.050) |
| | | 48 V | LA4DFE (2) | 0.11 (0.050) |

Relay Interface with Manual Override Switch (output forced “ON”)

| Operational Voltage | | Supply Voltage E1-E2 (dc) | Catalog Number | Weight lb (kg) |
|--|-----------------|------------------------------|----------------|----------------|
| AC 24 to 250 V | AC 100 to 250 V | | | |
| LC1D09 to D150 (3P) and DT20 to DT60 (4P) | – | 24 V | LA4DLB (2) | 0.10 (0.045) |
| | | 48 V | LA4DLE (2) | 0.10 (0.045) |

Solid State Interface

| | | | | |
|---|---------------------|------|------------|--------------|
| LC1D09 to D38 (3P) and DT20 to DT60 (4P) | LC1D40 to D115 (3P) | 24 V | LA4DWB (2) | 0.10 (0.045) |
|---|---------------------|------|------------|--------------|

Auto-Man-Stop Control Modules

For local override operation tests with two-position “Auto-Man” switch and “O-I” switch

- 3-pole contactors LC1D40 to D150 and 4-pole contactors LC1D65 to D115: mounted directly across terminals A1 and A2 of contactor (screw mounting).

| Operational voltage | | Catalog Number | Weight lb (kg) |
|--|---------------------|----------------|----------------|
| AC 24 to 100 V | AC 100 to 250 V | | |
| LC1D09 to D150 (3P) and DT20 to DT60 (4P) | – | LA4DMK (2) | 0.09 (0.040) |
| – | LC1D40 to D150 (3P) | LA4DMU | 0.09 (0.040) |

(1) For 24 V operation, the contactor must be fitted with a 21 V coil (code Z7). See pages 117.

(2) Mounting these accessories to TeSys LC1D09 through D38 AC controlled and LC1DT20 through DT40 AC controlled contactors requires the use of the LAD4BB adaptor. This adaptor can not be used on TeSys contactors with DC coils.


Characteristics: pages 103 - 105

Dimensions: pages 122, 123


Schematics: pages 126, 127

TeSys™ D-Line Contactors and Starters

Selection of Coil Suppressor Modules



LAD4



LA4D

RC Circuits (resistor-capacitor)

- Effective protection for circuits highly sensitive to "high frequency" interference. For use only in cases where the voltage is virtually sinusoidal, i.e. less than 5% total harmonic distortion.
- Voltage limited to 3 Uc maximum and oscillating frequency limited to 400 Hz maximum.
- Slight increase in drop-out time (1.2 to 2 times the normal time).

| Mounting | For use with Contactor (1) Rating | Type | | Catalog Number | Weight lb (kg) |
|-------------------|---------------------------------------|------------|-----|----------------|----------------|
| | | Vac | Vdc | | |
| Clip-on (3) | D09 to D38 (3P) and DT20 to DT40 | 24 to 48 | – | LAD4RCE | 0.03 (0.012) |
| | | 110 to 250 | – | LAD4RCU | 0.03 (0.012) |
| Screw mounting(4) | D40 to D150 (3P) and D40 to D115 (4P) | 24 to 48 | – | LA4DA2E | 0.04 (0.018) |
| | | 50 to 127 | – | LA4DA2G | 0.04 (0.018) |
| | | 110 to 250 | – | LA4DA2U | 0.04 (0.018) |
| | | 380 to 415 | – | LA4DA2N | 0.04 (0.018) |

Varistors (peak limiting)

- Protection provided by limiting the transient voltage to 2 Uc max.
- Maximum reduction of transient voltage peaks.
- Slight increase in drop-out time (1.1 to 1.5 times the normal time).

| | | | | | |
|--|---------------------------------------|------------|------------|---------|--------------|
| Clip-on (3) | D09 to D38 (3P) (2) DT20 to DT40 | 24 to 48 | – | LAD4VE | 0.03 (0.012) |
| | | 50 to 127 | – | LAD4VG | 0.03 (0.012) |
| | | 110 to 250 | – | LAD4VU | 0.03 (0.012) |
| Screw connection to the contactor coil terminals | D40 to D115 (3P) and D40 to D115 (4P) | 24 to 48 | – | LA4DE2E | 0.04 (0.018) |
| | | 50 to 127 | – | LA4DE2G | 0.04 (0.018) |
| | | 110 to 250 | – | LA4DE2U | 0.04 (0.018) |
| Screw connection of wire to the contactor coil terminals | D40 to D115 (3P) and D40 to D115 (4P) | – | 24 to 48 | LA4DE3E | 0.04 (0.018) |
| | | – | 50 to 127 | LA4DE3G | 0.04 (0.018) |
| | | – | 110 to 250 | LA4DE3U | 0.04 (0.018) |

Diodes

- No over voltage or oscillating frequency.
- Increase in drop-out time (6 to 10 times the normal time).
- Polarized component.

| | | | | | |
|--------------------|-------------------------------------|---|-----------|---------|--------------|
| Screw mounting (4) | D40 to D95 (3P) D40 and D80 (4P) | – | 24 to 250 | LA4DC3U | 0.04 (0.018) |
|--------------------|-------------------------------------|---|-----------|---------|--------------|

Bidirectional peak limiting diode

- Protection provided by limiting the transient voltage to 2 Uc max.
- Maximum reduction of transient voltage peaks.

| | | | | | |
|--------------------|---------------------|----|----|---------|--------------|
| Clip-on (3) | D09 to D38 (3P) (2) | 24 | – | LAD4TB | 0.03 (0.012) |
| | DT20 to DT40 | 72 | – | LAD4TS | 0.03 (0.012) |
| Screw mounting (4) | D40 to D95 (3P) | 24 | – | LA4DB2B | 0.04 (0.018) |
| | D40 and D80 (4P) | 72 | – | LA4DB2S | 0.04 (0.018) |
| | D40 to D95 (3P) | – | 24 | LA4DB3B | 0.04 (0.018) |
| | D40 and D80 (4P) | – | 72 | LA4DB3S | 0.04 (0.018) |

(1) For satisfactory protection, a suppressor module must be installed across the coil of each contactor.

(2) From LC1D09 to D38 and LC1DT20 to DT40, dc and low consumption 3-pole contactors are fitted with built-in suppression as standard.

(3) Clipping-on makes the electrical connection. The overall size of the contactor remains unchanged.

(4) Mounting at the top of the contactor on coil terminals A1 and A2.

Characteristics: pages 100 - 102


Dimensions: pages 122, 123

Schematics: pages 126, 127


TeSys™ D-Line Contactors and Starters

Selection of Accessories for Contactors and Reversing Contactors


Accessories for Main Pole and Control Connections




LA9D3260




LA9D11550-



LA9D11560-



LA9D11570-



LA9D80962

| Description | For Use on Contactors | | Sold In Lots Of | Catalog Number | Weight lb (kg) | |
|---|---|----------------------|----------------------|-----------------|--------------------|--------------|
| | AC | DC | | | | |
| Connectors for cable, sizes (1 connector) | 4-pole 10 mm ² (8 AWG) | D09, D12, DT20, DT25 | D09, D12, DT20, DT25 | 1 | LAD92560 | 0.67 (0.030) |
| | 3-pole 25 mm ² (4 AWG) | D09 to D38 | D09 to D38 | 1 | LA9D3260 | 0.09 (0.040) |
| | 4-pole 25 mm ² (4 AWG) | DT32 to DT40 | DT32 to DT40 | 1 | LAD96060 | 0.13 (0.060) |
| Connectors for cable, sizes (2 connectors) | 3-pole 120 mm ² (250 MCM) | D115, D150 | D115, D150 | 1 | LA9D115603B | 1.2 (0.560) |
| | 4-pole 120 mm ² (250 MCM) | D115 | D115 | 1 | LA9D115604 | 1.6 (0.740) |
| Connector for lug type terminals (2 connectors) | 3-pole | D115, D150 | D115, D150 | 1 | LA9D115503B | 0.66 (0.300) |
| | 4-pole | D115 | D115 | 1 | LA9D115504 | 0.80 (0.360) |
| Protective covers for lug type terminals | 3-pole (1) | D115, D150 | D115, D150 | 1 | LA9D115703 | 0.55 (0.250) |
| | 4-pole (1) | D115, D150 | D115, D150 | 1 | LA9D115704 | 0.66 (0.300) |
| Links for parallel connection of | 2 poles | D09 to D38 | D09 to D38 | 10 | LA9D2561 | 0.13 (0.060) |
| | | DT20 & DT25 (4P) | DT20 & DT25 (4P) | 10 | LA9D1261 | 0.03 (0.012) |
| | | DT32 to DT40 (4P) | DT32 to DT40 (4P) | 10 | LAD96061 | 0.13 (0.060) |
| | | D40 to D65 | D40 to D65 | 2 | LA9D40961 | 0.05 (0.021) |
| | | D80, D95 | D80 | 2 | LA9D80961 | 0.13 (0.060) |
| | 3 poles (star connection) | D09 to D38 | D09 to D38 | 10 | LAD9P3 (2) | 0.01 (0.005) |
| | | D80, D95 | D80 | 1 | LA9D80962 | 0.18 (0.080) |
| | | DT20 to DT40 | DT20 to DT40 | 2 | LA9D1263 | 0.05 (0.024) |
| | 4 poles | D40 to D65 | D40 to D65 | 2 | LA9D40963 | 0.15 (0.070) |
| | | D80, D95 | D80 | 2 | LA9D80963 | 0.22 (0.100) |
| | | D40 to D65 | D40 to D65 | 10 | LA9D6567 | 0.02 (0.010) |
| | Staggered coil connection | – | D40 to D80 | 10 | LA9D09966 | 0.01 (0.006) |
| Control circuit take-off from main pole | D80, D95 | D80 | 10 | LA9D8067 | 0.02 (0.010) | |
| | Spreaders for increasing the pole pitch to 45 mm | D115, D150 | D115, D150 | 3 | GV7AC03 | 0.4 (0.180) |


- (1) For 3-pole contactors: 1 set of 6 covers, for 4-pole contactors: 1 set of 8 covers.
 (2) Separate connecting bar for connecting 2 poles in parallel.

Dimensions: pages 122, 123

Schematics: pages 126, 127

TeSys™ D-Line Contactors and Starters


Selection of Accessories for Contactors and Reversing Contactors



GV2G245

Sets of Contacts and Arc Chambers

| Description | For Use on Contactors | Catalog Number | Weight lb (kg) | |
|-----------------|-----------------------|----------------|----------------|--------------|
| Set of contacts | 3-pole | LC1D115 | LA5D1158031 | 0.60 (0.260) |
| | | LC1D150 | LA5D150803 | 0.60 (0.260) |
| | 4-pole | LC1D115004 | LA5D115804 | 0.72 (0.330) |
| Arc chambers | 3-pole | LC1D115 | LA5D11550 | 0.87 (0.395) |
| | | LC1D150 | LA5D15050B | 0.87 (0.395) |
| | 4-pole | LC1D115004 | LA5D115450B | 1.03 (0.470) |




GV1G09

Cabling Accessories

| | | | | |
|---|---|--------------------------|---------------|--------------|
| For adapting existing wiring to a new product | LC1D09 to D38 and LC1DT20 to DT60 AC only | Without coil suppression | LAD4BB | 0.04 (0.019) |
| | | With coil suppression | ac 24 to 48 V | LAD4BBVE |
| | ac 50 to 127 V | | LAD4BBVG | 0.03 (0.014) |
| | ac 110 to 250 V | | LAD4BBVU | 0.03 (0.014) |
| Set of 63 A busbars for paralleling of contactors | 2 contactors LC1D09 to D18 or D25 to D38 | | GV2G245 | 0.08 (0.036) |
| | 4 contactors LC1D09 to D18 or D25 to D38 | | GV2G445 | 0.17 (0.077) |
| Terminal block for supply to: | One or more GV2G busbar sets | | GV1G09 | 0.09 (0.040) |

Protection Accessories



LA9D941

| Description | Application | Sold in Lots Of | Catalog Number | Weight lb (kg) |
|--|--------------------------------|-----------------|----------------|----------------|
| Miniature fuse holder | 5 x 20 with 4 A-250 V fuse | 1 | LA9D941 | 0.05 (0.025) |
| Sealing cover | For LADT, LADR | 1 | LA9D901 | 0.01 (0.005) |
| Safety cover preventing access to the moving contact carrier | LC1D09 to D38 and DT20 to DT60 | 1 | LAD9ET1 | 0.06 (0.026) |
| | LC1D40 to D65 | 1 | LAD9ET2 | 0.03 (0.012) |
| | LC1D80 and D95 | 1 | LAD9ET3 | 0.008 (0.004) |
| | LC1D115 and D150 | 1 | LAD9ET4 | 0.008 (0.004) |


Marking Accessories



LAD9ET.

| Description | Application | Sold in Lots Of | Catalog Number | Weight lb (kg) |
|---|--|-----------------|----------------|----------------|
| Sheet of 80 blank labels self-adhesive, 8 x 33 (1) | Contactors (excluding 4-pole LC1-D65 to D115) LADN (4 contacts), LA6DK | 10 | LAD21 | 0.04 (0.020) |
| Sheet of 80 blank labels self-adhesive, 8 x 12 (1) | LADN (2 contacts), LADT, LADR, LRD | 10 | LAD22 | 0.04 (0.020) |
| Sheet of 80 blank labels for marking using plotter or 8 x 33 engraver | Contactors (excluding 4-pole LC1D65 to D115) LAD (4 contacts), LA6DK | 10 | LAD23 | 0.11 (0.050) |
| Sheet of 112 blank labels for marking using plotter or 8 x 12 mm engraver | All products | 35 | LAD24 | 0.44 (0.200) |
| Label holder snap-in, 8 x 22 mm | 4-pole contactors LC1D65 and D80, LA6DK | 100 | LA9D92 | 0.002 (0.001) |
| Legend holder snap-in, 8 x 22 mm | LC1D09 to D38 LC1DT20 to D40 LAD●N (4 contacts) LAD●T, LAD●R | 100 | LAD90 | 0.002 (0.001) |
| Bag of 300 blank labels self-adhesive, 7 x 21 mm | On holder LA9D92 | 1 | LA9D93 | 0.002 (0.001) |
| "SIS Label" label creation software | Multi-language version (EN, FR, GE) ▲ | 1 | XB Y2U | 0.13 (0.060) |

▲ System requirement: 486 processor or better; Windows 95, 98 or NT 4.0 or better.



XB Y1U

Mounting Accessories

| | | | | |
|----------------|---|---|---------|--------------|
| Mounting plate | For replacement of LC1F115 or F150 by LC1D115 or D150 | 1 | LA9D730 | 0.80 (0.360) |
| Set of shims | For fitting side mounting blocks LAD8N on LC1D40 to D95 | 1 | LA9D511 | 0.04 (0.020) |

(1) These legends are for sticking onto the safety cover of the contactors or add-on block, if fitted.

TeSys™ D-Line Contactors and Starters

D-line Voltage Code Table

D-line Voltage Code

| Voltage | Frequency | D-line (see notes at end of table) | | |
|---------|----------------|--|---|-----------------------------------|
| | | LC1D09 - D38 LC2D09 - D38 Notes D1, D3 | LC1D40 - D95 LC2D40 - D95 Note D1 | LC1D115 - D150 Note D1, D2, D4 |
| 5 | Low Consump DC | AL | - | - |
| 12 | 50/60 | J7 | - | - |
| | 50 | - | J5 | - |
| | DC | JD | JD | - |
| | Low Consump DC | JL | - | - |
| | Wide Range DC | - | JW | - |
| 20 | 50/60 | - | Z7 | - |
| | 50 | - | Z5 | - |
| | 60 | - | Z6 | - |
| | DC | - | - | - |
| 24 | Low Consump DC | ZL | - | - |
| | 50/60 | B7 | B7 | B7 |
| | 50 | - | B5 | B5 |
| | 60 | - | B6 | B6 |
| | 40-400 | - | - | - |
| 36 | DC | BD | BD | BD |
| | Low Consump DC | BL | - | - |
| | Wide Range DC | - | BW | - |
| | 50/60 | CC7 | - | - |
| 42 | DC | CD | CD | CD |
| | Wide Range DC | - | CW | - |
| | 50/60 | D7 | D7 | D7 |
| 48 | 50 | - | D5 | D5 |
| | 60 | - | - | - |
| | 50/60 | E7 | E7 | E7 |
| | 50 | - | E5 | E5 |
| | 60 | - | E6 | E6 |
| | 40-400 | - | - | - |
| | DC | ED | ED | ED |
| 60 | Low Consump DC | EL | - | - |
| | Wide Range DC | - | EW | - |
| | 50/60 | EE7 | - | - |
| 72 | DC | ND | ND | ND |
| | DC | SD | SD | SD |
| | Low Consump DC | SL | - | - |
| 96 | Wide Range DC | - | SW | - |
| | Low Consump DC | DL | - | - |
| 100 | 50/60 | K7 | K7 | - |
| | DC | - | - | - |

D-line Voltage Code (Continued)

| Voltage | Frequency | D-line (see notes at end of table) | | |
|---------|----------------|--|---|-----------------------------------|
| | | LC1D09 - D38 LC2D09 - D38 Notes D1, D3 | LC1D40 - D95 LC2D40 - D95 Note D1 | LC1D115 - D150 Note D1, D2, D4 |
| 110 | 50/60 | F7 | F7 | F7 |
| | 50 | - | F5 | F5 |
| | 60 | - | F6 | F6 |
| | 40-400 | - | - | - |
| | DC | FD | FD | FD |
| | Low Consump DC | FL | - | - |
| | Wide Range DC | - | FW | - |
| 110/127 | 40-400 | - | - | - |
| 115 | 50/60 | FE7 | FE7 | FE7 |
| | 50 | - | FE5 | FE5 |
| | 40-400 | - | - | - |
| 120 | 50/60 | G7 | G7 | G7 |
| | 50 | - | - | - |
| | 60 | - | G6 | G6 |
| | 40-400 | - | - | - |
| | DC | - | - | - |
| 125 | Low Consump DC | - | - | - |
| | DC | GD | GD | GD |
| 127 | 50/60 | FC7 | - | FC7 |
| | 60 | - | G5 | FC5 |
| | 40-400 | - | - | - |
| 155 | DC | PD | - | - |
| 174 | DC | - | - | - |
| 200 | 50/60 | L7 | L7 | - |
| | DC | - | - | - |
| 200/208 | 50/60 | - | - | - |
| | 60 | - | - | - |
| | 40-400 | - | - | - |
| 208 | 50/60 | LE7 | LE7 | LE7 |
| | 60 | - | L6 | L6 |
| | 40-400 | - | - | - |
| 220 | 50/60 | M7 | M7 | M7 |
| | 50 | - | - | M5 |
| | 60 | - | M6 | M6 |
| | 40-400 | - | - | - |
| | DC | MD | MD | MD |
| 220/230 | Low Consump DC | ML | - | - |
| | Wide Range DC | - | MW | - |
| 220/240 | 50/60 | - | - | - |
| | 50 | - | M5 | - |
| | 60 | - | - | - |
| 220/230 | 40-400 | - | - | - |
| | DC | - | - | - |
| 220/240 | 40-400 | - | - | - |
| | DC | - | - | - |

TeSys™ D-Line Contactors and Starters

D-line Voltage Code Table

D-line Voltage Code (Continued)

| Voltage | Frequency | D-line (see notes at end of table) | | |
|---------|----------------|--|---|--------------------------------------|
| | | LC1D09 - D38 LC2D09 - D38 Notes D1, D3 | LC1D40 - D95 LC2D40 - D95 Note D1 | LC1D115 - D150 Note D1, D2, D4 |
| 230 | 50/60 | P7 | P7 | P7 |
| | 50 | U7 | P5 | P5 |
| | 60 | - | - | - |
| | 40-400 | - | - | - |
| | DC | - | - | - |
| 230/240 | 50/60 | - | - | - |
| 240 | 50/60 | U7 | U7 | U7 |
| | 50 | - | U5 | U5 |
| | 60 | - | U6 | U6 |
| | 40-400 | - | - | - |
| | DC | - | - | - |
| 250 | DC | UD | UD | UD |
| | Low Consump DC | UL | - | - |
| 256 | 50/60 | - | - | - |
| | 50 | - | W5 | - |
| 277 | 50/60 | W7 | - | UE7 |
| | 50 | - | W6 | W6 |
| | 40-400 | - | - | - |
| 380 | 50/60 | Q7 | Q7 | Q7 |
| | 50 | - | - | Q5 |
| | 60 | - | Q6 | Q6 |
| | 40-400 | - | - | - |
| 380/400 | 50/60 | - | - | - |
| | 50 | - | Q5 | - |
| | 60 | - | - | - |
| | 40-400 | - | - | - |
| | DC | - | - | - |
| 380/440 | 40-400 | - | - | - |
| 400 | 50/60 | V7 | V7 | V7 |
| | 50 | - | V5 | V5 |
| | 40-400 | - | - | - |
| 400/415 | 50/60 | - | - | - |
| 415 | 50/60 | N7 | N7 | N7 |
| | 50 | - | N5 | N5 |
| | 40-400 | - | - | - |
| 415-440 | 50 | - | - | - |
| | 40-400 | - | - | - |
| 440 | 50/60 | R7 | R7 | R7 |
| | 50 | - | R5 | R5 |
| | 60 | - | R6 | R6 |
| | 40-400 | - | - | - |
| | DC | RD | RD | RD |
| 440/460 | DC | - | - | - |
| 460/480 | 60 | - | - | - |
| 480 | 50/60 | T7 | - | T7 |
| | 50 | - | - | - |
| | 60 | - | T6 | T6 |
| | 40-400 | - | - | - |
| 500 | 50/60 | S7 | - | S7 |
| | 50 | - | S5 | S5 |
| | 40-400 | - | - | - |
| 575 | 50/60 | SC7 | - | - |
| | 60 | - | S6 | - |

D-line Voltage Code (Continued)

| Voltage | Frequency | D-line (see notes at end of table) | | |
|---------|-----------|--|---|--------------------------------------|
| | | LC1D09 - D38 LC2D09 - D38 Notes D1, D3 | LC1D40 - D95 LC2D40 - D95 Note D1 | LC1D115 - D150 Note D1, D2, D4 |
| 600 | 50/60 | X7 | - | - |
| | 60 | X6 | X6 | - |
| | 40-400 | - | - | - |
| 660 | 50 | Y5 | Y5 | - |
| | 60 | - | - | - |
| 660/690 | 50/60 | - | - | - |

Notes:


D1 For operating ranges refer to technical data section of the D-line contactors. Ranges vary as a function of the current rating of the contactor and type of supply (AC/DC)

D2 LC1-D150 Contactors utilize dual frequency 50/60 Hz. coils only. Single frequency coils are not available.

D3 LC1D09-LC1D38 contactors with DC coil have integral suppression device (bi-directional diode) as standard.

D4 D115 and D150 coils have integral suppression device fitted as standard.

TeSys™ D-Line Contactors and Starters Selection of AC Coils



LXD1•

AC Coils for Contactors LC1D09 to D38 3-pole and 4-pole LC1DT20 to DT40

Specifications

| Control circuit voltage U _c | Average resistance at 20 °C ± 10% | Inductance of closed circuit | Catalog Number (1) | Weight lb (kg) |
|--|-----------------------------------|------------------------------|--------------------|----------------|
| V | Ω | H | 50/60 Hz | |

Average consumption at 20 °C (68 °F):

- inrush (cos φ = 0.75) 70 VA,

- sealed (cos φ = 0.3) 50 Hz: 7 VA, 60 Hz: 7.5 VA.

Operating range (θ ≤ 60 °C / 140 °F): 50 Hz: 0.8 to 1.1 U_c, 60 Hz: 0.85 to 1.1 U_c.


| | | | | |
|--------|-------|------|---------|--------------|
| 12 | 6.3 | 0.26 | LXD1J7 | 0.15 (0.070) |
| 21 (2) | 5.6 | 0.24 | LXD1Z7 | 0.15 (0.070) |
| 24 | 6.19 | 0.26 | LXD1B7 | 0.15 (0.070) |
| 32 | 12.3 | 0.48 | LXD1C7 | 0.15 (0.070) |
| 36 | 12.83 | | LXD1CC7 | 0.15 (0.070) |
| 42 | 19.15 | 0.77 | LXD1D7 | 0.15 (0.070) |
| 48 | 25 | 1 | LXD1E7 | 0.15 (0.070) |
| 60 | 34.6 | – | LXD1EE7 | 0.15 (0.070) |
| 100 | 100.4 | – | LXD1K7 | 0.15 (0.070) |
| 110 | 130 | 5.5 | LXD1F7 | 0.15 (0.070) |
| 115 | 129.8 | – | LXD1FE7 | 0.15 (0.070) |
| 120 | 159 | 6.7 | LXD1G7 | 0.15 (0.070) |
| 127 | 192.5 | 7.5 | LXD1FC7 | 0.15 (0.070) |
| 200 | 410.7 | – | LXD1L7 | 0.15 (0.070) |
| 208 | 417 | 16 | LXD1LE7 | 0.15 (0.070) |
| 220 | 539 | 22 | LXD1M7 | 0.15 (0.070) |
| 230 | 595 | 21 | LXD1P7 | 0.15 (0.070) |
| 240 | 645 | 25 | LXD1U7 | 0.15 (0.070) |
| 277 | 781 | 30 | LXD1W7 | 0.15 (0.070) |
| 380 | 1580 | 60 | LXD1Q7 | 0.15 (0.070) |
| 400 | 1810 | 64 | LXD1V7 | 0.15 (0.070) |
| 415 | 1938 | 74 | LXD1N7 | 0.15 (0.070) |
| 440 | 2242 | 79 | LXD1R7 | 0.15 (0.070) |
| 480 | 2300 | 85 | LXD1T7 | 0.15 (0.070) |
| 575 | 3432 | 119 | LXD1SC7 | 0.15 (0.070) |
| 600 | 3600 | 135 | LXD1X7 | 0.15 (0.070) |
| 690 | 5600 | 190 | LXD1Y7 | 0.15 (0.070) |

(1) The last two digits of the reference represent the voltage code.

(2) Voltage for special coils installed in contactors with serial timer modules, with 24 V supply.

TeSys™ D-Line Contactors and Starters

Selection of AC Coils



LX1D6

AC Coils for 3 or 4-pole Contactors LC1D40, D50, D65, D80, D95

Specifications

| Control circuit voltage U _c | Average resistance at 20 °C ± 10% | Inductance of closed circuit | Catalog Number (1) | Average resistance at 20 °C ± 10% | Inductance of closed circuit | Catalog Number (1) | Weight lb (kg) |
|--|-----------------------------------|------------------------------|--------------------|-----------------------------------|------------------------------|--------------------|----------------|
| V | Ω | H | 50 Hz | W | H | 60 Hz | |

Average consumption at 20 °C (68 °F):
 - inrush (cos φ = 0.75) 50 Hz: 200 VA, 60 Hz: 220 VA,
 - sealed (cos φ = 0.3) 50 Hz: 20 VA, 60 Hz: 22 VA.
 Operating range (θ ≤ 55 °C / 131 °F): 0.85 to 1.1 U_c.

| | | | | | | | |
|---------|------|------|----------|------|------|---------|--------------|
| 24 | 1.4 | 0.09 | LX1D6B5 | 1.05 | 0.06 | LX1D6B6 | 0.61 (0.280) |
| 32 | 2.6 | 0.16 | LX1D6C5 | – | – | – | 0.61 (0.280) |
| 42 | 4.4 | 0.27 | LX1D6D5 | – | – | – | 0.61 (0.280) |
| 48 | 5.5 | 0.35 | LX1D6E5 | 4.2 | 0.23 | LX1D6E6 | 0.61 (0.280) |
| 110 | 31 | 1.9 | LX1D6F5 | 22 | 1.2 | LX1D6F6 | 0.61 (0.280) |
| 115 | 31 | 1.9 | LX1D6FE5 | – | – | – | 0.61 (0.280) |
| 120 | – | – | – | 28 | 1.5 | LX1D6G6 | 0.61 (0.280) |
| 127 | 41 | 2.4 | LX1D6G5 | – | – | – | 0.61 (0.280) |
| 208 | – | – | – | 86 | 4.3 | LX1D6L6 | 0.61 (0.280) |
| 220 | – | – | – | 98 | 4.8 | LX1D6M6 | 0.61 (0.280) |
| 220/230 | 127 | 7.5 | LX1D6M5 | – | – | – | 0.61 (0.280) |
| 230 | 133 | 8.1 | LX1D6P5 | – | – | – | 0.61 (0.280) |
| 240 | 152 | 8.7 | LX1D6U5 | 120 | 5.7 | LX1D6U6 | 0.61 (0.280) |
| 256 | 166 | 10 | LX1D6W5 | – | – | – | 0.61 (0.280) |
| 277 | – | – | – | 157 | 8 | LX1D6W6 | 0.61 (0.280) |
| 380 | – | – | – | 300 | 14 | LX1D6Q6 | 0.61 (0.280) |
| 380/400 | 381 | 22 | LX1D6Q5 | – | – | – | 0.61 (0.280) |
| 400 | 411 | 25 | LX1D6V5 | – | – | – | 0.61 (0.280) |
| 415 | 463 | 26 | LX1D6N5 | – | – | – | 0.61 (0.280) |
| 440 | 513 | 30 | LX1D6R5 | 392 | 19 | LX1D6R6 | 0.61 (0.280) |
| 480 | – | – | – | 480 | 23 | LX1D6T6 | 0.61 (0.280) |
| 500 | 668 | 38 | LX1D6S5 | – | – | – | 0.61 (0.280) |
| 575 | – | – | – | 675 | 33 | LX1D6S6 | 0.61 (0.280) |
| 600 | – | – | – | 775 | 36 | LX1D6X6 | 0.61 (0.280) |
| 660 | 1220 | 67 | LX1D6Y5 | – | – | – | 0.61 (0.280) |


Specifications

Average consumption at 20 °C (68 °F):
 - inrush (cos φ = 0.75) 50/60 Hz: 245 VA at 50 Hz,
 - sealed (cos φ = 0.3) 50/60 Hz: 26 VA at 50 Hz.
 Operating range (θ ≤ 55 °C / 131 °F): 0.85 to 1.1 U_c.

| | | | | | | 50/60 Hz | |
|-------------|---|---|---|------|------|----------|--------------|
| 24 | – | – | – | 1.22 | 0.08 | LX1D6B7 | 0.61 (0.280) |
| 42 | – | – | – | 3.5 | 0.25 | LX1D6D7 | 0.61 (0.280) |
| 48 | – | – | – | 5 | 0.32 | LX1D6E7 | 0.61 (0.280) |
| 110 | – | – | – | 26 | 1.7 | LX1D6F7 | 0.61 (0.280) |
| 115 | – | – | – | – | – | LX1D6FE7 | 0.61 (0.280) |
| 120 | – | – | – | 32 | 2 | LX1D6G7 | 0.61 (0.280) |
| 208 | – | – | – | 88.7 | 4.42 | LC1D6LE7 | 0.61 (0.280) |
| 220/230 (2) | – | – | – | 102 | 6.7 | LX1D6M7 | 0.61 (0.280) |
| 230 | – | – | – | 115 | 7.7 | LX1D6P7 | 0.61 (0.280) |
| 230/240 (3) | – | – | – | 131 | 8.3 | LX1D6U7 | 0.61 (0.280) |
| 380/400 (4) | – | – | – | 310 | 20 | LX1D6Q7 | 0.61 (0.280) |
| 400 | – | – | – | 349 | 23 | LX1D6V7 | 0.61 (0.280) |
| 415 | – | – | – | 390 | 24 | LX1D6N7 | 0.61 (0.280) |
| 440 | – | – | – | 410 | 27 | LX1D6R7 | 0.61 (0.280) |

- (1) The last two digits of the reference represent the voltage code.
- (2) For use on 230 V 50 Hz, apply a coefficient of 0.6 to the mechanical durability of the contactor (see page 82). This coil can be used on 240 V at 60 Hz.
- (3) This coil can be used on 220/240 V at 50 Hz and on 240 V only at 60 Hz.
- (4) For use on 400 V 50 Hz, apply a coefficient of 0.6 to the mechanical durability of the contactor.

TeSys™ D-Line Contactors and Starters Selection of AC Coils

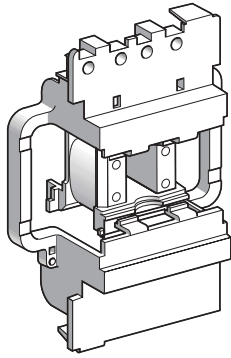

LX1D8..

AC Coils for 3 or 4-pole Contactors LC1D115

| Control circuit voltage U _c | Average resistance at 20 °C ± 10% | Inductance of closed circuit | Catalog Number(1) | Average resistance at 20 °C ± 10% | Inductance of closed circuit | Catalog Number (1) | Weight lb (kg) |
|--|-----------------------------------|------------------------------|-------------------|-----------------------------------|------------------------------|--------------------|----------------|
| V | Ω | H | 50 Hz | Ω | H | 60 Hz | kg |

Specifications

Average consumption at 20 °C (68 °F):
 - inrush (cos φ = 0.8) - 50 or 60 Hz: 300 VA,
 - sealed (cos φ = 0.3) - 50 or 60 Hz: 22 VA.
 Operating range (θ ≤ 55 °C / 131 °F): 0.85 to 1.1 U_c.

| | | | | | | | |
|-----|--------|-------|----------|--------|-------|---------|--------------|
| 24 | 1.24 | 0.09 | LX1D8B5 | 0.87 | 0.07 | LX1D8B6 | 0.57 (0.260) |
| 32 | 2.14 | 0.17 | LX1D8C5 | – | – | – | 0.57 (0.260) |
| 42 | 3.91 | 0.28 | LX1D8D5 | – | – | – | 0.57 (0.260) |
| 48 | 4.51 | 0.36 | LX1D8E5 | 3.91 | 0.28 | LX1D8E6 | 0.57 (0.260) |
| 110 | 26.53 | 2.00 | LX1D8F5 | 19.97 | 1.45 | LX1D8F6 | 0.57 (0.260) |
| 115 | 26.53 | 2.00 | LX1D8FE5 | – | – | – | 0.57 (0.260) |
| 120 | – | – | – | 24.02 | 1.70 | LX1D8G6 | 0.57 (0.260) |
| 127 | 32.75 | 2.44 | LX1D8FC5 | – | – | – | 0.57 (0.260) |
| 208 | – | – | – | 67.92 | 5.06 | LX1D8L6 | 0.57 (0.260) |
| 220 | 104.77 | 7.65 | LX1D8M5 | 79.61 | 5.69 | LX1D8M6 | 0.57 (0.260) |
| 230 | 104.77 | 8.29 | LX1D8P5 | – | – | – | 0.57 (0.260) |
| 240 | 125.25 | 8.89 | LX1D8U5 | 97.04 | 6.75 | LX1D8U6 | 0.57 (0.260) |
| 277 | – | – | – | 125.75 | 8.89 | LX1D8W6 | 0.57 (0.260) |
| 380 | 338.51 | 22.26 | LX1D8Q5 | 243.07 | 17.04 | LX1D8Q6 | 0.57 (0.260) |
| 400 | 368.43 | 25.55 | LX1D8V5 | – | – | – | 0.57 (0.260) |
| 415 | 368.43 | 27.65 | LX1D8N5 | – | – | – | 0.57 (0.260) |
| 440 | 441.56 | 30.34 | LX1D8R5 | 338.51 | 22.26 | LX1D8R6 | 0.57 (0.260) |
| 480 | – | – | – | 368.43 | 25.55 | LX1D8T6 | 0.57 (0.260) |
| 500 | 566.62 | 38.12 | LX1D8S5 | – | – | – | 0.57 (0.260) |

For 3 or 4-pole contactors LC1D115, D150

Specifications


Average consumption at 20 °C (68 °F):
 - inrush: cos φ = 0.9 - 280 to 350 VA,
 - sealed: cos φ = 0.9 - 2 to 18 VA.
 Operating range (θ ≤ 55 °C / 131 °F): 0.8 to 1.15 U_c.
 Coils with integral suppression device fitted as standard, class B.

| | | | | | | 50/60 Hz | |
|-----|---|---|---|--------|--------|----------|--------------|
| 24 | – | – | – | 147 | 3.03 | LX1D8B7 | 0.64 (0.290) |
| 32 | – | – | – | 301 | 8.28 | LX1D8C7 | 0.64 (0.290) |
| 42 | – | – | – | 498 | 13.32 | LX1D8D7 | 0.64 (0.290) |
| 48 | – | – | – | 1061 | 24.19 | LX1D8E7 | 0.64 (0.290) |
| 110 | – | – | – | 4377 | 109.69 | LX1D8F7 | 0.64 (0.290) |
| 115 | – | – | – | 4377 | 109.69 | LX1D8FE7 | 0.64 (0.290) |
| 120 | – | – | – | 4377 | 109.69 | LX1D8G7 | 0.64 (0.290) |
| 127 | – | – | – | 6586 | 152.65 | LX1D8FC7 | 0.64 (0.290) |
| 208 | – | – | – | 10 895 | 260.15 | LX1D8LE7 | 0.64 (0.290) |
| 220 | – | – | – | 9895 | 210.72 | LX1D8M7 | 0.64 (0.290) |
| 230 | – | – | – | 9895 | 210.72 | LX1D8P7 | 0.64 (0.290) |
| 240 | – | – | – | 9895 | 210.72 | LX1D8U7 | 0.64 (0.290) |
| 277 | – | – | – | 21 988 | 533.17 | LX1D8UE7 | 0.64 (0.290) |
| 380 | – | – | – | 21 011 | 482.42 | LX1D8Q7 | 0.64 (0.290) |
| 400 | – | – | – | 21 011 | 482.42 | LX1D8V7 | 0.64 (0.290) |
| 415 | – | – | – | 21 011 | 482.42 | LX1D8N7 | 0.64 (0.290) |
| 440 | – | – | – | 21 501 | 507.47 | LX1D8R7 | 0.64 (0.290) |
| 480 | – | – | – | 32 249 | 938.41 | LX1D8T7 | 0.64 (0.290) |
| 500 | – | – | – | 32 249 | 938.41 | LX1D8S7 | 0.64 (0.290) |

(1) The last two characters of the reference represent the voltage code.

TeSys™ D-Line Contactors and Starters

Selection of DC Coils




LX4D6●●

DC Coils for 3-pole Contactors LC1D40 to D65 or 4-pole Contactors LP1D65

| Control circuit voltage U _c | Average resistance at 20 °C ± 10% | Inductance of closed circuit | Catalog Number (1) | Weight lb (kg) |
|---|-----------------------------------|------------------------------|--------------------|----------------|
| V | Ω | H | | |
| Specifications | | | | |
| Average consumption: 22 W. Operating range: 0.85 to 1.1 U _c . | | | | |
| 12 | 7.1 | 0.44 | LX4D6JD | 0.91 (0.415) |
| 24 | 26.8 | 1.69 | LX4D6BD | 0.91 (0.415) |
| 36 | 58 | 3.55 | LX4D6CD | 0.91 (0.415) |
| 48 | 109 | 6.86 | LX4D6ED | 0.91 (0.415) |
| 60 | 173 | 10.9 | LX4D6ND | 0.91 (0.415) |
| 72 | 234 | 14.7 | LX4D6SD | 0.91 (0.415) |
| 110 | 560 | 35.28 | LX4D6FD | 0.91 (0.415) |
| 125 | 717 | 45.2 | LX4D6GD | 0.91 (0.415) |
| 220 | 2255 | 142 | LX4D6MD | 0.91 (0.415) |
| 250 | 2940 | 185 | LX4D6UD | 0.91 (0.415) |
| 440 | 9080 | 572 | LX4D6RD | 0.91 (0.415) |

For 3-pole contactors LC1D80 or 4-pole contactors LP1D80


| Specifications | | | | |
|---|------|------|---------|--------------|
| Average consumption: 22 W. Operating range: 0.85 to 1.1 U _c . | | | | |
| 12 | 6.6 | 0.46 | LX4D7JD | 1.50 (0.680) |
| 24 | 27 | 1.89 | LX4D7BD | 1.50 (0.680) |
| 36 | 57 | 4 | LX4D7CD | 1.50 (0.680) |
| 48 | 107 | 7.5 | LX4D7ED | 1.50 (0.680) |
| 60 | 170 | 11.9 | LX4D7ND | 1.50 (0.680) |
| 72 | 230 | 16.1 | LX4D7SD | 1.50 (0.680) |
| 110 | 564 | 39.5 | LX4D7FD | 1.50 (0.680) |
| 125 | 718 | 50.3 | LX4D7GD | 1.50 (0.680) |
| 220 | 2215 | 155 | LX4D7MD | 1.50 (0.680) |
| 250 | 2850 | 200 | LX4D7UD | 1.50 (0.680) |
| 440 | 9195 | 640 | LX4D7RD | 1.50 (0.680) |



LX4D7●●

(1)1 The last two characters of the reference represent the voltage code.

TeSys™ D-Line Contactors and Starters Selection of DC Coils



LX4D8•D

DC Coils for 3 or 4-pole Contactors LC1D115, D150


| Control circuit voltage U _c | Average resistance at 20 °C ± 10% | Inductance of closed circuit | Catalog Number(1) | Weight lb (kg) |
|--|-----------------------------------|------------------------------|-------------------|----------------|
| V | Ω | H | | |

Specifications

Consumption: inrush 270 to 365 W, sealed 2.4 to 5.1 W.
Operating range: 0.7 to 1.2 U_c.
Coils have integral suppression device as standard, class B.

| | | | | |
|-----|--------|--------|---------|--------------|
| 24 | 147 | 3.03 | LX4D8BD | 0.66 (0.300) |
| 48 | 1061 | 24.19 | LX4D8ED | 0.66 (0.300) |
| 60 | 1673 | 38.44 | LX4D8ND | 0.66 (0.300) |
| 72 | 2500 | 56.27 | LX4D8SD | 0.66 (0.300) |
| 110 | 4377 | 109.69 | LX4D8FD | 0.66 (0.300) |
| 125 | 6586 | 152.65 | LX4D8GD | 0.66 (0.300) |
| 220 | 9895 | 210.72 | LX4D8MD | 0.66 (0.300) |
| 250 | 18 022 | 345.40 | LX4D8UD | 0.66 (0.300) |
| 440 | 21 501 | 684.66 | LX4D8RD | 0.66 (0.300) |

(1) The last two characters of the reference represent the voltage code.



LX4D6••

Wide Range DC Coils for 3-pole Contactors LC1D40 to D65 or 4-pole Contactors LP1 to D65

| Control circuit voltage U _c | Average resistance at 20 °C ± 10% | Inductance of closed circuit | Catalog Number(1) | Weight lb (kg) |
|--|-----------------------------------|------------------------------|-------------------|----------------|
| V | Ω | H | | |

Specifications

Average consumption: 22 W.
Operating range: 0.75 to 1.2 U_c.
Coils with "TH" treatment as standard.

| | | | | |
|-----|------|------|---------|--------------|
| 12 | 6.8 | 0.45 | LX4D6JW | 0.91 (0.415) |
| 24 | 30 | 1.9 | LX4D6BW | 0.91 (0.415) |
| 36 | 53 | 3.5 | LX4D6CW | 0.91 (0.415) |
| 48 | 110 | 7.2 | LX4D6EW | 0.91 (0.415) |
| 72 | 215 | 14.2 | LX4D6SW | 0.91 (0.415) |
| 110 | 580 | 38.3 | LX4D6FW | 0.91 (0.415) |
| 220 | 2120 | 140 | LX4D6MW | 0.91 (0.415) |

For 3-pole contactors LC1D80 or 4-pole contactors LP1D80

Specifications

Average consumption: 23 W.
Operating range: 0.75 to 1.2 U_c.
Coils with "TH" treatment as standard.

| | | | | |
|-----|------|------|---------|--------------|
| 12 | 6.2 | 0.49 | LX4D7JW | 1.50 (0.680) |
| 24 | 23.5 | 1.75 | LX4D7BW | 1.50 (0.680) |
| 36 | 51.9 | 4.18 | LX4D7CW | 1.50 (0.680) |
| 48 | 94.2 | 7 | LX4D7EW | 1.50 (0.680) |
| 72 | 204 | 15.7 | LX4D7SW | 1.50 (0.680) |
| 110 | 483 | 36 | LX4D7FW | 1.50 (0.680) |
| 220 | 1922 | 144 | LX4D7MW | 1.50 (0.680) |

(1) The last two characters of the reference represent the voltage code.

TeSys™ D-Line Contactors and Starters

Dimensions for Type LC1D Contactors

D-Line Contactors AC Control Circuits

| LC1D09 to D18 (3-pole) | | LC1D25 to D38 (3-pole) LC1D20 to DT40 (4-pole) | | | | | | | | |
|------------------------|---------------------------------------|---|----------------|------------------|----------------|----------------|---------------|-----------------|--------------|-----------------|
| | | | | | | | | | | |
| LC1 | | D09 to D18 | D093 to D183 | D099 to D189 | D25 to D38 | D253 and D323 | DT20 and DT25 | DT203 and DT253 | DT32 to DT40 | DT323 and DT403 |
| b | without add-on blocks | 3.03 (77) | 3.89 (99) | 3.14 (80) | 3.36 (85) | 3.89 (99) | 3.34 (85) | 3.89 (99) | 3.58 (91) | 4.13 (105) |
| b1 | with LAD4BB | 3.70 (94) | 4.21 (107) | 3.75 (95.5) | 3.85 (98) | 4.21 (107) | 3.85 (98) | — | — | — |
| | with LA4D•2 | 4.33 (110) (1) | 4.84 (123) (1) | 4.30 (111.5) (1) | 4.48 (114) (1) | 4.84 (123) (1) | 4.48 (114) | — | — | — |
| | with LA4DF, DT | 4.68 (119) (1) | 5.19 (132) (1) | 4.76 (120.5) (1) | 4.84 (123) (1) | 5.19 (132) (1) | 5.02 (129) | — | — | — |
| | with LA4DR, DW, DL | 4.96 (126) (1) | 5.67 (139) (1) | 5.0 (127.5) (1) | 5.11 (130) (1) | 5.47 (139) (1) | 7.48 (190) | — | — | — |
| c | without cover or add-on blocks | 3.30 (84) | 3.30 (84) | 3.30 (84) | 3.54 (90) | 3.54 (90) | 3.54 (90) | 3.54 (90) | 3.85 (98) | 3.85 (98) |
| | with cover, without add-on blocks | 3.38 (86) | 3.38 (86) | 3.38 (86) | 3.62 (92) | 3.62 (92) | 3.62 (92) | 3.62 (92) | 3.93 (100) | 3.93 (100) |
| c1 | with LADN or C (two or four contacts) | 4.60 (117) | 4.60 (117) | 4.60 (117) | 4.84 (123) | 4.84 (123) | 4.84 (123) | 4.84 (123) | 5.15 (131) | 5.15 (131) |
| c2 | with LA6DK10, LAD6K10 | 5.07 (129) | 5.07 (129) | 5.07 (129) | 5.31 (135) | 5.31 (135) | 5.31 (135) | 5.31 (135) | 5.62 (143) | 5.62 (143) |
| c3 | with LADT, R, S | 5.39 (137) | 5.39 (137) | 5.39 (137) | 5.62 (143) | 5.62 (143) | 5.62 (143) | 5.62 (143) | 5.94 (151) | 5.94 (151) |
| | with LADT, R, S and sealing cover | 5.55 (141) | 5.59 (141) | 5.55 (141) | 5.78 (147) | 5.78 (147) | 5.78 (147) | 5.78 (147) | 6.10 (155) | 6.10 (155) |

(1) Including LAD4BB


| LC1D40 to D65 (3-pole) | | LC1D80 and D95 (3-pole) | | | | | |
|---------------------------------------|---------------------------------------|-------------------------------|------------|------------|------------|------------|------------|
| LC1D65004, D40008 and D65008 (4-pole) | | LC1D80004 and D80008 (4-pole) | | | | | |
| | | | | | | | |
| LC1 | | D40 to D65 | D40008 | D80 D65004 | D95 D65008 | D80004 | D80008 |
| a | | 2.95 (75) | 3.34 (85) | 3.34 (85) | 3.34 (85) | 96 | 96 |
| b1 | with LA4D•2 | 5.31 (135) | 5.31 (135) | 5.31 (135) | 5.31 (135) | 5.31 (135) | 5.31 (135) |
| | with LA4DB3 | — | — | 5.31 (135) | — | — | — |
| | with LA4DF, DT | 5.59 (142) | 5.59 (142) | 5.59 (142) | 5.59 (142) | 5.59 (142) | 5.59 (142) |
| | with LA4DM, DR, DW, DL | 5.90 (150) | 5.90 (150) | 5.90 (150) | 5.90 (150) | 5.90 (150) | 5.90 (150) |
| c | without cover or add-on blocks | 4.72 (114) | 4.92 (125) | 4.92 (125) | 4.92 (125) | 4.92 (125) | 5.51 (140) |
| | with cover, without add-on blocks | 4.68 (119) | — | 5.11 (130) | 5.11 (130) | — | — |
| c1 | with LADN (one contact) | 5.47 (139) | 5.47 (139) | 5.90 (150) | 5.90 (150) | 5.90 (150) | 5.90 (150) |
| | with LADN or C (two or four contacts) | 5.78 (147) | 5.78 (147) | 6.22 (158) | 6.22 (158) | 6.22 (158) | 6.22 (158) |
| c2 | with LA6DK | 6.25 (159) | 6.25 (159) | 6.69 (170) | 6.69 (170) | 6.69 (170) | 6.69 (170) |
| c3 | with LADT, R, S | 6.57 (167) | 6.57 (167) | 7.00 (178) | 7.00 (178) | 7.00 (178) | 7.00 (178) |
| | with LADT, R, S and sealing cover | 6.73 (171) | 6.73 (171) | 7.16 (182) | 7.16 (182) | 7.16 (182) | 7.16 (182) |

| LC1D115 and D150 (3-pole) | | LC1D115004 (4-pole) | | | | |
|---------------------------|---------------------------------------|---------------------|------------|------------|------------|------------|
| | | | | | | |
| LC1 | | D115 D150 | D115004 | D115006 | D150006 | D1150046 |
| a | | 4.72 (120) | 5.90 (150) | 4.72 (120) | 4.72 (120) | 6.10 (155) |
| b1 | with LA4DA2 | 6.85 (174) | 6.85 (174) | 6.85 (174) | 6.85 (174) | 6.85 (174) |
| | with LA4DF, DT | 7.28 (185) | 7.28 (185) | 7.28 (185) | 7.28 (185) | 7.28 (185) |
| | with LA4DM, DR, DL | 7.40 (188) | 7.40 (188) | 7.40 (188) | 7.40 (188) | 7.40 (188) |
| | with LA4DW | 7.40 (188) | 7.40 (188) | 7.40 (188) | — | 7.40 (188) |
| c | without cover or add-on blocks | 5.19 (132) | 5.19 (132) | 4.52 (115) | 4.52 (115) | 4.52 (115) |
| | with cover, without add-on blocks | 5.35 (136) | — | — | — | — |
| c1 | with LADN or C (two or four contacts) | 5.90 (150) | 5.90 (150) | 5.90 (150) | 5.90 (150) | 5.90 (150) |
| c2 | with LA6DK20 | 6.10 (155) | 6.10 (155) | 6.10 (155) | 6.10 (155) | 6.10 (155) |
| c3 | with LADT, R, S | 6.61 (168) | 6.61 (168) | 6.61 (168) | 6.61 (168) | 6.61 (168) |
| | with LADT, R, S and sealing cover | 6.77 (172) | 6.77 (172) | 6.77 (172) | 6.77 (172) | 6.77 (172) |


Selection: pages 142, 143 Characteristics: pages 84, 85 Schematics: pages 126, 127

TeSys™ D-Line Contactors and Starters Dimensions for Type LC1D Contactors


D-Line Contactors DC Control Circuit or Low Consumption

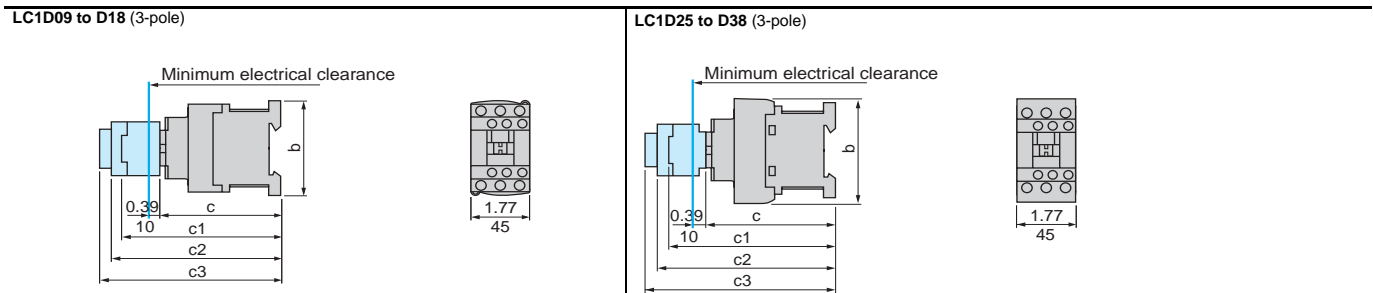

| LC1 | D09 to D18 | D093 to D183 | D099 to D189 | D25 to D38 | D253 and D383 |
|-----|---------------------------------------|--------------|--------------|------------|---------------|
| b | 3.03 (77) | 3.89 (99) | 3.30 (80) | 3.34 (85) | 3.89 (99) |
| c | without cover or add-on blocks | 3.66 (93) | 3.66 (93) | 3.89 (99) | 3.89 (99) |
| | with cover, without add-on blocks | 3.76 (95) | 3.76 (95) | 3.97 (101) | 3.97 (101) |
| c1 | with LADN or C (two or four contacts) | 4.96 (126) | 4.96 (126) | 5.19 (132) | 5.19 (132) |
| c2 | with LA6DK10 | 5.43 (138) | 5.43 (138) | 5.66 (144) | 5.66 (144) |
| c3 | with LADT, R, S | 5.76 (146) | 5.76 (146) | 5.98 (152) | 5.98 (152) |
| | with LADT, R, S and sealing cover | 5.90 (150) | 5.76 (146) | 5.76 (146) | 6.14 (156) |

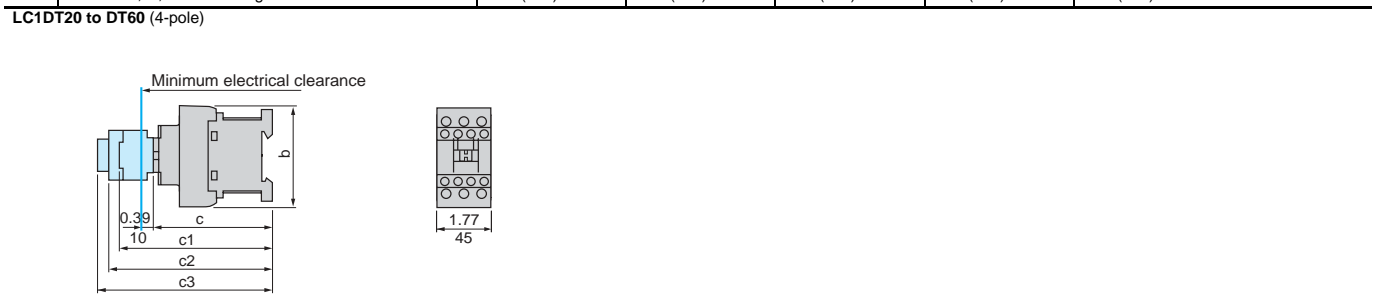

| LC1 | DT20 and DT25 D098 and D128 | DT203 and DT253 D0983 and D1283 | DT32 to DT40 D188 to D258 | DT323 and DT403 D1883 and D2583 |
|-----|---------------------------------------|------------------------------------|------------------------------|------------------------------------|
| b | 3.34 (85) | 3.89 (99) | 3.58 (91) | 4.13 (105) |
| c | with cover | 3.56 (90) | 3.54 (98) | 3.54 (98) |
| c1 | with LADN or C (two or four contacts) | 4.84 (123) | 5.15 (131) | 5.15 (131) |
| c2 | with LA6DK10 | 5.31 (135) | 5.62 (143) | 5.62 (143) |
| c3 | with LADT, R, S | 5.62 (143) | 5.94 (151) | 5.94 (151) |
| | with LADT, R, S and sealing cover | 5.78 (147) | 5.78 (147) | 6.10 (155) |

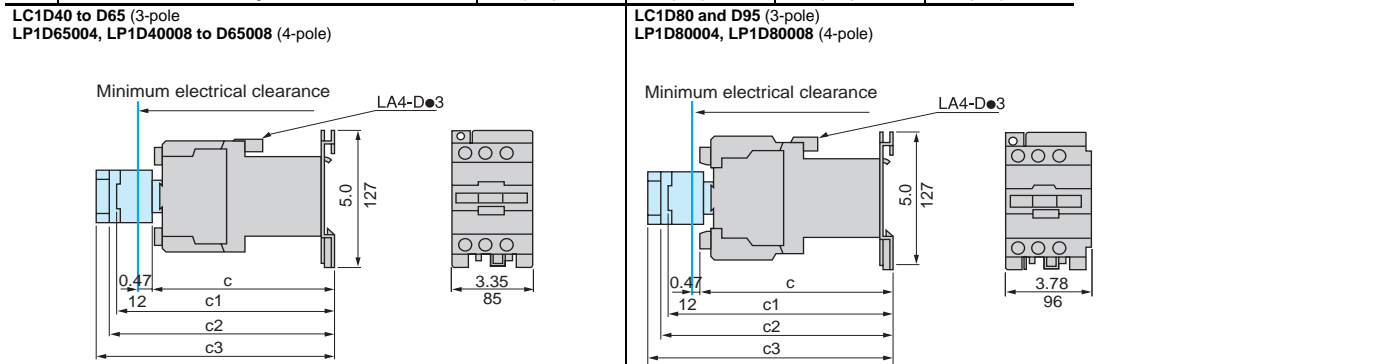

| | LC1 D40 to D65 | LP1D65004 | LP1D40008 and D65008 | LC1 D80 and D95 | LP1 D80004 | LP1 D80008 |
|----|-----------------------------------|------------|-------------------------|--------------------|---------------|---------------|
| c | without cover or add-on blocks | 6.73 (171) | 6.73 (171) | 7.40 (181) | 7.40 (181) | – |
| | with cover, without add-on blocks | 6.92 (176) | – | 7.32 (186) | – | 8.03 (204) |
| c1 | with LADN (1 contact) | 7.71 (196) | 7.71 (196) | 8.03 (204) | 8.03 (204) | 8.26 (210) |
| | with LADN or C (2 or 4 contacts) | 7.95 (202) | 7.95 (202) | 8.26 (210) | 8.26 (210) | 8.70 (221) |
| c2 | with LA6DK10 | 8.38 (213) | 8.38 (213) | 8.70 (221) | 8.70 (221) | 9.01 (229) |
| c3 | with LADT, R, S | 8.70 (221) | 8.70 (221) | 9.01 (229) | 9.01 (229) | 9.17 (233) |

Selection: pages 92


Characteristics: pages 80 - 87

Schematics: pages 126, 127

TeSys™ D-Line Contactors and Starters

Mounting Information for Type LC1D and LP1D Contactors

On mounting rail AM1DP200, DR200 or AM1DE200 (width 35 mm)
LC1D09 to D38, DT20 to DT60

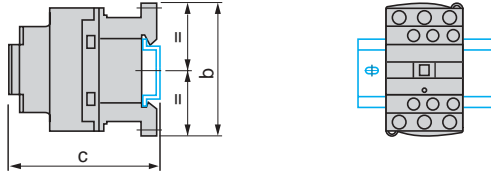


| LC1 | D09 to D18 | D25 to D38 | DT20 and DT25 | DT32 to DT40 |
|---------------------------|------------|------------|---------------|--------------|
| b | 3.03 (77) | 3.36 (85) | 3.36 (85) | 3.93 (100) |
| c (AM1DP200 or DR200) (1) | 3.46 (88) | 3.70 (94) | 3.70 (94) | 4.29 (109) |
| c (AM1DE200) (1) | 3.77 (96) | 4.01 (102) | 4.01 (102) | 4.60 (117) |

dc control circuit


| | | | | |
|---------------------------|------------|------------|------------|------------|
| b | 3.03 (77) | 3.36 (85) | 3.70 (94) | 4.29 (109) |
| c (AM1DP200 or DR200) (1) | 3.81 (97) | 4.05 (103) | 4.05 (103) | 4.64 (118) |
| c (AM1DE200) (1) | 4.13 (105) | 4.33 (110) | 4.37 (111) | 4.84 (123) |

(1) with safety cover

On two mounting rails DZ5MB at 120 mm center
LC1D115, D150

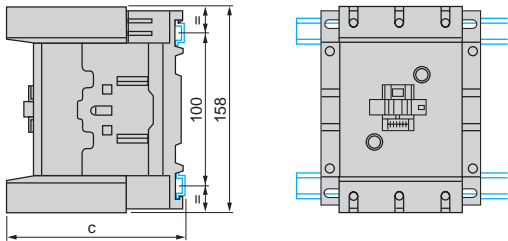

On two mounting rails DZ5MB at 120 mm center
LC1D40 to D95, LP1D40 to D80

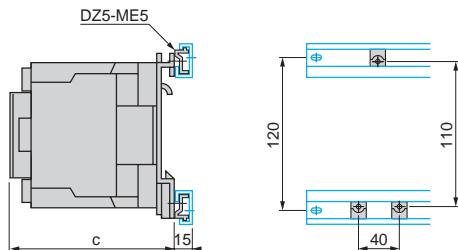

ac control circuit

| LC1 | D40 to D65 | D80 and D95 |
|--------------|------------|-------------|
| c with cover | 4.70 (119) | 5.11 (130) |

dc control circuit


| LC1 | D40 to D65 | D80 and D95 |
|--------------|-------------|-------------|
| c with cover | 6.92 (176) | 7.32 (186) |
| LP1 | D40 and D65 | D80 |
| c | 6.73 (171) | 7.12 (181) |

Selection: pages 88

Characteristics: pages 80 - 87

Schematics: pages 126, 127

On mounting rail AM1DL200 or DL201 (width 75 mm)
 On mounting rail AM1ED*** or AM1DE200 (width 35 mm)
LC1D40 to D95, LP1D40 to D80

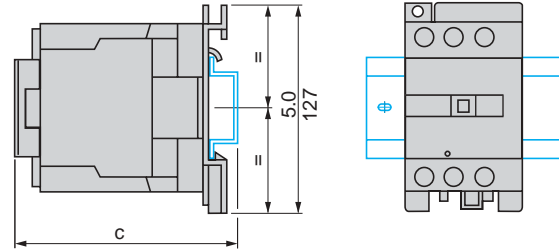

ac control circuit

| LC1 | D40 to D65 | D80 and D95 |
|---------------------------|------------|-------------|
| c (AM1DL200) (1) | 5.35 (136) | 5.78 (147) |
| c (AM1DL201) (1) | 4.96 (126) | 5.39 (137) |
| c (AM1ED*** or DE200) (1) | 4.96 (126) | 5.39 (137) |

dc control circuit

| LC1 | D40 to D65 | D80 and D95 |
|------------------|------------|-------------|
| c (AM1DL200) (1) | 7.59 (193) | 7.99 (203) |
| c (AM1DL201) (1) | 7.20 (183) | 7.99 (203) |

| LP1 | D40 | D65 | D80 |
|--------------|------------|------------|------------|
| c (AM1DL200) | 7.40 (188) | 7.40 (188) | 7.78 (198) |
| c (AM1DL201) | 7.00 (178) | 7.00 (178) | 7.78 (198) |

(1) with safety cover

ac or dc control circuit


| LC1 | D115 and D150 | D1156 and D1506 |
|-----------------------|---------------|-----------------|
| c (AM1DP200 or DR200) | 134.5 | 117.5 |
| c (AM1DE200 or ED***) | 142.5 | 125.5 |

TeSys™ D-Line Contactors and Starters

Mounting Information for Type LC1D and LP1D Contactors

LC1D09 to D38 and LC1DT20 to DT60


On two mounting rails DZ5MB

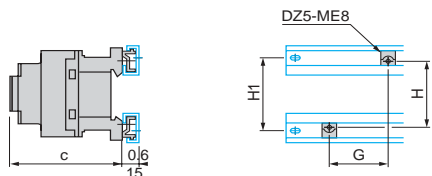

| Control circuit: | | ac | | dc | |
|-------------------|---------------|-------------------|---------------|--------------|--|
| LC1 | D09 to D18 | D25 to D38 | D09 to D18 | D25 to D38 | |
| c with cover | 3.38 (86) | 3.62 (92) | 3.76 (95) | 3.97 (101) | |
| G | 1.37 (35) | 1.37 (35) | 1.37 (35) | 1.37 (35) | |
| H | 2.36 (60) | 2.36 (60) | 2.36 (60) | 2.36 (60) | |
| H1 | 2.75 (70) | 2.75 (70) | 2.75 (70) | 2.75 (70) | |
| 4-pole contactors | | | | | |
| LC1 | DT20 and DT25 | DT32 to DT60 | DT20 and DT25 | DT32 to DT60 | |
| c | 3.62 (92) | 3.93 (100) | 3.97 (101) | 4.29 (109) | |
| G | 5.31 (135) | 1.57/1.96 (40/50) | 1.37 (35) | 1.37 (35) | |
| H | 2.36 (60) | 2.36 (60) | 2.36 (60) | 2.36 (60) | |
| H1 | 2.75 (70) | 2.75 (70) | 2.75 (70) | 2.75 (70) | |

LC1D09 to D38 and LC1DT20 to DT60


On pre-slotted mounting plate AM1PA, PB, PC

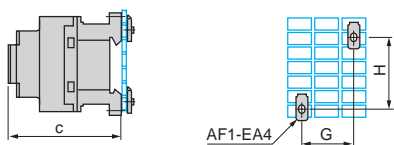

| Control circuit: | | ac | | dc | |
|-------------------|------------|------------|------------|------------|--|
| LC1 | D09 to D18 | D25 to D38 | D09 to D18 | D25 to D38 | |
| c with cover | 3.38 (86) | 3.62 (92) | 3.76 (95) | 3.97 (101) | |
| G | 1.37 (35) | 1.37 (35) | 1.37 (35) | 1.37 (35) | |
| c with cover | 3.38 (86) | 3.62 (92) | 3.74 (95) | 3.97 (101) | |
| 4-pole contactors | | | | | |

LC1D40 to D95, LP1D40 to D80


On pre-slotted mounting plate AM1PA, PB, PC

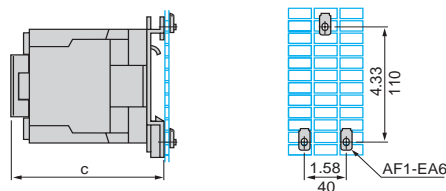

| Control circuit: | | ac | | | | dc | | | |
|------------------|---------------|--------------|---------------|--------------|-----------------|------------|-------------|-------------|-------------|
| LC1 | DT20 and DT25 | DT32 to DT60 | DT20 and DT25 | DT32 to DT60 | LC1 | D40 to D65 | D80 and D95 | D40 to D65 | D80 and D95 |
| c | 3.14 (80) | 3.66 (93) | 4.64 (118) | 5.19 (132) | c with cover | 4.68 (119) | 5.11 (130) | 6.92 (176) | 7.32 (186) |
| G | 1.37 (35) | 1.37 (35) | 1.37 (35) | 1.37 (35) | LP1 | - | - | D40 and D65 | D80 |
| H | 2.36 (60) | 2.36 (60) | 2.36 (60) | 2.36 (60) | c without cover | - | - | 6.73 (171) | 7.12 (181) |


Note: Units with DC coils have round mounting holes ONLY and are spaced at 70 mm.

LC1D09 to D38 Panel mounted

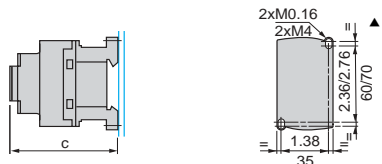

| Control circuit: | | ac | | dc | |
|-------------------|------------|------------|------------|------------|--|
| LC1 | D09 to D18 | D25 to D38 | D09 to D18 | D25 to D38 | |
| c with cover | 3.38 (86) | 3.62 (92) | 3.76 (95) | 3.97 (101) | |
| 4-pole contactors | | | | | |


LC1D40 to D95, LP1D40 to D80 Panel mounted

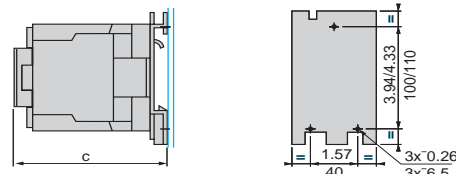

| Control circuit: | | ac | | dc | |
|------------------|------------|-------------|-------------|-------------|--|
| LC1 | D40 to D65 | D80 and D95 | D40 to D65 | D80 and D95 | |
| c with cover | 4.68 (119) | 5.11 (130) | 6.92 (176) | 7.92 (186) | |
| LP1 | - | - | D40 and D65 | D80 | |
| c without cover | - | - | 6.73 (171) | 7.12 (181) | |

LC1D115, D150

Panel mounted

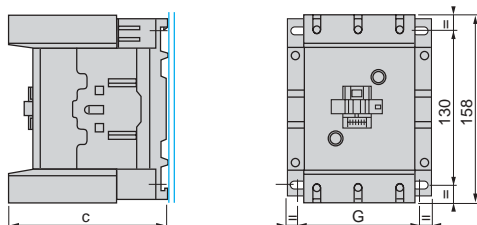

| LC1 | D115 | D1156 | D150 | D1506 |
|------------|---------------------|---------------------|--------------------|--------------------|
| c | 5.19 (132) | 4.52 (115) | 5.19 (132) | 4.52 (115) |
| G (3-pole) | 3.77/4.33 (96/110) | 3.77/4.33 (96/110) | 3.77/4.33 (96/110) | 3.77/4.33 (96/110) |
| G (4-pole) | 5.11/5.66 (130/144) | 5.11/5.66 (130/144) | - | - |

Selection: pages 88

Characteristics: pages 80 - 87

Schematics: pages 126, 127

▲ Units with DC coils have round mounting holes ONLY and are spaced at 70 mm.



TeSys™ D-Line Contactors and Starters

Schematics for Type LC1D Contactors

3-Pole Contactors

AC Magnetic 3-Pole Contactor with Overload Relay

LC1D09 to D150






4-Pole Contactors

LC1 and LP1
D12004 to D80004
LC1D115004

LC1 and LP1
D12008 to D25008

LC1 and LP1
D40008 to D80008



Front Mounting Add-on Contact Blocks Instantaneous Auxiliary Contacts

| | | | |
|---------------------|--|------------------------------|------------------|
| One N.O. LADN10 (1) | One N.C. LADN01 (1) | One N.O. + 1 N.C. LADN11 | Two N.O. LADN20 |
| | | | |
| Two N.C. LADN02 | Two N.O. + two N.C. LADN22 | One N.O. + three N.C. LADN13 | Four N.O. LADN40 |
| | | | |
| Four N.C. LADN04 | Two N.O. + two N.C. including one N.O. + one N.C. make before break LADC22 | Three N.O. + one N.C. LADN31 | |
| | | | |

Front Mounting Add-on Contact Blocks Instantaneous Auxiliary Contacts Conforming to Standard EN 50012

| | | | |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| One N.O. + one N.C. LADN11G | One N.O. + one N.C. LADN11P | Two N.O. + two N.C. LADN22G | Two N.O. + two N.C. LADN22P |
| | | | |

(1) Items in brackets are for blocks mounted on right-hand side of contactor.

TeSys™ D-Line Contactors and Starters Schematics for Type LC1D Contactors

Front Mounting Add-on Contact Blocks Dust and Damp Protected Instantaneous Auxiliary Contacts


| | | | | |
|-------------------------------|-------------------------------|------------------------------|--|---|
| Two N.O. (24-50 V) LA1DX20 | Two N.C. (24-50 V) LA1DX02 | Two N.O. (5-24 V) LA1DY20 | Two N.O. protected (24-50 V) Two N.O. standard LA1DZ40 | Two N.O. protected (24-50 V) + one N.O. + one N.C. standard LA1DZ31 |
| | | | | |

Front Mounting Add-on Contact Blocks Time-delay Auxiliary Contacts

| | | |
|--------------------------------------|---------------------------------------|---|
| On-delay one N.O. + one N.C. LADT | Off-delay one N.O. + one N.C. LADR | On-delay N.C. with one N.O. break before make LADS |
| | | |

Mechanical Latch Blocks

LA6DK10 and LA6DK20




Side Mounting Add-on Contact Blocks Instantaneous Auxiliary Contacts

| | | |
|---------------------------------|----------------------|----------------------|
| One N.O. + one N.C. LAD8N11 (1) | Two N.O. LAD8N20 (1) | Two N.C. LAD8N02 (1) |
| | | |

(1) Items in Brackets are for Blocks Mounted on Right-hand Side of Contactor


Electronic serial timer modules

On-delay LA4DT•U



Auto-Man-Stop modules

LA4DM• (1) PLC







Interface Modules

Relay interface
LA4DF•

LA4DFBQ

Relay interface with
override switch LA4DL•


Solid state
LA4DWB•



TeSys™ D-Line Contactors and Starters

Dimensions for Type LC2D Contactors

LC2D09 to D38
2 x LC1D09 to D38

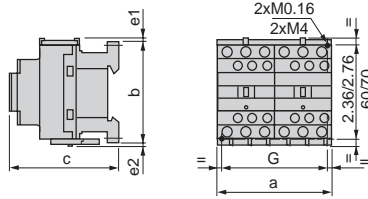


| LC2 or 2 x LC1 | a | b | c (1) | e1 | e2 | G |
|-----------------|-----------|-----------|------------|----------|------------|------------|
| D09 to D18 ac | 3.54 (90) | 3.03 (77) | 3.38 (86) | 0.15 (4) | 0.05 (1.5) | 3.14 (80) |
| D093 to D183 ac | 3.54 (90) | 3.89 (99) | 3.38 (86) | – | – | 3.14 (80) |
| D09 to D18 dc | 3.54 (90) | 3.03 (77) | 3.74 (95) | 0.15 (4) | 0.05 (1.5) | 3.14 (80) |
| D093 to D183 dc | 3.54 (90) | 3.89 (99) | 3.74 (95) | – | – | 3.14 (80) |
| D12004 | – | 2.91 (74) | 3.14 (80) | – | 0.23 (6) | 3.74 (95) |
| D25 to D38 ac | 3.54 (90) | 3.34 (85) | 3.62 (92) | 0.35 (9) | 0.19 (5) | 3.14 (80) |
| D253 to D383 ac | 3.54 (90) | 3.89 (99) | 3.62 (92) | – | – | 3.14 (80) |
| D25 to D32 dc | 3.54 (90) | 3.34 (85) | 3.97 (101) | 0.35 (9) | 0.19 (5) | 3.14 (80) |
| D253 to D383 dc | 3.54 (90) | 3.89 (99) | 3.97 (101) | – | – | 3.14 (80) |
| D25004 | – | 3.30 (84) | 3.66 (93) | – | 0.22 (7) | 4.37 (111) |

e1 and e2: including cabling.

(1) With safety cover, without add-on block.


LC2DT20 to DT60
2 x LC1DT20 to DT60

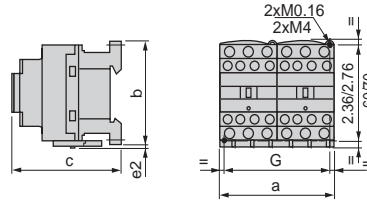

| LC2 or 2 x LC1 | a | b | c | G |
|----------------|-----------|-----------|-----------|-----------|
| DT20 and DT25 | 3.54 (90) | 3.34 (85) | 3.54 (90) | 3.14 (80) |
| DT32 to DT60 | 3.54 (90) | 3.58 (91) | 3.85 (98) | 3.14 (80) |

c, e2: including cabling.


LC2D40 to D65
2 x LC1D40 to D65

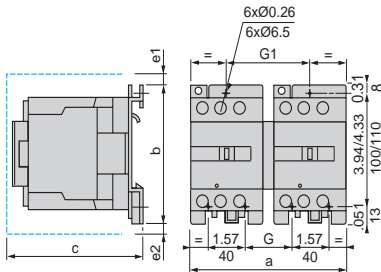

| LC2 or 2 x LC1 | a | b | c | e1 | e2 | G | G1 |
|----------------|------------|-----------|-----------|----------|-----------|-----------|------------|
| D40 to D65 | 6.49 (165) | 5.0 (127) | 5.6 (142) | 0.49 (5) | – | 1.96 (50) | 3.54 (90) |
| D40004 | 7.16 (182) | 5.0 (127) | 5.2 (133) | – | 0.78 (11) | 2.24 (57) | 3.81 (97) |
| D65004 | 7.16 (182) | 5.0 (127) | 5.2 (133) | – | 0.78 (11) | 2.24 (57) | 3.81 (97) |
| D80 and D95 | 7.16 (182) | 5.0 (127) | 6.2 (158) | 0.5 (13) | – | 2.24 (57) | 3.77 (96) |
| D80004 | 8.14 (207) | 5.0 (127) | 6.2 (158) | – | 1.78 (20) | 2.79 (71) | 4.37 (111) |

c, e1 and e2: including cabling.


2 x LP1D40 and D65

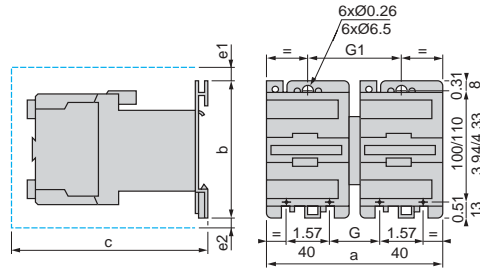

| LC2 or 2 x LC1 | a | b | c | e1 | e2 | G | G1 |
|----------------|------------|------------|-----------|-----------|-----------|----------|-----------|
| D40 to D65 | 7.16 (182) | 5.0 (127) | 7.4 (190) | 1.19 (5) | 0.43 (11) | 2.2 (57) | 3.8 (97) |
| D80 and D95 | 8.14 (207) | 11.0 (127) | 8.4 (215) | 0.51 (13) | 0.78 (20) | 3.7 (96) | 4.3 (111) |

c, e1 and e2: including cabling.

LC2D115 and D150
2 x LC1D115 and D150

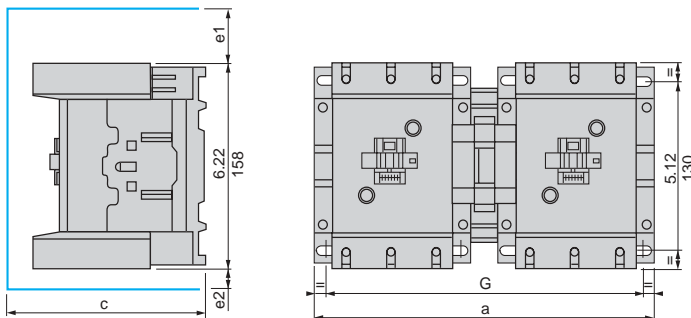

| LC2 or 2 x LC1 | a | c | e1 | e2 | G |
|----------------|------------|-----------|----------|----------|---------------------|
| D115, D150 | 10.5 (266) | 5.9 (148) | 2.2 (56) | 0.7 (18) | 9.5/10.0 (242/256) |
| D115004 | 13.1 (334) | 5.9 (148) | – | 2.4 (60) | 12.2/12.7 (310/324) |

c, e1 and e2: including cabling.


Selection: pages 93

Characteristics: pages 80, 87


Schematics: pages 129

TeSys™ D-Line Contactors and Starters Schematics for Type LC2D Contactors


Reversing contactors for motor control, horizontally mounted LC2D09 to D150

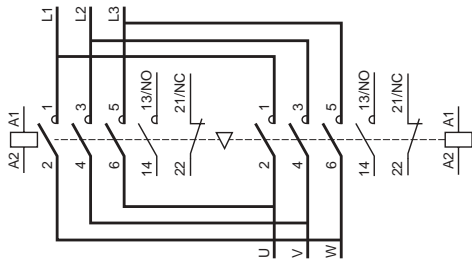


Reversing contactors for motor control with integral electrical interlocking (LAD9R1V)

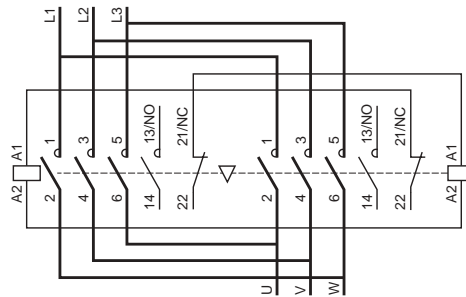



Reversing contactor with overload relay

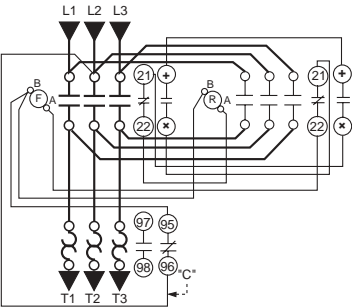


Changeover contactor pairs, horizontally mounted LC2DT20 to DT60

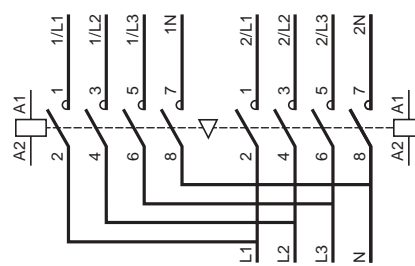


Electrical interlocking of contactors using:
mechanical interlock with integral electrical contacts LA9D•••02



Mechanical interlock without integral electrical contacts LA9D•••78, LAD9R1



Low speed - High speed cabling kit

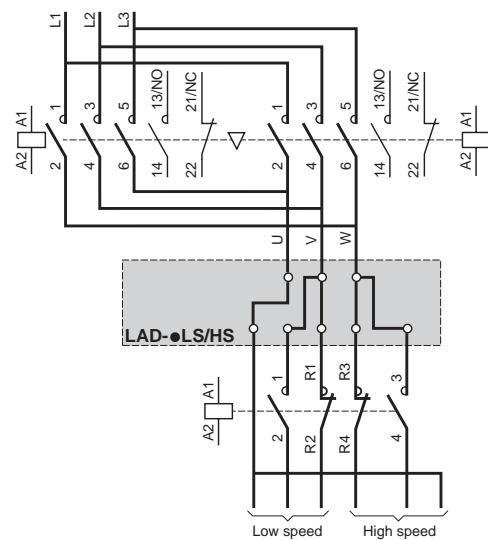


TeSys™ D-Line Contactors and Starters

LR2 and LR3D 3-pole Bimetallic Overload Relays


Description

D-Line 3-pole thermal overload relays are designed to protect ac circuits and motors against overloads, phase failure, long starting times and prolonged stalling of the motor.

LRD01 to 35

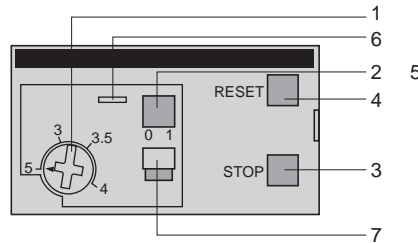

LRD3322 to 4369, LR2D

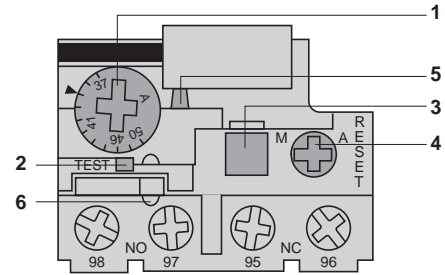

- 1 Adjustment dial I_r
- 2 Test button
Operation of the Test button allows:
 - checking of control circuit wiring,
 - simulation of relay tripping (actuates both the N.O. and N.C. contacts).
- 3 Stop button. Actuates the N.C. contact; does not affect the N.O. contact.
- 4 Reset button
- 5 Trip indicator
- 6 Setting locked by sealing the cover.
- 7 Selector for manual or automatic reset. Relays LRD01 to LRD35 are supplied with the selector in the manual position, protected by a cover. Deliberate action is required to move it to the automatic position.

Environment

| | | | |
|---|--|----|--|
| Conforming to standards | | | IEC 60947-1, IEC 60947-4-1, NF C 63-650, VDE 0660, BS 4941 |
| Product certifications | | | CSA, UL, Sichere Trennung, PTB except LAD4: UL, CSA. |
| Degree of protection | Conforming to VDE 0106 | | Protection against direct finger contact IP 2X |
| Protective treatment | Conforming to IEC 60068 | | "TH" |
| Ambient air temperature around the device | Storage | °C | - 60 to + 70 (- 140 to + 158 °F) |
| | Normal operation, without derating (IEC 60947-4-1) | °C | - 20 to + 60 (- 68 to + 140 °F) |
| | Minimum and maximum operating temperatures (with derating) | °C | - 40 to + 70 (- 104 to + 158 °F) |
| Operating positions without derating | In relation to normal, vertical mounting plane | | Any position |
| Shock resistance | Permissible acceleration conforming to IEC 60068-2-7 | | 15 gn - 11 ms |
| Vibration resistance | Permissible acceleration conforming to IEC 60068-2-6 | | 6 gn |
| Dielectric strength at 50 Hz | Conforming to IEC 60255-5 | kV | 6 |
| Impulse withstand voltage | Conforming to IEC 60801-5 | kV | 6 |

Auxiliary Contact Characteristics

| | | | | | | | | |
|--|---|------------------------|---------------------|-----|-----|-----|-----|-----|
| Conventional rated thermal current | | A | 5 Amps AC; 1 Amp DC | | | | | |
| Maximum consumption of operating coils of controlled contactors (Occasional operating cycles of contact 95-96) | ac supply | V | 24 | 48 | 110 | 220 | 380 | 600 |
| | | VA | 100 | 200 | 400 | 600 | 600 | 600 |
| | dc supply | V | 24 | 48 | 110 | 220 | 440 | - |
| | | W | 100 | 100 | 50 | 45 | 25 | - |
| Short-circuit protection ● | By gG, BS or Class CC fuse. Max. rating or by GB2 circuit-breaker | A | 5 maximum | | | | | |
| Connection to screw clamp terminals | | | Min - max c.s.a. | | | | | |
| Flexible cable with cable end | One or two conductors | AWG (mm ²) | 18 - 14 (1 - 2.5) | | | | | |
| Solid cable without cable end | One or two conductors | AWG (mm ²) | 18 - 14 (1 - 2.5) | | | | | |
| Flexible cable without cable end | One or two conductors | AWG (mm ²) | 18 - 14 (1 - 2.5) | | | | | |
| Solid cable without cable end | One or two conductors | AWG (mm ²) | 18 - 14 (1 - 2.5) | | | | | |
| Tightening torque | | lb-in (N.m) | 15 (1.7) | | | | | |

- Select short circuit protection to meet the National Electrical Code or other local codes and standards.

Catalog Numbers: pages 134, 135 Dimensions: pages 138 - 140

TeSys™ D-Line Contactors and Starters LR2 and LR3D 3-pole Bimetallic Overload Relays

Electrical Characteristics of Power Circuit

| Relay type | | | LRD 01 to 16 LR3 D01 to D16 | LR2 D15•• | LRD 21 to 35 LR3 D21 to D35 | LR2 D25•• | LRD 3322 to 33696 LR3 D3322 to D33696 | LR2 D35•• | LRD 4365 to 4369 |
|---|-----------------------------|----|--|--------------|--|--------------|--|--------------|------------------------------|
| Tripping class | To UL 508, IEC 60947-4-1 | | 10 | 20 | 10 | 20 | 10 | 20 | 10 |
| Rated insulation voltage (Ui) | Conforming to IEC 60947-4-1 | V | 690 | | 690 | | 1000 | | 1000 |
| | Conforming to UL, CSA | V | 600 | | 600 | | 600 | | 600 except LRD4369 |
| Rated impulse withstand voltage (Uimp) | | kV | 6 | | 6 | | 6 | | 6 |
| Frequency limits | Of the operational current | Hz | 0 to 400 | | 0 to 400 | | 0 to 400 | | 0 to 400 |
| Setting range | Depending on model | A | 0.1 to 13 | | 12 to 38 | | 17 to 104 | | 80 to 140 |

Connection to screw clamp terminals

Min - max c.s.a.

| | | AWG (mm ²) | 14 - 8 (1.5 - 10) | 14 - 8 (1.5 - 10) | 10 - 2 (4 - 35) | | 10 - 1 (4 - 50) |
|----------------------------------|---------------|------------------------|-------------------|--|-----------------|-----------|-----------------|
| Flexible cable without cable end | One conductor | AWG (mm ²) | 14 - 8 (1.5 - 10) | 14 - 8 (1.5 - 10) | 10 - 2 (4 - 35) | | 10 - 1 (4 - 50) |
| Flexible cable with cable end | One conductor | AWG (mm ²) | 16 - 12 (1 - 4) | 16 - 10 (1 - 6) except LRD21 : 16 - 12 (1 - 4) | 10 - 2 (4 - 35) | | 10 - 2 (4 - 35) |
| Solid cable without cable end | One conductor | AWG (mm ²) | 16 - 10 (1 - 6) | 14 - 8 (1.5 - 10) except LRD21 : 16 - 10 (1 - 6) | 12 - 2 (4 - 35) | | 10 - 1 (4 - 50) |
| Tightening torque | | lb-in (N.m) | 15.0 (1.7) | 16.4 (1.85) | 22.1 (2.5) | 100 lb-in | 100 lb-in |

Connection to spring terminals

Min - max c.s.a.


| | | AWG (mm ²) | 14 - 12 (1.5 - 4) | – | 14 - 12 (1.5 - 4) | – | – | – |
|----------------------------------|---------------|------------------------|-------------------|---|-------------------|---|---|---|
| Flexible cable without cable end | One conductor | AWG (mm ²) | 14 - 12 (1.5 - 4) | – | 14 - 12 (1.5 - 4) | – | – | – |
| Solid cable without cable end | One conductor | AWG (mm ²) | 14 - 12 (1.5 - 4) | – | 14 - 12 (1.5 - 4) | – | – | – |

Operating Characteristics

| | | | | | | |
|-------------------------------------|-----------------------------|----------|---|-------------------------------|-------------------------------|-------------------------------|
| Temperature compensation | | °C °F | - 20 to + 60 - 68 to + 140 | - 30 to + 60 - 86 to + 140 | - 30 to + 60 - 86 to + 140 | - 20 to + 60 - 68 to + 140 |
| Tripping threshold | Conforming to IEC 60947-4-1 | A | 1.14 ± 0.06 In | | | |
| Sensitivity to phase failure | Conforming to IEC 60947-4-1 | | Tripping current 30% of In on one phase, the others at In | | | |

Tripping curves

Average operating time
related to multiples of the
current setting

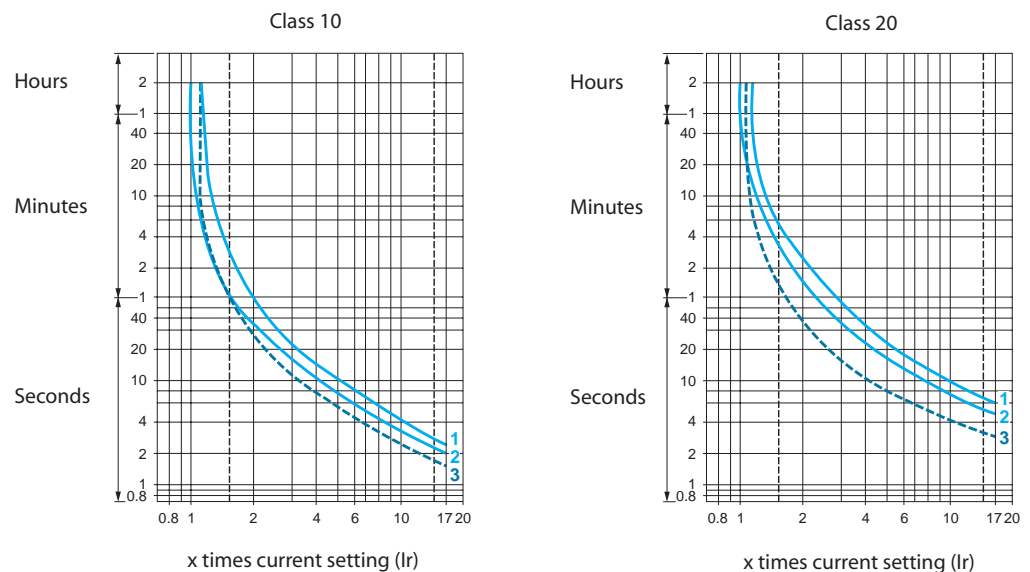

- 1 Balanced operation, 3-phase, from cold state.
- 2 Balanced operation, 2-phase, from cold state.
- 3 Balanced operation, 3-phase, after a long period at the set current (hot state).

Catalog Numbers: pages 134, 135

Dimensions: pages 138 - 140

TeSys™ D-Line Contactors and Starters


LR9D 3-pole Solid-state Overload Relays

Description

LR9D electronic thermal overload relays are designed for use with contactors LC1D115 and D150.

In addition to the protection provided by model d thermal overload relays, (see page 130), they offer the following special features:

- Protection against phase imbalance.
- Choice of starting class.
- Protection of unbalanced circuits.
- Protection of single-phase circuits.
- Alarm function to avoid tripping by load shedding.

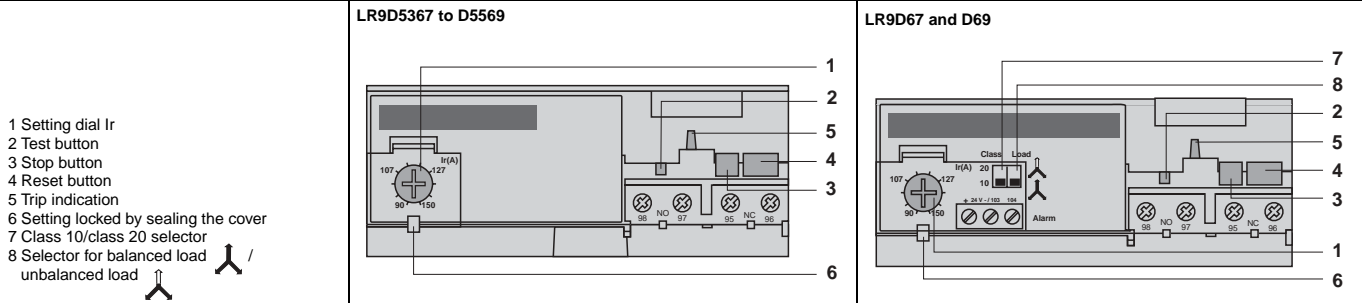

Environment

| | | | |
|--|---|------|--|
| Conforming to standards | | | IEC 60947-4-1, 255-8, 255-17, VDE 0660 and EN 60947-4-1 |
| Product certifications | | | UL 508, CSA 22-2 |
| Degree of protection | Conforming to IEC 60529 and VDE 0106 | | IP 20 on front face with protective covers LA9D11570• or D11560• |
| Protective treatment | Standard version | | "TH" |
| Ambient air temperature around the device (conforming to IEC 60255-8) | Storage | °C | - 40 to + 85 (- 104 to + 185 °F) |
| | Normal operation | °C | - 20 to + 55 (1) (- 68 to + 131 °F) |
| Maximum operating altitude | Without derating | ft/m | 6562 (2000) |
| Operating positions without derating | In relation to normal, vertical mounting plane | | Any position |
| Shock resistance | Permissible acceleration conforming to IEC 60068-2-27 | | 13 gn - 11 ms |
| Vibration resistance | Permissible acceleration conforming to IEC 60068-2-6 | | 2 gn - 5 to 300 Hz |
| Dielectric strength at 50 Hz | Conforming to IEC 60255-5 | kV | 6 |
| Impulse withstand voltage | Conforming to IEC 61000-4-5 | kV | 6 |
| Resistance to electrostatic discharge | Conforming to IEC 61000-4-2 | kV | 8 |
| Resistance to radio-frequency conducted disturbances | Conforming to IEC 61000-4-3 and NF C 46-022 | V/m | 10 |
| Resistance to fast transient currents | Conforming to IEC 61000-4-4 | kV | 2 |
| Electromagnetic compatibility | Draft EN 50081-1 and 2, EN 50082-2 | V | Meets requirements |

Electrical characteristics of auxiliary contacts

| | | | | | | | | |
|---|--|------------------------|---|-----|-----|-----|-----|-----|
| Conventional thermal current | | A | 5 | | | | | |
| Maximum consumption of operating coils of controlled contactors (Occasional operating cycles of contact 95-96) | ac supply | V | 24 | 48 | 110 | 220 | 380 | 600 |
| | | VA | 100 | 200 | 400 | 600 | 600 | 600 |
| | dc supply | V | 24 | 48 | 110 | 220 | 440 | — |
| | | W | 100 | 100 | 50 | 45 | 25 | — |
| Short-circuit protection ● | By gG, BS or Class CC fuse or by GB2 circuit-breaker | A | 5 | | | | | |
| Cabling | One or two conductors | AWG (mm ²) | Minimum c.s.a.: 16 (1) / maximum c.s.a.: 14 (2.5) | | | | | |
| Flexible cable without cable end | Tightening torque | lb-in (N.m) | 11 (1.2) | | | | | |

- (1) For operation at 70 °C (158 °F), please consult your Regional Sales Office.
- Select short circuit protection to meet the National Electrical Code or other local codes and standards.

Catalog Numbers: pages 135

Dimensions: pages 138

TeSys™ D-Line Contactors and Starters

LR9D 3-pole Solid-state Overload Relays

Electrical Characteristics of Power Circuit

| | | |
|--|-------------------------------------|---|
| Relay Type | | LR9-D |
| Tripping Class | Conforming to UL 508, IEC 60947-4-1 | 10 or 20 |
| Rated Insulation Voltage (Ui) | Conforming to IEC 60947-4-1 | 1000 V |
| | Conforming to UL, CSA | 600 V |
| Rated Impulse Withstand Voltage (Uimp) | | 8 kV |
| Frequency Limits | Of the operational current | 50-60 Hz For other frequencies, consult your Regional Sales Office. (1) |
| Setting Range | Depending on model | 60-150 A |
| Power Circuit Connections | Width of terminal lug | 0.787 in (20 mm) |
| | Clamping screw | M8 |
| | Tightening torque | lb-ft 13 (18 N•m) |

Operating Specifications

| | | |
|------------------------------|-----------------------------------|--|
| Temperature Compensation | | -20 to +70 °C (- 68 to + 158 °F) |
| Tripping Threshold | Conforming to IEC 60947-4-1 Alarm | 1.05 ± 0.06 In A |
| | Tripping | 1.12 ± 0.06 In A |
| Sensitivity to Phase Failure | Conforming to IEC 60947-4-1 | Tripping current 4 s ± 20% in the event of phase failure |


Alarm Circuit Specifications

| | | |
|-----------------------|----------------------------------|--|
| Rated Supply Voltage | dc supply | 24 Vdc |
| Supply Voltage Limits | | 17 - 32 V |
| Current Consumption | No load | less than or equal to 5 mA |
| Switching Capacity | | 0 - 150 mA |
| Protection | Short-circuit and overload | Self-protected |
| Voltage Drop | Closed state | less than or equal to 2.5 V |
| Cabling | Flexible cable without cable end | 20 - 16 AWG (0.5 - 1.5 mm ²) |
| Tightening Torque | | 4.0 lb-in (0.45 N•m) |

Tripping Curve LR9-D

Average Operating Time Related to Multiples of the Current Setting

Tripping time in seconds

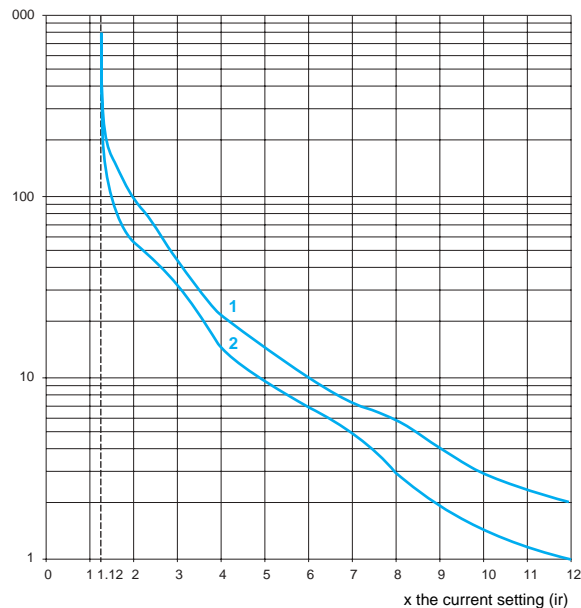

- 1 Cold state curve.
- 2 Hot state curve.

(1) For use of these relays with soft start units or variable speed controllers, please consult your Regional Sales Office.

Catalog Numbers: pages 135

Dimensions: pages 138

TeSys™ D-Line Contactors and Starters

Selection of 3-pole Class 10 Bimetallic Overload Relays

Differential (Single Phase Sensitive) Thermal Overload Relays

Compensated Relays with Manual or Automatic Reset, with Relay Trip Indicator, for ac or dc.

| | | | | |
|---|--|--|--------------------|---|
| Short-circuit Protection for North American Applications | | | By Circuit Breaker | Select in Accordance with NEC and Local Codes |
| | | | By Fuses | Maximum 400% of Motor FLA |

| Relay Setting Range | Fuses to be used with Selected Relay | | | For use with Contactor LC1- | Catalog Number | Weight lb. (kg) |
|---------------------|--------------------------------------|----|------|-----------------------------|----------------|-----------------|
| | aM | gG | BS88 | | | |
| A | A | A | A | | | |

Class 10 with Connection by Screw Clamp Terminals

| | | | | | | |
|--------------|------|-----|-----|-----------------|--------------|--------------|
| 0.10 to 0.16 | 0.25 | 2 | – | D09 to D38 (2) | LRD01 | 0.27 (0.124) |
| 0.16 to 0.25 | 0.5 | 2 | – | D09 to D38 (2) | LRD02 | 0.27 (0.124) |
| 0.25 to 0.40 | 1 | 2 | – | D09 to D38 (2) | LRD03 | 0.27 (0.124) |
| 0.40 to 0.63 | 1 | 2 | – | D09 to D38 (2) | LRD04 | 0.27 (0.124) |
| 0.63 to 1 | 2 | 4 | – | D09 to D38 (2) | LRD05 | 0.27 (0.124) |
| 1 to 1.6 | 2 | 4 | 6 | D09 to D38 (2) | LRD06 | 0.27 (0.124) |
| 1.6 to 2.5 | 4 | 6 | 10 | D09 to D38 (2) | LRD07 | 0.27 (0.124) |
| 2.5 to 4 | 6 | 10 | 16 | D09 to D38 (2) | LRD08 | 0.27 (0.124) |
| 4 to 6 | 8 | 16 | 16 | D09 to D38 (2) | LRD10 | 0.27 (0.124) |
| 5.5 to 8 | 12 | 20 | 20 | D09 to D38 (2) | LRD12 | 0.27 (0.124) |
| 7 to 10 | 12 | 20 | 20 | D09 to D38 (2) | LRD14 | 0.27 (0.124) |
| 9 to 13 | 16 | 25 | 25 | D12 to D38 (2) | LRD16 | 0.27 (0.124) |
| 12 to 18 | 20 | 35 | 32 | D18 to D38 (2) | LRD21 | 0.27 (0.124) |
| 16 to 24 | 25 | 50 | 50 | D25 to D38 (2) | LRD22 | 0.27 (0.124) |
| 23 to 32 | 40 | 63 | 63 | D25 to D38 (2) | LRD32 | 0.27 (0.124) |
| 30 to 38 | 50 | 80 | 80 | D32 and D38 (2) | LRD35 | 0.27 (0.124) |
| 17 to 25 | 25 | 50 | 50 | D40 to D95 | LRD3322 | 1.12 (0.510) |
| 23 to 32 | 40 | 63 | 63 | D40 to D95 | LRD3353 | 1.12 (0.510) |
| 30 to 40 | 40 | 100 | 80 | D40 to D95 | LRD3355 | 1.12 (0.510) |
| 37 to 50 | 63 | 100 | 100 | D40 to D95 | LRD3357 | 1.12 (0.510) |
| 48 to 65 | 63 | 100 | 100 | D50 to D95 | LRD3359 | 1.12 (0.510) |
| 55 to 70 | 80 | 125 | 125 | D50 to D95 | LRD3361 | 1.12 (0.510) |
| 63 to 80 | 80 | 125 | 125 | D65 to D95 | LRD3363 | 1.12 (0.510) |
| 80 to 104 | 100 | 160 | 160 | D80 and D95 | LRD3365 | 1.12 (0.510) |
| 80 to 104 | 125 | 200 | 160 | D115 and D150 | LRD4365 | 1.98 (0.900) |
| 95 to 120 | 125 | 200 | 200 | D115 and D150 | LRD4367 | 1.98 (0.900) |
| 110 to 140 | 160 | 250 | 200 | D150 | LRD4369 | 1.98 (0.900) |
| 80 to 104 | 100 | 160 | 160 | D115 and D150 | LRD33656 (1) | 2.20 (1.000) |
| 95 to 120 | 125 | 200 | 200 | D115 and D150 | LRD33676 (1) | 2.20 (1.000) |
| 110 to 140 | 160 | 250 | 200 | D115 and D150 | LRD33696 (1) | 2.20 (1.000) |

Class 10 with Spring Terminal Connections (for direct mounting on the contactor only)

| | | | | | | |
|--------------|------|----|----|----------------|--------|--------------|
| 0.10 to 0.16 | 0.25 | 2 | – | D09 to D38 (2) | LRD013 | 6.31 (0.140) |
| 0.16 to 0.25 | 0.5 | 2 | – | D09 to D38 (2) | LRD023 | 6.31 (0.140) |
| 0.25 to 0.40 | 1 | 2 | – | D09 to D38 (2) | LRD033 | 6.31 (0.140) |
| 0.40 to 0.63 | 1 | 2 | – | D09 to D38 (2) | LRD043 | 6.31 (0.140) |
| 0.63 to 1 | 2 | 4 | – | D09 to D38 (2) | LRD053 | 6.31 (0.140) |
| 1 to 1.6 | 2 | 4 | 6 | D09 to D38 (2) | LRD063 | 6.31 (0.140) |
| 1.6 to 2.5 | 4 | 6 | 10 | D09 to D38 (2) | LRD073 | 6.31 (0.140) |
| 2.5 to 4 | 6 | 10 | 16 | D09 to D38 (2) | LRD083 | 6.31 (0.140) |
| 4 to 6 | 8 | 16 | 16 | D09 to D38 (2) | LRD103 | 6.31 (0.140) |
| 5.5 to 8 | 12 | 20 | 20 | D09 to D38 (2) | LRD123 | 6.31 (0.140) |
| 7 to 10 | 12 | 20 | 20 | D09 to D38 (2) | LRD143 | 6.31 (0.140) |
| 9 to 13 | 16 | 25 | 25 | D12 to D38 (2) | LRD163 | 6.31 (0.140) |
| 12 to 18 | 20 | 35 | 32 | D18 to D38 (2) | LRD213 | 6.31 (0.140) |
| 16 to 24 | 25 | 50 | 50 | D25 to D38 (2) | LRD223 | 6.31 (0.140) |

Class 10 with Ring-Tongue Terminals for LRD01 through LRD35 (load side terminals only)

Select the appropriate overload relay with screw clamp terminals from the table above and add **6** to the end of the reference.

Example: LRD01 becomes LRD016.

Thermal Overload Relays for use on single phase loads

Class 10 with connection by screw clamp terminals

Change the prefix in the references above from LRD (except LRD4●●●) to LR3D. Example: LRD01 becomes LR3D01.

Thermal Overload Relays for use on 1000 V Supplies

Class 10 with connection by screw clamp terminals

For relays LRD-01 to LRD-35 only, for an operating voltage of 1000 V, and only for independent mounting, the reference becomes LRD33 A66. Example: LRD12 becomes LRD3312A66.

Order an LA7D3064 terminal block separately; see page 137.

- (1) These are special separate mounted versions of the LRD43 overload relays for the LC1D115 and D150 contactors. Part number includes overload relay, terminal block and 6 connectors (unit is not UL/CSA approved).
- (2) When used with D25-D38 contactors, order spacer clip (part number W816366180111). See page 137.



LRD08



LRD21



LRD33



LRD083

TeSys™ D-Line Contactors and Starters

Selection of 3-pole Class 20 Bimetallic and Class 10 Solid-state Overload Relays

Differential (Single Phase Sensitive) Thermal Overload Relays

Compensated relays with manual or automatic reset, with relay trip indicator, for ac or dc LR2-D1508 to 2553: independent mounting either by ordering a terminal block LA7D1064 or LA7D2064, or by ordering the relay pre-assembled; in this case, add the suffix LA7 to the reference.
Example: LR2D1508 becomes LR2D1508LA7.

| Short-circuit Protection for North American Applications | | | | By Circuit Breaker | | Select in Accordance with NEC and Local Codes | |
|--|--|----|------|------------------------|--|---|-----------------|
| | | | | By Fuses | | Maximum 400% of Motor FLA | |
| Relay Setting Range | Fuses to be used with the Selected Relay | | | For use with Contactor | | Catalog Number | Weight lb. (kg) |
| | aM | gG | BS88 | LC1 | | | |
| A | A | A | A | | | | |

Class 20 for Connection by Screw Clamp Terminals

| | | | | | | |
|----------|-----|-----|-----|-----------------|-------------|--------------|
| 2.5 to 4 | 6 | 10 | 16 | D09 to D38 (2) | LRD1508 (3) | 0.42 (0.190) |
| 4 to 6 | 8 | 16 | 16 | D09 to D38 (2) | LRD1510 (3) | 0.42 (0.190) |
| 5.5 to 8 | 12 | 20 | 20 | D09 to D38 (2) | LRD1512 (3) | 0.42 (0.190) |
| 7 to 10 | 16 | 20 | 25 | D09 to D38 (2) | LRD1514 (3) | 0.42 (0.190) |
| 9 to 13 | 16 | 25 | 25 | D12 to D38 (2) | LRD1516 (3) | 0.42 (0.190) |
| 12 to 18 | 25 | 35 | 40 | D18 to D38 (2) | LRD1521 (3) | 0.42 (0.190) |
| 17 to 25 | 32 | 50 | 50 | D25 and D38 (2) | LRD1522 (3) | 0.42 (0.190) |
| 23 to 28 | 40 | 63 | 63 | D25 and D38 (2) | LRD1530 (3) | 0.76 (0.345) |
| 25 to 32 | 40 | 63 | 63 | D25 and D38 (2) | LRD1532 (3) | 0.76 (0.345) |
| 17 to 25 | 32 | 50 | 50 | D40 to D95 | LRD3522 | 1.18 (0.535) |
| 23 to 32 | 40 | 63 | 63 | D40 to D95 | LR2D3553 | 1.18 (0.535) |
| 30 to 40 | 50 | 100 | 80 | D40 to D95 | LR2D3555 | 1.18 (0.535) |
| 37 to 50 | 63 | 100 | 100 | D50 to D95 | LR2D3557 | 1.18 (0.535) |
| 48 to 65 | 80 | 125 | 100 | D50 to D95 | LR2D3559 | 1.18 (0.535) |
| 55 to 70 | 100 | 125 | 125 | D65 to D95 | LR2D3561 | 1.18 (0.535) |
| 63 to 80 | 100 | 160 | 125 | D80 and D95 | LR2D3563 | 1.18 (0.535) |



LRD15

Solid-state Differential Thermal Overload Relays

Compensated relays, with relay trip indicator, for ac or dc, for direct mounting on contactor or independent mounting (1).

| Relay Setting Range | Fuses to be used with Selected Relay (4) | | For Direct Mounting Beneath Contactor LC1 | Catalog Number | Weight lb. (kg) |
|---------------------|--|----|---|----------------|-----------------|
| | aM | gG | | | |
| A | A | A | | | |

Class 10 for Connection using Bars or Connectors

| | | | | | |
|-----------|-----|-----|---------------|----------|--------------|
| 60 to 100 | 100 | 160 | D115 and D150 | LR9D5367 | 1.95 (0.885) |
| 90 to 150 | 160 | 250 | D115 and D150 | LR9D5369 | 1.95 (0.885) |

Class 20 for Connection using Bars or Connectors

| | | | | | |
|-----------|-----|-----|---------------|----------|--------------|
| 60 to 100 | 125 | 160 | D115 and D150 | LR9D5567 | 1.95 (0.885) |
| 90 to 150 | 200 | 250 | D115 and D150 | LR9D5569 | 1.95 (0.885) |

Solid-state Thermal Overload Relays for use with Balanced/Unbalanced Loads (Single Phase)

Compensated relays, with separate outputs for alarm and tripping.

| Relay Setting Range | Fuses to be used with Selected Relay (4) | | For Direct Mounting Beneath Contactor LC1 | Catalog Number | Weight lb. (kg) |
|---------------------|--|----|---|----------------|-----------------|
| | aM | gG | | | |
| A | A | A | | | |

Class 10 or 20 Selectable with Connection using Bars or Connectors

| | | | | | |
|-----------|-----|-----|---------------|--------|--------------|
| 60 to 100 | 100 | 160 | D115 and D150 | LR9D67 | 1.98 (0.900) |
| 90 to 150 | 160 | 250 | D115 and D150 | LR9D69 | 1.98 (0.900) |

- (1) Power terminals can be protected against direct finger contact by the addition of shrouds and/or insulated terminal blocks, to be ordered separately (see page 113).
- (2) For use with D25-D38 contactors, order spacer clip (part number W816366180111). See page 137.
- (3) These overloads are available without single phase sensitivity. To order, change the LRD prefix to LR3D and add A1 to the end of the number.
Example: LRD1508 becomes LR3D1508A1
- (4) Select short circuit protection to meet the National Electrical Code or other local codes and standards.

Other Versions



Thermal overload relays for resistive circuits in category AC-1. Please consult your Regional Sales Office.



LR2D35


TeSys™ D-Line Contactors and Starters

Selection of Overload Relay Accessories

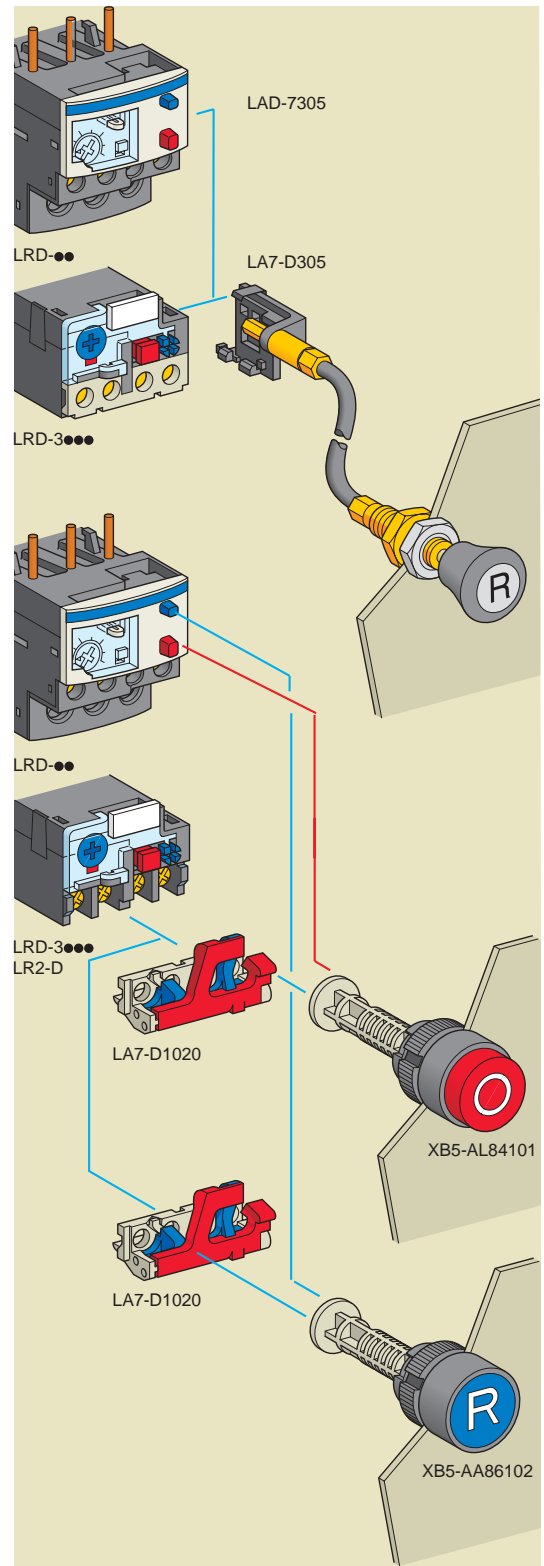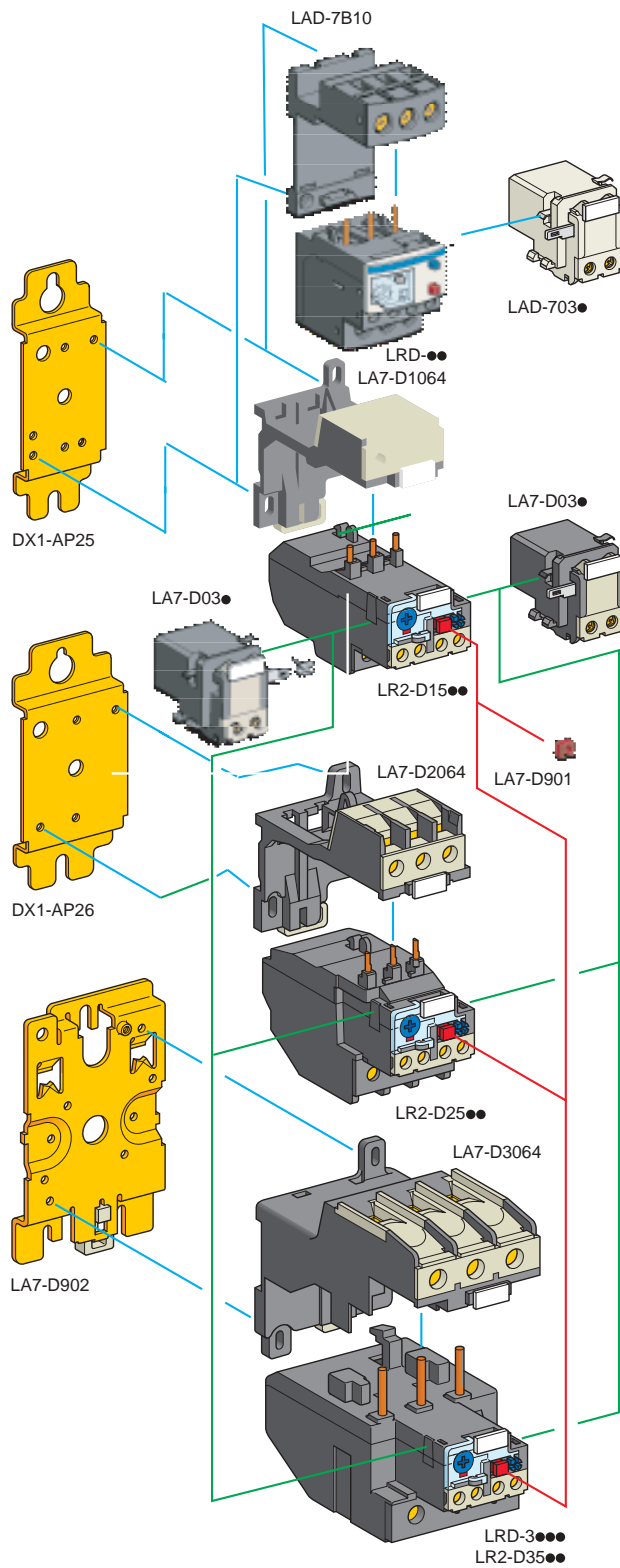


TeSys™ D-Line Contactors and Starters

Selection of Overload Relay Accessories

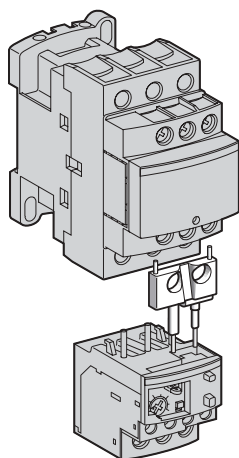

LAD7C



LAD7B10



Overload Relay and Spacer
(W816366180111)

Accessories (to be ordered separately)

| Description | For use on: | Sold in Lots of: | Catalog Number | Weight lb. (kg) |
|--|---|------------------|----------------|-----------------|
| Pre-wiring kit allowing direct connection of the N.C. contact of relay LRD01 to 35 or LR3D01 to D35 to the contactor | LC1D09 to D18 | 10 | LAD7C1 | 0.002 (0.004) |
| | LC1D25 to D38 | 10 | LAD7C2 | 0.003 (0.007) |
| Separate Mount Kits | LRD01 to 35 and LR3D01 to D35 | 1 | LAD7B10 | 0.100 (0.22) |
| Terminal blocks (1) for separate mounting on 35 mm rail (AM1DP200) or screw mounting; for mounting centers, see pages 138 to 140. | LRD15●● | 1 | LAD7B105 | 0.100 (0.22) |
| | LR2D15●● | 1 | LA7D1064 | 0.100 (0.22) |
| | LR2D25●● | 1 | LA7D2064 | 0.120 (0.26) |
| | LRD3●●●, LR3D3●●●, LR2D35●● | 1 | LA7D3064 (2) | 0.370 (0.82) |
| Terminal block adapter for mounting a relay beneath an LC1D115 or D150 contactor | LRD3●●●, LR3D3●●●, LR2D35●● | 1 | LA7D3058 | 0.080 (0.18) |
| Mounting plates (3) for screw mounting on 110 mm center | LRD01 to 35, LR3D01 to D35, LR2D15●● | 10 | DX1AP25 | 0.065 (0.14) |
| | LR2D25●● | 10 | DX1AP26 | 0.082 (0.18) |
| | LRD3●●●, LR3D3●●●, LR2D35●● | 1 | LA7D902 | 0.130 (0.29) |
| Marker holder snap in | All relays except LRD01 to 35 and LR3D01 to D35 (4) | 100 | LA7D903 | 0.001 (0.002) |
| Bag of 400 labels (blank, self-adhesive, 7 x 16 mm) | – | 1 | LA9D91 | 0.001 (0.002) |
| Stop button locking device | All relays except LRD01 to 35, LR3D01 to D35 and LR9D | 10 | LA7D901 | 0.005 (0.01) |
| Remote stop or electrical reset device (5) | LRD01 to 35 and LR3D01 to D35 | 1 | LAD703• (6) | 0.090 (0.20) |
| Remote tripping or electrical reset device (5) | All relays except LRD01 to 35 and LR3D01 to D35 | 1 | LA7D03• (6) | 0.090 (0.20) |
| Block of insulated terminals | LR9D | 2 | LA9F103 | 0.560 (1.23) |
| Spacer | Mounting small overload relays to LC1D25 and LC1D32 | 10 | W816366180111 | 0.050 (0.023) |

Remote Control

"Reset" Function

| | | | | |
|---|---|---|---------|--------------|
| By flexible cable (length = 0.5 m / 1.64 ft.) | LRD01 to 35 and LR3D01 to D35 | 1 | LAD7305 | 0.075 (0.17) |
| | All relays except LRD01 to 35 and LR3D01 to D35 | 1 | LA7D305 | 0.075 (0.17) |

"Stop" and/or "Reset" Functions

The terminal protection shroud must be removed and the following three products must be ordered separately.

| | | | | |
|---|---|---|------------|--------------|
| Adapter for door interlock mechanism | All relays except LRD01 to 35 and LR3D01 to D35 | 1 | LA7D1020 | 0.005 (0.01) |
| Operating head for spring return push button | Stop All relays | 1 | XB5AL84101 | 0.027 (0.06) |
| | Reset All relays | 1 | XB5AA86102 | 0.027 (0.06) |

- (1) Terminal blocks are supplied with terminals protected against direct finger contact and screws in the open, "ready-to-tighten" position.
- (2) To order a terminal block (separate mount kit) with ring-tongue terminals, the catalog number becomes **LA7D30646**.
- (3) Requires separate mount terminal block corresponding to the type of relay.
- (4) For LRD01 to 35 (see page 114).
- (5) The time for which the coil of remote tripping or electrical resetting device **LA7D03** or **LAD703** can remain energized depends on its rest time: 1 s pulse duration with 9 s rest time; 5 s pulse duration with 30 s rest time; 10 s pulse duration with 90 s rest time; maximum pulse duration of 20 s with a rest time of 300 s. Minimum pulse time: 200 ms.
- (6) Reference to be completed by adding the code indicating control circuit voltage. Standard control circuit voltages (for other voltages, please consult your Regional Sales Office).

| Volts | 12 | 24 | 48 | 96 | 110 | 220/230 | 380/400 | 415/440 |
|--|----|----|----|----|-----|---------|---------|---------|
| 50/60 Hz | – | B | E | – | F | M | Q | N |
| Consumption, inrush and sealed: < 100 VA | | | | | | | | |
| dc | J | B | E | DD | F | M | – | – |

Consumption, inrush and sealed: < 100 W.


TeSys™ D-Line Contactors and Starters

Dimensions for 3-pole Bi-metallic and Solid-state Overload Relays

D-Line Thermal Overload Relays


LRD-01-35

Direct mounting beneath contactors with screw

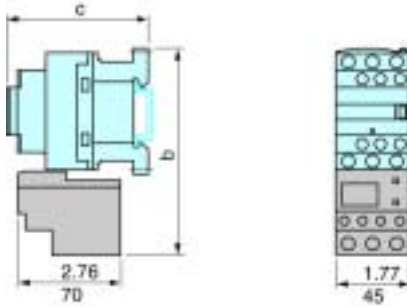

LRD-013-353

Direct mounting beneath contactors with spring terminal connections

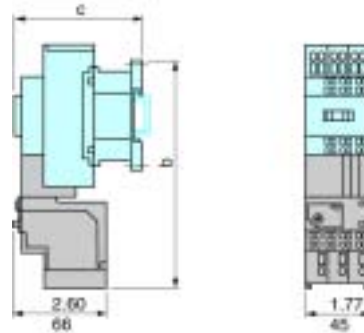


Dual Dimensions: Inches
mm

| LC1• | D09 - D18 | D25 - D38 | LC1• | D093 - 383 |
|------|---------------------|------------|------|---------------------|
| b | 4.84 (123) | 5.39 (137) | b | 4.84 (123) |
| c | See pages 122, 123. | | c | See pages 122, 123. |

LRD-3***


Direct mounting beneath contactors
LC1-D40 to D95 and LP1-D40 to D80

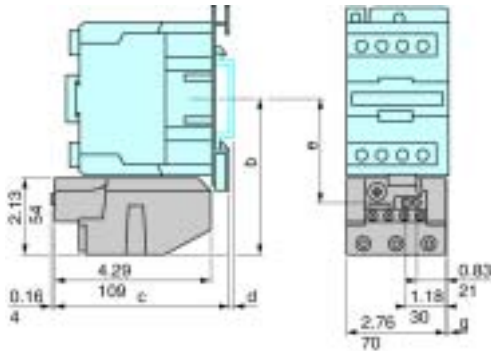

| AM1• | DL201 | DL200 | | | | | |
|---------------------|--------------|--------------|-------------|------------|-----------|-------|-------|
| d | 0.28 (7) | 0.67 (17) | b | c | e | g(3P) | g(4P) |
| ac control circuit: | | | | | | | |
| LC1D40 | 4.37 (111) | 4.69 (119) | 2.85 (72.4) | 0.18 (4.5) | 0.51 (13) | | |
| LC1D50 | 4.37 (111) | 4.69 (119) | 2.85 (72.4) | 0.18 (4.5) | - | | |
| LC1D65 | 4.37 (111) | 4.69 (119) | 2.85 (72.4) | 0.18 (4.5) | 0.51 (13) | | |
| LC1D80 | 4.55 (115.5) | 4.88 (124) | 3.03 (76.9) | 0.37 (9.5) | 0.87 (22) | | |
| LC1D95 | 4.55 (115.5) | 4.88 (124) | 3.03 (76.9) | 0.37 (9.5) | - | | |
| dc control circuit: | | | | | | | |
| LC1D40, LP1D40 | 4.37 (111) | 6.93 (176) | 2.85 (72.4) | 0.18 (4.5) | 0.51 (13) | | |
| LC1D50 | 4.37 (111) | 6.93 (176) | 2.85 (72.4) | 0.18 (4.5) | - | | |
| LC1D65, LP1D65 | 4.37 (111) | 6.93 (176) | 2.85 (72.4) | 0.18 (4.5) | 0.51 (13) | | |
| LC1D80, D95, LP1D80 | 4.55 (115.5) | 7.06 (179.4) | 3.03 (76.9) | 0.37 (9.5) | 0.87 (22) | | |


LRD4***

Direct mounting beneath contactors
LC1D115 and D150

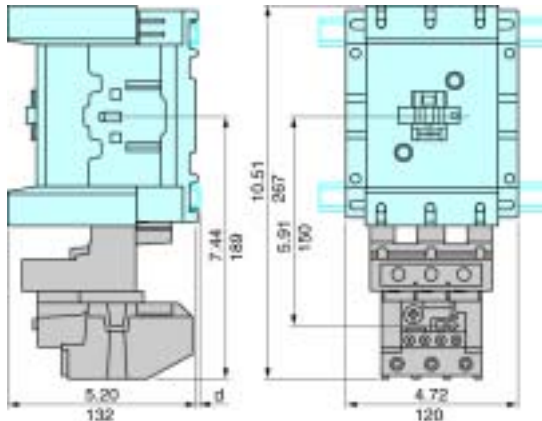

LR9D

Direct mounting beneath contactors
LC1D115 and D150

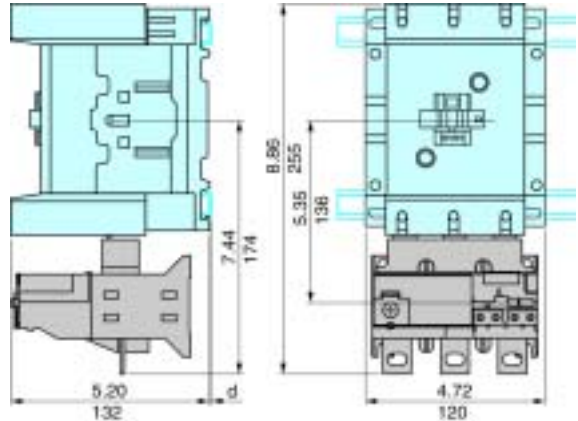

| AM1DL200 and DR200 | AM1DE200 and ED*** | AM1DP200 and DR200 | AM1DE200 and ED*** |
|----------------------------------|--------------------|--------------------------------|--------------------|
| d | 0.10 (2.5) | d | 0.41 (10.5) |
| Characteristics: pages 130 - 133 | | Catalog Number: pages 134, 135 | |

TeSys™ D-Line Contactors and Starters


Mounting Information for Bimetallic and Solid-state Overload Relays

D-Line Thermal Overload Relays


LRD-01-35

Independent mounting on 50 mm centers or on rail AM1DP200 or DE200

Independent mounting on 110 mm centers

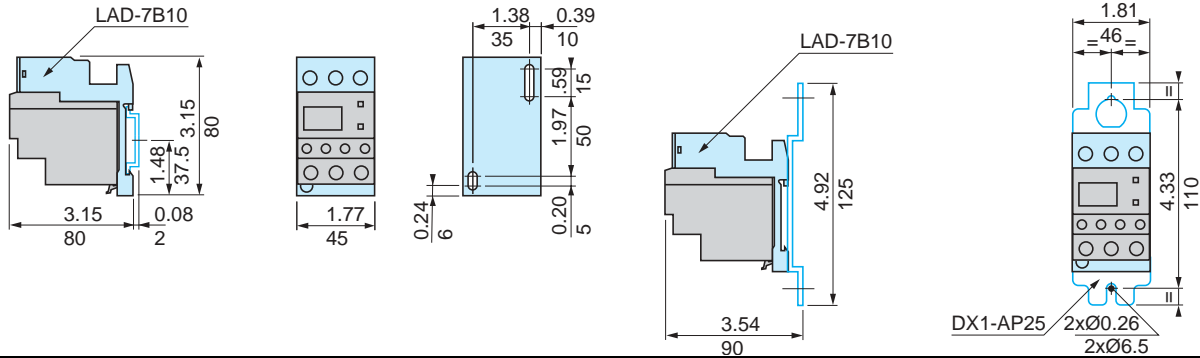

Remote tripping or electrical reset





Dual Dimensions: Inches
mm

(1) Can only be mounted on RH side of relay LRD-01 to 35

LRD15**

Independent mounting on 50 mm centers or on rail AM1DP200 or DE200

Remote tripping or electrical reset

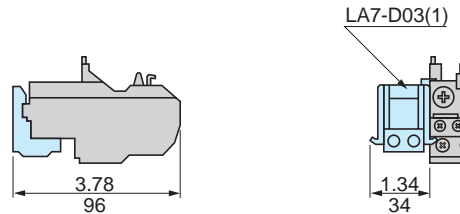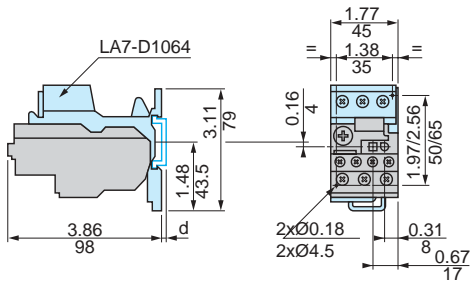

AM1DP200 **AM1DE200**



d 0.08 (2) 0.37 (9.5)

(1) Can be mounted on RH or LH side of relay LR2D15**

LR2D25**

Independent mounting on 50 mm centers or on rail AM1DP200 or DE200

Remote tripping or electrical reset

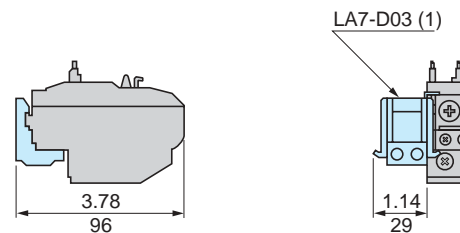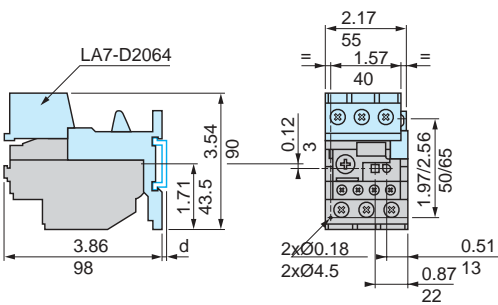

AM1DP200 **AM1DE200**

d 0.08 (2) 0.37 (9.5)

(1) Can be mounted on RH or LH side of relay LR2D25**

Characteristics: pages 130 - 133 Catalog Number: pages 134, 135


TeSys™ D-Line Contactors and Starters

Mounting Information for Bimetallic and Solid-state Overload Relays

D-Line Thermal Overload Relays


LRD3*** and LR2D35**

Independent mounting on 50 mm centers or on rail AM1DP200 or DE200

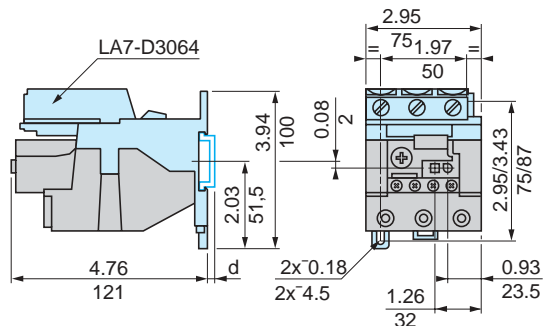

LRD3***, LR2D35** and LR9D

Remote tripping or electrical reset

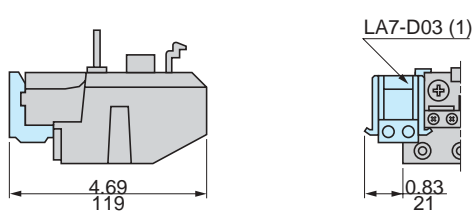

AM1DP200

AM1DE200


d 0.08 (2)

0.37 (9.5)

(1) Can be mounted on RH or LH side of relay LR23***, LR2D35** or LR9D


LR2D and LRD3***

Adapter for door interlock mechanism LA7D1020




c: adjustable from 0.67 to 4.72 in. (17 to 120 mm)

Stop




Reset



LRD, LR2D and LR9D


"Reset" by flexible cable LA7D305 and LAD7305
Mounting with cable straight

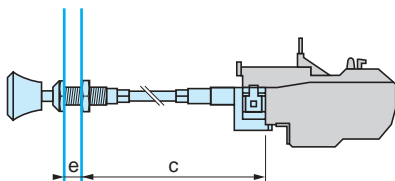

c: up to 21.6in (550 mm)

e: up to .79in (20 mm)

Mounting with cable bent



e: up to 0.79in (20 mm)

Characteristics: pages 130 - 133

Catalog Number: pages 134, 135

TeSys™ D-Line Contactors and Starters

Capacitor-switching Contactors (International Applications Only)

For Switching 3-phase Capacitor Banks used for Power Factor Correction - Selection

Standard Contactors

Capacitors, together with the circuits to which they are connected, form oscillatory circuits which can, at the moment of switch-on, give rise to high transient currents (> 180 In) at high frequencies (1 to 15 kHz).

As a general rule, the peak current on energizing is lower when:

- the mains inductances are high,
- the line transformer ratings are low,
- the transformer short-circuit voltage is high,
- the ratio between the sum of the ratings of the capacitors already switched into the circuit and that of the capacitors to be switched in is small (for multiple step capacitor banks).

In accordance with standards IEC 60070, NF C 54-100, VDE 0560, the switching contactor must be able to withstand a continuous current of 1.43 times the rated current of the capacitor bank step being switched.

The rated operational powers given in the tables opposite take this overload into account.

Short-circuit protection is normally provided by gL type HPC fuses rated at 1.7 to 2 In.

Contactor Applications

Operating Conditions

Capacitors are directly switched. **The values of peak current at switch-on must not exceed the values indicated opposite.**

An inductor may be inserted in each of the three phases supplying the capacitors to reduce the peak current, if necessary. Inductance values are determined according to the selected operating temperature.

Power factor correction by a single-step capacitor bank

The use of a choke inductor is unnecessary; the inductance of the mains supply is adequate to limit the peak to a value compatible with the contactor characteristics.

Power factor correction by a multiple-step capacitor bank

Select a special contactor as defined on page 142.

If a standard contactor is used, it is essential to insert a choke inductor in each of the three phases of each step.

Maximum operational power of contactors

Standard Contactors

Maximum operating rate: 120 operating cycles/hour.
Electrical durability at maximum load: 100,000 operating cycles.
With choke inductors connected, where necessary.

| Operational power at 50/60 Hz | | | | | | Maximum Peak Current | Contactor Size |
|--|-------|-------|--|-------|-------|----------------------|----------------|
| $\theta \leq 40\text{ °C} / 104\text{ °F} (1)$ | | | $\theta \leq 55\text{ °C} / 131\text{ °F} (1)$ | | | | |
| 220 V | 400 V | 600 V | 220 V | 400 V | 600 V | | |
| 240 V | 440 V | 690 V | 240 V | 440 V | 690 V | | |
| kVAR | kVAR | kVAR | kVAR | kVAR | kVAR | A | |
| 6 | 11 | 15 | 6 | 11 | 15 | 560 | LC1D09, D12 |
| 9 | 15 | 20 | 9 | 15 | 20 | 850 | LC1D18 |
| 11 | 20 | 25 | 11 | 20 | 25 | 1600 | LC1D25 |
| 14 | 25 | 30 | 14 | 25 | 30 | 1900 | LC1D32, D38 |
| 17 | 30 | 37 | 17 | 30 | 37 | 2160 | LC1D40 |
| 22 | 40 | 50 | 22 | 40 | 50 | 2160 | LC1D50 |
| 22 | 40 | 50 | 22 | 40 | 50 | 3040 | LC1D65 |
| 35 | 60 | 75 | 35 | 60 | 75 | 3040 | LC1D80, D95 |
| 50 | 90 | 125 | 38 | 75 | 80 | 3100 | LC1D115 |
| 60 | 110 | 135 | 40 | 85 | 90 | 3300 | LC1D150 |
| 70 | 125 | 160 | 50 | 100 | 100 | 3500 | LC1F185 |
| 80 | 140 | 190 | 60 | 110 | 110 | 4000 | LC1F225 |
| 90 | 160 | 225 | 75 | 125 | 125 | 5000 | LC1F265 |
| 100 | 190 | 275 | 85 | 140 | 165 | 6500 | LC1F330 |
| 125 | 220 | 300 | 100 | 160 | 200 | 8000 | LC1F400 |
| 180 | 300 | 400 | 125 | 220 | 300 | 10 000 | LC1F500 |
| 250 | 400 | 600 | 190 | 350 | 500 | 12 000 | LC1F630 |
| 250 | 400 | 600 | 190 | 350 | 500 | 14 200 | LC1F800 |

(1) Upper limit of temperature category conforming to IEC 70.

TeSys™ D-Line Contactors and Starters

Capacitor-switching Contactors (International Applications Only)

For Switching 3-phase Capacitor Banks, used for Power Factor Correction
Direct Connection without Choke Inductors - References



LC1DFK11..

Special Contactors

Special contactors **LC1D•K** are designed for switching 3-phase, single or multiple-step capacitor banks; they conform to standards IEC 60070 and 60831, NFC 54-100, VDE 0560, UL and CSA.

Contactors Applications

Specification

Contactors fitted with a block of early make poles and damping resistors, limiting the value of the current on closing to 60 In max. This current limitation increases the life of all the components of the installation, in particular that of the fuses and capacitors. The patented design of the add-on block (No. 90 119-20) ensures safety and long life of the installation.

Operating Conditions

There is no need to use choke inductors for either single or multiple-step capacitor banks. Short-circuit protection must be provided by gl type fuses rated at 1.7 to 2 In.

Maximum Operational Power

The power values given in the selection table below are for the following operating conditions.

| | | | | | | | |
|--|----------------------------|-------|----------------------------------|--------------------------------|--|-----------------|--------------|
| Prospective Peak Current at Switch-on | LC1D•K | | 200 In | | | | |
| Maximum Operating Rate | LC1DFK, DGK, DLK, DMK, DPK | | 240 operating cycles/hour | | | | |
| | LC1DTK, DWK | | 100 operating cycles/hour | | | | |
| Electrical Durability at Nominal Load | All Contactor Ratings | | 400 V | 300,000 operating cycles | | | |
| | | | 690 V | 200,000 operating cycles | | | |
| Operational Power at 50/60 Hz (1) | | | Instantaneous Auxiliary Contacts | Tightening Torque on Cable End | Basic Reference. Complete with Code Indicating Control Circuit Voltage (2) | Weight lb. (kg) | |
| $\theta \leq 55\text{ }^{\circ}\text{C} / 131\text{ }^{\circ}\text{F} (3)$ | | | | | | | |
| 220 V | 400 V | 660 V | | | | | |
| 240 V | 440 V | 690 V | | | | | |
| kVAR | kVAR | kVAR | N.O. | N.C. | lb-in (N.m) | | |
| 6.7 | 12.5 | 18 | 1 | 1 | 11 (1.2) | LC1DFK11.. | 0.94 (0.430) |
| | | | – | 2 | 11 (1.2) | LC1DFK02.. | 0.94 (0.430) |
| 8.5 | 16.7 | 24 | 1 | 1 | 15 (1.7) | LC1DGK11.. | 0.99 (0.450) |
| | | | – | 2 | 15 (1.7) | LC1DGK02.. | 0.99 (0.450) |
| 10 | 20 | 30 | 1 | 1 | 17 (1.9) | LC1DLK11.. | 1.3 (0.600) |
| | | | – | 2 | 17 (1.9) | LC1DLK02.. | 1.3 (0.600) |
| 15 | 25 | 36 | 1 | 1 | 22 (2.5) | LC1DMK11.. | 1.4 (0.630) |
| | | | – | 2 | 22 (2.5) | LC1DMK02.. | 1.4 (0.630) |
| 20 | 33.3 | 48 | 1 | 2 | 44 (5) | LC1DPK12.. | 2.9 (1.300) |
| 25 | 40 | 58 | 1 | 2 | 44 (5) | LC1DTK12.. | 2.9 (1.300) |
| 40 | 60 | 92 | 1 | 2 | 80 (9) | LC1DWK12.. | 3.6 (1.650) |

Switching of multiple step capacitor banks (with equal or different power ratings).

The correct contactor for each step is selected from the above table, according to the power rating of the step to be switched.

Example: 50 kVAR 3-step capacitor bank. Temperature 50 °C (122 °F) and U = 400 V or 440 V.

One 25 kVAR step: contactor LC1-DMK, one 15 kVAR step: contactor LC1-DGK and one 10 kVAR step: contactor LC1-DFK.

(1) Operational power of the contactor according to the schematic on page 143.

(2) Standard control circuit voltages.

| | | | | | | | | | | | | |
|----------|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Volts | 24 | 42 | 48 | 110 | 115 | 220 | 230 | 240 | 380 | 400 | 415 | 440 |
| 50/60 Hz | B7 | D7 | E7 | F7 | FE7 | M7 | P7 | U7 | Q7 | V7 | N7 | R7 |

For other voltages between 24 and 440 V, please consult your Regional Sales Office

(3) The average temperature over a 24-hour period, in accordance with standards IEC 60070 and 60831, is 45 °C (113 °F).


TeSys™ D-Line Contactors and Starters

Capacitor-switching Contactors (International Applications Only)

For Switching 3-phase Capacitor Banks, used for Power Factor Correction
Dimensions, Schematics - References


Dimensions

LC1DFK, DGK

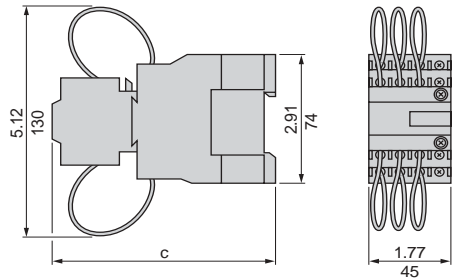


| LC1 | c | Type of Mounting |
|-----|-----|---------------------------|
| DFK | 117 | LC1D12 See pages 124, 125 |
| DGK | 122 | LC1D18 See pages 124, 125 |

LC1DPK, DTK

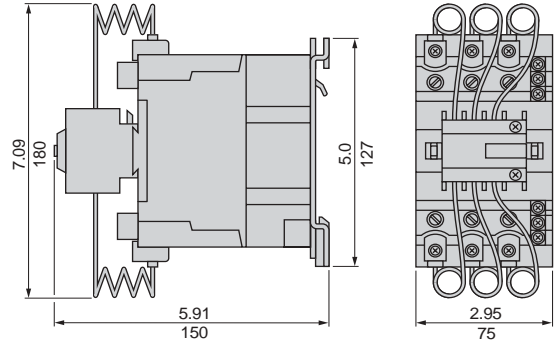


| LC1 | Type of Mounting |
|-----|---------------------------|
| DPK | LC1D40 See pages 124, 125 |
| DTK | LC1D50 See pages 124, 125 |

LC1DLK, DMK

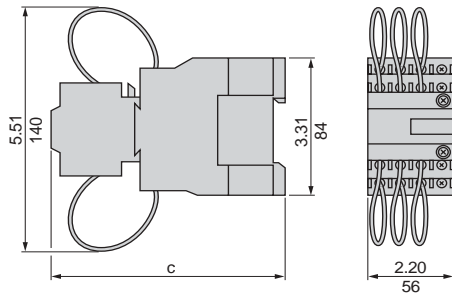

| LC1 | c | Type of Mounting |
|-----|-----|---------------------------|
| DLK | 117 | LC1D25 See pages 124, 125 |
| DMK | 122 | LC1D32 See pages 124, 125 |


LC1DWK

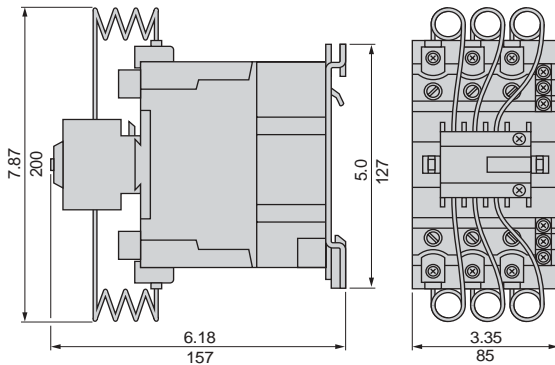

| LC1 | Type of Mounting |
|-----|---------------------------|
| DWK | LC1D80 See pages 124, 125 |

Schematics

LC1D•K



Cabling (maximum permissible c.s.a.)

R = Pre-wired resistor connections

| Contactor type LC1 | DFK | | DGK | | DLK | | DMK | | DPK, DTK | | DWK | |
|--|----------|----------|--------|----------|--------|--------|--------|--------|----------|--------|--------|--------|
| Number of conductors | 1 | 2 | 1 | 2 | 1 | 2 | 1 | 2 | 1 | 2 | 1 | 2 |
| Flexible cable with cable end AWG (mm ²) | 14 (2.5) | 16 (1.5) | 12 (4) | 14 (2.5) | 12 (4) | 12 (4) | 10 (6) | 12 (4) | 6 (16) | 10 (6) | 1 (50) | 4 (25) |
| Solid cable without cable end AWG (mm ²) | 12 (4) | 12 (4) | 10 (6) | 10 (6) | 8 (10) | 10 (6) | 6 (16) | 8 (10) | 4 (25) | 6 (16) | 1 (50) | 2 (35) |

TeSys™ D-Line Contactors and Starters

Plate-mounted Starters LC4D (International Applications Only)



LC4D09A**

AC D.O.L. Starters, Plate Mounted, for Motor Control 4 to 37 kW, (1), with Isolating Device, Pre-Assembled - References

| Utilization Category ac-3 | | | | | | Operational Current | Fuses to be Fitted by the Customer | | Basic Reference. Complete with Code Indicating Control Circuit Voltage (2) | Weight lb (kg) |
|---|-------|-----|-------|-------|-------|---------------------|------------------------------------|------|--|----------------|
| Standard Power Ratings of 3-phase Motors 50/60 Hz | | | | | | | 440 V up to | Size | | |
| 220 V | 380 V | | 440 V | 500 V | 660 V | A | | | | A |
| 220 V | 380 V | | 440 V | 500 V | 660 V | 440 V up to | | | | |
| kW | kW | kW | kW | kW | kW | A | | | | |
| 2.2 | 4 | 4 | 4 | 5.5 | – | 9 | 10 x 38 | 12 | LC4D09A** | 1.9 (0.870) |
| 3 | 5.5 | 5.5 | 5.5 | 7.5 | – | 12 | 10 x 38 | 16 | LC4D12A** | 1.9 (0.870) |
| 4 | 7.5 | 9 | 9 | 10 | – | 18 | 10 x 38 | 20 | LC4D18A** | 2.5 (1.150) |
| 5.5 | 11 | 11 | 11 | 15 | – | 25 | 10 x 38 | 25 | LC4D25A** | 3.5 (1.580) |
| 7.5 | 15 | 15 | 15 | 18.5 | 18.5 | 32 | 14 x 51 | 32 | LC4D32A** | 5.8 (2.630) |
| 11 | 18.5 | 22 | 22 | 22 | 30 | 40 | 14 x 51 | 40 | LC4D40** | 6.5 (2.930) |
| 15 | 22 | 25 | 30 | 30 | 33 | 50 | 22 x 58 | 63 | LC4D50** | 7.0 (3.200) |
| 18.5 | 30 | 37 | 37 | 37 | 37 | 65 | 22 x 58 | 80 | LC4D65** | 7.4 (3.340) |
| 22 | 37 | 45 | 45 | 55 | 45 | 80 | 22 x 58 | 80 | LC4D80** | 8.0 (3.650) |

Specifications

Pre-wired power and control circuit connections.

3-pole isolating device

- (1) Thermal overload relay to be ordered separately (see pages 134, 135).
- (2) Standard control circuit voltages.

| Volts | 24 | 42 | 48 | 110 | 220 | 230 | 240 | 380 | 400 | 415 | 440 |
|----------|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|
| 50/60 Hz | B7 | D7 | E7 | F7 | M7 | P7 | U7 | Q7 | V7 | N7 | R7 |

For other voltages, please consult your Regional Sales Office.

TeSys™ D-Line Contactors and Starters

Plate-mounted Starters LC4D (International Applications Only)

D.O.L. Starters, Plate Mounted, for Motor Control
4 to 37 kW, with Isolating Device, Pre-assembled - Dimensions, Schematics



Dimensions

D.O.L. Starters

Plate Mounted, Pre-assembled

LC4D09 to D25A


LC4D32A

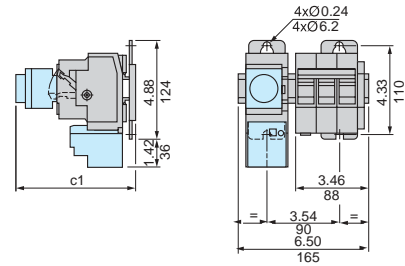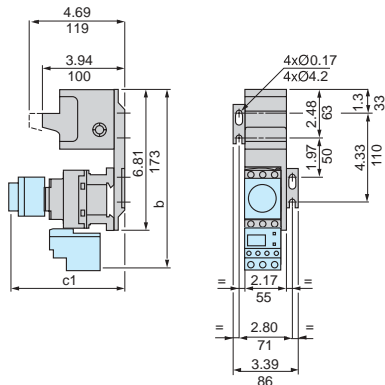

| LC4 | D09A to D18A | D25A |
|---------------------------------------|--------------|------------|
| b | 8.58 (218) | 8.70 (221) |
| c1 without cover or add-on blocks | 3.70 (94) | 3.93 (100) |
| with cover, without add-on block | 3.77 (96) | 4.01 (102) |
| with LADN or C (two or four contacts) | 5.0 (127) | 5.23 (133) |
| with LA6DK10 | 5.47 (139) | 5.70 (145) |
| with LADT, R, S | 5.78 (147) | 6.02 (153) |
| with LADT, R, S and sealing cover | 5.94 (151) | 6.18 (157) |

| LC4 | D32A |
|---------------------------------------|------------|
| c1 without cover or add-on blocks | 8.70 (221) |
| with cover, without add-on block | 4.01 (102) |
| with LADN or C (two or four contacts) | 5.23 (133) |
| with LA6DK10 | 5.70 (145) |
| with LADT, R, S | 6.02 (153) |
| with LADT, R, S and sealing cover | 6.18 (157) |


LC4-D40 to D80

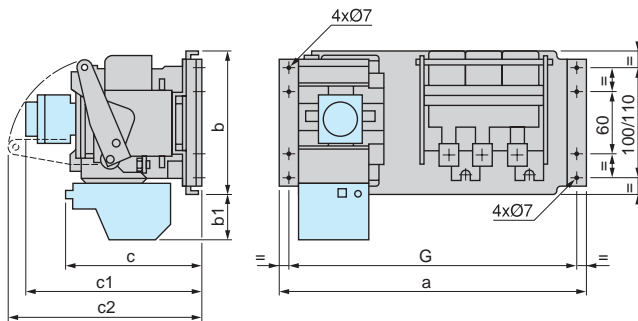

| LC4 | D40 to D65 | D80 |
|--|------------|------------|
| a | 11.0 (281) | 12.2 (311) |
| b | 5.6 (143) | 5.6 (143) |
| c | 5.1 (130) | 5.5 (140) |
| c1 without cover or add-on blocks | 4.8 (124) | 5.3 (135) |
| with cover, without add-on block | 5.2 (129) | 5.5 (140) |
| with LA1-DN (one contact) | 6.1 (149) | 6.3 (160) |
| with LAD-N or C (two or four contacts) | 6.4 (157) | 6.6 (168) |
| with LA6-DK | 6.6 (169) | 7.0 (180) |
| with LAD-T, R, S | 6.9 (177) | 7.4 (188) |
| with LAD-T, R, S and sealing cover | 7.12 (181) | 7.5 (192) |
| c2 | 3.9 (100) | 7.0 (178) |

D.O.L. Starters

LC4-D09A to D80



TeSys™ D-Line Contactors and Starters

AC Wye-delta Starters LC3D (International Applications Only)

5.5 to 132 kW, (1), without Isolating Device, Pre-assembled - References

NOTE: Wiring methods differ from typical North American practice.
 Contains UL listed, CSA certified, CE marked components.
 Assemblies are not UL Listed or CSA Certified.



LC3D32A●●

| Standard Power Ratings of Squirrel Cage Motors | | | | Auxiliary Contacts Available on Each Contactor | | | Star Delta Mechanical Interlock | Catalog Number | Weigh lb. (kg) |
|--|-----------|-------|-------|--|-------|------|---|----------------|----------------|
| | | | | line | delta | star | | | |
| Line Voltage - Delta Connection | | | | KM2 | KM3 | KM1 | Complete with Code Indicating Control Circuit Voltage (2) | | |
| 220/230 V | 380/400 V | 415 V | 440 V | | | | | | |
| kW | kW | kW | kW | | | | | | |

Plate Mounted

Maximum Operating Rate: 30 starts/hour. Maximum starting time: 30 seconds.

| Line Voltage (V) | 220/230 V | 380/400 V | 415 V | 440 V | Line | Delta | Star | Auxiliary Contacts | Interlock | Control Circuit Voltage | Model | Weight (kg) |
|------------------|-----------|-----------|-------|-------|------|-------|------|--------------------|-----------|-------------------------|------------------|---------------|
| 4 | 7.5 | 7.5 | 7.5 | - | - | - | -(3) | - | 1 | With | LC3D09A●● | 3.4 (1.530) |
| 5.5 | 11 | 11 | 11 | - | - | - | -(3) | - | 1 | With | LC3D12A●● | 3.4 (1.530) |
| 11 | 18.5 | 22 | 22 | - | - | - | -(3) | - | 1 | With | LC3D18A●● | 3.8 (1.730) |
| 15 | 25 | 30 | 30 | - | - | - | -(3) | - | 1 | With | LC3D32A●● | 4.5 (2.030) |
| 18.5 | 37 | 37 | 37 | - | 1 | 1 | -(3) | - | 1 | Without | LC3D40●● | 9.6 (4.360) |
| | | | | | | | | | | With | LC3D40●●A64 | 9.9 (4.500) |
| 30 | 55 | 59 | 59 | - | 1 | 1 | -(3) | - | -(3) | Without | LC3D50●● | 9.6 (4.360) |
| | | | | | | | | | | With | LC3D50●●A64 | 9.9 (4.500) |
| 37 | 75 | 75 | 75 | - | 1 | 1 | -(3) | - | -(3) | Without | LC3D80●● | 11.5 (5.200) |
| | | | | | | | | | | With | LC3D80●●A64 | 12.0 (5.400) |
| 63 | 110 | 110 | 110 | - | 1 | 1 | -(3) | - | -(3) | Without | LC3D115●● (4) | 26.0 (11.800) |
| | | | | | | | | | | With | LC3D115●●A64 (4) | 26.7 (12.100) |
| 75 | 132 | 132 | 147 | - | 1 | 1 | -(3) | - | 1 (3) | Without | LC3D150●● (4) | 26.7 (12.100) |
| | | | | | | | | | | With | LC3D150●●A64 (4) | 26.7 (12.100) |

Rail Mounted (35 mm DIN rail)

Maximum Operating Rate: 12 starts/hour. Maximum starting time: 30 seconds.

| Line Voltage (V) | 220/230 V | 380/400 V | 415 V | 440 V | Line | Delta | Star | Auxiliary Contacts | Interlock | Control Circuit Voltage | Model | Weight (kg) |
|--|-----------|-----------|-------|-------|------|-------|------|--------------------|-----------|-------------------------|------------|-------------|
| 3 | 5.5 | 5.5 | 5.5 | - | - | - | - | - | 1 | With | LC3K06●● | 1.6 (0.740) |
| 4 | 7.5 | 7.5 | 7.5 | - | - | - | - | - | 1 | With | LC3K09●● | 1.6 (0.740) |
| Maximum operating rate: 30 starts/hour. Maximum starting time: 30 seconds. | | | | | | | | | | | | |
| 4 | 7.5 | 7.5 | 7.5 | - | - | - | -(3) | - | 1 | With | LC3D090A●● | 3.4 (1.530) |
| 5.5 | 11 | 11 | 11 | - | - | - | -(3) | - | 1 | With | LC3D120A●● | 3.4 (1.530) |
| 11 | 18.5 | 22 | 22 | - | - | - | -(3) | - | 1 | With | LC3D180A●● | 3.8 (1.730) |
| 15 | 25 | 30 | 30 | - | - | - | -(3) | - | 1 | With | LC3D320A●● | 4.5 (2.030) |

- (1) Protection must be provided by the addition of an overload relay, to be ordered separately. Select appropriate overload relay for setting at 0.58 of the full load rated motor current (see pages 134 and 135).
- (2) Standard control circuit voltages

| Volts ac 50/60 Hz | 24 | 36 | 42 | 48 | 110 | 220 | 230 | 240 | 380 | 400 | 415 | 440 |
|--|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|
| Wye-delta Starters LC3K06 and K09 | | | | | | | | | | | | |
| Code | B7 | C7 | D7 | E7 | F7 | M7 | P7 | U7 | - | V7 | N7 | R7 |
| Wye-delta starters LC3D09A to D150, LC3D090A to D320A | | | | | | | | | | | | |
| Code | B7 | - | D7 | E7 | F7 | M7 | P7 | U7 | Q7 | V7 | N7 | R7 |


For other voltages, please consult your Regional Sales Office.

- (3) One auxiliary contact block type LADN can also be installed, see page 107.
- (4) These starters consist of contactors LC1D115 or D150 without connectors.

TeSys™ D-Line Contactors and Starters

AC Wye-delta Starters LC3D (International Applications Only)

Wye-delta Starting

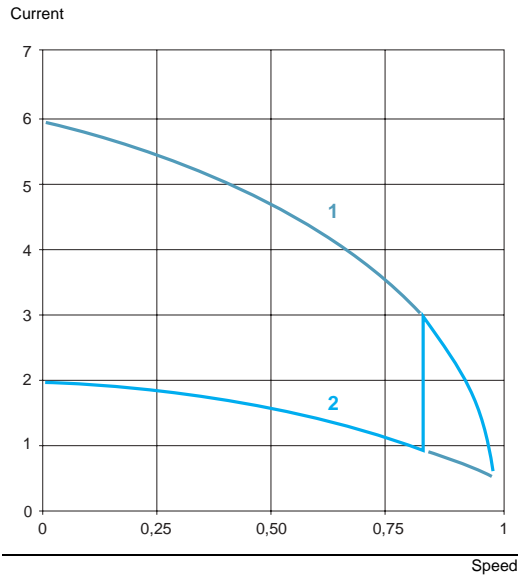

This method of starting is applicable to motors on which all six stator terminals are accessible and whose delta connection voltage corresponds to the mains voltage.


Wye-delta starting should be used for motors starting on no-load or having a low load torque and gradual build-up: the starting torque in star connection is reduced to one third of the direct starting torque, i.e. about 50% of the rated torque; the starting current in star connection is about 1.8 to 2.6 times the rated current.

The transition from wye to delta connection must occur when the machine has run up to speed. A too rapid build-up in load torque would cause the stabilized run-up speed to be too low and would therefore eliminate any advantage in this method of starting: this is the case with certain machines whose load torque depends on the machine speed (a characteristic of centrifugal machines, for example).

All wye-delta starters are supplied with a special LA2DS2 or LA2KT2 time delay relay which imposes a delay on the delta contactor during the transition period in order to allow the star contactor sufficient breaking time.

For ratings D115 and D150, this function is performed by a time delay auxiliary contact block LA2DT2 and a control relay.

1 Starting in direct delta connection
2 Starting in wye connection

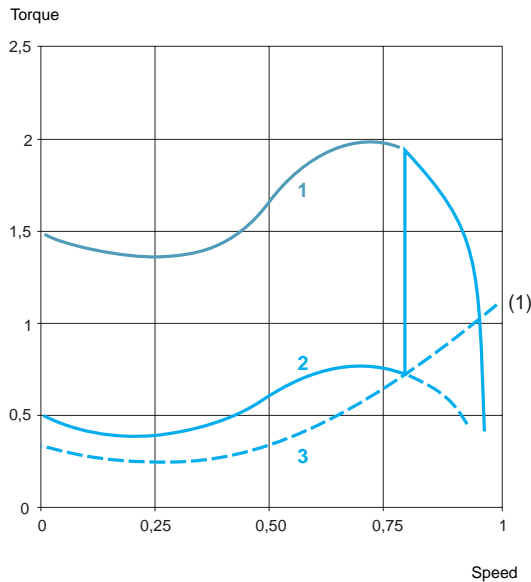


1 Starting in direct delta connection
2 Starting in star connection
3 Machine resistive torque

(1) Motor manufacturers generally specify machine load torques.
Example: maximum resistive torque on completion of star-delta start (expressed as a proportion of the rated torque).

TeSys™ D-Line Contactors and Starters

AC Wye-delta Starter Kits (International Applications Only)

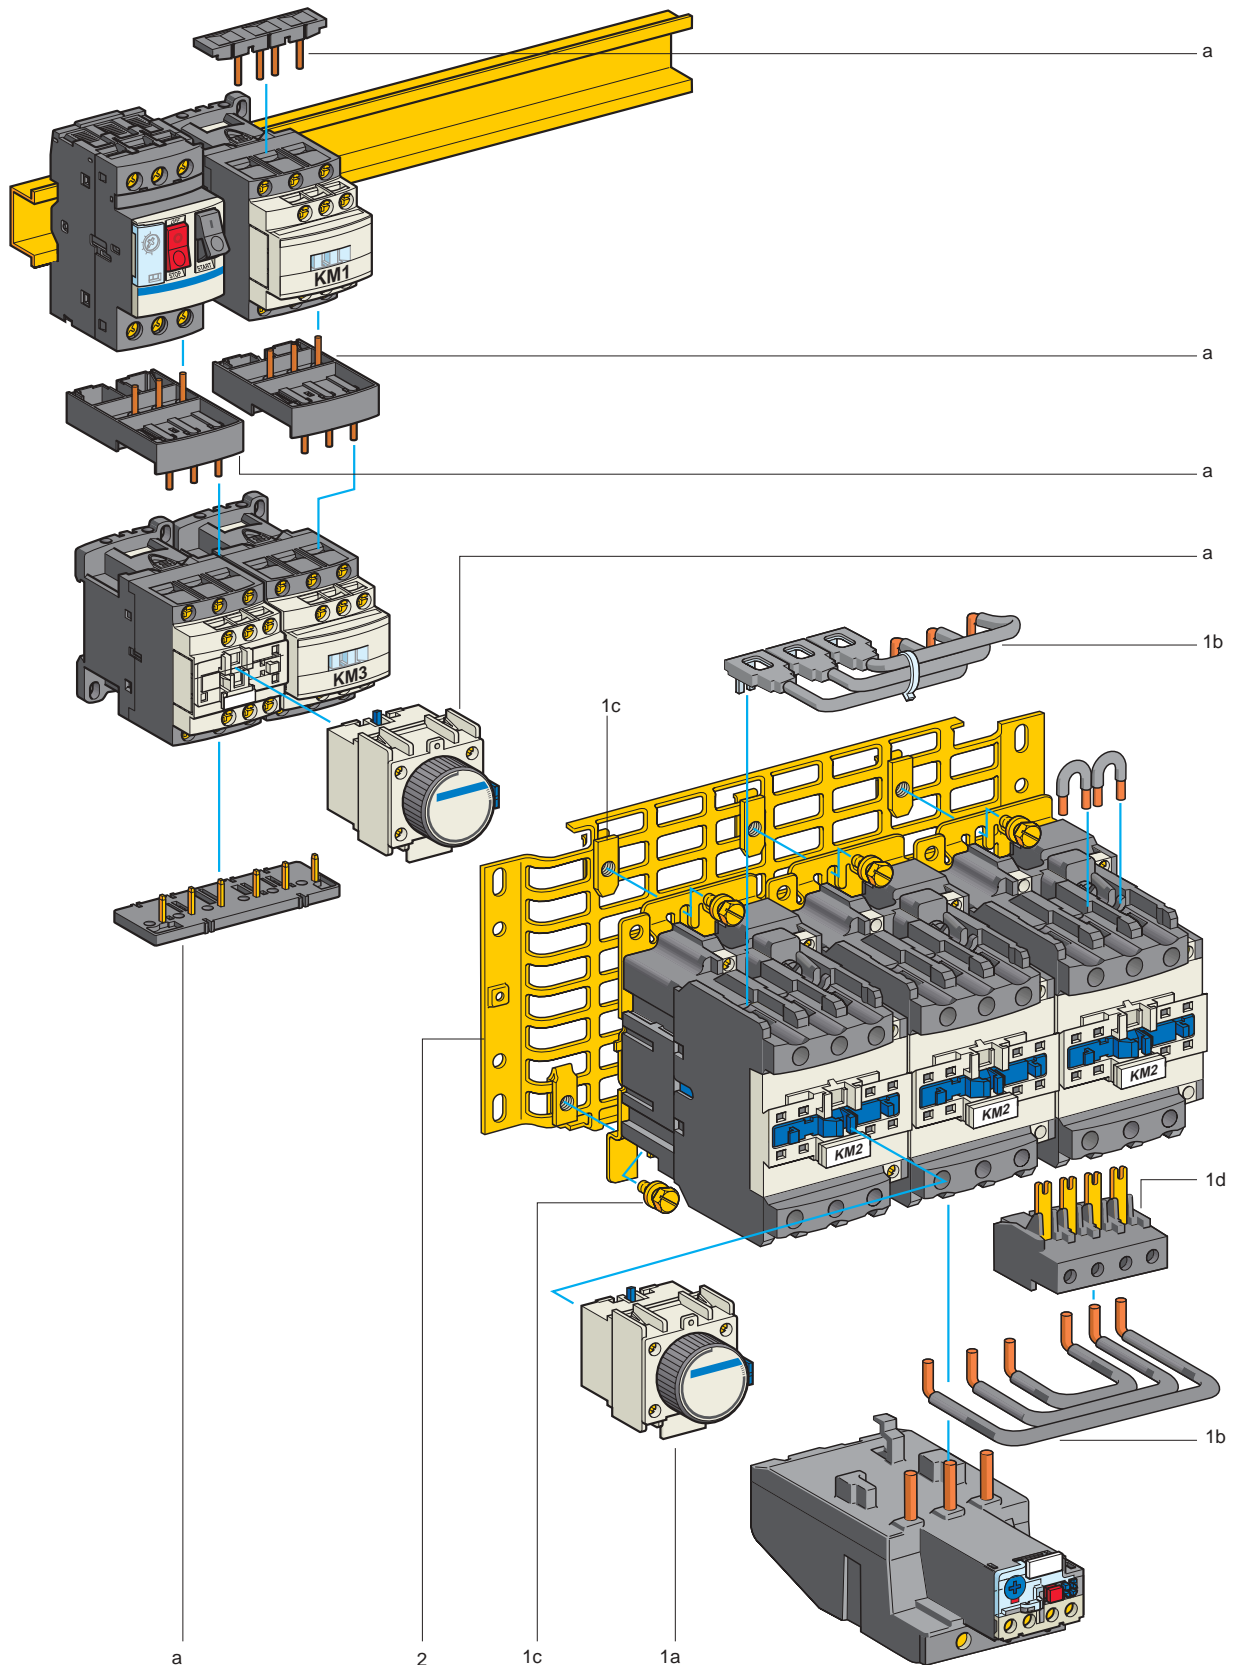

TeSys™ D-Line Contactors and Starters

AC Wye-delta Starter Kits (International Applications Only)

Wye-delta Starters, for Motor Control, 7.5 to 132 kW (1), without Mechanical Interlock, for Customer Assembly (on plate or on mounting rail) (2) - References

Starters for Direct Combination with Circuit-breaker

| Maximum Operating Rate: 30 starts/hour. Maximum starting time: 30 seconds | | | | | |
|---|-------------|----------------------------|---|----------|----------|
| Standard Power Ratings of Squirrel Cage Motors (3) Mains Voltage-delta | | Motor Thermal-magnetic MCB | Catalog Number Complete with Code Indicating Control Circuit Voltage (4) | | |
| 400/415 V kW | 440 V kW | | line | delta | star |
| | | | KM2 | KM3 | KM1 |
| 7.5 | 7.5 | GV2ME20 | LC1D09** | LC1D09** | LC1D09** |
| – | 9 | GV2ME20 | LC1D12** | LC1D12** | LC1D09** |
| 9 | 11 | GV2ME21 | LC1D12** | LC1D12** | LC1D09** |
| 11 | – | GV2ME22 | LC1D18** | LC1D18** | LC1D09** |
| 15 | 15 | GV2ME32 | LC1D18** | LC1D18** | LC1D09** |

Separate Parts

| Description | Illustration Item No. | Catalog Number | Weight lb. (kg) |
|---|-----------------------|----------------|-----------------|
| Mounting Kit comprising: Power circuit connections and 1 time delay contact block LADS2 | a | LAD912GV | 0.29 (0.130) |

Starters for Mounting Separately from Upstream Protection

| Maximum Operating Rate : 30 starts/hour. Maximum starting time: 30 seconds | | | | | | | |
|--|-----------|-------|-------|---|-----------|-----------|-------------------------------|
| Standard power ratings of squirrel cage motors (3) Mains voltage-delta | | | | Contactors (basic references to be completed with code indicating the voltage) (4) | | | Separate Parts (see below) |
| 220/230 V | 380/400 V | 415 V | 440 V | line | delta | star | Component Type |
| kW | kW | kW | kW | KM2 | KM3 | KM1 | |
| 4 | 7.5 | 7.5 | 7.5 | LC1D09** | LC1D09** | LC1D09** | D09 |
| 5.5 | 11 | 11 | 11 | LC1D12** | LC1D12** | LC1D09** | D12 |
| 11 | 18.5 | 22 | 22 | LC1D18** | LC1D18** | LC1D09** | D18 |
| 15 | 25 | 30 | 30 | LC1D32** | LC1D32** | LC1D18** | D32 |
| 18.5 | 37 | 37 | 37 | LC1D40** | LC1D40** | LC1D40** | D40 |
| 30 | 55 | 59 | 59 | LC1D50** | LC1D50** | LC1D40** | D50 |
| 37 | 75 | 75 | 75 | LC1D80** | LC1D80** | LC1D50** | D80 |
| 63 | 110 | 110 | 110 | LC1D115** | LC1D115** | LC1D80** | D115 |
| 75 | 132 | 132 | 147 | LC1D150** | LC1D150** | LC1D115** | D150 |

Separate Parts

| Description | Illustration Item No. | For use on | Catalog Number | Weight lb. (kg) |
|---|--------------------------|---------------|----------------|-----------------|
| Mounting Kit comprising: - 1 time delay contact block LADS2 (D09 to D80) (3) - power circuit connections (D09 to D80) - screws and clamps for attaching contactors to the plate (D40 to D80) - terminal block (D09 to D32) | 1 a 1 b 1 c 1 d | D09 to D18 | LAD91217 | 0.40 (0.180) |
| | | D32 | LAD93217 | 0.65 (0.310) |
| | | D40 | LA9D4017 | 0.83 (0.380) |
| | | D50 | LA9D5017 | 1.06 (0.480) |
| | | D80 | LA9D8017 | 1.5 (0.680) |
| Equipment Mounting Plate | 2 | D09, D12, D18 | LA9D12974 | 0.33 (0.150) |
| | | D32 | LA9D32974 | 0.40 (0.180) |
| | | D40 and D50 | LA9D40973 | 0.66 (0.300) |
| | | D80 | LA9D80973 | 0.66 (0.300) |

- (1) Protection must be provided by the addition of a thermal overload relay, to be ordered separately. Select appropriate overload relay for setting at 0.58 of the rated motor current, see pages 134 and 135.
- (2) For mounting, assembly and cabling: refer to installation instructions supplied with the equipment.
- (3) See comments on page 147.
- (4) See page 115.


TeSys™ D-Line Contactors and Starters

AC Wye-delta Starter Kits (International Applications Only)

Wye-delta Starters - Dimensions, Schematics

Dimensions for Wye-delta Starters


On mounting rail AM1-DP, pre-assembled
LC3-D090A to D320A

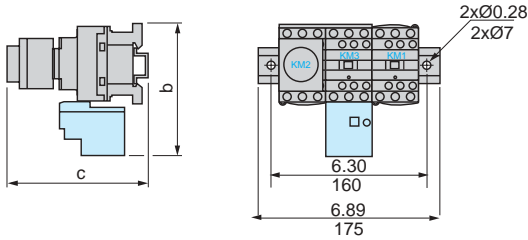


| LC3 | D090A to D180A | D320A |
|-----|------------------------------|-----------|
| b | 6.0 (153) | 5.6 (137) |
| c | with LAD-S | 5.9 (145) |
| | with LAD-S and sealing cover | 5.8 (143) |

Schematics


LC3-K, LC3-D09A to D80 / LC3D090A to D320A

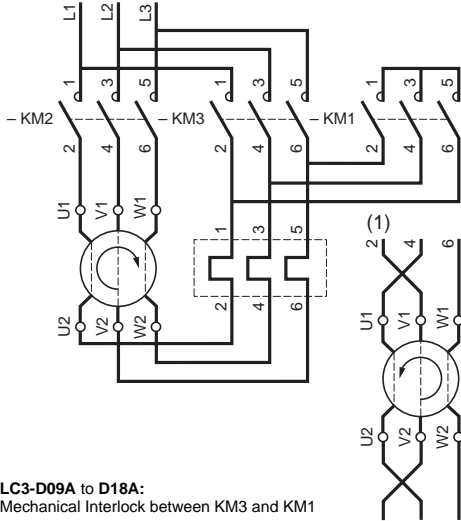

LC3-K

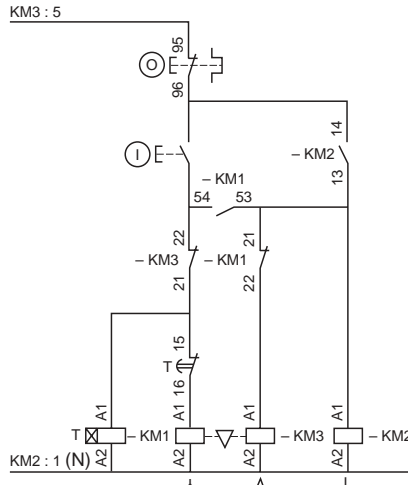

LC3-D


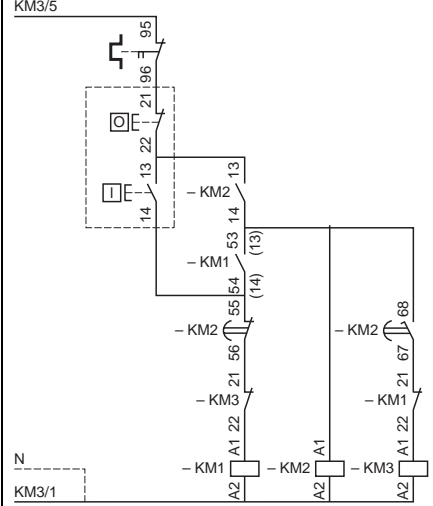


LC3-D09A to D18A:
Mechanical Interlock between KM3 and KM1

(1) Recommended cabling for reversal of motor rotation (Standard motor, viewed from shaft end)

For LC3D50, D80

LC3-D115 and D150

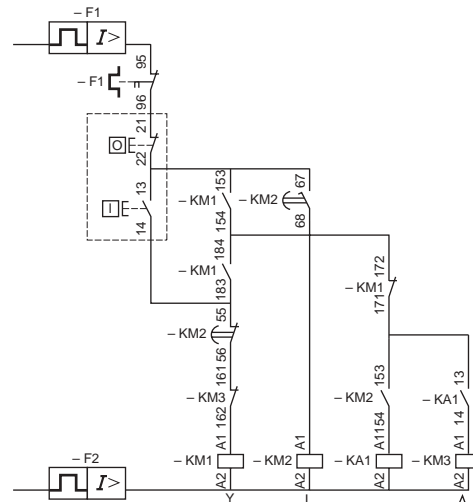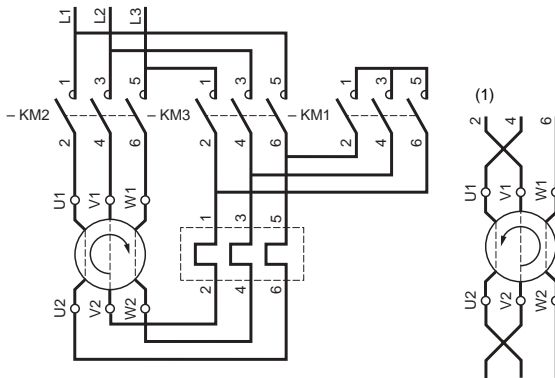

(1) Recommended cabling for reversal of motor rotation (Standard motor, viewed from shaft end)

TeSys™ D-Line Contactors and Starters Enclosed Contactors and Starters

Horsepower Ratings for North American Applications of D-Line Products in Metal Enclosures

D-line enclosed full voltage starters are available in Type 1 and Type 12/3R enclosures through 50 hp at 460 Vac.

See pages 106 to 112 for a complete selection of D-line accessories. See page 155 for Insta-Kit accessories.



E154118
CCN NLDX
CCN NLDX7



LR23506 41
Class 3211 04

Enclosed full voltage non-reversing starters

| Max. Horsepower Ratings (AC3) 3 Phase | | | | Auxiliary Contacts | | Current Rating of Contactor | Catalog Number Type 1 | Weight kg (lb.) | Catalog Number Type 12/3R | Weight kg (lb.) |
|--|-------|-------|-------|--------------------|------|-----------------------------|---------------------------|-----------------|------------------------------|-----------------|
| 200 V | 230 V | 460 V | 575V | N.O. | N.C. | | | | | |
| 2 | 2 | 5 | 7 1/2 | 1 | ... | 9 | LE1D093A62(1)(2)(3)(4)(5) | 3.1 (6.9) | LE1D093A72(1)(2)(3)(4)(5) | 3.5 (7.7) |
| 3 | 3 | 7 1/2 | 10 | 1 | ... | 12 | LE1D123A62(1)(2)(3)(4)(5) | 3.1 (6.9) | LE1D123A72(1)(2)(3)(4)(5) | 3.5 (7.7) |
| 5 | 5 | 10 | 15 | 1 | ... | 18 | LE1D183A62(1)(2)(3)(4)(5) | 3.1 (6.9) | LE1D183A72(1)(2)(3)(4)(5) | 3.5 (7.7) |
| 5 | 7 1/2 | 15 | 20 | 1 | ... | 25 | LE1D253A62(1)(2)(3)(4)(5) | 3.3 (7.3) | LE1D253A72(1)(2)(3)(4)(5) | 3.6 (8.1) |
| 7 1/2 | 10 | 20 | 25 | 1 | ... | 32 | LE1D323A62(1)(2)(3)(4)(5) | 3.3 (7.3) | LE1D323A72(1)(2)(3)(4)(5) | 3.6 (8.1) |
| 10 | 10 | 30 | 30 | 1 | 1 | 40 | LE1D403A62(1)(2)(3)(4)(5) | 5.1 (11.4) | LE1D403A72(1)(2)(3)(4)(5) | 5.5 (12.3) |
| 10 | 15 | 30 | 40 | 1 | 1 | 50 | LE1D503A62(1)(2)(3)(4)(5) | 5.1 (11.4) | LE1D503A72(1)(2)(3)(4)(5) | 5.5 (12.3) |
| 15 | 20 | 40 | 50 | 1 | 1 | 65 | LE1D653A62(1)(2)(3)(4)(5) | 7.4 (16.5) | LE1D653A72(1)(2)(3)(4)(5) | 7.8 (17.4) |
| 20 | 20 | 50 | 60 | 1 | 1 | 80 | LE1D803A62(1)(2)(3)(4)(5) | 7.6 (16.8) | LE1D803A72(1)(2)(3)(4)(5) | 8.0 (17.8) |

Enclosed full voltage reversing starters

| Max. Horsepower Ratings (AC3) 3 Phase | | | | Auxiliary Contacts | | Current Rating of Contactor | Catalog Number Type 1 | Weight kg (lb.) | Catalog Number Type 12/3R | Weight kg (lb.) |
|--|-------|-------|-------|--------------------|------|-----------------------------|---------------------------|-----------------|------------------------------|-----------------|
| 200 V | 230 V | 460 V | 575 V | N.O. | N.C. | | | | | |
| 2 | 2 | 5 | 7 1/2 | 2 | 2 | 9 | LE2D093A62(1)(2)(3)(4)(5) | 4.5 (10) | LE2D093A72(1)(2)(3)(4)(5) | 4.9 (10.8) |
| 3 | 3 | 7 1/2 | 10 | 2 | 2 | 12 | LE2D123A62(1)(2)(3)(4)(5) | 4.5 (10) | LE2D123A72(1)(2)(3)(4)(5) | 4.9 (10.8) |
| 5 | 5 | 10 | 15 | 2 | 2 | 18 | LE2D183A62(1)(2)(3)(4)(5) | 4.5 (10) | LE2D183A72(1)(2)(3)(4)(5) | 4.9 (10.8) |
| 5 | 7 1/2 | 15 | 20 | 2 | 2 | 25 | LE2D253A62(1)(2)(3)(4)(5) | 4.5 (10) | LE2D253A72(1)(2)(3)(4)(5) | 4.9 (10.8) |
| 7 1/2 | 10 | 20 | 25 | 2 | 2 | 32 | LE2D323A62(1)(2)(3)(4)(5) | 4.5 (10) | LE2D323A72(1)(2)(3)(4)(5) | 4.9 (10.8) |
| 10 | 10 | 30 | 30 | 2 | 2 | 40 | LE2D403A62(1)(2)(3)(4)(5) | 4.5 (10) | LE2D403A72(1)(2)(3)(4)(5) | 4.9 (10.8) |
| 10 | 15 | 30 | 40 | 2 | 2 | 50 | LE2D503A62(1)(2)(3)(4)(5) | 4.5 (10) | LE2D503A72(1)(2)(3)(4)(5) | 4.9 (10.8) |
| 15 | 20 | 40 | 50 | 2 | 2 | 65 | LE2D653A62(1)(2)(3)(4)(5) | 4.5 (10) | LE2D653A72(1)(2)(3)(4)(5) | 4.9 (10.8) |
| 20 | 20 | 50 | 60 | 2 | 2 | 80 | LE2D803A62(1)(2)(3)(4)(5) | 4.5 (10) | LE2D803A72(1)(2)(3)(4)(5) | 4.9 (10.8) |

NOTE: Use of control circuit transformers requires Insta-Kit wiring.

- Control Power Transformer: Select letter from below for primary voltage of CPT.

Control Power Transformer Primary Voltage Code Table

| Voltage | No Transformer used | 208 | 240 | 480 | 600 |
|---------|---------------------|-----|-----|-----|-----|
| Code | O | L | M | T | X |

- Contactor/starter coil voltage: Select coil voltage from table below.

NOTE: If control transformer is used, the only options available are 24 or 120 volts as the secondary of the transformer.

Contactor Coil Voltage Table

| Voltage | 24 | 120 | 208 | 240 | 480 | 600 |
|---------|----|-----|-----|-----|-----|-----|
| AC | B | G | L | U | T | X |

- Coil Frequency: Select: 7 = dual frequency coils (50/60 Hz), 6 = 60 Hz.

NOTE: For 9 to 32 A contactors, only dual frequency coils are available. For 40 to 80 A contactors, the 24 V to 240 V coils are dual frequency only (50/60 Hz.). The 480 V to 600 V coils are 60 Hz. only.

- Overload relay type: Select: 0 = No overload relay, 1 = Trip Class 10, 2 = Trip Class 20.
- Overload relay range: Select code from page 152.

NOTE: If no overload relay is required, leave this portion of the catalog number blank.

TeSys™ D-Line Contactors and Starters

Enclosed IEC Non-Combination Starters



LE2D093A62

Enclosed starter overload relay selection table

| Code | Range | For use on Contactors |
|------|-----------------|--------------------------|
| 01 | 0.1–0.16 | LC1D09–D32 ▲ |
| 02 | 0.16–0.25 | LC1D09–D32 ▲ |
| 03 | 0.25–0.40 | LC1D09–D32 ▲ |
| 04 | 0.40–0.63 | LC1D09–D32 ▲ |
| 05 | 0.63–1.0 | LC1D09–D32 ▲ |
| 06 | 1.0–1.6 | LC1D09–D32 ▲ |
| 07 | 1.6–2.5 | LC1D09–D32 ▲ |
| 08 | 2.5–4 | LC1D09–D32 |
| 10 | 4–6 | LC1D09–D32 |
| 12 | 5.5–8 | LC1D09–D32 |
| 14 | 7–10 | LC1D09–D32 |
| 16 | 9–13 | LC1D12–D32 |
| 21 | 12–18 | LC1D18–D32 |
| 22 | 16–24 ▲ 17–25 ■ | LC1D25–D32 ▲ LC1D40–80 ■ |
| 30 | 23–28 | LC1D25–D32 ■ |
| 32 | 25–32 ▲ 23–32 ■ | LC1D25–D32 |
| 53 | 30–38 | LC1D40–D80 |
| 55 | 30–40 | LC1D40–D80 |
| 57 | 37–50 | LC1D40–D80 |
| 59 | 48–65 | LC1D40–D80 |
| 61 | 55–70 | LC1D40–D80 |
| 63 | 63–80 | LC1D40–80 |

- ▲ Available in Class 10 only
- Available in Class 20 only

NOTE: Use of control circuit transformers requires Insta-Kit wiring.

- Control Power Transformer: Select letter from below for primary voltage of CPT.

Control Power Transformer Primary Voltage Code Table

| Voltage | No Transformer used | 208 | 240 | 480 | 600 |
|---------|---------------------|-----|-----|-----|-----|
| Code | O | L | M | T | X |

- Contactor/starter coil voltage: Select coil voltage from table below.

NOTE: If control transformer is used, the only options available are 24 or 120 volts as the secondary of the transformer.

Contactor Coil Voltage Table

| Voltage | 24 | 120 | 208 | 240 | 480 | 600 |
|---------|----|-----|-----|-----|-----|-----|
| AC | B | G | L | U | T | X |

- Coil frequency: Select: 7 = dual frequency for all starter coil selections except for 480 V or 600 V coils, on 40 A - 80 A starters select 6, 60 Hz only.
- Overload relay type: Select: 0 = No overload relay, 1 = Trip Class 10, 2 = Trip Class 20.
- Overload relay range: Select code from page 155.

NOTE: If no overload relay is required, leave this portion of the catalog number blank.

TeSys™ D-Line Contactors and Starters Enclosed IEC Combination Starters

Horsepower Ratings for North American Applications of

D-Line Products in Metal Enclosures with Fusible Disconnect Switch or Circuit Breaker

IEC combination starters combine the requirements of motor overload and short circuit protection in one convenient compact package. All devices provide Type 2 Coordination through 30 hp at 460 V. Devices are available in Type 1 and Type 12/3R enclosures.

NOTE: Use tables and notes from page 152 to complete the catalog numbers. See pages 106 to 112 for a complete selection of D-line accessories. See page 155 for Insta-Kit accessories.



E154118
CCN NLDX
CCN NLDX7



LR23506 41
Class 3211 04

Enclosed full voltage non-reversing fusible combination starters

| Max. Horsepower Ratings (AC3) 3 Phase | | | | Fuse Clip Rating | | Auxiliary Contacts | | Current Rating of Contactor | Catalog Number | Weight kg (lb.) | Catalog Number | Weight kg (lb.) |
|--|-------|-------|-------|------------------|----------|--------------------|------|-----------------------------|---------------------------|-----------------|---------------------------|-----------------|
| 200 V | 230 V | 460 V | 575 V | Amperes | UL Class | N.O. | N.C. | | Type 1 | | Type 12/3R | |
| 2 | 2 | 5 | 7½ | 30 A | CC | 1 | ... | 9 | LE1D096B62(1)(2)(3)(4)(5) | 8.1 (18) | LE1D096B72(1)(2)(3)(4)(5) | 8.1 (18) |
| 3 | 3 | 7½ | 10 | 30 A | CC | 1 | ... | 12 | LE1D126B62(1)(2)(3)(4)(5) | 8.1 (18) | LE1D126B72(1)(2)(3)(4)(5) | 8.1 (18) |
| 5 | 5 | 10 | 15 | 30 A | J | 1 | ... | 18 | LE1D186B62(1)(2)(3)(4)(5) | 8.1 (18) | LE1D186B72(1)(2)(3)(4)(5) | 8.1 (18) |
| 5 | 7½ | 15 | 20 | 30 A | J | 1 | ... | 25 | LE1D256B62(1)(2)(3)(4)(5) | 8.1 (18) | LE1D256B72(1)(2)(3)(4)(5) | 8.1 (18) |
| 7½ | 10 | 20 | 25 | 60 A | J | 1 | ... | 32 | LE1D326C62(1)(2)(3)(4)(5) | 11.7 (26) | LE1D326C72(1)(2)(3)(4)(5) | 11.7 (26) |
| 10 | 10 | 30 | 30 | 60 A | J | 1 | 1 | 40 | LE1D406C62(1)(2)(3)(4)(5) | 12.6 (28) | LE1D406C72(1)(2)(3)(4)(5) | 12.6 (28) |

Enclosed full voltage reversing fusible combination starters

| Max. Horsepower Ratings (AC3) 3 Phase | | | | Fuse Clip Rating | | Auxiliary Contacts | | Current Rating of Contactor | Catalog Number | Weight kg (lb.) | Catalog Number | Weight kg (lb.) |
|--|-------|-------|-------|------------------|----------|--------------------|------|-----------------------------|---------------------------|-----------------|---------------------------|-----------------|
| 200 V | 230 V | 460 V | 575 V | Amperes | UL Class | N.O. | N.C. | | Type 1 | | Type 12/3R | |
| 2 | 2 | 5 | 7½ | 30 A | CC | 2 | 2 | 9 | LE2D096B62(1)(2)(3)(4)(5) | 11.7 (26) | LE2D096B72(1)(2)(3)(4)(5) | 11.7 (26) |
| 3 | 3 | 7½ | 10 | 30 A | CC | 2 | 2 | 12 | LE2D126B62(1)(2)(3)(4)(5) | 11.7 (26) | LE2D126B72(1)(2)(3)(4)(5) | 11.7 (26) |
| 5 | 5 | 10 | 15 | 30 A | J | 2 | 2 | 18 | LE2D186B62(1)(2)(3)(4)(5) | 11.7 (26) | LE2D186B72(1)(2)(3)(4)(5) | 11.7 (26) |
| 5 | 7½ | 15 | 20 | 30 A | J | 2 | 2 | 25 | LE2D256B62(1)(2)(3)(4)(5) | 11.7 (26) | LE2D256B72(1)(2)(3)(4)(5) | 11.7 (26) |
| 7½ | 10 | 20 | 25 | 60 A | J | 2 | 2 | 32 | LE2D326C62(1)(2)(3)(4)(5) | 12.2 (27) | LE2D326C72(1)(2)(3)(4)(5) | 12.2 (27) |
| 10 | 10 | 30 | 30 | 60 A | J | 2 | 2 | 40 | LE2D406C62(1)(2)(3)(4)(5) | 14.0 (31) | LE2D406C72(1)(2)(3)(4)(5) | 14.0 (31) |

Enclosed full voltage non-reversing circuit breaker combination starters

| Max. Horsepower Ratings (AC3) 3 Phase | | | | Auxiliary Contacts | | Circuit Breaker Maximum Current Rating | Current Rating of Contactor | Catalog Number | Weight kg (lb.) | Catalog Number | Weight kg (lb.) |
|--|-------|-------|-------|--------------------|------|--|-----------------------------|---------------------------|-----------------|---------------------------|-----------------|
| 200 V | 230 V | 460 V | 575 V | N.O. | N.C. | | | Type 1 | | Type 12/3R | |
| 2 | 2 | 5 | 7½ | 1 | - | 15 A | 9 | LE1D097D62(1)(2)(3)(4)(5) | 9.0 (20) | LE1D097D72(1)(2)(3)(4)(5) | 9.0 (20) |
| 3 | 3 | 7½ | 10 | 1 | - | 15 A | 12 | LE1D127D62(1)(2)(3)(4)(5) | 9.0 (20) | LE1D127D72(1)(2)(3)(4)(5) | 9.0 (20) |
| 5 | 5 | 10 | 15 | 1 | - | 30 A | 18 | LE1D187E62(1)(2)(3)(4)(5) | 9.0 (20) | LE1D187E72(1)(2)(3)(4)(5) | 9.0 (20) |
| 5 | 7½ | 15 | 20 | 1 | - | 30 A | 25 | LE1D257E62(1)(2)(3)(4)(5) | 9.0 (20) | LE1D257E72(1)(2)(3)(4)(5) | 9.0 (20) |
| 7½ | 10 | 20 | 25 | 1 | - | 50 A | 32 | LE1D327F62(1)(2)(3)(4)(5) | 12.2 (27) | LE1D327F72(1)(2)(3)(4)(5) | 12.2 (27) |
| 10 | 10 | 30 | 30 | 1 | 1 | 50 A | 40 | LE1D407F62(1)(2)(3)(4)(5) | 13.0 (29) | LE1D407F72(1)(2)(3)(4)(5) | 13.0 (29) |

Enclosed full voltage reversing circuit breaker combination starters

| Max. Horsepower Ratings (AC3) 3 Phase | | | | Auxiliary Contacts | | Circuit Breaker Maximum Current Rating | Current Rating of Contactor | Catalog Number | Weight kg (lb.) | Catalog Number | Weight kg (lb.) |
|--|-------|-------|-------|--------------------|------|--|-----------------------------|---------------------------|-----------------|---------------------------|-----------------|
| 200 V | 230 V | 460 V | 575 V | N.O. | N.C. | | | Type 1 | | Type 12/3R | |
| 2 | 2 | 5 | 7½ | 2 | 2 | 15 A | 9 | LE2D097D62(1)(2)(3)(4)(5) | 10.8 (24) | LE2D097D72(1)(2)(3)(4)(5) | 10.8 (24) |
| 3 | 3 | 7½ | 10 | 2 | 2 | 15 A | 12 | LE2D127D62(1)(2)(3)(4)(5) | 10.8 (24) | LE2D127D72(1)(2)(3)(4)(5) | 10.8 (24) |
| 5 | 5 | 10 | 15 | 2 | 2 | 30 A | 18 | LE2D187E62(1)(2)(3)(4)(5) | 12.6 (28) | LE2D187E72(1)(2)(3)(4)(5) | 12.6 (28) |
| 5 | 7½ | 15 | 20 | 2 | 2 | 30 A | 25 | LE2D257E62(1)(2)(3)(4)(5) | 12.6 (28) | LE2D257E72(1)(2)(3)(4)(5) | 12.6 (28) |
| 7½ | 10 | 20 | 25 | 2 | 2 | 50 A | 32 | LE2D327F62(1)(2)(3)(4)(5) | 12.6 (28) | LE2D327F72(1)(2)(3)(4)(5) | 12.6 (28) |
| 10 | 10 | 30 | 30 | 2 | 2 | 50 A | 40 | LE2D407F62(1)(2)(3)(4)(5) | 14.4 (32) | LE2D407F72(1)(2)(3)(4)(5) | 14.4 (32) |

TeSys™ D-Line Contactors and Starters

Enclosed IEC Combination Starters



LE1D406C72



LE1D097D62

Enclosed starter overload relay selection table

| Code | Range | For use on Contactors |
|------|-----------|-----------------------|
| 01 | 0.1–0.16 | LC1D09–D32 ▲ |
| 02 | 0.16–0.25 | LC1D09–D32 ▲ |
| 03 | 0.25–0.40 | LC1D09–D32 ▲ |
| 04 | 0.40–0.63 | LC1D09–D32 ▲ |
| 05 | 0.63–1.0 | LC1D09–D32 ▲ |
| 06 | 1.0–1.6 | LC1D09–D32 ▲ |
| 07 | 1.6–2.5 | LC1D09–D32 ▲ |
| 08 | 2.5–4 | LC1D09–D32 |
| 10 | 4–6 | LC1D09–D32 |
| 12 | 5.5–8 | LC1D09–D32 |
| 14 | 7–10 | LC1D09–D32 |
| 16 | 9–13 | LC1D12–D32 |
| 21 | 12–18 | LC1D18–D32 |
| 22 | 16–24 | LC1D25–D32 |
| 30 | 23–28 | LC1D25–D32 ■ |
| 32 | 23–32 | LC1D25–D32 |
| 53 | 30–38 | LC1D40–D80 |
| 55 | 30–40 | LC1D40–D80 |
| 57 | 37–50 | LC1D40–D80 |
| 59 | 48–65 | LC1D40–D80 |
| 61 | 55–70 | LC1D40–D80 |

- ▲ Available in Class 10 only
- Available in Class 20 only

NOTE: Use of control circuit transformers requires Insta-Kit wiring.

- Control Power Transformer: Select letter from below for primary voltage of CPT.

Control Power Transformer Primary Voltage Code Table

| Voltage | No Transformer used | 208 | 240 | 480 | 600 |
|---------|---------------------|-----|-----|-----|-----|
| Code | O | L | M | T | X |

- Contactors/starter coil voltage: Select coil voltage from table below.

NOTE: If control transformer is used, the only options available are 24 or 120 volts as the secondary of the transformer.

Contactors Coil Voltage Table

| Voltage | 24 | 120 | 208 | 240 | 480 | 600 |
|---------|----|-----|-----|-----|-----|-----|
| AC | B | G | L | U | T | X |

- Coil frequency: Select: 7 = dual frequency for all starter coil selections except for 480 V or 600 V coils, on 40 A - 80 A starters select 6, 60 Hz only.
- Overload relay type: Select: 0 = No overload relay, 1 = Trip Class 10, 2 = Trip Class 20.
- Overload relay range: Select code from page 155.

NOTE: If no overload relay is required, leave this portion of the catalog number blank.


TeSys™ D-Line Contactors and Starters Enclosed IEC Combination Starters

Factory Modifications and Insta-Kit Selection

Add the Factory Modification Code to the end of the catalog number created from pages 151 and 152. Only one operator scheme (factory modification code or field-installable Insta-Kit option) can be used. Only the combinations of operators and pilot lights shown below can be ordered. Pilot lights will be at the coil voltage indicated in the catalog number for the starter.

| | | |
|--|---|---|
| LA9FF4TK  E61239 CCN XPTQ CCN XPTQ7 | All Others  E154118 CCN NLDX CCN NLDX7 |  LR23506 41 Class 3211 04 |
|--|---|---|

| Description | Factory Modification Code ▲ | Insta-Kits (for field installation) |
|---|-----------------------------|-------------------------------------|
| Control Units Only | | |
| For-Rev-Stop Push Button | A06L | LA9CA06LT |
| Start/Stop Push Button | A06G | LA9CA06GT |
| I/O (Start/Stop) Push Button | N/A | N/A |
| I/O Push Button (double touch) | A06I | LA9CA06IO |
| Emergency Stop | N/A | N/A |
| Start / Mushroom Head Stop Push Button | A06X | LA9CA06XT |
| Hand-Off-Auto Selector Switch | A06E | LA9CA06ET |
| On/off Selector Switch | A06D | LA9CA06DT |
| Pilot Lights only | | |
| LED Pilot light, 24, 120 or 240 V | A16S | LA9CA16ST ★ |
| Green-Red Pilot Light, 120 V ■ | A06S | LA9CA06ST |
| Green-Red Transformer Pilot Light, 120, 208/240, 480 or 600 V ■ | A06F | LA9CA06FT ★ |
| Available combination of control units and pilot lights | | |
| Hand-Off-Auto Selector Switch, 120 V LED Pilot Light | A16U | LA9CA16UT ★ |
| Start/Stop Push Button w/ 24, 120 or 240 V LED Pilot Light | A16V | LA9CA16VT ★ |
| On/off Selector w/ 24, 120 or 240 V LED Pilot Light | A16W | LA9CA16WT ★ |
| Start/Stop Push Button w/ Green-Red Transformer Pilot Light | A06N | LA9CA06NT ★ |
| Start/Stop Push Button w/Green-Red Pilot Light | A06G | LA9CA06VT |
| Hand-Off-Auto Selector Switch w/Green-Red Pilot Light 120 V | A06U | LA9CA06UT |
| Hand-Off-Auto Selector Switch w/Green-Red Transformer Pilot Light | A06J | LA9CA06JT ★ |
| On/Off Selector w/Green-Red Pilot Light | A06W | LA9CA06WT |
| On/Off Selector w/Green-Red Transformer Pilot Light | A06H | LA9CA06HT ★ |
| Control Power Transformer | | |
| Standard VA, 2 fuses in Primary, 1 Fuse in secondary | A206P | ◆ |
| 50 VA extra, 2 fuses in Primary, 1 Fuse in secondary | A207P | ◆ |
| 100 VA extra, 2 fuses in Primary, 1 Fuse in secondary | A208P | ◆ |
| Local / Remote Adapter, 3-wire ● | - | LA9AADIS3 |
| Local / Remote Adapter, 4-wire ● | - | LA9AADIS4 |
| Local / Remote Adapter, 5-wire ● | - | LA9AADIS5 |
| Local / Remote Adapter, 7-wire ● | - | LA9AADIS7 |

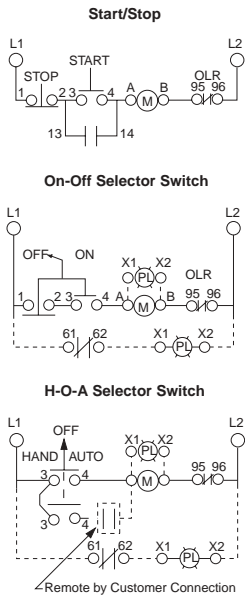

- ▲ Add these forms to the catalog number selected on pages 151 or 152. The numbers as shown are for use in NEMA 1 Enclosures. For uses in NEMA 12/3R change the 6 to a 7 (ex A06U becomes A07U). The change DOES NOT apply to control power transformer forms or Insta-Kits.
- Pilot lights are wired such that the light is on when the contactor is energized. For non-LED type pilot lights, a green lens is installed on the unit when shipped. A red lens is included for use as applicable.
- ◆ Select Insta-Kit from table below.
- ★ Complete the catalog number for the Insta-Kit by selecting the voltage code from the appropriate tables below.
- 3-wire adapter required when START/STOP pushbutton remote station is used in conjunction with START/STOP local control OR if local pilot light only is used.
- 4-wire adapter required when FOR/REV/STOP is required for both local and remote control.
- 5-wire adapter required when START/STOP pushbutton with pilot light remote station OR pilot light only remote is used with START/STOP pushbutton local control.
- 7-wire adapter required for remote control only applications.

| Total VA | Insta-Kit Catalog Number | Weight / kg (lb.) |
|----------|--------------------------|-------------------|
| 50 | LA9TFD32 ★ | 0.80 (1.75) |
| 100 | LA9TFD80 ★ | 1.45 (3.25) |

Voltage Codes for pilot lights

| Voltage (Vac) | 24 | 120 | 208/240 | 480 | 600 |
|---------------|----|-----|---------|-----|-----|
| Code | B | G | M | T | X |

Voltage Codes for control power transformers

| Primary Voltage | 120 | 208 | 240 | 480 | 600 | 208 | 240 | 480 | 600 |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Secondary Voltage | 24 | | | | | 120 | | | |
| Code | E | D | C | B | A | L | M | T | X |


TeSys™ D-Line Contactors and Starters

Dimensions for Enclosed Combination and Non-Combination IEC Starters

Combination Starter Dimensions with Rotary Disconnect Handle - Type 1

Knockout Schedule

| Knockout | Conduit Size, in. (mm) |
|----------|---------------------------|
| A | 0.50 (12.7) |
| B | 1.00 (25.4); 1.25 (31.8) |
| C | 0.50 (12.7); 0.75 (19.05) |

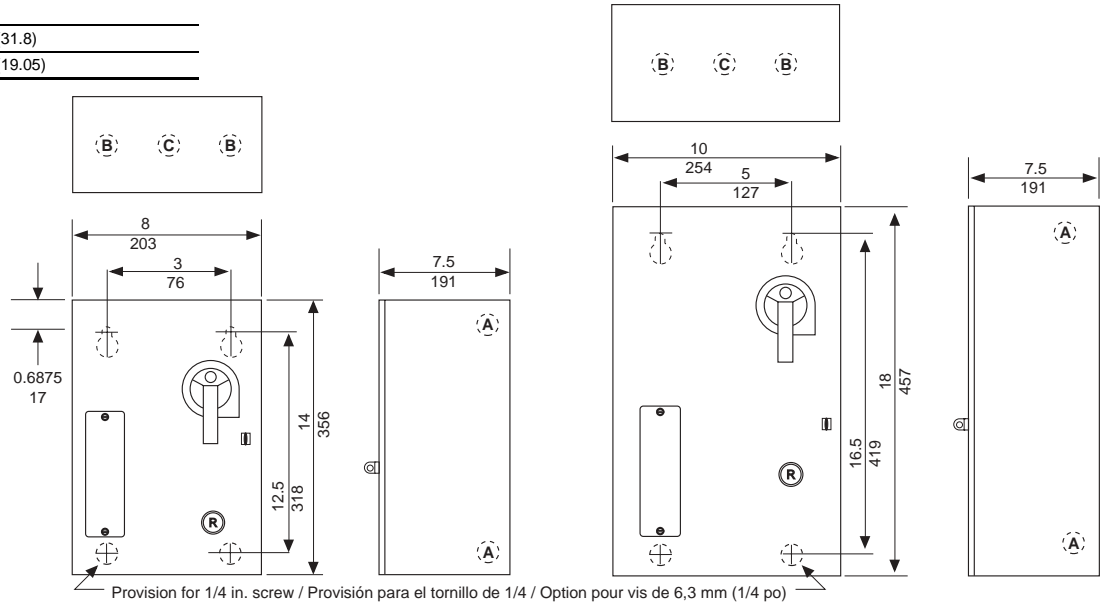


Dual Dimensions: $\frac{\text{Inches}}{\text{mm}}$

D09-25 (FVNR)


D09-40 (FVR); D32-40 (FVNR)

Type 12

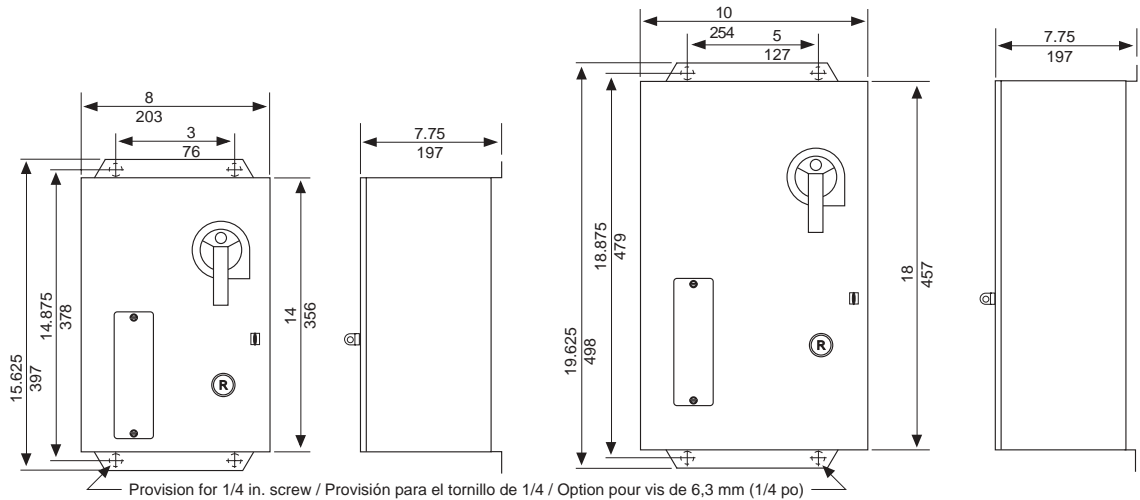

D09-25 (FVNR)

D09-40 (FVR); D32-40 (FVNR)

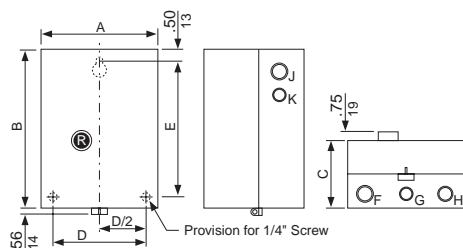


Non-combination Starter Dimensions

| | | TYPE 1 | | | | | | | | | | TYPE 12/3R | |
|---------------|-----------|--------------|--------------|-------------|-------------|--------------|--------------------------|--------------------|----------------------|---------------------|--------------------|--------------|--------------|
| Non-reversing | Reversing | A | B | C | D | E | F | G | H | J | K | D | E |
| D09-25 | ... | 6.77 172 | 10.04 255 | 6.25 158 | 5.38 136 | 9.00 228 | 1-1/4 25.4-31.7 | 1/2-3/4 12.7-19 | - | 1-1/4 25.4-6.3 | 1/2-3/4 12.7-19 | 5.38 13.6 | 11.37 288 |
| D32-50 | D09-32 | 8.66 220 | 10.83 275 | 7.21 183 | 7.25 184 | 9.75 247 | 1 1/4-1 1/2 31.7-38.1 | 1/2-3/4 12.7-19 | 1-1 1/4 25.4-31.7 | 1-1/4 25.4-6.3 | 1/2-3/4 12.7-19 | 5.38 13.6 | 12.15 308 |
| D65-80 | D40-80 | 10.63 270 | 13.98 355 | 7.21 183 | 9.22 234 | 12.94 328 | 1 1/4-1 1/2 31.7-38.1 | 1/2-3/4 12.7-19 | 1-1 1/4 25.4-31.7 | 1-1 1/4 25.4-6.3 | 1/2-3/4 12.7-19 | 5.38 13.6 | 15.30 385 |


TeSys™ D-Line Contactors and Starters

Schematics for Enclosed IEC Non-Combination Starters

Non-Reversing, Non-Combination 3-Phase Starter

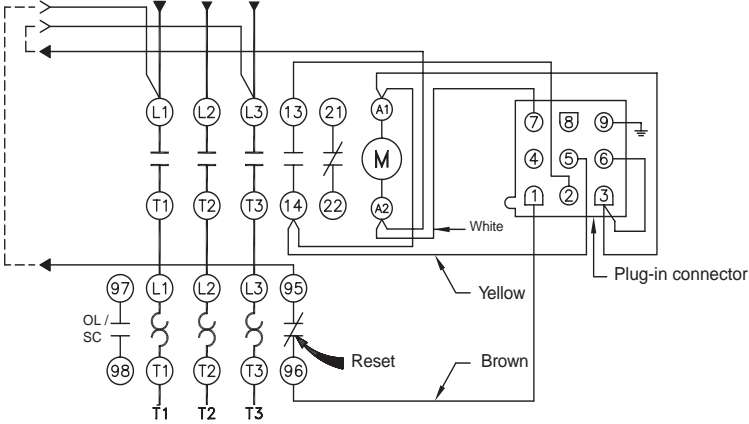


Reversing, Non-Combination 3-Phase Starter

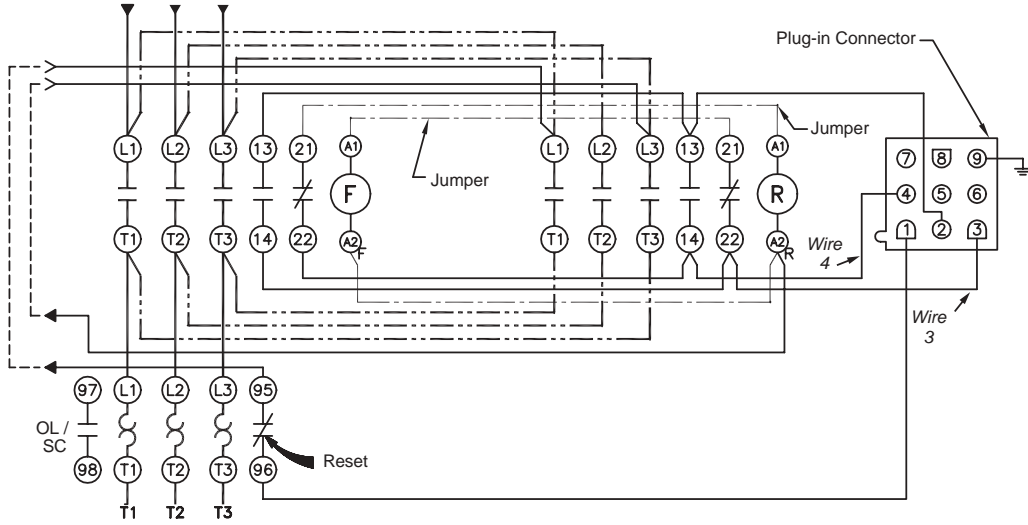


TeSys™ D-Line Contactors and Starters

Schematics for Enclosed IEC Combination Starters

Non-Reversing, Combination 3-Phase Starter

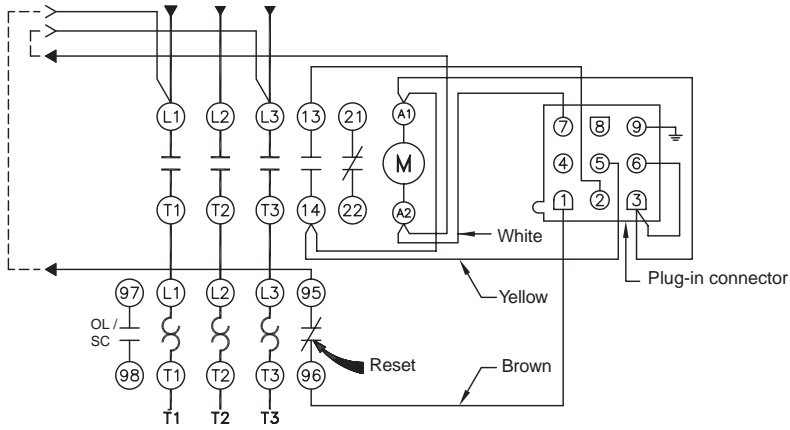

Reversing, Combination 3-Phase Starter

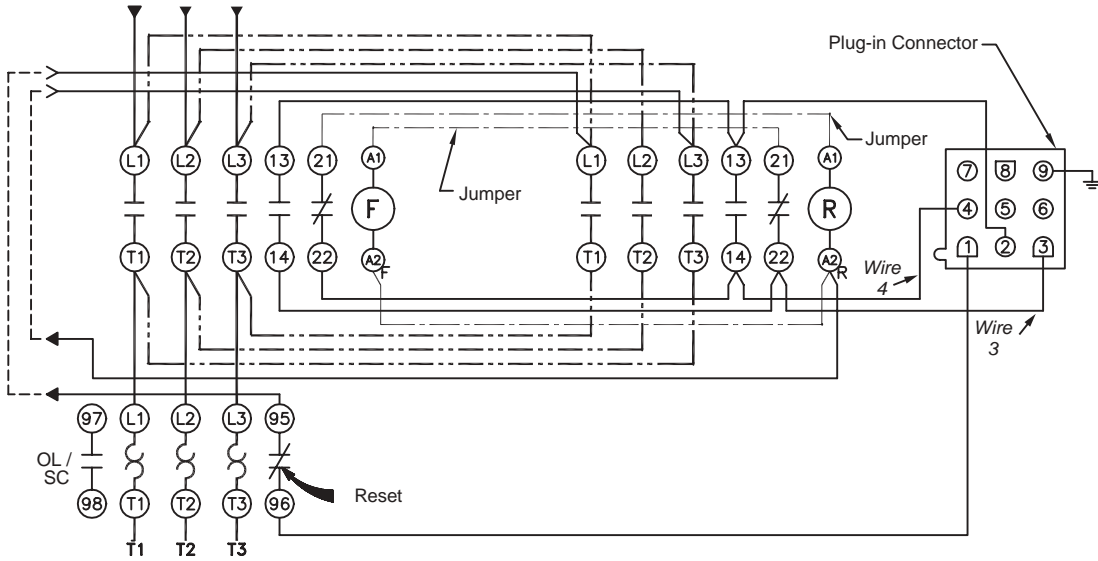

TeSys™ D-Line Contactors and Starters

Enclosed Contactors LE1D and LE2D

International
Applications Only

D.O.L. AC Starters for Motor Control (1) 2.2 to 45 kW, without Isolator Device

Characteristics

| | |
|-----------------------------------|--|
| Conforming to standards | IEC 60947-4-1 and IEC 60439-1, VDE 0660-102, EN 60947 |
| Degree of protection to IEC 60529 | IP 659: LE2K, IP 657: LE●D09 to D35 and IP 557: LE●D405 to D955 |
| Ambient air temperature | For operation: - 5 to + 40 °C (- 41 to + 104 °F) |
| Operating positions | Identical to positions for contactors |
| Material | Poly carbonate (2): LE2K and LE●D09 to D35. Sheet steel: LE●D405 to D955 |

Non-reversing Starters

| Standard Power Ratings of 3-phase Motors 50/60 Hz in Category AC-3 (kW) | | | | | | Maximum Current I the up to | Catalog Number, Complete with Control Circuit Voltage Code (3) | Standard Voltages | Weight lbs (kg) |
|--|--------------|------|-------|-------|--------------|-----------------------------------|--|----------------------|--------------------|
| 220 230 V | 380 400 V | 415V | 440 V | 500 V | 660 690 V | | | | |
| 2.2 | 4 | 4 | 4 | 5.5 | 5.5 | 9 | LE1D09** | F7 P7 V7 | 2.03 (0.92) |
| 3 | 5.5 | 5.5 | 5.5 | 7.5 | 7.5 | 12 | LE1D12** | F7 P7 V7 | 2.03 (0.92) |
| 4 | 7.5 | 9 | 9 | 10 | 10 | 18 | LE1D18** | F7 P7 V7 | 2.24 (1.015) |
| 5.5 | 11 | 11 | 11 | 15 | 15 | 25 | LE1D25** | F7 P7 V7 | 2.24 (1.015) |
| 7.5 | 15 | 15 | 15 | 18.5 | 18.5 | 35 | LE1D35** | F7 P7 V7 | 9.53 (4.320) |
| 11 | 18.5 | 22 | 22 | 22 | 30 | 40 | LE1D405** | F7 P7 V7 | 10.63 (4.82) |
| 15 | 22 | 25 | 30 | 30 | 33 | 50 | LE1D505** | F7 P7 V7 | 10.69 (4.85) |
| 18.5 | 30 | 37 | 37 | 37 | 37 | 65 | LE1D655** | F7 P7 V7 | 10.69 (4.85) |
| 22 | 37 | 45 | 45 | 55 | 45 | 80 | LE1D805** | F7 P7 V7 | 11.33 (5.14) |
| 25 | 45 | 45 | 45 | 55 | 45 | 95 | LE1D955** | F7 P7 V7 | 12.0 (5.44) |



LE1D12**



LE2D12**

Reversing Starters

| | | | | | | | | | |
|------|------|-----|-----|------|------|----|-----------|----------|---------------|
| 1.5 | 2.2 | 2.2 | 3 | - | - | 6 | LE2K065** | F7 P7 V7 | 2.38 (1.08) |
| 2.2 | 4 | 4 | 4 | - | - | 9 | LE2K095** | F7 P7 V7 | 2.38 (1.08) |
| | | | | | | | LE2D09** | F7 P7 V7 | 4.63 (2.100) |
| - | - | - | - | 5.5 | 5.5 | 9 | LE2D09** | F7 P7 V7 | 4.63 (2.100) |
| 3 | 5.5 | 5.5 | 5.5 | 7.5 | 7.5 | 12 | LE2D12** | F7 P7 V7 | 4.63 (2.100) |
| 4 | 7.5 | 9 | 9 | 10 | 10 | 18 | LE2D18** | F7 P7 V7 | 5.31 (2.410) |
| 5.5 | 11 | 11 | 11 | 15 | 15 | 25 | LE2D25** | F7 P7 V7 | 5.66 (2.570) |
| 7.5 | 15 | 15 | 15 | 18.5 | 18.5 | 35 | LE2D35** | F7 P7 V7 | 9.0 (4.100) |
| 11 | 18.5 | 22 | 22 | 22 | 30 | 40 | LE2D405** | F7 P7 V7 | 11.6 (5.270) |
| 15 | 22 | 25 | 30 | 30 | 33 | 50 | LE2D505** | F7 P7 V7 | 12.06 (5.470) |
| 18.5 | 30 | 37 | 37 | 37 | 37 | 65 | LE2D655** | F7 P7 V7 | 12.06 (5.470) |
| 22 | 37 | 45 | 45 | 55 | 45 | 80 | LE2D805** | F7 P7 V7 | 14.77 (6.700) |
| 25 | 45 | 45 | 45 | 55 | 45 | 95 | LE2D955** | F7 P7 V7 | 15.43 (7.000) |

(1) Protection must be provided by addition of an overload relay, to be ordered separately, see pages 134 and 135.

(2) Avoid placing this material in contact with harsh substances (detergents, chlorinated solvents, ketones, alcohol, aromatic hydrocarbons).

(3) Standard control circuit voltages.

| Volts AC 50/60 Hz | 24 | 42 | 48 | 110 | 115 | 220 | 230 | 240 | 380 | 400 | 415 | 440 |
|-------------------|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| LE2K | B7 | D7 | E7 | F7 | - | M7 | P7 | U7 | Q7 | V7 | N7 | R7 |
| LE1, LE2D | B7 | D7 | E7 | F7 | FE7 | M7 | P7 | U7 | Q7 | V7 | N7 | R7 |

For other voltages please consult your Regional Sales Office.

(4) Selection according to the number of operating cycles, please consult your Regional Sales Office.

TeSys™ D-Line Contactors and Starters

Enclosed Contactors LE1D and LE2D



LE1D12••A04

D.O.L. AC Starters for Motor Control (1) 2.2 to 45 kW without Isolator Device, Non-reversing

Description

Standard versions comprise:

- For non-reversing starters:
 - 1 green Start button "I",
 - 1 red Stop/Reset button "O".
- For reversing starters:
 - 1 Start button ↑,
 - 1 Start button ↓,
 - 1 red Stop/Reset button.
- LE2K:
- LE2D09 to D35:
 - 1 2-position spring return selector switch "I"-"II",
 - 1 red Stop/Reset button "O".
- LE2D405 to D955:
 - 1 blue Reset button "R".



LE1D12••A05

Forms (installed by Telemecanique)

| Description | For Use On | Suffix to be Added to Starter Catalog Number (2) |
|---|--|--|
| No push buttons on cover | LE1D09 through D955 LE2D09 through D955 | A04 |
| 1 green Start button "I" 1 green Start button "II" 1 red Stop/Reset button "O" | LE2D405 through D955 | A11 |
| 1 blue Reset button "R" | LE1D09 through D955 LE2K06 and K09 LE2D09 through D35 | A05 |
| 1 3-position stay put selector switch ("I"-"O"-"II") ("I": Automatic Start; "O": Stop; "II": Manual Start) 1 blue Reset button "R" | LE1D09 through D35 | A09 |
| 1 2-position stay put selector switch ("O"-"I") ("O": Stop; "I": Manual Start) 1 blue Reset button "R" | LE1D09 through D35 | A13 |
| 1 3-position stay put selector switch "O"-"I" with spring return to center position ("I": Manual start; "O": Stop, stay put) 1 blue Reset button "R" | LE1D09 through D35 | A35 |
| 1 neutral terminal Fitted as standard on LE1 and LE2D18 to D955 starters ordered with 220 V (M7), 230 V (P7) or 240 V (U7) control circuit voltage. | LE1D09 through D955 LE2K06 and K09 LE2D09 through D955 | A59 |



LE1D12••A09

Accessories (installed by the customer)

| Description | For Use On | Catalog Number | Weight lbs (kg) |
|--|----------------------|------------------|-----------------|
| Start pushbutton latching device for stay-put operation (Start-Stop) | LE1D405 through D955 | LA9D09907 | 0.13 (0.06) |

(1) See previous page.

(2) Example: **LE1D093F7A04**

Other versions: Combination of 2 accessories, please consult your Regional Sales Office.



LE1D12••A13



LE1D12••A35

TeSys™ D-Line Contactors and Starters

Enclosed Contactors with Fused Disconnect Switch LE2, LE4, and LE8

International
Applications Only

D.O.L. AC Starters for Motor Control (1), 2.2 to 45 kW with Isolator Device

Characteristics

| | |
|---------------------------------|--|
| Conforming to standards | IEC 60947-4-1 and IEC 60439-1, VDE 0660-102, EN 60947 |
| Degree of protection to IEC 529 | IP 659: LE•K , IP 657: LE•D09 to D35 and IP 55: LE•D406 to D806 |
| Ambient air temperature | For operation: - 5 to + 40 °C (- 41 to + 104 °F) |
| Operating positions | Identical to positions for contactors |
| Material | Poly carbonate (2): LE•K and LE•D09 to D35 . Sheet steel: LE•D406 to D806 |

Non-reversing Starters



LE4D12**



LE8D12**

| Standard Power Ratings of 3-phase Motors 50/60 Hz in Category AC-3 (kW) | | | | | | | Operational Current (A) 440 V up to | Fuses to be fitted by the customer | | Catalog Number, Complete with Control Circuit Voltage Code (3) | Weigh lbs (kg) |
|--|--------------|------|-------|-------|--------------|------|--|---------------------------------------|------------------------|---|-------------------|
| 220 230 V | 380 400 V | 415V | 440 V | 500 V | 660 690 V | Size | | Type aM A | | | |
| 1.5 | 2.2 | 2.2 | 3 | - | - | 6 | 10 X 38 | 10 | LE4K065** | 3.19 (1.45) | |
| 2.2 | 4 | 4 | 4 | - | - | 9 | 10 X 38 | 12 | LE4K095** | 3.19 (1.45) | |
| | | | | | | | | | or LE4D09** (4) | 4.32 (1.96) | |
| 2.2 | 4 | 4 | 4 | 5.5 | - | 9 | 10 X 38 | 12 | LE4D09** | 4.32 (1.96) | |
| 3 | 5.5 | 5.5 | 5.5 | 7.5 | - | 12 | 10 X 38 | 16 | LE4D12** | 4.32 (1.96) | |
| 4 | 7.5 | 9 | 9 | 10 | - | 18 | 10 X 38 | 20 | LE4D18** | 4.85 (2.20) | |
| 5.5 | 11 | 11 | 11 | 15 | - | 25 | 10 X 38 | 25 | LE4D25** | 4.85 (2.20) | |
| 7.5 | 15 | 15 | 15 | 18.5 | 18.5 | 35 | 14 X 51 | 32 | LE4D35** | 11.4 (5.19) | |
| 11 | 18.5 | 22 | 22 | 22 | 30 | 40 | 14 X 51 | 40 | LE4D406** | 12.7 (5.77) | |
| 15 | 22 | 25 | 30 | 30 | 33 | 50 | 22 X 58 | 63 | LE4D506** | 14.2 (6.44) | |
| 18.5 | 30 | 37 | 37 | 37 | 37 | 65 | 22 X 58 | 80 | LE4D656** | 14.7 (6.67) | |
| 22 | 37 | 45 | 45 | 55 | 45 | 80 | 22 X 58 | 80 | LE4D806** (5) | 15.6 (7.10) | |

Reversing Starters

| | | | | | | | | | | |
|------|------|-----|-----|------|------|----|---------|----|------------------------|---------------|
| 1.5 | 2.2 | 2.2 | 3 | - | - | 6 | 10 X 38 | 10 | LE8K065** | 3.52 (1.60) |
| 2.2 | 4 | 4 | 4 | - | - | 9 | 10 x 38 | 12 | LE8K095** | 3.52 (1.60) |
| | | | | | | | | | or LE8D09** (4) | 7.82 (3.55) |
| - | - | - | - | 5.5 | - | 9 | 10 x 38 | 12 | LE8D09** | 7.82 (3.55) |
| 3 | 5.5 | 5.5 | 5.5 | 7.5 | - | 12 | 10 x 38 | 16 | LE8D12** | 7.82 (3.55) |
| 4 | 7.5 | 9 | 9 | 10 | - | 18 | 10 x 38 | 20 | LE8D18** | 8.16 (3.70) |
| 5.5 | 11 | 11 | 11 | 15 | - | 25 | 10 x 38 | 25 | LE8D25** | 10.3 (4.67) |
| 7.5 | 15 | 15 | 15 | 18.5 | 18.5 | 35 | 14 x 51 | 32 | LE8D35** | 12.8 (5.80) |
| 11 | 18.5 | 22 | 22 | 22 | 30 | 40 | 14 x 51 | 40 | LE2D406** | 31.24 (14.17) |
| 15 | 22 | 25 | 30 | 30 | 33 | 50 | 22 x 58 | 63 | LE2D506** | 32.40 (14.17) |
| 18.5 | 30 | 37 | 37 | 37 | 37 | 65 | 22 x 58 | 80 | LE2D656** | 32.56 (14.77) |
| 22 | 37 | 45 | 45 | 55 | 45 | 80 | 22 x 58 | 80 | LE2D806** | 35.30 (16.00) |

- (1) Protection must be provided by addition of an overload relay, to be ordered separately, see pages 134 and 135.
- (2) Avoid placing this material in contact with harsh substances (detergents, chlorinated solvents, ketones, alcohol, aromatic hydrocarbons).
- (3) Standard control circuit voltages.

| Volts AC 50/60 Hz | 24 | 42 | 48 | 110 | 115 | 220 | 230 | 240 | 380 | 400 | 415 | 440 |
|-------------------|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| LE•K | B7 | D7 | E7 | F7 | - | M7 | P7 | U7 | Q7 | V7 | N7 | R7 |
| LE•D | B7 | D7 | E7 | F7 | FE7 | M7 | P7 | U7 | Q7 | V7 | N7 | R7 |

For other voltages please consult your Regional Sales Office.

- (4) Selection according to dimensions and the number of operating cycles, please consult your Regional Sales Office.
- (5) Supplied with 3 cable entries.

TeSys™ D-Line Contactors and Starters

Enclosed Reversing Starters with Fused Disconnect Switch LE2, LE4 and LE8

International
Applications Only

D.O.L. AC Starters for Motor Control (1) 2.2 to 45 kW with Isolator Device



LE4D12••A04



LE4D12••A05

Description

Standard versions comprise:

- For non-reversing starters:
 - LE4K and LE4D09 to D656: 1 green Start button "I",
1 red Stop/Reset button "O".
 - LE4D806: no pushbuttons on cover.
- For reversing starters:
 - LE8K: 1 Start button ↑,
1 Start button ↓,
1 red Stop/Reset button.
 - LE8D09 to D35: 1 2-position spring return selector switch "I"- "II",
1 red Stop/Reset button "O".
 - LE2D406 to D806: no pushbuttons on cover

Protection

LE4 and LE8K

LE4 and LE8D09 to D35

LE4 and LE2D406 to D806

Power Circuit

1 3-pole isolating device

1 3-pole isolating device

1 3-pole isolating device

Control Circuit

None

+ 1 additional pole LA8D254

+ 1 circuit-breaker GB2CB08

Forms (installed by Telemecanique)

| Description | For Use On | Suffix to be Added to Starter Catalog Number (2) |
|---|---|--|
| No push buttons on cover | LE4D09 through D656 LE8D09 through D35 | A04 |
| 1 green Start button "I" 1 green Start button "II" 1 red Stop/Reset button "O" | LE2D406 through D806 | A11 |
| 1 blue Reset button "R" | LE4D09 through D806 LE8K06 and K09 LE2D406 through D806 | A05 |
| 1 neutral terminal Fitted as standard on LE4D18 to D806, LE8D18 to D35 and LE4D406 to D806 starters ordered with 220 V (M7), 230 V (P7) or 240 V (U7) control circuit voltage. | LE4K06 and K09 LE4D09 through D806 LE8K06 and K09 LE8D09 through D35 LE2D406 through D806 | A59 |

Accessories (installed by the customer)

| Description | For Use On | Catalog Number | Weight lbs (kg) |
|--|----------------------|----------------|-----------------|
| Start pushbutton latching device for stay-put operation (Start-Stop) | LE4D406 through D656 | LA9D09907 | 0.13 (0.06) |

(1) See previous page.

(2) Example: **LE4D09F7A04**

Other versions: Combination of 2 accessories, please consult your Regional Sales Office.

TeSys™ D-Line Contactors and Starters

Wye-delta Starters LE3D (International Applications Only)

Wye-Delta Starters for Motor Control from 4 to 75 kW, without Off-Load Isolator (1) - References

Selection



LE3D12**

| Standard Power Ratings of Squirrel Cage Motors Mains Voltage - Delta Connection (kW) | | | | Catalog Number, Complete with Control Circuit Voltage Code (2) | Normal Control Circuit Voltage Code | Weight lbs (kg) |
|--|-------|------|-------|---|---|--------------------|
| 220 V | 380 V | 415V | 440 V | | | |
| Maximum operating rate in starts/hour: LE3-K: 12 and LE3-D: 30. Maximum starting time: 30 seconds. (4) | | | | | | |
| 3 | 5.5 | 5.5 | 5.5 | LE3K065** | F7 M7 Q7 | 3.22 (1.46) |
| 4 | 7.5 | 7.5 | 7.5 | LE3K095** | F7 M7 Q7 | 3.22 (1.46) |
| | | | | or LE3D09** | F7 M7 Q7 | 8.05 (3.65) |
| 5.5 | 11 | 11 | 11 | LE3D12** | F7 M7 Q7 | 8.05 (3.65) |
| 11 | 18.5 | 22 | 22 | LE3D18** | F7 M7 Q7 | 8.27 (3.75) |
| 15 | 25 | 30 | 30 | LE3D32** | F7 M7 Q7 | 11.38 (5.16) |
| 18.5 | 37 | 37 | 37 | LE3D405** | F7 M7 Q7 | 17.99 (8.16) |
| 30 | 55 | 59 | 59 | LE3D505** | F7 M7 Q7 | 17.97 (8.15) |
| 37 | 75 | 75 | 75 | LE3D805** | F7 M7 Q7 | 30.87 (14.00) |

Specifications

| | | |
|---|--------------------|---|
| Enclosure | LE3D09 through D80 | Metal Enclosure, IP 559 |
| Control (2 push buttons mounted on enclosure cover) | LE3D09 through D18 | 1 green start button "I" 1 red stop/reset button "O" |
| No push buttons on cover | LE3D32 through D80 | - |
| Connections | LE3K06 and K09 | Pre-wired power and control circuit connections |

A timer LA2-DS2 imposes a delay of 40 ms ± 15 ms on the delta contactor at the moment of changeover to ensure that the star contactor has sufficient breaking time.

Forms (installed by Telemecanique)

| Description | For Use On | Suffix to be Added to Starter Catalog Number (5) |
|---|--------------------------------------|--|
| No push buttons on cover | LE3D09 through D18 | A04 |
| 1 blue reset button "R" | LE3D09 through D80 | A05 |
| 1 green start button "I" 1 red stop/reset button "O" | LE3D32 through D80 | A06 |
| 1 neutral terminal Fitted as standard on starters ordered with 240 V (U7) control circuit voltage. | LE3K06 and K09 LE3D09 through D80 | A59 |
| Mechanical interlock Fitted as standard on starters LE3K and LE3D09 to D35 | LE3D405 TO D150 | A64 |

Control Circuit Voltage Codes

| LE3-K (6) | | | | | | | | | | | | | | | | |
|-----------------------------|----|----|----|-----|---------|-----|-----|-------------|-----|-------------|-------------|-----|-------------|-----|-----|-------------|
| Control Voltage 50/60 Hz | 12 | 24 | 36 | 42 | 48 | 110 | 127 | 220/ 230 | 230 | 230- 240 | 380/ 400 | 400 | 400/ 415 | 440 | 500 | 660/ 690 |
| Code | J7 | B7 | C7 | D7 | E7 | F7 | FC7 | M7 | P7 | U7 | Q7 | V7 | N7 | R7 | S7 | Y7 |
| LE3-D (6) | | | | | | | | | | | | | | | | |
| Control Voltage 50/60 Hz | 24 | 42 | 48 | 110 | 220/230 | 230 | 240 | 380/400 | 400 | 415 | 440 | | | | | |
| Code | B7 | D7 | E7 | F7 | M7 | P7 | U7 | Q7 | V7 | N7 | R7 | | | | | |

- (1) Overload protection by thermal overload relay, to be ordered separately. Select appropriate overload relay for setting at 0.58 the full load rated motor current.
 - (2) Standard control circuit voltages (variable delivery time, please consult your Regional Sales Office).
 - (4) Selection according to size and number of operating cycles (see AC-3 curves, page 20).
 - (5) Example: LE3-D095F7A04.
 - (6) Other voltages: For LE3-K, please consult your Regional Sales Office.
- Other versions: Combination of 2 accessories, please consult your Regional Sales Office.

TeSys™ D-Line Contactors and Starters

Wye-delta Starters with Fused Disconnect Switch LE3D (International Applications Only)

International Applications Only

NOTE: Wiring methods differ from typical North American practice. Contains UL Listed, CSA Certified, and CE marked components. Assemblies are not UL Listed or CSA Certified.



LE6D12**

| Standard power ratings of squirrel cage motors Mains voltages - delta connection | | | | Fuses to be installed by customer | | Catalog Number ■ ▼ | Weight |
|---|-------|-------|-------|-----------------------------------|---------|-----------------------|----------------|
| 220 V | 380 V | 415 V | 440 V | Size | Type aM | | |
| kW | kW | kW | kW | | A | | kg (lb.) |
| Maximum operating rate: 30 starts/hour. Maximum starting time: 30 seconds. | | | | | | | |
| 4 | 7.5 | 7.5 | 7.5 | 10 x 38 | 20 | LE6D09** | 3.900 (8.598) |
| 5.5 | 11 | 11 | 11 | 10 x 38 | 25 | LE6D12** | 3.900 (8.598) |
| 11 | 18.5 | 22 | 22 | 14 x 51 | 40 | LE6D18** | 4.850 (10.692) |
| 15 | 25 | 30 | 30 | 22 x 58 | 63 | LE6D326** | 7.650 (16.865) |
| 18.5 | 37 | 37 | 37 | 22 x 58 | 80 | LE3D406** | 16.90 (37.256) |
| 30 | 55 | 59 | 59 | 22 x 58 | 125 | LE3D506** | 17.00 (37.478) |
| 37 | 75 | 75 | 75 | 0 | 160 | LE3D806** | 27.50 (60.626) |

Specifications

| | | |
|--|-------------------|---|
| Enclosure | LE3D09 to LE3D80 | Metal enclosure, degree of protection IP 559 |
| Control (2 pushbuttons on enclosure cover) | LE3D09 and LE3D12 | 1 green Start button "I" 1 red Stop/Reset button "O" |
| No pushbuttons on cover | LE3D18 to LE3D80 | – |
| Isolator with external operator | LE3D09 and LE3D12 | 1 3-pole isolator + 1 additional pole LA8D254 |
| | LE3D18 to LE3D80 | 1 3-pole isolator and 1 circuit breaker GB2-CB08 |
| Connections | LE3D09 to LE3D80 | Pre-wired power and control circuit connections |

A timer LA2DS2 imposes a delay of 40 ms ± 15 ms on the delta contactor at the moment of changeover to ensure that the star contactor has sufficient breaking time.

- Overload protection by means of bimetallic overload relay, to be ordered separately. Select appropriate overload relay for setting at 0.58 of the full-load rated motor current.
- ▼ Complete catalog number with appropriate coil selection code below.

Coil Selection

| | | | | | | | | | | | |
|--------------|----|----|----|-----|---------|-----|-----|---------|-----|-----|-----|
| 50/60 Hz | 24 | 42 | 48 | 110 | 220/230 | 230 | 240 | 380/400 | 400 | 415 | 440 |
| Voltage Code | B7 | D7 | E7 | F7 | M7 | P7 | U7 | Q7 | V7 | N7 | R7 |



LE6D12**A04

Forms (installed by Telemecanique)

| Description | For use on | Suffix to be added to starter catalog number ● |
|---|------------------|--|
| No pushbuttons on cover | LE3D09 to LE3D12 | A04 |
| 1 blue Reset button "R" | LE3D09 to LE3D80 | A05 |
| 1 green Start button "I" 1 red Stop/Reset button "O" | LE3D18 to LE3D80 | A06 |
| 1 neutral terminal Fitted as standard on starters ordered with 240 V (U7) control supply | LE3D09 to LE3D80 | A59 |
| Mechanical interlock Fitted as standard on starters LE6D09 to D18 | LE3D326 to D80 | A64 |

- For example: LE3D096F7A04.




LE6D12**A05

TeSys™ D-Line Contactors and Starters


Spare Parts and Accessories (International Applications Only)



ZB5AA331




ZB5AL432




LAD9091



ZB5AD•



ZENL1111



LAD91809

Operating Heads for Start and Stop/Reset Pushbuttons

| Description | For use on | Catalog Number | Weight – kg (lb.) |
|--------------------------------|----------------|----------------|-------------------|
| Flush green "I" (1) | LE1D09 to D35 | ZB5AA331 | 0.018 (0.040) |
| Projecting red "O" (1) | LE1D09 to D35 | ZB5AL432 | 0.019 (0.042) |
| Mounting kit for head ZB5AL432 | LE1D09 and D12 | LAD9091 | 0.002 (0.004) |
| | LE1D18 to D35 | LAD91810 | 0.003 (0.006) |

Operating Heads for Reset Pushbuttons

| | | | |
|---------------------------------------|--------------------------------|------------|---------------|
| Flush blue "R" (2) | LE1D09 to D35 | ZB5AA0 | 0.022 (0.048) |
| | | ZBA639 (3) | 0.001 (0.002) |
| Mounting kit for head ZB5AA0 + ZBA639 | LE1D09 and D12 | LAD9092 | 0.002 (0.004) |
| | LE1 or LE2D18 to D35 | LAD91810 | 0.003 (0.006) |
| | LE3, LE6, LE4 or LE8D09 to D35 | LAD9T4 | 0.004 (0.008) |

Operating Heads for Selector Switches

| Description | For use on | Catalog Number | Weight – kg (lb.) |
|------------------------------------|---------------|----------------|-------------------|
| 3 position stay put | LE1D09 to D35 | ZB5AD3 | 0.024 (0.053) |
| 2 position stay put | LE1D09 to D35 | ZB5AD2 | 0.024 (0.053) |
| 3 position spring return to center | LE1D09 to D35 | ZB5AD5 | 0.024 (0.053) |

Contact Blocks

| | | | |
|-----------------------|-------------------|----------|---------------|
| 1 N.O. spring return | LE1D09 to D35 | ZENL1111 | 0.010 (0.022) |
| 1 N.C. spring return | LE1D09 to D35 | ZENL1121 | 0.010 (0.022) |
| Contact block support | LE1D09 and D12 | LAD90909 | 0.008 (0.017) |
| | LE•D18 to D35 (4) | LAD91809 | 0.014 (0.031) |

- (1) Remember to order mounting kit **LAD9091** or **LAD91810**, depending on the size.
- (2) Remember to order mounting kit **LAD9092**.
- (3) Sold in lots of 10.
- (4) LE1, LE2, LE3, LE4, LE6 or LE8.

TeSys™ D-Line Contactors and Starters
Spare Parts and Accessories (International Applications Only)

Empty Enclosures for D.O.L. Starters Without Isolator Device



DE1DS1A04



DE1DS1A05



DE1DS1



DE1DS1A13


| For use with | Push button operating head(s) or blanking plug(s) mounted on the cover | Catalog Number | Weight |
|---------------|--|----------------|--------------|
| | | | kg (lb.) |
| LE1D09, D12 | Without | DE1DS1A04 | 0.300 (0.66) |
| | 1 flush blue head "R" | DE1DS1A05 | 0.300 (0.66) |
| | 1 flush green head "I" 1 projecting red head "O" | DE1DS1 | 0.300 (0.66) |
| | 1 flush blue head "R" 1 switch | DE1DS1A13 | 0.300 (0.66) |
| LE1D18 to D35 | Without | DE1DS2A04 | 0.500 (1.10) |
| | 1 flush blue head "R" | DE1DS2A05 | 0.500 (1.10) |
| | 1 flush green head "I" 1 projecting red head "O" | DE1DS2 | 0.500 (1.10) |
| | 1 flush blue head "R" 1 switch | DE1DS2A13 | 0.500 (1.10) |

TeSys™ D-Line Contactors and Starters LE-D Dimensions (International Applications Only)

Enclosed D-line Starters Without Fused Disconnect Switch

| LE1D09 and D12 | LE1D18 to D35 LE2D09 to D35 | LE1D405 to D655 |
|-----------------------------------|---|---------------------------------|
| | | |
| c1 | c1 LE1D LE2D | c1 |
| Standard version 5.05 (128.5) | Standard version 6.0 (153.5) 6.3 (160) | Standard version 6.33 (161) |
| Version A04 4.7 (120) | Version A04 5.7 (145) 5.7 (145) | Version A04 5.9 (150) |
| Version A05 5.05 (128.5) | Version A05 6.0 (153.5) 6.0 (153.5) | Version A05 6.33 (161) |
| Version A09 5.31 (135) | Version A09 6.3 (160) — | |
| Version A13 5.31 (135) | Version A13 6.3 (160) — | |
| Version A35 5.31 (135) | Version A35 6.3 (160) — | |

LE2D095, LE2D125, LE2D185, LE2D255



Dual Dimensions: Inches
mm

| LE1D805 and D955 LE2D405 to D655 | LE2D805 and D955 |
|---|---------------------------------|
| | |
| c1 LE1D LE2D | c1 |
| Standard version 6.9 (176) 6.9 (176) | Standard version 7.6 (194) |
| Version A04 6.5 (165) 6.5 (165) | Version A04 7.48 (190) |
| Version A05 6.9 (176) — | Version A05 7.6 (194) |
| Version A11 — 6.9 (176) | |

Knock-outs or Blanking Plugs for Cable Glands

| Type of Enclosure | At top | | At bottom | |
|--------------------------------------|-------------------|-----------------------|-------------------|-----------------------|
| | PG | ISO | PG | ISO |
| LE1D09 and D12 | 2 x 13 or 2 x 16 | 2 x 20 I | 2 x 13 or 2 x 16 | 2 x 20 I |
| LE1D18 to D35 and LE2D09 to D35 | 2 x 16 or 2 x 21 | 2 x 20 I or 2 x 25 I | 2 x 16 or 2 x 21 | 2 x 20 I or 2 x 25 I |
| LE2D405 | 1 x 13 and 1 x 21 | 1 x 20 I and 1 x 25 I | 1 x 13 and 2 x 21 | 1 x 20 I and 2 x 25 I |
| LE1D405 to D655 and LE2D505 and D655 | 1 x 13 and 1 x 29 | 1 x 20 I and 1 x 32 I | 1 x 13 and 2 x 29 | 1 x 20 I and 2 x 32 I |
| LE1 or LE2D805 and D955 | 1 x 13 and 1 x 36 | 1 x 20 I and 1 x 40 I | 1 x 13 and 2 x 36 | 1 x 20 I and 2 x 40 I |
| LE2K | 2 x 13 and 2 x 16 | 4 x 20 I | 2 x 13 and 2 x 16 | 4 x 20 I |


(millimeters x 0.0394 = inches)

TeSys™ D-Line Contactors and Starters


LE-D Dimensions (International Applications Only)

Enclosed D-line Starters With Fused Disconnect Switch

LE4K06 and K09
LE8K06 and K09

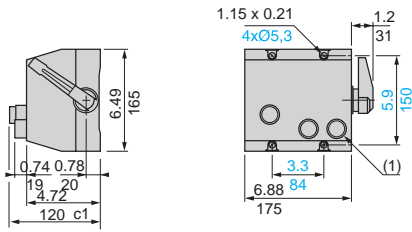


LE4D09 to D35
LE8D09 to D35

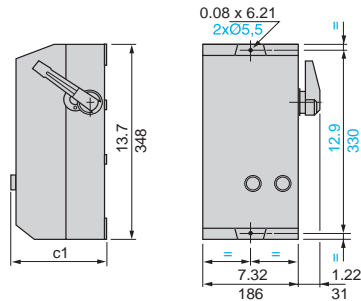

| | c1 | | c1 | |
|------------------|------------|------------|--------------|--------------|
| | LE4K | LE8K | LE4D | LE8D |
| Standard version | 5.74 (146) | 5.74 (146) | 6.90 (175.5) | 7.16 (182) |
| Version A05 | — | 5.47 (139) | 6.57 (167) | 6.57 (167) |
| Version A05 | | | 6.90 (175.5) | 6.90 (175.5) |

(1) For LE8 only.

LE4D406 to D656

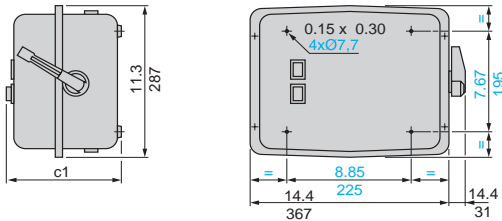


Dual Dimensions: Inches
mm

| | c1 |
|------------------|------------|
| Standard version | 7.91 (201) |
| Version A04 | 7.48 (190) |
| Version A05 | 7.91 (201) |

LE2D406 to D806

LE4D806

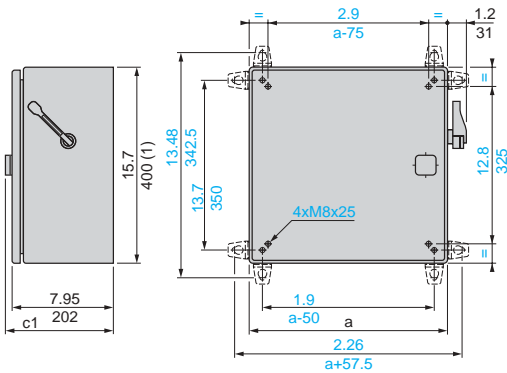

| LE2 | a | |
|------------------|------------|------------|
| D406, D506, D656 | 11.8 (300) | |
| D806 | 15.7 (400) | |
| LE4 | a | |
| D806 | 15.7 (400) | |
| | c1' | |
| | LE2D | LE4D |
| Standard version | 8.58 (218) | 8.58 (218) |
| Version A05 | 8.58 (218) | 8.58 (218) |
| Version A11 | — | 8.58 (218) |

(1) + 14 mm with blanking plugs

Knock-outs or Blanking Plugs for Cable Glands


| Type of Enclosure | At top | | At bottom | |
|--------------------------------------|--------------------------------------|--|--------------------------------------|--|
| | PG | ISO | PG | ISO |
| LE4 and LE8D09 to D35 | 2 x 13 or 2 x 16 or 2 x 21 or 2 x 29 | 2 x 20 I or 2 x 25 I or 2 x 32 I or 2 x 40 I | 2 x 13 or 2 x 16 or 2 x 21 or 2 x 29 | 2 x 20 I or 2 x 25 I or 2 x 32 I or 2 x 40 I |
| LE2D09 to D35 | 1 x 16 or 2 x 21 | 2 x 20 I or 2 x 25 I | 2 x 16 or 2 x 21 | 2 x 20 I or 2 x 25 I |
| LE2D406 and LE4D406 | 1 x 13 and 1 x 21 | 1 x 20 I and 1 x 25 I | 1 x 13 and 2 x 21 | 1 x 20 I and 2 x 25 I |
| LE1D506 to D656 and LE4D506 and D656 | 1 x 13 and 1 x 29 | 1 x 20 I and 1 x 32 I | 1 x 13 and 2 x 29 | 1 x 20 I and 2 x 32 I |
| LE2D806 and LE4D806 | 1 x 13 and 1 x 36 | 1 x 20 I and 1 x 40 I | 1 x 13 and 2 x 36 | 1 x 20 I and 2 x 40 I |
| LE4K, LE8K | 2 x 13 and 2 x 16 | 4 x 20 I | 2 x 13 and 2 x 16 | 4 x 20 I |

(millimeters x 0.0394 = inches)


TeSys™ D-Line Contactors and Starters LE-K Dimensions (International Applications Only)

Enclosed K-line Starters Without Fused Disconnect Switch

LE3K065, K095




LE3D09 to D35



| | |
|------------------|--------------|
| Standard version | 6.90 (175.5) |
| Version A04 | 6.57 (167) |
| Version A05 | 6.90 (175.5) |

LE3D405 to D505


Dimensions shown in millimeters
(millimeters x 0.0394 = inches)

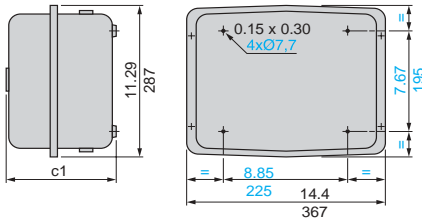

Dual Dimensions: $\frac{\text{Inches}}{\text{mm}}$

| | |
|------------------|------------|
| | c1 |
| Standard version | 7.48 (190) |
| Version A05 | 7.63 (194) |
| Version A06 | 7.63 (194) |

LE3D805 to D150

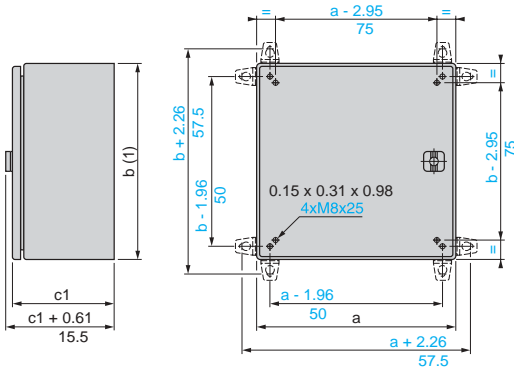

| LE3 | a | b |
|-------|------------|------------|
| D805 | 15.7 (400) | 15.7 (400) |
| D1155 | 19.6 (500) | 23.6 (600) |
| D1505 | 19.6 (500) | 23.6 (600) |

| | c1 | LE3D805 | LE3D115, D150 |
|------------------|------------|-------------|---------------|
| Standard version | 7.95 (202) | 9.92 (252) | |
| Version A05 | 8.58 (218) | - | |
| Version A06 | 8.58 (218) | 10.55 (268) | |

(1) + 14 mm with blanking plugs

Knock-outs or Blanking Plugs for Cable Glands

| Type of Enclosure | At top | | At bottom | |
|-------------------|--------------------------------------|--|--------------------------------------|--|
| | PG | ISO | PG | ISO |
| LE3D09 to D35 | 2 x 13 or 2 x 16 or 2 x 21 or 2 x 29 | 2 x 20 I or 2 x 25 I or 2 x 32 I or 2 x 40 I | 2 x 13 or 2 x 16 or 2 x 21 or 2 x 29 | 2 x 20 I or 2 x 25 I or 2 x 32 I or 2 x 40 I |
| LE3D405 | 1 x 29 | 1 X 32 I | 1 x 29, 2 x 13 and 2 x 21 | 1 x 32 I, 2 x 20 I and 2 x 25 I |
| LE3D505 | 1 x 36 | 1 x 40 I | 1 x 36, 2 x 13 and 2 x 29 | 1 x 40 I, 2 x 20 I and 2 x 32 I |
| LE3D805 | 1 x 36 | 1 x 40 I | 2 x 13 and 3 x 36 | 2 x 20 I and 3 x 40 I |
| LE3K | 2 x 13 and 2 x 16 | 4 x 20 I | 2 x 13 and 2 x 16 | 4 x 20 I |


(millimeters x 0.0394 = inches)

TeSys™ D-Line Contactors and Starters

LG1K and LG1D Dimensions (International Applications Only)

Starters Without Isolator


LE6D09 to D18

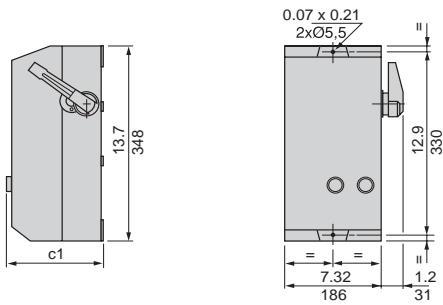


c1

| | |
|------------------|--------------|
| Standard version | 6.90 (175.5) |
| Version A04 | 6.57 (167) |
| Version A05 | 6.90 (175.5) |

LE3D326

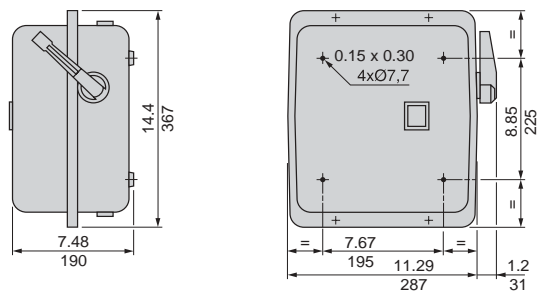

LE3D406 to D806

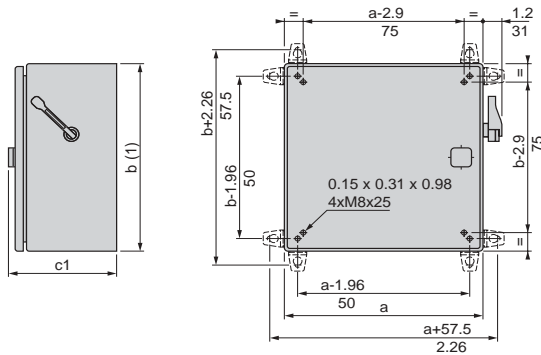

Dual Dimensions: $\frac{\text{Inches}}{\text{mm}}$

| | a | b | c1 |
|-------------------|------------|------------|------------|
| LE3 | | | |
| D406, D506 | 15.7 (400) | 19.6 (500) | 8.58 (218) |
| D806 | 19.6 (500) | 27.5 (700) | 10.6 (269) |

(1) + 14 mm with blanking plugs










Knock-outs or Blanking Plugs for Cable Glands

| Type of Enclosure | At top | | At bottom | |
|----------------------|--------------------------------------|--|--------------------------------------|--|
| | PG | ISO | PG | ISO |
| LE6D09 to D18 | 2 x 13 or 2 x 16 or 2 x 21 or 2 x 29 | 2 x 20 I or 2 x 25 I or 2 x 32 I or 2 x 40 I | 2 x 13 or 2 x 16 or 2 x 21 or 2 x 29 | 2 x 20 I or 2 x 25 I or 2 x 32 I or 2 x 40 I |
| LE3D326 | 1 x 21 | 1 X 32 I | 2 x 13, 2 x 16 and 1 x 21 | 2 x 20 I, 2 x 25 I and 1 x 32 I |
| LE3D406 | 1 x 29 | 1 X 32 I | 2 x 13, 2 x 21 and 1 x 29 | 2 x 20 I, 2 x 25 I and 1 x 32 I |
| LE3D506 | 1 x 36 | 1 x 40 I | 2 x 13, 2 x 29 and 1 x 36 | 1 x 40 I, 2 x 20 I and 2 x 32 I |
| LE3D806 | 1 x 36 | 1 x 40 I | 2 x 13 and 3 x 36 | 2 x 20 I and 3 x 40 I |

(millimeters x 0.0394 = inches)

TeSys™ D-Line Contactors and Starters



LE1K and LE1D Wiring Diagrams (International Applications Only)
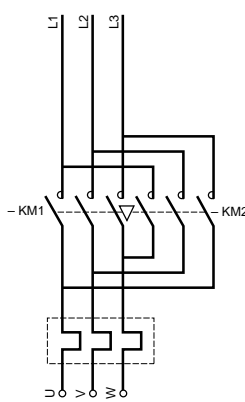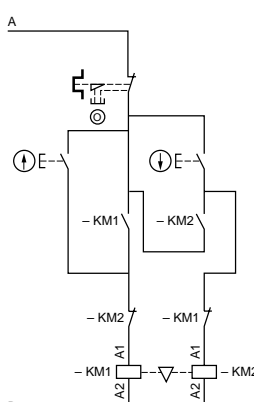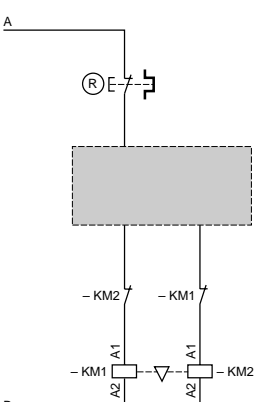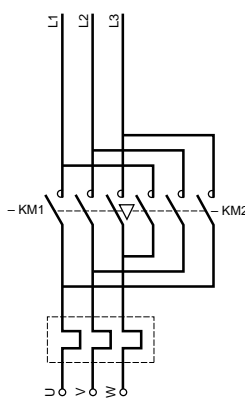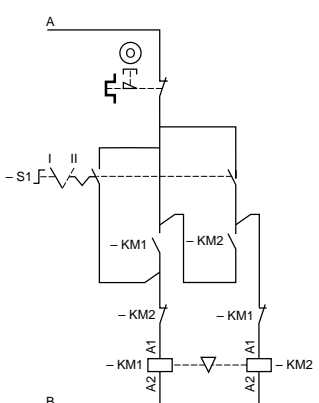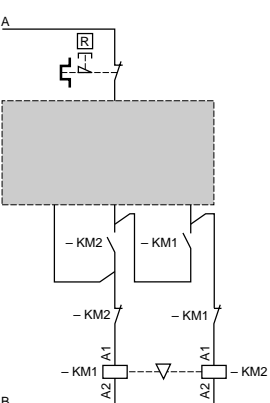
| <p>LE1D09 to D955</p>  | <p>LE1D09 to D955</p>  | <p>Form A04 or A05</p>  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|---|------------------------------|----|---------|--|------------------------|----|------------------|----------------------------|--------------|----|----|----------------|-----------------------|------------|------------|--|--------------------------------|-------------------|-------------------|--|--|---|---|--|----|---------|--|----|------------------|--|----|----|--|------------|------------|--|-------------------|-------------------|
| <p>LE2K06, K09</p>  | <p>LE2K06, K09</p>  | <p>Form A05</p>  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>LE2D09 to D955</p>  | <p>LE2D09 to D35</p>  | <p>LE2D405 to D955 LE2D09 to D955 with Forms A04 or A05</p>  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Connections</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 33%;">220 V, 230 V, 240 V</td> <td style="width: 33%;">LE2K, LE1 and LE2D09 and D12</td> <td style="width: 33%;">L3</td> <td style="width: 33%;">Neutral</td> </tr> <tr> <td></td> <td>LE1 and LE2D18 to D955</td> <td>L3</td> <td>Neutral terminal</td> </tr> <tr> <td>380 V, 400 V, 415 V, 440 V</td> <td>All products</td> <td>L3</td> <td>L1</td> </tr> <tr> <td>Other voltages</td> <td>LE1 and LE2D09 to D35</td> <td>Terminal 1</td> <td>Terminal 2</td> </tr> <tr> <td></td> <td>LE2K, LE1 and LE2D405 and D955</td> <td>Direct connection</td> <td>Direct connection</td> </tr> </tbody> </table> | | 220 V, 230 V, 240 V | LE2K, LE1 and LE2D09 and D12 | L3 | Neutral | | LE1 and LE2D18 to D955 | L3 | Neutral terminal | 380 V, 400 V, 415 V, 440 V | All products | L3 | L1 | Other voltages | LE1 and LE2D09 to D35 | Terminal 1 | Terminal 2 | | LE2K, LE1 and LE2D405 and D955 | Direct connection | Direct connection | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 33%;"></th> <th style="width: 33%;">A</th> <th style="width: 33%;">B</th> </tr> </thead> <tbody> <tr> <td></td> <td>L3</td> <td>Neutral</td> </tr> <tr> <td></td> <td>L3</td> <td>Neutral terminal</td> </tr> <tr> <td></td> <td>L3</td> <td>L1</td> </tr> <tr> <td></td> <td>Terminal 1</td> <td>Terminal 2</td> </tr> <tr> <td></td> <td>Direct connection</td> <td>Direct connection</td> </tr> </tbody> </table> | | A | B | | L3 | Neutral | | L3 | Neutral terminal | | L3 | L1 | | Terminal 1 | Terminal 2 | | Direct connection | Direct connection |
| 220 V, 230 V, 240 V | LE2K, LE1 and LE2D09 and D12 | L3 | Neutral | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | LE1 and LE2D18 to D955 | L3 | Neutral terminal | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 380 V, 400 V, 415 V, 440 V | All products | L3 | L1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Other voltages | LE1 and LE2D09 to D35 | Terminal 1 | Terminal 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | LE2K, LE1 and LE2D405 and D955 | Direct connection | Direct connection | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | A | B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | L3 | Neutral | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | L3 | Neutral terminal | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | L3 | L1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Terminal 1 | Terminal 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Direct connection | Direct connection | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

TeSys™ D-Line Contactors and Starters


LE2K and LE2D Wiring Diagrams (International Applications Only)

LE6D09 to D18


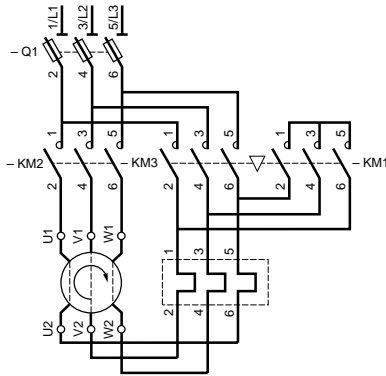


Recommended cabling for reversal of motor rotation (standard motor, viewed from shaft end).

LE6D09 to D18

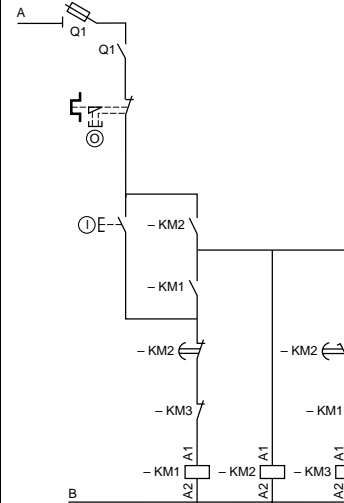


LE3D326 to D806

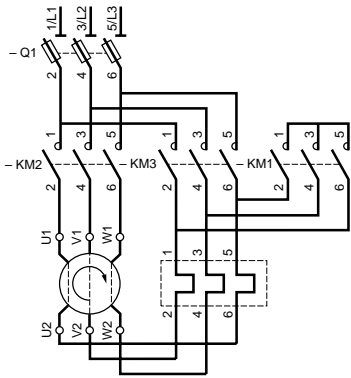

Recommended cabling for reversal of motor rotation (standard motor, viewed from shaft end).

LE3D326 to D806

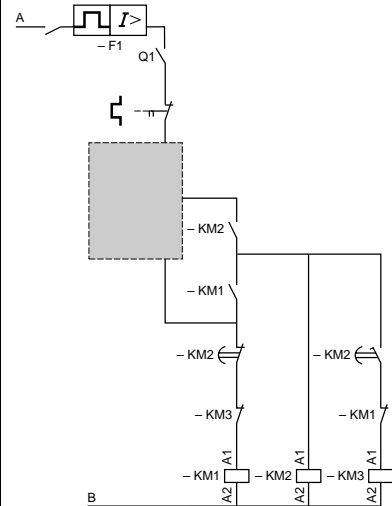


Connections

| Connections | | A | B |
|----------------------------|-------------------|-------------------|-------------------|
| 220 V, 230 V, 240 V | LE6D09 and D12 | L3 | Neutral |
| | LE6D18 to LE3D806 | L3 | Neutral terminal |
| 380 V, 400 V, 415 V, 440 V | All products | L3 | L1 |
| Other voltages | LE6D09 to D18 | Terminal 1 | Terminal 2 |
| | LE3D326 to D806 | Direct connection | Direct connection |


TeSys™ D-Line Contactors and Starters

LE4K, LE4D, LE8K, and LE2D Dimensions (International Applications Only)


LE3K065 and K095

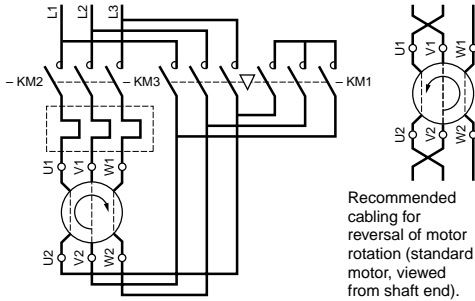


LE3K065 and K095

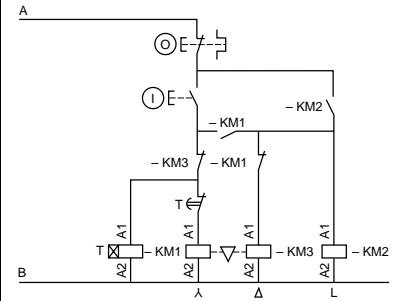


LE3D09 to D805

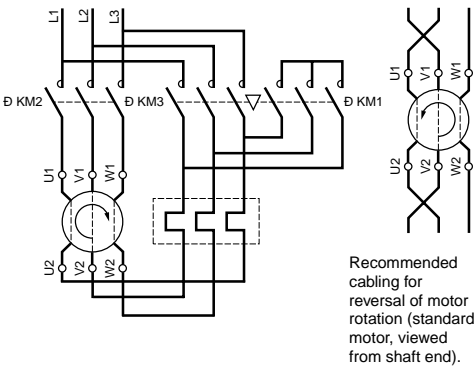

LE3D09 to D35

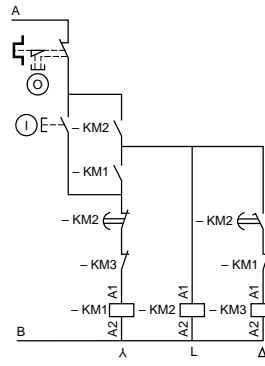


LE3D405 to D805

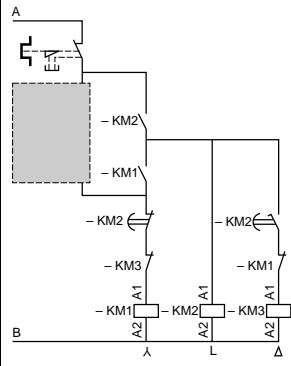


Note: In accordance with current installation regulations, short-circuit protection must be provided by fused or a circuit-breaker.

LE3D115 and D150

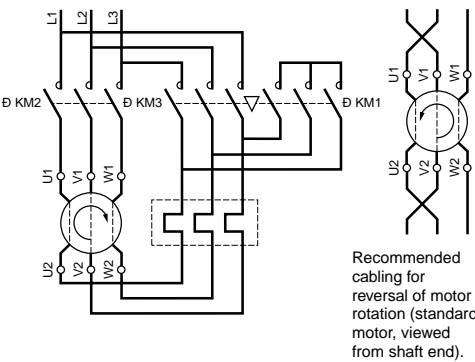

LE3D115 and D150

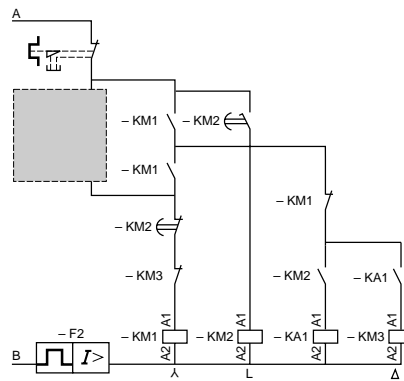

| Connections | | A | B |
|----------------------------|--------------------------|-------------------|-------------------|
| 220 V, 230 V, 240 V | LD09 and D12 | L3 | Neutral |
| | LE3D18 to D150 | L3 | Neutral terminal |
| 380 V, 400 V, 415 V, 440 V | All products | L3 | L1 |
| Other voltages | LE3D09 to D35 | Terminal 1 | Terminal 2 |
| | LE3K and LE3D405 to D150 | Direct connection | Direct connection |

TeSys™ D-Line Contactors and Starters

LG1K, LG1D, LG7K, LG7D, and LG8K Dimensions (International Applications Only)

| | | | | | |
|--|-----------------------------|--|-------------------------------|---|--|
| <p>LE4K06, K09 LE4D09 to D806</p> | <p>LE4K06, K09</p> | <p>LE4D09 to D35</p> | <p>LE4D406 to D656</p> | <p>LE4D806 LE4D09 to D656 with Form A04 or A05</p> | |
| <p>LE8K06, K09</p> | <p>LE8K06, K09</p> | <p>Form A05</p> | | | |
| <p>LE8D09 to LE2D806</p> | <p>LE8D09 to D35</p> | <p>LE2D406 to D806</p> | | | |
| <p>Connections</p> | | <p>A</p> | <p>B</p> | | |
| <p>220 V, 230 V, 240 V</p> | | <p>LE4 and LE8K, LE4 and LE8D09 and D12</p> | <p>L3</p> | <p>Neutral</p> | |
| <p>380 V, 400 V, 415 V, 440 V</p> | | <p>LE4D18 to D806, LE8D18 to D35 and LE2D406 to D806</p> | <p>L3</p> | <p>Neutral terminal</p> | |
| <p>Other voltages</p> | | <p>All products</p> | <p>L3</p> | <p>L1</p> | |
| <p>Other voltages</p> | | <p>LE4 and LE8D09 to D35</p> | <p>Terminal 1</p> | <p>Terminal 2</p> | |
| <p>Other voltages</p> | | <p>LE4 and LE2D406 and D806</p> | <p>Direct connection</p> | <p>Direct connection</p> | |

TeSys™ D-Line Contactors and Starters Cross-Reference Table

3-Pole AC Contactors(1)

| Connection for Cables with or without Cable End | | for Ring Terminal Type | | for Slip on Connectors | |
|--|-----------------|------------------------|-----------------|------------------------|-----------------|
| Old Catalog No. | New Catalog No. | Old Catalog No. | New Catalog No. | Old Catalog No. | New Catalog No. |
| LC1D0900 | LC1D09 | LC1D09006 | LC1D096 | LC1D09009 | LC1D099 |
| LC1D0910 | LC1D09 | LC1D09106 | LC1D096 | LC1D09109 | LC1D099 |
| LC1D0901 | LC1D09 | LC1D09016 | LC1D096 | LC1D09019 | LC1D099 |
| LC1D1200 | LC1D12 | LC1D12006 | LC1D126 | LC1D12009 | LC1D129 |
| LC1D1210 | LC1D12 | LC1D12106 | LC1D126 | LC1D12109 | LC1D129 |
| LC1D1201 | LC1D12 | LC1D12016 | LC1D126 | LC1D12019 | LC1D129 |
| LC1D1800 | LC1D18 | LC1D18006 | LC1D186 | | |
| LC1D1810 | LC1D18 | LC1D18106 | LC1D186 | | |
| LC1D1801 | LC1D18 | LC1D18016 | LC1D186 | | |
| LC1D2500 | LC1D25 | LC1D25006 | LC1D256 | | |
| LC1D2510 | LC1D25 | LC1D25106 | LC1D256 | | |
| LC1D2501 | LC1D25 | LC1D25016 | LC1D256 | | |
| LC1D3200 | LC1D32 | LC1D32006 | LC1D326 | | |
| LC1D3210 | LC1D32 | LC1D32106 | LC1D326 | | |
| LC1D3201 | LC1D32 | LC1D32016 | LC1D326 | | |
| LC1D3810 | LC1D38 | LC1D38106 | LC1D386 | | |
| LC1D3801 | LC1D38 | LC1D38016 | LC1D386 | | |
| LC1D4011 | LC1D40 | LC1D40116 | LC1D406 | | |
| LC1D5011 | LC1D50 | LC1D50116 | LC1D506 | | |
| LC1D6511 | LC1D65 | LC1D65116 | LC1D656 | | |
| LC1D8011 | LC1D80 | LC1D80116 | LC1D806 | | |
| LC1D9511 | LC1D95 | LC1D95116 | LC1D956 | | |
| LC1D11500 | LC1D115 | LC1D115006 | LC1D1156 | | |
| LC1D15000 | LC1D150 | LC1D150006 | LC1D1506 | | |



4-Pole AC Contactors (1)

| | | | |
|-----------|---------|------------|----------|
| LC1D12004 | LC1DT25 | LC1D120046 | LC1DT256 |
| LC1D12008 | LC1D128 | LC1D120086 | LC1D1286 |
| LC1D25004 | LC1DT40 | LC1D250046 | LC1DT406 |
| LC1D25008 | LC1D258 | LC1D250086 | LC1D2586 |

(1) Coil voltages: codes to be added to the end of the new catalog numbers

| | | | | | | |
|------------------|----|----|-----|-----|-----|-----|
| Volts - 50/60 Hz | 24 | 48 | 220 | 230 | 380 | 400 |
| Voltage Code | B7 | E7 | M7 | P7 | Q7 | V7 |

3-Pole DC Contactors (2)

| | | | | | |
|-----------|---------|------------|----------|-----------|---------|
| LP1D0910 | LC1D09 | LP1D09106 | LC1D096 | LP1D09109 | LC1D099 |
| LP1D0901 | LC1D09 | LP1D09016 | LC1D096 | LP1D09019 | LC1D099 |
| LP1D1210 | LC1D12 | LP1D12106 | LC1D126 | LP1D12109 | LC1D129 |
| LP1D1201 | LC1D12 | LP1D12016 | LC1D126 | LP1D12019 | LC1D129 |
| LP1D1810 | LC1D18 | LP1D18106 | LC1D186 | | |
| LP1D1801 | LC1D18 | LP1D18016 | LC1D186 | | |
| LP1D2510 | LC1D25 | LP1D25106 | LC1D256 | | |
| LP1D2501 | LC1D25 | LP1D25016 | LC1D256 | | |
| LP1D3210 | LC1D32 | LP1D32106 | LC1D326 | | |
| LP1D3201 | LC1D32 | LP1D32016 | LC1D326 | | |
| LP1D4011 | LC1D40 | LP1D40116 | LC1D406 | | |
| LP1D5011 | LC1D50 | LP1D50116 | LC1D506 | | |
| LP1D6511 | LC1D65 | LP1D65116 | LC1D656 | | |
| LP1D8011 | LC1D80 | LP1D80116 | LC1D806 | | |
| LP1D11500 | LC1D115 | LC1D115006 | LC1D1156 | | |
| LP1D15000 | LC1D150 | LC1D150006 | LC1D1506 | | |

4-Pole DC Contactors (2)

| | | | |
|-----------|---------|------------|----------|
| LP1D12004 | LC1DT25 | LC1D120046 | LC1DT256 |
| LP1D12008 | LC1D128 | LC1D120086 | LC1D1286 |
| LP1D25004 | LC1DT40 | LC1D250046 | LC1DT406 |
| LP1D25008 | LC1D258 | LC1D250086 | LC1D2586 |

(2) Coil voltages: codes to be added to the end of the new catalog numbers

| | | | |
|--------------|----|----|----|
| Volts dc | 24 | 48 | 72 |
| Voltage Code | BD | ED | SD |



TeSys™ D-Line Contactors and Starters

Cross-Reference Table

3-Pole Contactors, Low Consumption (1)

| Connection for Cables with or without Cable End | | for Lugs or Bars | | for Faston Connectors | |
|---|-----------------|------------------|-----------------|-----------------------|-----------------|
| Old Catalog No. | New Catalog No. | Old Catalog No. | New Catalog No. | Old Catalog No. | New Catalog No. |
| LP4D0910 | LC1D09 | | | | |
| LP4D0901 | LC1D09 | | | | |
| LP4D1210 | LC1D12 | | | | |
| LP4D1201 | LC1D12 | | | | |
| LP4D1810 | LC1D18 | | | | |
| LP4D1801 | LC1D18 | | | | |
| LP4D2500 | LC1D25 | | | | |

3-Pole Reversing Contactors, Low Consumption (1)

| | |
|----------|--------|
| LP5D0910 | LC2D09 |
| LP5D1210 | LC2D12 |
| LP5D1810 | LC2D18 |
| LP5D2500 | LC2D25 |

(1) Coil voltages: codes to be added to the end of the new catalog numbers

| | | | |
|-----------------------|----|----|----|
| Low Consumption Volts | 24 | 48 | 72 |
| Code | BL | EL | SL |

3-Pole Reversing Contactors, AC

| | | | | | |
|-----------|---------|------------|----------|-----------|---------|
| LC2D0901 | LC2D09 | LC2D09016 | LC2D096 | LC2D09019 | LC2D099 |
| LC2D1201 | LC2D12 | LC2D12016 | LC2D126 | LC2D12019 | LC2D129 |
| LC2D1801 | LC2D18 | LC2D18016 | LC2D186 | | |
| LC2D2501 | LC2D25 | LC2D25016 | LC2D256 | | |
| LC2D3201 | LC2D32 | LC2D32016 | LC2D326 | | |
| LC2D3801 | LC2D38 | LC2D38016 | LC2D386 | | |
| LC2D4011 | LC2D40 | LC2D115006 | LC2D1156 | | |
| LC2D5011 | LC2D50 | LC2D150006 | LC2D1506 | | |
| LC2D6511 | LC2D65 | | | | |
| LC2D8011 | LC2D80 | | | | |
| LC2D9511 | LC2D95 | | | | |
| LC2D11500 | LC2D115 | | | | |
| LC2D15000 | LC2D150 | | | | |

4-Pole Changeover Contactors, AC

| | | | |
|-----------|---------|------------|----------|
| LC2D12004 | LC2DT25 | LC2D120046 | LC2DT256 |
| LC2D25004 | LC2DT40 | LC2D250046 | LC2DT406 |

3-Pole Reversing Contactors, DC

| | | | | | |
|----------|--------|-----------|----------|-----------|---------|
| LP2D0901 | LC2D09 | LP2D09016 | LC2D0906 | LP2D09109 | LC2D099 |
| LP2D1201 | LC2D12 | LP2D12016 | LC2D126 | LP2D12019 | LC2D129 |
| LP2D1801 | LC2D18 | LP2D18016 | LC2D186 | | |
| LP2D2501 | LC2D25 | LP2D25016 | LC2D256 | | |
| LP2D3201 | LC2D32 | LP2D32016 | LC2D326 | | |

4-Pole Changeover Contactors, DC

| | | | |
|-----------|---------|------------|----------|
| LP2D12004 | LC2DT25 | LP2D120046 | LC2DT256 |
| LP2D25004 | LC2DT40 | LP2D250046 | LC2DT406 |

Contact Blocks

| | | | | | |
|---------|---------|----------|----------|--------|-------|
| LA1DN10 | LADN10 | LA1DN11M | LA1DN11G | LA2DT0 | LADT0 |
| LA1DN01 | LADN01 | LA1DN11P | LADN11P | LA2DT2 | LADT2 |
| LA1DN11 | LADN11 | LA1DN11G | LADN11G | LA2DT4 | LADT4 |
| LA1DN20 | LADN20 | LA1DN22M | LADN22G | LA2DS2 | LADS2 |
| LA1DN02 | LADN02 | LA1DN13M | LADN22G | LA3DR0 | LADR0 |
| LA8DN11 | LAD8N11 | LA1DN31M | LADN31G | LA3DR2 | LADR2 |
| LA8DN20 | LAD8N20 | LA1DN22P | LADN22P | LA3DR4 | LADR4 |
| LA1DN22 | LADN22 | LA1DN13P | LADN31P | | |
| LA1DN13 | LADN13 | LA1DN31P | LADN31P | | |
| LA1DN40 | LADN40 | LA1DN22G | LADN22G | | |
| LA1DN04 | LADN04 | LN1DN11 | LADN11 | | |
| LA1DN31 | LADN31 | | | | |
| LA1DC22 | LADC22 | | | | |

TeSys™ D-Line Contactors and Starters Cross-Reference Table

Thermal Overload Relays



| For Use with Balanced Loads | | For Use with Unbalanced (Single Phase) Loads | | For Use on 1000V Supplies | |
|-----------------------------|-----------------|---|-----------------|---------------------------|-----------------|
| Old Catalog No. | New Catalog No. | Old Catalog No. | New Catalog No. | Old Catalog No. | New Catalog No. |
| LR2D1301 | LRD01 | LR3D1301 | LR3D01 | LR2D3301A66 | LRD3301A66 |
| LR2D1302 | LRD02 | LR3D1302 | LR3D02 | LR2D3302A66 | LRD3302A66 |
| LR2D1303 | LRD03 | LR3D1303 | LR3D03 | LR2D3303A66 | LRD3303A66 |
| LR2D1304 | LRD04 | LR3D1304 | LR3D04 | LR2D3304A66 | LRD3304A66 |
| LR2D1305 | LRD05 | LR3D1305 | LR3D05 | LR2D3305A66 | LRD3305A66 |
| LR2D1306 | LRD06 | LR3D1306 | LR3D06 | LR2D3306A66 | LRD3306A66 |
| LR2D13X6 | LRD06 | LR3D13X6 | LR3D06 | LR2D33X6A66 | LRD33X6A66 |
| LR2D1307 | LRD07 | LR3D1307 | LR3D07 | LR2D3307A66 | LRD3307A66 |
| LR2D1308 | LRD08 | LR3D1308 | LR3D08 | LR2D3308A66 | LRD3308A66 |
| LR2D1310 | LRD10 | LR3D1310 | LR3D10 | LR2D3310A66 | LRD3310A66 |
| LR2D1312 | LRD12 | LR3D1312 | LR3D12 | LR2D3312A66 | LRD3312A66 |
| LR2D1314 | LRD14 | LR3D1314 | LR3D14 | LR2D3314A66 | LRD3314A66 |
| LR2D1316 | LRD16 | LR3D1316 | LR3D16 | LR2D3316A66 | LRD3316A66 |
| LR2D1321 | LRD21 | LR3D1321 | LR3D21 | LR2D3321A66 | LRD3321A66 |
| LR2D1322 | LRD22 | LR3D1322 | LR3D22 | LR2D3322A66 | LRD3322A66 |
| LR2D2353 | LRD32 | LR3D2353 | LR3D32 | | |
| LR2D2355 | LRD35 | LR3D2355 | LR3D35 | | |
| LR2D1508 | LRD1508 | | | | |
| LR2D1510 | LRD1510 | | | | |
| LR2D1512 | LRD1512 | | | | |
| LR2D1514 | LRD1514 | | | | |
| LR2D1516 | LRD1516 | | | | |
| LR2D1521 | LRD1521 | | | | |
| LR2D1522 | LRD1522 | | | | |
| | LRD1530 (1) | | | | |
| LR2D2553 | or | | | | |
| | LRD1532 (1) | | | | |
| LR2D3322 | LRD3322 | LR3D3322 | LR3D3322 | | |
| LR2D3353 | LRD3353 | LR3D3353 | LR3D3353 | | |
| LR2D3355 | LRD3355 | LR3D3355 | LR3D3355 | | |
| LR2D3357 | LRD3357 | LR3D3357 | LR3D3357 | | |
| LR2D3359 | LRD3359 | LR3D3359 | LR3D3359 | | |
| LR2D3361 | LRD3361 | LR3D3361 | LR3D3361 | | |
| LR2D3363 | LRD3363 | LR3D3363 | LR3D3363 | | |
| LR2D3365 | LRD3365 | LR3D3365 | LR3D3365 | | |
| LR2D4365 | LRD4365 | | | | |
| LR2D4367 | LRD4367 | | | | |
| LR2D4369 | LRD4369 | | | | |

(1) Depends on actual Full Load Current.

TeSys™ D-Line Contactors and Starters


TeSys™ F-Line

Contactors, Overload Relays, and Accessories

Catalog

04

File 8502

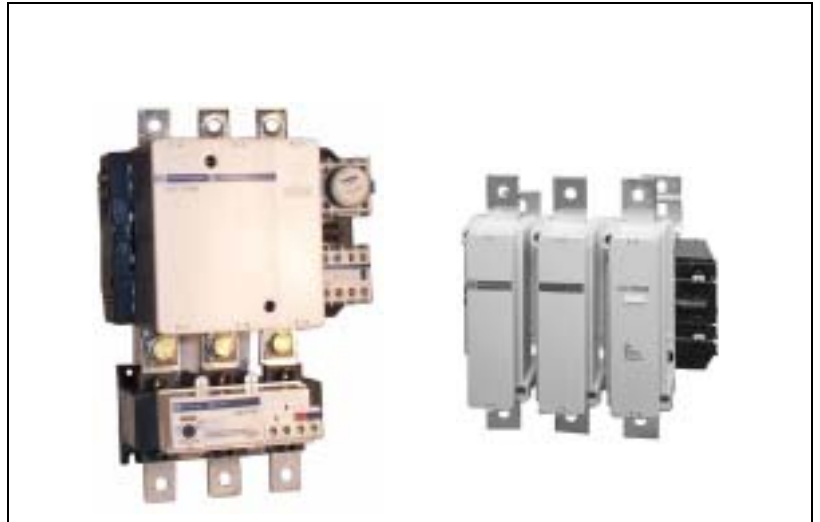

CONTENTS

| Description | Page |
|---|------|
| General Information | 181 |
| Contactors | |
| Characteristics | 182 |
| Selection | 188 |
| Mechanical Interlocks and Power Connections | 190 |
| Auxiliary Contacts and Timers | 194 |
| Accessories, and Spare Parts | 196 |
| F-line Voltage Code Table | 200 |
| Replacement Coils | 202 |
| Dimensions and Mounting | 210 |
| Schematics | 216 |
| Solid State Overload Relays | |
| Characteristics | 218 |
| Selection | 220 |
| Accessories | 221 |
| Dimensions and Mountings | 222 |
| Wiring Diagrams and Special Functions | 224 |
| CR1F/CR1B Magnetic Latching Contactors | |
| Characteristics | 225 |
| Selection | 230 |
| Accessories – Selection | 231 |
| Mechanical Interlocks and Power Connections | 232 |
| Coils and Spare Parts | 234 |
| Dimensions and Mounting | 239 |
| Schematics | 245 |

TeSys™ F-Line Contactors and Starters

TeSys™ F-Line Contactors and Starters General Information

The F-line contactors and overload relays offer proven performance for resistive loads or large motor starting applications such as fans, crushers, pumps, compressors and overhead cranes. They offer high reliability with long mechanical and electrical life and the most complete line of accessories in the industry.

Contactor Ratings




F-line contactors and overload relays are available in the USA market for inductive motor applications up to 800 full load Amps and resistive loads up to 1000 Amps. They offer motor control and overload protection for motors rated up to 800 horsepower at 480 Vac or 900 horsepower at 600 Vac.

- 2 pole, 3 pole and 4 pole Contactors and Magnetic Latching Contactors
- AC or DC operating coils
- Includes UL listing, CSA Certification and CE mark
- Both North American and international terminal markings
- Replacement parts available
 - Contact Kits
 - Arc Chambers
 - Operating Coils
- Easily installed accessories
 - Auxiliary contact blocks with serrated wiping action
 - Front mount dust tight auxiliary contact blocks
 - Pneumatic time delay blocks
- Solid State Overload Relays

Class 10 or class 20 overload relays are available from 30 to 630 Amperes. They are ambient compensated and include single phase sensitivity for phase unbalance and phase loss protection. They also include the following features: Isolated N.C. trip contact, N.O. alarm contact, manual reset button, rotary dial for adjustable current settings with tamper resistant window, test trip button, momentary stop button and trip indicator.

TeSys™ F-Line Contactors and Starters Characteristics




Contactors Type LC1F (115 to 800A) Control Circuit: AC or DC Supply

| Type | | | LC1F115 | LC1F150 | LC1F185 | LC1F225 | LC1F265 | |
|--|---|--------------|--|--------------------------|--------------------------|--------------------------|--------------------------|------|
| Environment | | | | | | | | |
| Rated insulation voltage (Vi) | Conforming to IEC 60947-4-1/IEC 60947-4 | V | 1000 | 1000 | 1000 | 1000 | 1000 | |
| | Conforming to VDE 0110 gr C | V | 1500 | 1500 | 1500 | 1500 | 1500 | |
| Rated impulse withstand voltage (Vimp) | Test with coil not connected to the power circuit | kV | 8 | 8 | 8 | 8 | 8 | |
| Conforming to standards |  Meets the essential requirements of the LV & EMC directives | | IEC 60947-4, NFC 63-110, VDE 0660, BS 5424, JEM 1038 | | | | | |
| Approvals |  E164862 NLDX  LR 43364 3211 04 | | ASE, CSA, UL, BV, GL, LROS, USSR, NORSK VERITAS, RINA | | | | | |
| Degree of protection | Conforming to IEC 60529 | | IP 20 front face with shrouds LA9F | | | | | |
| | Conforming to VDE 0106 | | Protection against direct finger contact with shrouds LA9F | | | | | |
| Protective treatment | Standard version | | "TH" | | | | | |
| Ambient air temperature around the device | Storage | | - 60 to + 80 °C (- 76 to +176 °F) | | | | | |
| | Operation | | - 5 to + 55 °C (23 to + 131 °F) for operation at 80 to 110% of nominal control voltage | | | | | |
| | Permissible at Vc ♦ | | - 40 to + 70 °C (- 40 to + 158 °F) for operation at nominal control voltage | | | | | |
| Maximum operating altitude | Without derating | | 3000 m (9800 ft.) | | | | | |
| Operating positions | Without derating | | ± 30° possible, in relation to normal vertical mounting plane | | | | | |
| Shock resistance ■ 1/2 sine wave = 11 ms | Contacteur open | | 9 gn | 9 gn | 7 gn | 7 gn | 6 gn | |
| | Contacteur closed | | 13 gn | 13 gn | 15 gn | 15 gn | 15 gn | |
| Vibration resistance ■ 5 to 300 Hz | Contacteur open | | 2 gn | 2 gn | 2 gn | 2 gn | 2 gn | |
| | Contacteur closed | | 6 gn | 6 gn | 5 gn | 5 gn | 5 gn | |
| Pole Characteristics ▲ | | | | | | | | |
| Number of poles | | | 3 or 4 | 3 or 4 | 3 or 4 | 3 or 4 | 3 or 4 | |
| Rated operational current (Ie) (Ve ≤ 440 V) | In AC-3, q ≤ 55 °C (131 °F) | A | 115 | 150 | 185 | 225 | 265 | |
| | In AC-1, q ≤ 40 °C (104 °F) | A | 200 | 250 | 275 | 315 | 350 | |
| Rated operational voltage (Ve) | Up to | V | 1000 | 1000 | 1000 | 1000 | 1000 | |
| Frequency limits | Of the operational current ▼ | Hz | 16 ^{2/3} to 200 | 16 ^{2/3} to 200 | 16 ^{2/3} to 200 | 16 ^{2/3} to 200 | 16 ^{2/3} to 200 | |
| Conventional rated thermal current | θ ≤ 40 °C (104 °F) | A | 200 | 250 | 275 | 315 | 350 | |
| Rated making capacity | I rms to IEC 60947-4-1 | A | 1400 | 1700 | 2100 | 2460 | 2940 | |
| Rated breaking capacity | I rms conforming to IEC 60947-4-1 | up to 440 V | A | 1300 | 1500 | 1800 | 2050 | 2450 |
| | | 500 V | A | 1100 | 1200 | 1600 | 1850 | 2200 |
| | | 660 to 690 V | A | 900 | 1100 | 1200 | 1350 | 1700 |
| | | 1000 V | A | 400 | 450 | 600 | 780 | 800 |
| Permissible short time rating from cold state, no current flowing for preceding 60 minutes θ ≤ 40 °C (104 °F) | For 1 s | A | 1100 | 1200 | 1500 | 1800 | 2200 | |
| | For 5 s | A | 1100 | 1200 | 1500 | 1800 | 2200 | |
| | For 10 s | A | 1100 | 1200 | 1500 | 1800 | 2200 | |
| | For 30 s | A | 640 | 700 | 920 | 1000 | 1230 | |
| | For 1 min | A | 520 | 600 | 740 | 850 | 950 | |
| | For 3 min | A | 400 | 450 | 500 | 560 | 620 | |
| | For 10 min | A | 320 | 350 | 400 | 440 | 480 | |
| Short-circuit protection | By circuit breaker | | Select in accordance with NEC and local codes | | | | | |
| | By fuses | | Max 400% of motor FLA | | | | | |
| Average impedance per pole | At Ith and 50 Hz | mΩ | 0.40 | 0.40 | 0.36 | 0.36 | 0.32 | |
| Power dissipation per pole for the above operational currents | AC-3 | W | 6 | 9 | 12 | 18 | 22 | |
| | AC-1 | W | 18 | 25 | 26 | 35 | 39 | |
| Mechanical durability at nominal voltage | Millions of operations | | 10 | 10 | 10 | 10 | 10 | |
| Maximum operating rate | ≤ 55°C (131°F) | ops/HR | 2400 | 2400 | 2400 | 2400 | 2400 | |
| Cabling | Cable size (min-max) | AWG | #14 to 2/0 | #6 to 3/0 | #6 to 3/0 | — | #6 to 300mcm | |
| | Lug | | DZ2FF | DZ2FG | DZ2FG | — | DZ2FH | |
| Tightening torque using DZ2F•• Lug | Bolt lug to contactor | lb.-in | 89 | 160 | 160 | — | 310 | |
| | Wire pressure screw | lb.-in | 120 | 200 | 200 | — | 275 | |

- ♦ In these conditions, for ratings F115 to F225, it is recommended to use LX9F coils.
- In the least favorable direction, without change of contact state (coil at Vc).
- ▲ Paralleling of poles must be carried out only in accordance with the fuse manufacturer's recommendations.
- ▼ Sine wave without interference, above these values, please consult your Local Square D Field Sales Office.

TeSys™ F-Line Contactors and Starters Characteristics

Contactors Type LC1F (115 to 800 A) Control Circuit: AC or DC Supply

| Type | | | LC1F330 | LC1F400 | LC1F500 | LC1F630 | LC1F780 | LC1F800 | |
|--|---|--------------|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------|
| Environment | | | | | | | | | |
| Rated insulation voltage (Vi) | Conforming to IEC 60947-4-1/IEC 60947-4 | V | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | |
| | Conforming to VDE 0110 gr C | V | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | |
| Rated impulse withstand voltage (Vimp) | Test with coil not connected to the power circuit | kV | 8 | 8 | 8 | 8 | 8 | 8 | |
| Conforming to standards |  Meets the essential requirements of the LV & EMC directives | | IEC 60947-4, NFC 63-110, VDE 0660, BS 5424, JEM 1038 | | | | | | |
| Approvals |  E164862 NLDX  LR 43364 3211 04 | | ASE, CSA C22.2 No.14, UL 508, BV, GL, LROS, USSR, NORSEK VERITAS, RINA | | | | | | |
| Degree of protection | Conforming to IEC 60529 | | IP 20 front face with shrouds LA9F | | | | | | |
| | Conforming to VDE 0106 | | Protection against direct finger contact with shrouds LA9F | | | | | | |
| Protective treatment | Standard version | | "TH" | | | | | | |
| Ambient air temperature around the device | Storage | | - 60 to + 80°C (- 76 to +176°F) | | | | | | |
| | Operation | | - 5 to + 55°C (23 to + 131°F) for operation at 80 to 110% of nominal control voltage | | | | | | |
| | Permissible at Vc | | - 40 to + 70°C (- 40 to + 158°F) for operation at nominal control voltage | | | | | | -5 to +55°C (23-131 °F) |
| Maximum operating altitude | Without derating | | 3000 m (9800 ft.) | | | | | | |
| Operating positions | Without derating | | ± 30° possible, in relation to normal vertical mounting plane | | | | | | |
| | | | | | | | | | |
| Shock resistance ■ 1/2 sine wave = 11 ms | Contactors open | | 6 gn | 6 gn | 9 gn | 6 gn | 5 gn | 6 gn | |
| | Contactors closed | | 15 gn | 15 gn | 15 gn | 15 gn | 15 gn | 15 gn | |
| Vibration resistance ■ 5 to 300 Hz | Contactors open | | 2 gn | 1.5 gn | 2 gn | 2 gn | 2.5 gn | 2 gn | |
| | Contactors closed | | 5 gn | 5 gn | 4 gn | 4 gn | 5.5 gn | 4 gn | |
| Pole Characteristics ▲ | | | | | | | | | |
| Number of poles | | | 3 or 4 | 2, 3 or 4 | 2, 3 or 4 | 2, 3 or 4 | 3 or 4 | 3 | |
| Rated operational current (Ie) (Ve ≤ 440 V) | In AC-3, q ≤ 55 °C (131 °F) | A | 330 | 400 | 500 | 630 | 780 | 800 | |
| | In AC-1, q ≤ 40 °C (104 °F) | A | 400 | 500 | 700 | 1000 | 1600 | 1000 | |
| Rated operational voltage (Ve) | Up to | V | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | |
| Frequency limits | Of the operational current ▼ | Hz | 16 ^{2/3} to 200 | 16 ^{2/3} to 200 | 16 ^{2/3} to 200 | 16 ^{2/3} to 200 | 16 ^{2/3} to 200 | 16 ^{2/3} to 200 | |
| Conventional rated thermal current | θ ≤ 40 °C (104 °F) | A | 400 | 500 | 700 | 1000 | 1600 | 1000 | |
| Rated making capacity | I rms to IEC 60947-4-1 | A | 3600 | 4500 | 5550 | 6740 | 8550 | 8200 | |
| Rated breaking capacity | I rms conforming to IEC 60947-4-1 | up to 440 V | A | 3000 | 4000 | 5000 | 6300 | 7100 | 7400 |
| | | 500 V | A | 2810 | 3500 | 4500 | 5400 | 6100 | 6200 |
| | | 660 to 690 V | A | 2350 | 3050 | 3560 | 4600 | 5200 | 5400 |
| | | 1000 V | A | 1150 | 1200 | 2500 | 3200 | 3800 | 3850 |
| Permissible short time rating from cold state, no current flowing for preceding 60 minutes θ ≤ 40 °C (104 °F) | For 1 s | A | 2650 | 3600 | 4200 | 5050 | 6250 | 5100 | |
| | For 5 s | A | 2650 | 3600 | 4200 | 5050 | 6250 | 5100 | |
| | For 10 s | A | 2650 | 3600 | 4200 | 5050 | 6250 | 5100 | |
| | For 30 s | A | 1800 | 2400 | 3200 | 4400 | 5600 | 4400 | |
| | For 1 min | A | 1300 | 1700 | 2400 | 3400 | 4600 | 3400 | |
| | For 3 min | A | 900 | 1200 | 1500 | 2200 | 3000 | 2200 | |
| | For 10 min | A | 750 | 1000 | 1200 | 1600 | 2200 | 1600 | |
| Short-circuit protection | By circuit breaker | | Select in accordance with NEC and local codes | | | | | | |
| | By fuses | | Max 400% of motor FLA | | | | | | |
| Average impedance per pole | At 1th and 50 Hz | mΩ | 0.28 | 0.28 | 0.18 | 0.12 | 0.10 | 0.12 | |
| Power dissipation per pole for the above operational currents | AC-3 | W | 31 | 45 | 45 | 48 | 60 | 77 | |
| | AC-1 | W | 44 | 70 | 88 | 120 | 250 | 120 | |
| Mechanical durability at nominal voltage | Millions of operations | | 10 | 10 | 10 | 5 | 5 | 5 | |
| Maximum operating rate | ≤ 55°C (131°F) | ops/HR | 2400 | 2400 | 2400 | 1200 | 1200 | 1200 | |
| Cabling | Cable size (min-max) | AWG | #6 to 300mcm | #4 to 500mcm | 2 x #2 to 600mcm | 3 x #2 to 600mcm | 4 x1/0 to 750mcm | 3 x#2 to 600mcm | |
| | Lug | | DZ2FH | DZ2FJ | DZ2FK | DZ2FL | DZ2FX | DZ2FL | |
| Tightening torque using DZ2F•• Lug | Bolt lug to contactor | lb.-in | 310 | 310 | 310 | 510 | 510 | 510 | |
| | Wire pressure screw | lb.-in | 275 | 500 | 500 | 500 | 500 | 500 | |

- In the least favorable direction, without change of contact state (coil at Vc).
- ▲ Paralleling of poles must be carried out only in accordance with the fuse manufacturer's recommendations.
- ▼ Sine wave without interference, above these values, please consult your Local Square D Field Sales Office.

TeSys™ F-Line Contactors and Starters Characteristics

Contactors Type LC1F (115 to 800 A) Control Circuit: AC Supply

| Type | | | LC1F115 | LC1F150 | LC1F185 | LC1F225 | LC1F265 | LC1F330 | |
|--|---|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------|
| Control Circuit Characteristics (LX1/LX8 type coils) | | | | | | | | | |
| Rated control circuit voltage (Vc) | 50 or 60 Hz | V | 24 to 1000 | 24 to 1000 | 24 to 1000 | 24 to 1000 | 48 to 1000 | 48 to 1000 | |
| Control voltage limits ($\theta \leq 55\text{ }^{\circ}\text{C}$ [131 °F]) | 50 or 60 Hz coils | Operational | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | – | – | |
| | | Drop-out | 0.35 to 0.55 Vc | 0.35 to 0.55 Vc | 0.35 to 0.55 Vc | 0.35 to 0.55 Vc | – | – | |
| | 40 to 400 Hz coils | Operational | – | – | – | – | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | |
| | | Drop-out | – | – | – | – | 0.35 to 0.55 Vc | 0.35 to 0.55 Vc | |
| Average consumption at 20 °C (68 °F) and at Vc | AC 50 Hz Inrush | 50 Hz coil | VA | 550 | 550 | 805 | 805 | – | – |
| | | 40 to 400 Hz coil | VA | – | – | – | – | 650 | 650 |
| | | Power factor | | 0.3 | 0.3 | 0.3 | 0.3 | 0.9 | 0.9 |
| | AC 50 Hz Sealed | 50 Hz coil | VA | 45 | 45 | 55 | 55 | – | – |
| | | 40 to 400 Hz coil | VA | – | – | – | – | 10 | 10 |
| | | Power factor | | 0.3 | 0.3 | 0.3 | 0.3 | 0.9 | 0.9 |
| | AC 60 Hz Inrush | 60 Hz coil | VA | 660 | 660 | 970 | 970 | – | – |
| | | 40 to 400 Hz coil | VA | – | – | – | – | 650 | 650 |
| | | Power factor | | 0.3 | 0.3 | 0.3 | 0.3 | 0.9 | 0.9 |
| | AC 60 Hz Sealed | 60 Hz coil | VA | 55 | 55 | 66 | 66 | – | – |
| | | 40 to 400 Hz coil | VA | – | – | – | – | 10 | 10 |
| | | Power factor | | 0.3 | 0.3 | 0.3 | 0.3 | 0.9 | 0.9 |
| Heat dissipation | | W | 12 to 16 | 12 to 16 | 18 to 24 | 18 to 24 | 8 | 8 | |
| Operating time ■ | Closing "C" | ms | 23 to 35 | 23 to 35 | 20 to 35 | 20 to 35 | 40 to 65 | 40 to 65 | |
| | Opening "O" | ms | 5 to 15 | 5 to 15 | 7 to 15 | 7 to 15 | 100 to 170 | 100 to 170 | |
| Mechanical durability to Vc in millions of operating cycles | | | 10 | 10 | 10 | 10 | 10 | 10 | |
| Maximum operating rate at ambient temperature $\leq 55\text{ }^{\circ}\text{C}$ (131 °F) | In operating cycles per hour | | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | |
| Cabling | | | Min/max | | | | | | |
| | Solid or stranded cable | 1 or 2 conductors | AWG | 16/12 | 16/12 | 16/12 | 16/12 | 16/12 | 16/12 |
| | | | Min/max c.s.a. | | | | | | |
| | Stranded cable without cable end | 1 or 2 conductors | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | Stranded cable with cable end | 1 conductor | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | | 2 conductors | mm ² | 1/2.5 | 1/2.5 | 1/2.5 | 1/2.5 | 1/2.5 | 1/2.5 |
| Solid cable without cable end | 1 or 2 conductors | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | |
| Tightening torque | | N•m/lb-in | 1.2/10 | 1.2/10 | 1.2/10 | 1.2/10 | 1.2/10 | 1.2/10 | |
| Mechanical latching | The LA6DK mechanical latch blocks cannot be mounted on LC1F contactors, for similar operation use CR1F magnetic latching contactors (see page 226). | | | | | | | | |

- The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles.
The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.

TeSys™ F-Line Contactors and Starters Characteristics

Contactors Type LC1F (115 to 800 A) Control Circuit: AC Supply

| Type | | | LC1F400 | LC1F500 | LC1F630 | LC1F780 | LC1F800 | |
|--|---|-------------------|-----------------|----------------|----------------|----------------|----------------|---------------|
| Control Circuit Characteristics (LX1/LX8 type coils) | | | | | | | | |
| Rated control circuit voltage (Vc) | 50 or 60 Hz | | V | 48 to 1000 | 48 to 1000 | 48 to 1000 | 110 to 500 | 110 to 440 |
| Control voltage limits ($\theta \leq 55\text{ °C}$ [131 °F]) | 50 or 60 Hz coils | Operational | | – | – | – | – | – |
| | | Drop-out | | – | – | – | – | – |
| | 40 to 400 Hz coils | Operational | | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.7 to 1.3 Vc |
| | | Drop-out | | 0.3 to 0.5 Vc | 0.3 to 0.5 Vc | 0.25 to 0.5 Vc | 0.2 to 0.4 Vc | 0.3 to 0.5 Vc |
| Average consumption at 20 °C (68 °F) and at Vc | AC 50 Hz Inrush | 50 Hz coil | VA | – | – | – | – | – |
| | | 40 to 400 Hz coil | VA | 1075 | 1100 | 1650 | 2100 | 1300 |
| | | Power factor | | 0.9 | 0.9 | 0.9 | 0.9 | – |
| | AC 50 Hz Sealed | 50 Hz coil | VA | – | – | – | – | – |
| | | 40 to 400 Hz coil | VA | 15 | 18 | 22 | 50 | 15 |
| | | Power factor | | 0.9 | 0.9 | 0.9 | 0.9 | – |
| | AC 60 Hz Inrush | 60 Hz coil | VA | – | – | – | – | – |
| | | 40 to 400 Hz coil | VA | 1075 | 1100 | 1650 | 2100 | 1300 |
| | | Power factor | | 0.9 | 0.9 | 0.9 | 0.9 | – |
| | AC 60 Hz Sealed | 60 Hz coil | VA | – | – | – | – | – |
| | | 40 to 400 Hz coil | VA | 15 | 18 | 22 | 50 | 15 |
| | | Power factor | | 0.9 | 0.9 | 0.9 | 0.9 | – |
| Heat dissipation | | | W | 14 | 18 | 20 | 2 x 22 | 25 |
| Operating time ■ | Closing "C" | | ms | 40 to 75 | 40 to 75 | 40 to 80 | 40 to 80 | 40 to 80 |
| | Opening "O" | | ms | 100 to 170 | 100 to 170 | 100 to 200 | 130 to 230 | 20 to 40 |
| Mechanical durability to Vc in millions of operating cycles | | | | 10 | 10 | 5 | 5 | 5 |
| Maximum operating rate at ambient temperature $\leq 55\text{ °C}$ (131 °F) | In operating cycles per hour | | | 2400 | 2400 | 1200 | 600 | 600 |
| Cabling | | | | Min/max | | | | |
| | Solid or stranded cable | 1 or 2 conductors | AWG | 16/12 | 16/12 | 16/12 | 16/12 | 16/12 |
| | | | | Min/max c.s.a. | | | | |
| | Stranded cable without cable end | 1 or 2 conductors | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | Stranded cable with cable end | 1 conductor | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | | 2 conductors | mm ² | 1/2.5 | 1/2.5 | 1/2.5 | 1/2.5 | 1/2.5 |
| Solid cable without cable end | 1 or 2 conductors | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | |
| Tightening torque | | | N•m/lb-in | 1.2/10 | 1.2/10 | 1.2/10 | 1.2/10 | 1.2/10 |
| Mechanical latching | The LA6DK mechanical latch blocks cannot be mounted on LC1F contactors, for similar operation use CR1F magnetic latching contactors (see page 226). | | | | | | | |

- The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles.
The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.

TeSys™ F-Line Contactors and Starters

Characteristics

Contactors Type LC1F (115 to 800 A) Control Circuit: DC Supply

| Type | | | LC1F115 | LC1F150 | LC1F185 | LC1F225 | LC1F265 | LC1F330 | |
|---|---|-----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------|
| Control Circuit Characteristics (LX4/LX8 type coils) | | | | | | | | | |
| Rated control circuit voltage (Vc) | DC | V | 24 to 460 | 24 to 460 | 24 to 460 | 24 to 460 | 24 to 460 | 24 to 460 | |
| Control voltage limits ($\theta \leq 55^\circ\text{C}$ [131 °F]) | Operational | | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | |
| | Drop-out | | 0.15 to 0.2 Vc | 0.15 to 0.2 Vc | 0.1 to 0.2 Vc | 0.15 to 0.2 Vc | 0.15 to 0.2 Vc | 0.15 to 0.2 Vc | |
| Average consumption at 20 °C (68 °F) and at Vc | DC | Inrush | W | 560 | 560 | 800 | 800 | 750 | 750 |
| | | Sealed | W | 4.5 | 4.5 | 5 | 5 | 5 | 5 |
| Average operating time ■ | Closing "F" | ms | | 30 to 40 | 30 to 40 | 30 to 40 | 30 to 40 | 40 to 50 | 40 to 50 |
| | Opening "O" | ms | | 30 to 50 | 30 to 50 | 30 to 50 | 30 to 50 | 40 to 65 | 40 to 65 |
| Note: The arcing time depends on the circuit switched by the poles. For normal 3-phase applications, the arcing time is usually less than 10 ms. The load is isolated from the supply after a time equal to the sum of the opening time and the arcing time. | | | | | | | | | |
| Mechanical durability at Vc | In millions of operating cycles | | | 10 | 10 | 10 | 10 | 10 | |
| Maximum operating rate at ambient temperature $\leq 55^\circ\text{C}$ (131 °F) | In operating cycles/hour | | | 2400 | 2400 | 2400 | 2400 | 2400 | |
| Cabling | Solid or stranded cable | | 1 or 2 conductors | AWG | 16/12 | 16/12 | 16/12 | 16/12 | 16/12 |
| | | | | | Min/max | | | | |
| | | | | | Min/max c.s.a. | | | | |
| | Stranded cable without cable end | 1 conductor | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | | 2 conductors | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | Stranded cable with cable end | 1 conductor | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| 2 conductors | | mm ² | 1/2.5 | 1/2.5 | 1/2.5 | 1/2.5 | 1/2.5 | 1/2.5 | |
| Solid cable without cable end | 1 conductor | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | |
| | 2 conductors | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | |
| Tightening torque | | | N•m /lb-in | 1.2/10 | 1.2/10 | 1.2/10 | 1.2/10 | 1.2/10 | |
| Mechanical latching | The LA6DK mechanical latch blocks cannot be mounted on LC1F contactors, for similar operation use CR1F magnetic latching contactors (see page 226). | | | | | | | | |

- Operating times depend on the type of contactor electromagnet and its control mode.
The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles.
The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.

TeSys™ F-Line Contactors and Starters Characteristics

Contactors Type LC1F (115 to 800 A) Control Circuit: DC Supply

| Type | | | | LC1F400 | LC1F500 | LC1F630 | LC1F780 | LC1F800 |
|---|---|-------------------|-----------------|----------------|----------------|----------------|----------------|---------------|
| Control Circuit Characteristics (LX4/LX8 type coils) | | | | | | | | |
| Rated control circuit voltage (Vc) | DC | | V | 48 to 460 | 48 to 460 | 48 to 460 | 110 to 460 | 110 to 440 |
| Control voltage limits ($\theta \leq 55\text{ °C}$ [131 °F]) | Operational | | | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.85 to 1.1 Vc | 0.7 to 1.3 Vc |
| | Drop-out | | | 0.2 to 0.35 Vc | 0.2 to 0.35 Vc | 0.2 to 0.35 Vc | 0.2 to 0.4 Vc | 0.3 to 0.5 Vc |
| Average consumption at 20 °C (68 °F) and at Vc | DC | Inrush | W | 1000 | 1100 | 1600 | 2 x 1000 | 1300 |
| | | Sealed | W | 6 | 6 | 9 | 2 x 21 | 15 |
| Average operating time ■ | Closing "F" | ms | | 50 to 60 | 50 to 60 | 60 to 70 | 70 to 80 | 40 to 80 |
| | Opening "O" | ms | | 45 to 60 | 45 to 60 | 40 to 50 | 100 to 130 | 20 to 40 |
| Note: The arcing time depends on the circuit switched by the poles. For normal 3-phase applications, the arcing time is usually less than 10 ms. The load is isolated from the supply after a time equal to the sum of the opening time and the arcing time. | | | | | | | | |
| Mechanical durability at Vc | In millions of operating cycles | | | 10 | 10 | 5 | 5 | 5 |
| Maximum operating rate at ambient temperature $\leq 55\text{ °C}$ (131 °F) | In operating cycles/hour | | | 2400 | 2400 | 1200 | 600 | 600 |
| Cabling | | | | Min/max | | | | |
| | Solid or stranded cable | 1 or 2 conductors | AWG | 16/12 | 16/12 | 16/12 | 16/12 | 16/12 |
| | | | | Min/max c.s.a. | | | | |
| | Stranded cable without cable end | 1 conductor | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | | 2 conductors | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | Stranded cable with cable end | 1 conductor | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| 2 conductors | | mm ² | 1/2.5 | 1/2.5 | 1/2.5 | 1/2.5 | 1/2.5 | |
| Solid cable without cable end | 1 conductor | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | |
| | 2 conductors | mm ² | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 | |
| Tightening torque | | | N•m /lb-in | 1.2/10 | 1.2/10 | 1.2/10 | 1.2/10 | 1.2/10 |
| Mechanical latching | The LA6DK mechanical latch blocks cannot be mounted on LC1F contactors, for similar operation use CR1F magnetic latching contactors (see page 226). | | | | | | | |

- Operating times depend on the type of contactor electromagnet and its control mode.
The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles.
The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.

TeSys™ F-Line Contactors and Starters

Selection – Contactors



LC1F225



LC1F630

Control Circuit: AC or DC
 Kilowatt Ratings for International Applications

2-, 3-, and 4-Pole Contactors

| Standard power ratings of 3-phase motors 50/60 Hz in category AC-3 | | | | | | | Maximum current ($\theta \leq 40^\circ\text{C}$ [104 °F]) | | Number of poles | Catalog Number ▲ ▼ Panel mount with screws ■ | Weight lb (kg) |
|---|----------------|-------|-------|----------------|-------|--------|---|------------------------|--------------------|---|----------------|
| 220 V 230 V | 380 V 400 V | 415 V | 440 V | 660 V 500 V | 690 V | 1000 V | AC-3 up to 400 V | AC-1 up to 400 V | | | |
| kW | kW | kW | kW | kW | kW | kW | A | A | | | |
| 30 | 55 | 59 | 59 | 75 | 80 | 65 | 115 | 200 | 3 | LC1F115●● | 7.56 (3.430) |
| | | | | | | | | | 4 | LC1F1154●● | 8.44 (3.830) |
| 40 | 75 | 80 | 80 | 90 | 100 | 65 | 150 | 250 | 3 | LC1F150●● | 7.56 (3.430) |
| | | | | | | | | | 4 | LC1F1504●● | 8.44 (3.830) |
| 55 | 90 | 100 | 100 | 110 | 110 | 100 | 185 | 275 | 3 | LC1F185●● | 10.2 (4.650) |
| | | | | | | | | | 4 | LC1F1854●● | 12.0 (5.450) |
| 63 | 110 | 110 | 110 | 129 | 129 | 100 | 225 | 315 | 3 | LC1F225●● | 10.5 (4.750) |
| | | | | | | | | | 4 | LC1F2254●● | 12.2 (5.550) |
| 75 | 132 | 140 | 140 | 160 | 160 | 147 | 265 | 350 | 3 | LC1F265●● | 16.4 (7.440) |
| | | | | | | | | | 4 | LC1F2654●● | 18.8 (8.540) |
| 100 | 160 | 180 | 200 | 200 | 220 | 160 | 330 | 400 | 3 | LC1F330●● | 18.9 (8.600) |
| | | | | | | | | | 4 | LC1F3304●● | 20.9 (9.500) |
| 110 | 200 | 220 | 250 | 257 | 280 | 185 | 400 | 500 | 2 | LC1F4002●● | 17.6 (8.000) |
| | | | | | | | | | 3 | LC1F400●● | 20.0 (9.100) |
| 147 | 250 | 280 | 295 | 355 | 335 | 335 | 500 | 700 | 4 | LC1F4004●● | 22.5 (10.200) |
| | | | | | | | | | 2 | LC1F5002●● | 21.5 (9.750) |
| 200 | 335 | 375 | 400 | 400 | 450 | 450 | 630 | 1000 | 3 | LC1F500●● | 25.0 (11.350) |
| | | | | | | | | | 4 | LC1F5004●● | 28.5 (12.950) |
| 220 | 400 | 425 | 425 | 450 | 475 | 450 | 780 | 1600 | 2 | LC1F6302●● | 34.2 (15.500) |
| | | | | | | | | | 3 | LC1F630●● | 41.0 (18.600) |
| 250 | 450 | 450 | 450 | 450 | 475 | 450 | 800 | 1000 | 4 | LC1F6304●● | 47.4 (21.500) |
| | | | | | | | | | 3 | LC1F780●● | 87.1 (39.500) |
| | | | | | | | | | 4 | LC1F7804●● | 105.8 (48.000) |
| | | | | | | | | | 3 | LC1F800●● | 41.3 (18.750) |

Note: For auxiliary contact blocks and modules (see pages 195 to 196).

■ The power terminals may be protected by the addition of shrouds, to be ordered separately except LC1F780. For power terminal lugs, see page 199.

▲ Use voltage codes on page 200 "Voltage Codes Table" to complete catalog number.

▼ The following coil types include one normally open holding circuit contact incorporated in the design of the coil for 3-wire control applications:

LX1FF, FG, FJ, FK, FL, LX1FX0422 to FH3802. The following coil types require an additional LA•DN1•, LADN2•, LADN31, or LADN4.

Auxiliary contact block: LX1FH0202 to 0362, LX1FH4402 to 10002, LX8F8•W, LX1FX, LX1FX, LX9FF, FG, LX9FH•••2, LX9FJ, FK, FL, LX4FF, FG FH, FJ, FK, FL.

TeSys™ F-Line Contactors and Starters Selection – Contactors



LC1F225



LC1F630

Control Circuit: AC or DC
Horsepower Ratings for North American Applications

2-, 3-, and 4-Pole Contactors

| Standard power ratings of 3-phase motors 50/60 Hz in category AC-3 | | | | Maximum current ($\theta \leq 40^\circ\text{C}$ [104 °F]) | | Number of poles | Catalog Number ▲ ▼ | Weight lb (kg) |
|---|----------------|----------------|----------------|---|------|--------------------|---------------------------|-------------------|
| | | | | AC-3 | AC-1 | | | |
| 200 V 208 V | 220 V 240 V | 460 V 480 V | 575 V 600 V | A | A | | | |
| HP | HP | HP | HP | A | A | | Panel mount with screws ■ | |
| 30 | 40 | 75 | 100 | 115 | 200 | 3 | LC1F115●● | 7.56 (3.430) |
| | | | | | | 4 | LC1F1154●● | 8.44 (3.830) |
| 40 | 50 | 100 | 125 | 150 | 250 | 3 | LC1F150●● | 7.56 (3.430) |
| | | | | | | 4 | LC1F1504●● | 8.44 (3.830) |
| 50 | 60 | 125 | 150 | 185 | 275 | 3 | LC1F185●● | 10.2 (4.650) |
| | | | | | | 4 | LC1F1854●● | 12.0 (5.450) |
| Current Rated | | | | 225 | 315 | 3 | LC1F225●● | 10.5 (4.750) |
| | | | | | | 4 | LC1F2254●● | 12.2 (5.550) |
| 60 | 75 | 150 | 175 | 265 | 350 | 3 | LC1F265●● | 16.4 (7.440) |
| | | | | | | 4 | LC1F2654●● | 18.8 (8.540) |
| 75 | 100 | 200 | 250 | 330 | 400 | 3 | LC1F330●● | 18.9 (8.600) |
| | | | | | | 4 | LC1F3304●● | 20.9 (9.500) |
| 100 | 125 | 250 | 300 | 400 | 500 | 2 | LC1F4002●● | 17.6 (8.000) |
| | | | | | | 3 | LC1F400●● | 20.0 (9.100) |
| | | | | | | 4 | LC1F4004●● | 22.5 (10.200) |
| | | | | | | 3 | LC1F5002●● | 21.5 (9.750) |
| 150 | 200 | 400 | 500 | 500 | 700 | 3 | LC1F500●● | 25.0 (11.350) |
| | | | | | | 4 | LC1F5004●● | 28.5 (12.950) |
| | | | | | | 2 | LC1F6302●● | 34.2 (15.500) |
| 250 | 300 | 600 | 800 | 630 | 1000 | 3 | LC1F630●● | 41.0 (18.600) |
| | | | | | | 4 | LC1F6304●● | 47.4 (21.500) |
| | | | | | | 3 | LC1F780●● | 87.1 (39.500) |
| Current Rated | | | | 780 | 1600 | 4 | LC1F7804●● | 105.8 (48.000) |
| | | | | | | 3 | LC1F800●● | 41.3 (18.750) |
| — | 450 | 800 | 900 | 800 | 1000 | 3 | | |

Note: For auxiliary contact blocks and modules (see pages 195 to 196).

■ The power terminals may be protected by the addition of shrouds, to be ordered separately except LC1F780. For power terminal lugs, see page 199.

▲ Use voltage codes on page 200 "Voltage Codes Table" to complete catalog number.







▼ The following coil types include one normally open holding circuit contact incorporated in the design of the coil for 3-wire control applications: LX1FF, FG, FJ, FK, FL, LX1FX0422 to FH3802. The following coil types require an additional LA•DN1•, LADN2•, LADN31, or LADN4.

Auxiliary contact block: LX1FH0202 to 0362, LX1FH4402 to 10002, LX8F8•W, LX1FX, LX1FX, LX9FF, FG, LX9FH●●2, LX9FJ, FK, FL, LX4FF, FG FH, FJ, FK, FL.

TeSys™ F-Line Contactors and Starters

Mechanical Interlocks and Power Connections

Components for Assembling 3-Pole Reversing Contactors and Changeover Contactor Pairs, for Customer Assembly
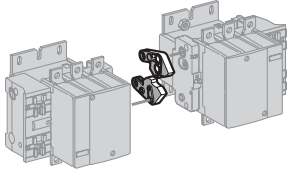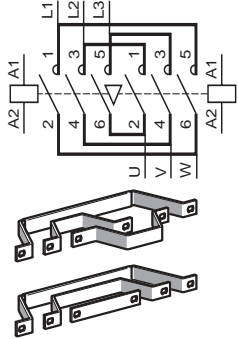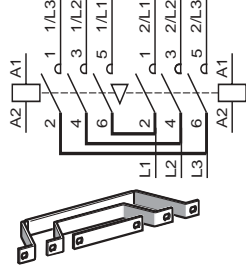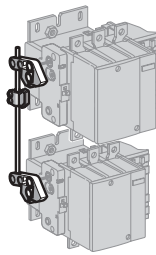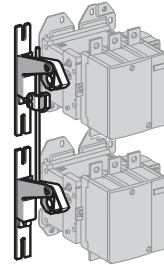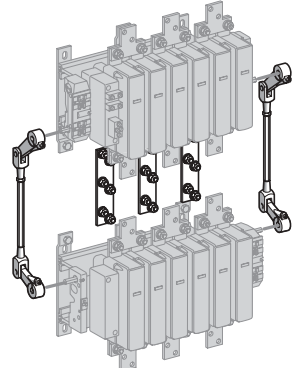
| Horizontally mounted | Mechanical interlocks | Sets of power connections | |
|---|---|--|---|
| <p>Reversers assembled using 2 contactors of identical rating, type:</p> <p>LA9F•970</p> <p>LC1F115 LC1F150 LC1F185 LC1F225 LC1F265 LC1F330 LC1F400 LC1F500 LC1F630 LC1F800</p> | <p>LA9F•970</p>  | <p>Reversing contactors</p> <p>LA9F•••76</p>  | <p>3-pole changeover contactor pairs ■</p> <p>LA9F•••82</p>  |
| <p>Reversers assembled using 2 contactors of identical rating, type:</p> <p>LC1F115 LC1F150 LC1F185 LC1F225 LC1F265 LC1F330 LC1F400 LC1F500 LC1F630 LC1F800</p> | <p>LA9FF4F LA9FG4G</p>  | <p>LA9FH4H LA9FJ4J LA9FK4K LA9FL4L</p>  | |
| <p>LC1F780</p> | <p>LA9FX970</p>  | | |

■ For 4-pole changeover contactor pairs, see pages 193 and 194.

TeSys™ F-Line Contactors and Starters Mechanical Interlocks and Power Connections

Components for Assembling 3-Pole Reversing Contactors and Changeover Contactor Pairs, for Customer Assembly.

How to order:

Components are available for customer assembly of F-line reversing contactors and changeover contactors. For example the following components must be ordered to build a 75 HP @ 460 V reversing contactor with a 120 V/60 Hz coil:

| Quantity | Catalog number | Description |
|----------|----------------|-------------------------|
| 2 | LC1F115G6 | Contactors |
| 6 | DZ2FF1 | Lugs |
| 2 | LA1DN•1 | Auxiliary Contact Block |
| 1 | LA9FF976 | Power Connections |
| 1 | LA9FF970 | Mechanical Interlock |

Using 2 contactors of identical rating

| Contactor Type ■ | Set of power connections | | Mechanical interlock | |
|--|--------------------------|----------------|----------------------|----------------|
| | Catalog Number | Weight lb (kg) | Kit Catalog Number | Weight lb (kg) |
| For assembly of 3-pole reversing contactors for motor control | | | | |
| Horizontally mounted | | | | |
| LC1F115 | LA9FF976 | 1.3 (0.600) | LA9FF970 | 0.13 (0.060) |
| LC1F150 | LA9F15076 | 1.3 (0.600) | LA9FF970 | 0.13 (0.060) |
| LC1F185 | LA9FG976 | 1.7 (0.780) | LA9FG970 | 0.13 (0.060) |
| LC1F225 | LA9F22576 | 3.3 (1.500) | LA9FG970 | 0.13 (0.060) |
| LC1F265 | LA9FH976 | 3.3 (1.500) | LA9FJ970 | 0.31 (0.140) |
| LC1F330 | LA9FJ976 | 4.6 (2.100) | LA9FJ970 | 0.31 (0.140) |
| LC1F400 | LA9FJ976 | 4.6 (2.100) | LA9FJ970 | 0.31 (0.140) |
| LC1F500 | LA9FK976 | 5.2 (2.350) | LA9FJ970 | 0.31 (0.140) |
| LC1F630 or F800 | LA9FL976 | (8.4 3.800) | LA9FL970 | 0.33 (0.150) |
| Vertically mounted | | | | |
| LC1F115 or F150 | ● | – | LA9FF4F | 0.76 (0.345) |
| LC1F185 | ● | – | LA9FG4G | 0.77 (0.350) |
| LC1F225 | ● | – | LA9FG4G | 0.77 (0.350) |
| LC1F265 or F330 | ● | – | LA9FH4H | 2.34 (1.060) |
| LC1F400 | ● | – | LA9FJ4J | 2.64 (1.200) |
| LC1F500 | ● | – | LA9FK4K | 2.64 (1.200) |
| LC1F630 or F800 | ● | – | LA9FL4L | 2.64 (1.220) |
| LC1F780 | ▲ | – | LA9FX970 ▲ | 13.4 (6.100) |
| For assembly of 3-pole changeover contactor pairs ♦ | | | | |
| Horizontally mounted | | | | |
| LC1F115 | LA9FF982 | 1.0 (0.460) | LA9FF970 | 0.13 (0.060) |
| LC1F150 | LA9F15082 | 1.0 (0.460) | LA9FF970 | 0.13 (0.060) |
| LC1F185 | LA9FG982 | 1.3 (0.610) | LA9FG970 | 0.13 (0.060) |
| LC1F225 | LA9F22582 | 2.6 (1.200) | LA9FG970 | 0.13 (0.060) |
| LC1F265 | LA9FH982 | 2.6 (1.200) | LA9FJ970 | 0.31 (0.140) |
| LC1F330 | LA9FJ982 | 4.0 (1.800) | LA9FJ970 | 0.31 (0.140) |
| LC1F400 | LA9FJ982 | 4.0 (1.800) | LA9FJ970 | 0.31 (0.140) |
| LC1F500 | LA9FK982 | 5.1 (2.300) | LA9FJ970 | 0.31 (0.140) |
| LC1F630 or F800 | LA9FL982 | 7.5 (3.400) | LA9FL970 | 0.33 (0.150) |
| Vertically mounted | | | | |
| LC1F115 or F150 | ● | – | LA9FF4F | 0.76 (0.345) |
| LC1F185 | ● | – | LA9FG4G | 0.77 (0.350) |
| LC1F225 | ● | – | LA9FG4G | 0.77 (0.350) |
| LC1F265 or F330 | ● | – | LA9FH4H | 2.34 (1.060) |
| LC1F400 | ● | – | LA9FJ4J | 2.64 (1.200) |
| LC1F500 | ● | – | LA9FK4K | 2.64 (1.200) |
| LC1F630 or F800 | ● | – | LA9FL4L | 2.64 (1.220) |
| LC1F780 | ▼ | – | LA9FX970 ▼ | 17.2 (7.800) |

■ To order the 2 contactors: see pages 188 and 189. Order 2 contact blocks **LA1DN•1** to obtain electrical interlocking between the 2 contactors: see pages 194 and 195.

● All power connections are to be made by the customer, except for contactors type **LC1F780**.











▲ Double mechanical interlock mechanism with 2 interlock connecting rods and 3 power connecting links.

♦ For assembly of 4-pole changeover contactor pairs, see pages 192 and 193.

▼ Double mechanical interlock mechanism with 2 interlock connecting rods and 4 power connecting links.

TeSys™ F-Line Contactors and Starters Mechanical Interlocks and Power Connections

Components for Assembling 3- and 4-Pole Changeover Contactor Pairs, for Customer Assembly
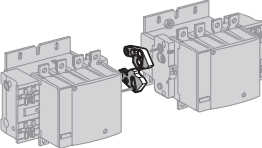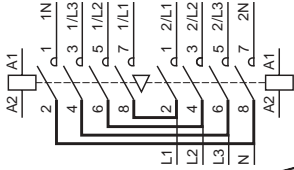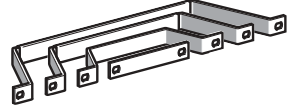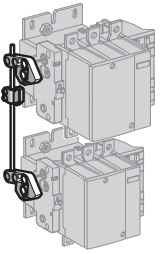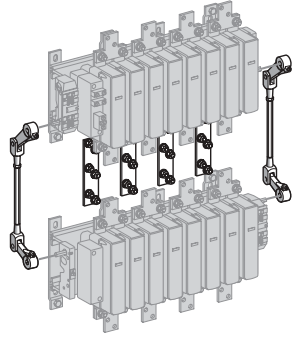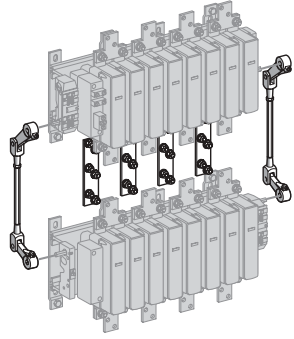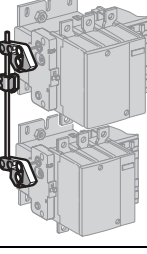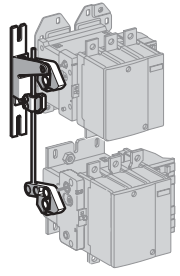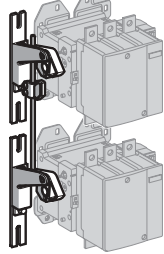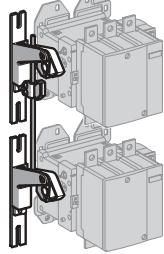
| Horizontally mounted | Mechanical interlocks | Sets of power connections | |
|---|---|---|--|
| <p>Reversers assembled using 2 contactors of identical rating, type:</p> <p>LA9F•970</p> <p>LC1F1154 LC1F1504 LC1F1854 LC1F2254 LC1F2654 LC1F3304 LC1F4004 LC1F5004 LC1F6304</p> |  | <p>4-pole changeover contactor pairs ■ LA9F•••77</p>   | |
| Vertically mounted | Mechanical interlocks | | |
| <p>Reversers assembled using 2 contactors of identical rating, type:</p> <p>LA9FF4F LA9FG4G</p> <p>LC1F1154 LC1F1504 LC1F1854 LC1F2254 LC1F2654 LC1F3304 LC1F4004 LC1F5004 LC1F6304</p> |  | <p>LA9FH4H LA9FJ4J LA9FK4K LA9FL4L</p>  | <p>LA9FX971</p>  |
| <p>Reversers assembled using 2 contactors of different ratings, type:</p> <p>LA9FG4F</p> <p>LC1F115 or F1154 LC1F150 or F1504 LC1F185 or F1854 LC1F225 or F2254 LC1F265 or F2654 LC1F330 or F3304 LC1F400 or F4004 LC1F500 or F5004 LC1F630 or F6304 LC1F800</p> |  | <p>LA9FH4F LA9FJ4F LA9FK4F LA9FL4F LA9FH4G LA9FJ4G LA9FK4G LA9FL4G</p>  | <p>LA9FJ4H LA9FK4K LA9FL4L LA9FJ4J LA9FK4J LA9FL4J</p>  |
| <p>Reversers assembled using 3 contactors of identical or different ratings, type:</p> <p>LA9F•4•4•</p> <p>LC1F115 or F1154 LC1F150 or F1504 LC1F185 or F1854 LC1F225 or F2254 LC1F265 or F2654 LC1F330 or F3304 LC1F400 or F4004 LC1F500 or F5004 LC1F630 or F6304 LC1F800</p> |  | | |

Warning: the contactor ratings must be in decreasing size from top to bottom (largest size at top and smallest size at bottom).

■ For 3-pole changeover contactor pairs, see pages 190 and 191.

TeSys™ F-Line Contactors and Starters Mechanical Interlocks and Power Connections

Components for Assembling 3 and 4-Pole Changeover Contactor Pairs, for Customer Assembly
For additional information see **How to Order** on page 191.

Using 2 contactors of identical rating

| For assembly of 4-pole changeover contactor pairs ▲ | | | | |
|---|--------------------------|----------------|----------------------|----------------|
| Contactor Type ■ | Set of power connections | | Mechanical Interlock | |
| | Catalog Number | Weight lb (kg) | Kit Catalog Number | Weight lb (kg) |
| Horizontally mounted | | | | |
| LC1F1154 | LA9FF977 | 1.0 (0.460) | LA9FF970 | 0.13 (0.060) |
| LC1F1504 | LA9F15077 | 1.0 (0.460) | LA9FF970 | 0.13 (0.060) |
| LC1F1854 | LA9FG977 | 1.3 (0.610) | LA9FG970 | 0.13 (0.060) |
| LC1F2254 | LA9F22577 | 2.6 (1.200) | LA9FG970 | 0.13 (0.060) |
| LC1F2654 | LA9FH977 | 2.6 (1.200) | LA9FJ970 | 0.30 (0.140) |
| LC1F3304 | LA9FJ977 | 4.0 (1.800) | LA9FJ970 | 0.30 (0.140) |
| LC1F4004 | LA9FJ977 | 4.0 (1.800) | LA9FJ970 | 0.30 (0.140) |
| LC1F5004 | LA9FK977 | 5.1 (2.300) | LA9FJ970 | 0.30 (0.140) |
| LC1F6304 | LA9FL977 | 7.5 (3.400) | LA9FL970 | 0.33 (0.150) |
| Vertically mounted | | | | |
| LC1F1154 or F1504 | ● | – | LA9FF4F | 0.76 (0.345) |
| LC1F1854 | ● | – | LA9FG4G | 0.77 (0.350) |
| LC1F2254 | ● | – | LA9FG4G | 0.77 (0.350) |
| LC1F2654 or F3304 | ● | – | LA9FH4H | 2.33 (1.060) |
| LC1F4004 | ● | – | LA9FJ4J | 2.64 (1.200) |
| LC1F5004 | ● | – | LA9FK4K | 2.64 (1.200) |
| LC1F6304 | ● | – | LA9FL4L | 2.70 (1.220) |
| LC1F7804 | ◆ | – | LA9FX971♦ | 17.2 (7.800) |


Using 2 contactors of different ratings

| For assembly of 3 or 4-pole changeover contactor pairs | | | |
|--|------------------------|----------------|--------------|
| Contactor Type ■ | Mechanical Interlock | | |
| | Kit Catalog Number | Weight lb (kg) | |
| Vertically mounted | | | |
| at bottom | at top | | |
| LC1F115 or F1154 or LC1F150 or F1504 | LC1F185 or F1854 | LA9FG4F | 0.77 (0.350) |
| | LC1F225 or F2254 | LA9FG4F | 0.77 (0.350) |
| | LC1F265 or F2654 | LA9FH4F | 1.92 (0.870) |
| | LC1F330 or F3304 | LA9FH4F | 1.92 (0.870) |
| | LC1F400 or F4004 | LA9FJ4F | 2.05 (0.930) |
| | LC1F500 or F5004 | LA9FK4F | 2.07 (0.940) |
| | LC1F630, F6304 or F800 | LA9FL4F | 2.07 (0.940) |
| LC1F185 or F1854 or LC1F225 or F2254 | LC1F265 or F2654 | LA9FH4G | 1.90 (0.860) |
| | LC1F330 or F3304 | LA9FH4G | 1.90 (0.860) |
| | LC1F400 or F4004 | LA9FJ4G | 2.07 (0.940) |
| | LC1F500 or F5004 | LA9FK4G | 2.07 (0.940) |
| LC1F265 or F2654 or LC1F330 or F3304 | LC1F630, F6304 or F800 | LA9FL4G | 2.09 (0.950) |
| | LC1F400 or F4004 | LA9FJ4H | 2.50 (1.130) |
| | LC1F500 or F5004 | LA9FK4H | 2.50 (1.130) |
| LC1F400 or F4004 | LC1F630, F6304 or F800 | LA9FL4H | 2.51 (1.140) |
| | LC1F500 or F5004 | LA9FK4J | 2.64 (1.200) |
| LC1F500 or F5004 | LC1F630, F6304 or F800 | LA9FL4J | 2.70 (1.210) |
| | LC1F630, F6304 or F800 | LA9FL4K | 2.70 (1.210) |

- ▲ For assembly of 3-pole changeover contactor pairs, see pages 190 and 191.
 - To order the 2 contactors: see pages 188 and 189. Order 2 contact blocks **LADN•1** to obtain electrical interlocking between the 2 contactors: see pages 194 and 195.
 - All power connections are to be made by the customer, except for contactors type **LC1F780**.
 - ◆ Double mechanical interlock mechanism with 2 interlock connecting rods and 4 power connecting links.
- For assembly of reversers using 3 contactors, vertically mounted, see pages 191 and 192.

TeSys™ F-Line Contactors and Starters

Auxiliary Contacts and Timers

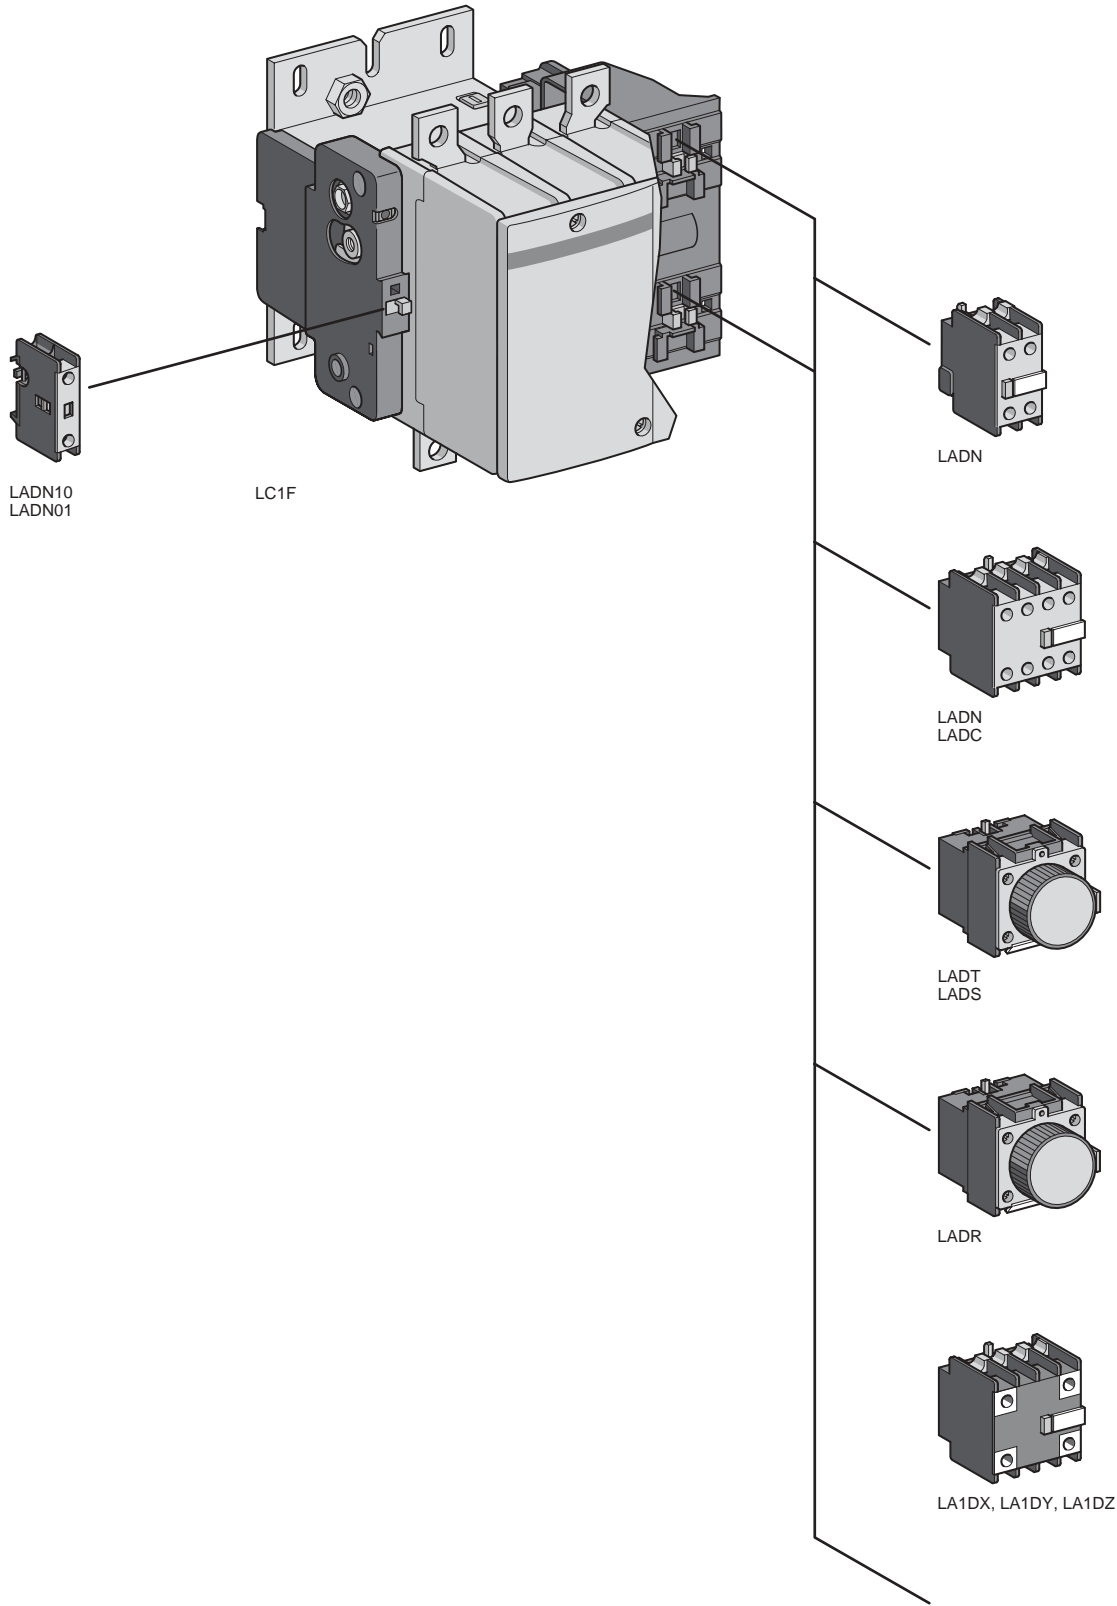





TeSys™ F-Line Contactors and Starters Auxiliary Contacts and Timers

Contactors and Reversing Contactors Type LC1F Auxiliary Contact Blocks and Interface Module

Instantaneous Auxiliary Contact Blocks





For use in normal operating environments

| Number of contacts | Max. number of blocks per contactor | Auxiliary Contacts | | | | Catalog Number | Weight lb (kg) |
|---|-------------------------------------|---|---|---|---|----------------|----------------|
| | | Side clip-on mounting | | | | | |
| | |  |  |  |  | | |
| | | ● | ◆ | N.O. | N.C. | | |
| 1 | 1 | - | - | 1 | - | LADN10 | 0.04 (0.020) |
| | | - | - | - | 1 | LADN01 | 0.04 (0.020) |
| 2 | 2 | - | - | 1 | 1 | LADN11 | 0.07 (0.030) |
| | | - | - | 2 | - | LADN20 | 0.07 (0.030) |
| 4 | 2 | - | - | - | 2 | LADN02 | 0.07 (0.030) |
| | | - | - | 2 | 2 | LADN22 | 0.11 (0.050) |
| | | - | - | 1 | 3 | LADN13 | 0.11 (0.050) |
| | | - | - | 4 | - | LADN40 | 0.11 (0.050) |
| | | - | - | - | 4 | LADN04 | 0.11 (0.050) |
| | | - | - | 3 | 1 | LADN31 | 0.11 (0.050) |
| | | - | - | 2 | 2 ■ | LADC22 | 0.11 (0.050) |
| With terminal referencing conforming to standard EN 50012 ◊ | | | | | | | |
| 2 | 2 | - | - | 1 | 1 | LADN11P | 0.07 (0.030) |
| | | - | - | - | 1 | LADN11G | 0.07 (0.030) |
| 4 | 2 | - | - | 2 | 2 | LADN22P | 0.11 (0.050) |
| | | - | - | 2 | 2 | LADN22G | 0.11 (0.050) |

◊ See page 216 for actual markings.

Instantaneous Auxiliary Contact Blocks With Dust and Damp Protected Contacts

For use in harsh industrial environments



| Number of contacts | Max. number of blocks per contactor | Auxiliary Contacts | | | | Catalog Number | Weight lb (kg) |
|--------------------|-------------------------------------|---|---|---|---|----------------|----------------|
| | | Side clip-on mounting | | | | | |
| | |  |  |  |  | | |
| | | ● | ◆ | N.O. | N.C. | | |
| 2 | 2 | 2 | - | - | - | LA1DX20 | 0.09 (0.040) |
| | | 2 | 2 | - | - | LA1DY20 | 0.09 (0.040) |
| 4 | 2 | 2 | - | 2 | - | LA1DZ40 | 0.11 (0.050) |
| | | 2 | - | 1 | 1 | LA1DZ31 | 0.11 (0.050) |

Time Delay Auxiliary Contacts


| Number of Contacts | Max. number of blocks per contactor | Time delay | | Catalog Number | Weight lb (kg) |
|-----------------------|-------------------------------------|-----------------------|------------|----------------|----------------|
| | | Type | Range (s) | | |
| | | Side clip-on mounting | | | |
| 1 N.O. + 1 N.C. | 2 | OnDelay | 0.1 to 3 ▲ | LADT0 | 0.13 (0.060) |
| | | | 0.1 to 30 | LADT2 | 0.13 (0.060) |
| | | | 10 to 180 | LADT4 | 0.13 (0.060) |
| | | | 1 to 30 ▼ | LADS2 | 0.13 (0.060) |
| | | | 0.1 to 3 ▲ | LADR0 | 0.13 (0.060) |
| | | | 0.1 to 30 | LADR2 | 0.13 (0.060) |
| | | OffDelay | 10 to 180 | LADR4 | 0.13 (0.060) |

- Sealed dust tight contacts.
- ◆ Ground terminal connections.
- Including 1 N.O. + 1 N.C. make before break.
- ▲ With extended scale from 0.1 to 0.6 s.
- ▼ With switching time of 40 ms ± 15 ms between opening of the N.C. contact and closing of the N.O. contact.

TeSys™ F-Line Contactors and Starters Accessories and Spare Parts



LA9F•602



LA9F•601



DZ3FA3


Contactors and Reversing Contactors Type LC1F Suppressor Blocks and Cabling Accessories

Suppressor Blocks

| Type of Suppressor | Specifications | Coil Voltage Range | Catalog Number | Weight lb (kg) |
|---|---|--------------------|----------------|----------------|
| RC (Resistor-Capacitor) | Used on AC only Limits transients to 3X Uc max. Increases contactor drop out time 10 to 30 % | 24 - 48 | LA4FRCE | 0.07 (0.030) |
| | | 50 - 110 | LA4FRCF | 0.07 (0.030) |
| | | 127 - 240 | LA4FRCP | 0.07 (0.030) |
| | | 265 - 415 | LA4FRCV | 0.07 (0.030) |
| Varistor | Used on AC or DC Limits Transients to 2 X Uc max. | 24 - 48 | LA4FVE | 0.07 (0.030) |
| | | 50 - 110 | LA4FVF | 0.07 (0.030) |
| | | 127 - 240 | LA4FVP | 0.07 (0.030) |
| | | 265 - 415 | LA4FVV | 0.07 (0.030) |
| Bi-directional Diode | Used on AC or DC Limits Transients to 2.5 X Uc max. | 24 - 48 | LA4FTE | 0.07 (0.030) |
| | | 50 - 110 | LA4FTF | 0.07 (0.030) |
| | | 127 - 240 | LA4FTP | 0.07 (0.030) |
| | | 265 - 415 | LA4FTV | 0.07 (0.030) |
| Diode | Used on DC only No overvoltage Polarity sensitive Increases contactor drop out time 300-400% | 24 - 48 | LA4FDE | 0.07 (0.030) |
| | | 55 - 110 | LA4DFD | 0.07 (0.030) |
| | | 125 - 250 | LA4FDP | 0.07 (0.030) |
| | | 280 - 440 | LA4FDV | 0.07 (0.030) |
| Mounting bracket (for 35mm DIN rail or panel mounting) for suppressor block | | | LA9D09981 | 0.02 (0.010) |

Cabling Accessories

| Links for parallel connection of poles (in pairs) | | | Set of 4 links | Weight lb (kg) |
|---|----------------------|-----------------|---------------------|----------------|
| For use on | 4-pole contactors | | Set Catalog Number | |
| LC1F1154 | | | LA9FF602 | 0.44 (0.200) |
| LC1F1504, F1854 | | | LA9FG602 | 0.77 (0.350) |
| LC1F2254, F2654, F3304, F4004 | | | LA9FH602 | 2.20 (1.000) |
| LC1F5004 | | | LA9FK602 | 3.85 (1.750) |
| LC1F6304 | | | LA9FL602 | 6.61 (3.000) |
| Links for "star" connection of 3 poles | | | LA9FF601 | 0.08 (0.035) |
| LC1F115 | | | LA9FG601 | 0.11 (0.050) |
| LC1F150, F185 | | | LA9FH601 | 0.26 (0.120) |
| LC1F225, F265, F330, F400 | | | LA9FK601 | 0.40 (0.180) |
| LC1F500 | | | LA9FL601 | 1.21 (0.550) |
| LC1F630, F800 | | | | |
| Control circuit voltage take-off from power terminals | | | | |
| For use on contactors | Mounted on bolt size | Sold in lots of | Unit Catalog Number | Weight lb (kg) |
| LC1F115 | M6 | 10 | DZ3FA3 | 0.008 (0.004) |
| LC1F150, F185 | M8 | 10 | DZ3GA3 | 0.008 (0.004) |
| LC1F225 to F500 | M10 | 10 | DZ3HA3 | 0.013 (0.006) |
| LC1F630, F800 | M12 | 10 | DZ3JA3 | 0.019 (0.009) |




LA9F•981

Contactors and Reversing Contactors Type LC1F
Suppressor Blocks and Cabling Accessories

Right-Angled Connectors


| For use on | | Connector | | Set of 3 Connectors | |
|------------------------------|----------------------------|------------------|---------------|---------------------|----------------|
| Contactors | Thermal Overload Relays | Width | Type | Set Catalog Number | Weight lb (kg) |
| LC1F115 | LR•F5•67, LR1F105, F125 | 0.59" (15 mm) | Rear | LA9FF981 | 0.13 (0.060) |
| | | | Side | LA9FF979 | 0.53 (0.240) |
| | | | Large s. area | LA9FF980 | 0.33 (0.150) |
| LC1F150, F185 | LR•F5•69, F5•71 | 0.79" (20 mm) | Rear | LA9FG981 | 0.18 (0.080) |
| | | | Side | LA9FG979 | 0.77 (0.350) |
| | | | Large s. area | LA9FG980 | 0.44 (0.200) |
| LC1F225, F265, F330, F400 | LR•F6•73, F6•75, F6•77 | 0.98" (25 mm) | Rear | LA9FJ981 | 0.95 (0.430) |
| | | | Side | LA9FJ979 | 1.65 (0.750) |
| | | | Large s. area | LA9FJ980 | 1.08 (0.490) |
| LC1F500 | LR•F7•79, F7•81 | 1.18" (30 mm) | Rear | LA9FK981 | 1.06 (0.480) |
| | | | Side | LA9FK979 | 2.03 (0.920) |
| | | | Large s. area | LA9FK980 | 1.76 (0.800) |
| LC1F630, F800 | LR•F8•83, F8•85 | 1.57" (40 mm) | Rear | LA9FL981 | 2.67 (1.210) |
| | | | Side | LA9FL979 | 5.66 (2.570) |
| | | | Large s. area | LA9FL980 | 7.03 (3.190) |



LA9F•979


Connection Accessories

| For use on | | Width of Connector Plates | Set of 3 bus bars | |
|---------------------|---------------------------------|------------------------------|--------------------|----------------|
| Contactors | Thermal Overload Relays | | Set Catalog Number | Weight lb (kg) |
| LC1F115 | LR9F5357, F5363 F5367, F5369 | 0.59" (15 mm) | LA7F401 | 0.24 (0.110) |
| LC1F150 and F185 | LR9F5357, F5363 F5367, F5369 | 0.79" (20 mm) | LA7F402 | 0.24 (0.110) |
| LC1F225 and F265 | LR9F5371 | 0.98" (25 mm) | LA7F403 | 0.35 (0.160) |
| LC1F330 and F400 | LR9F7375 and F7379 | 0.98" (25 mm) | LA7F404 | 0.35 (0.160) |
| LC1F400 | LR9F7381 | 0.98" (25 mm) | LA7F404 | 0.35 (0.160) |
| LC1F500 | LR9F7375, F7379 F7381 | 1.18" (30 mm) | LA7F405 | 0.60 (0.270) |
| LC1F630 | LR9F7381 | 1.57" (40 mm) | LA7F406 | 1.30 (0.600) |



LA9F•980

TeSys™ F-Line Contactors and Starters Accessories and Spare Parts




Contactors and Reversing Contactors Type LC1F Cabling Accessories and Spare Parts

Lug Kits

Lugs can be ordered either individually (for 2-pole and 4-pole contactors) or in sets of 6 (for 3-pole contactors). Mounting hardware is provided with the contactors, not the kits.

DZ2F●●

| Single lug | Set of six lugs | Cable size AWG range | Suitable for contactor LC1●●●● / CR1●●●● | Suitable for overload relay LR9●●●● ▲ |
|------------|-----------------|----------------------|--|---------------------------------------|
| DZ2FF1 | DZ2FF6 | 14 to 2/0 | F115 | none |
| DZ2FG1 | DZ2FG6 | 6 to 3/0 | F150, F185 | F5●57, F5●63, F5●67, F5●69 |
| DZ2FH1 | DZ2FH6 | 6 to 300 MCM | F265, F330 | LR9F●71 |
| DZ2FJ1 | DZ2FJ6 | 4 to 500 MCM | F400 | none |
| DZ2FK1 | DZ2FK6 | 2x2 to 600 MCM | F500 | F7●75, F7●79 |
| DZ2FL● ■ | DZ2FL6 | 3x2 to 600 MCM | F630, F800 | F7●81 |
| DZF2FX1 | DZ2FX6 | 4x1/0 to 750 MCM | F780 | none |



LA9F103

Insulated Terminal Blocks


| For use on 3-pole contactors | Cable Size AWG Range | Set of 2 blocks | |
|--|----------------------|--------------------|----------------|
| | | Set Catalog Number | Weight lb (kg) |
| LC1F115, F150, F185 (provides IP20 touch-safe protection) | #6 to 300 mcm | LA9F103 | 1.23 (0.560) |

Power Terminal Protection Shrouds

These clear plastic protective shrouds are an effective means to meet international touch-safe requirements for power terminals. They are designed to be used with power cables that have been bolted to the terminal. Note: The protection shrouds do not attach to contactors or overloads utilizing DZ2F lug kits.


| For use with 2-, 3-, and 4-pole contactors | Number of shrouds per set | Set Catalog Number | Weight lb (kg) |
|---|---------------------------|--------------------|----------------|
| LC1F115 | 6 | LA9F701 | 0.55 (0.250) |
| LC1F150, F185 CR1F150, F185 | 6 | LA9F702 | 0.55 (0.250) |
| LC1F225, F265, F330, F400 and F4002, F500 and F5002 CR1F265, F400 and F500 | 6 | LA9F703 | 0.55 (0.250) |
| LC1F630, F6302 and F800 CR1F630 | 6 | LA9F704 | 0.55 (0.250) |
| LC1F1154 | 8 | LA9F706 | 0.66 (0.300) |
| LC1F1504 and F1854 | 8 | LA9F707 | 0.66 (0.300) |
| LC1F2254, F2654, F3304, F4004, F5004 | 8 | LA9F708 | 0.66 (0.300) |
| LC1F6304 | 8 | LA9F709 | 0.66 (0.300) |

- ▲ When direct mounting the LR9F to an LC1F or CR1F contactor, lugs of different sizes may be required. See page 220 for additional information.
- For 3-pole F630 contactors, order DZ2FL1 for L1 and T3, DZ2FL2 for L2 and T2, and DZ2PL3 for L3 and T1 terminals.
For 4-pole F6304 contactors, order DZ2FL1 for L1 and T4, DZ2FL2 for L2, T2, L3 and T3, and DZ2FL3 for L4 and T1 terminals.




LA9F701

Contactors and Reversing Contactors Type LC1F
Spare Parts



LA5FG431



LA5F40050

Main Contact Sets

Per pole: 2 stationary contacts and 1 moving contact, 2 deflectors, 1 leaf spring, screws and washers

| For contactor | Type | Replacement for | Catalog Number | Weight lb (kg) |
|---------------|-----------------|-------------------|----------------------------|--------------------------------|
| 2-pole | LC1F4002 | 2 poles | LA5F400802 | 3.00 (1.350) |
| | LC1F5002 | 2 poles | LA5F500802 | 4.30 (1.950) |
| | LC1F6302 | 2 poles | LA5F630802 | 10.3 (4.700) |
| 3-pole | LC1F115, F150 | 3 poles | LA5FF431 | 0.60 (0.270) |
| | LC1F185, F225 | 3 poles | LA5FG431 | 0.77 (0.350) |
| | LC1F265 | 3 poles | LA5FH431 | 1.45 (0.660) |
| | LC1F330, F400 | 3 poles | LA5F400803 | 4.40 (2.000) |
| | LC1F500 | 3 poles | LA5F500803 | 6.50 (2.950) |
| | LC1F630 | 3 poles | LA5F630803 | 13.4 (6.100) |
| | LC1F780 | 1 pole 3 poles | LA5F780801 ■ LA5F780803 | 10.4 (4.700) 29.1 (13.200) |
| 4-pole | LC1F1504, F1154 | 4 poles | LA5FF441 | 0.80 (0.360) |
| | LC1F1854, F2254 | 4 poles | LA5FG441 | 1.20 (0.465) |
| | LC1F2654 | 4 poles | LA5FH441 | 1.94 (0.880) |
| | LC1F3304, F4004 | 4 poles | LA5F400804 | 5.95 (2.700) |
| | LC1F5004 | 4 poles | LA5F500804 | 8.59 (3.900) |
| | LC1F6304 | 4 poles | LA5F630804 | 17.9 (8.150) |
| | LC1F7804 | 1 pole 4 poles | LA5F780801 ■ LA5F780804 | 10.36 (4.700) 38.1 (17.300) |

Arc Chambers

| For contactor | Type | Replacement for | Catalog Number | Weight lb (kg) |
|---------------|----------|-----------------|----------------|----------------|
| 2-pole | LC1F4002 | 2 poles | LA5F400250 | 1.91 (0.870) |
| | LC1F5002 | 2 poles | LA5F500250 | 2.75 (1.250) |
| | LC1F6302 | 2 poles | LA5F630250 | 4.62 (2.100) |
| 3-pole | LC1F115 | 3 poles | LA5F11550 | 1.08 (0.490) |
| | LC1F150 | 3 poles | LA5F15050 | 1.08 (0.490) |
| | LC1F185 | 3 poles | LA5F18550 | 1.47 (0.670) |
| | LC1F225 | 3 poles | LA5F22550 | 1.47 (0.670) |
| | LC1F265 | 3 poles | LA5F26550 | 2.03 (0.920) |
| | LC1F330 | 3 poles | LA5F33050 | 2.90 (1.300) |
| | LC1F400 | 3 poles | LA5F40050 | 2.90 (1.300) |
| | LC1F500 | 3 poles | LA5F50050 | 4.08 (1.850) |
| | LC1F630 | 3 poles | LA5F63050 | 6.94 (3.150) |
| | LC1F780 | 1 pole | LA5F780150 ■ | 4.63 (2.100) |
| 4-pole | LC1F800 | 3 poles | LA5F80050 | 6.94 (3.150) |
| | LC1F1154 | 4 poles | LA5F115450 | 1.45 (0.660) |
| | LC1F1504 | 4 poles | LA5F150450 | 1.45 (0.660) |
| | LC1F1854 | 4 poles | LA5F185450 | 2.00 (0.910) |
| | LC1F2254 | 4 poles | LA5F225450 | 2.20 (1.000) |
| | LC1F2654 | 4 poles | LA5F265450 | 2.70 (1.220) |
| | LC1F3304 | 4 poles | LA5F330450 | 3.83 (1.740) |
| | LC1F4004 | 4 poles | LA5F400450 ◆ | 3.83 (1.740) |
| | LC1F5004 | 4 poles | LA5F500450 ◆ | 5.51 (2.500) |
| | LC1F6304 | 4 poles | LA5F630450 ▲ | 9.26 (4.200) |
| LC1F7804 | 1 pole | LA5F780150 ■ | 9.63 (2.100) | |

- Comprising 2 identical items per pole.
- ◆ Comprising two 2-pole arc chambers.
- ▲ Comprising single-pole arc chambers.

TeSys™ F-Line Contactors and Starters

F-line Voltage Code Table

F-line Voltage Code

| Voltage | Frequency | F-line (see notes at end of table) | | | | |
|---------|-------------------|-------------------------------------|-------------------------------------|-------------------------------------|---------------------------|-------------------------------|
| | | LC1F115 - F225 Note F1, F2 | LC1F265 - F400 Note F1, F2 | LC1F500 - F630 Note F1, F2 | LC1F780 Note F1, F2 | LC1F800 Note F1, F2, F3 |
| 5 | Low Consump DC | - | - | - | - | - |
| 12 | 50/60 | - | - | - | - | - |
| | 50 | - | - | - | - | - |
| | DC | - | - | - | - | - |
| | Low Consump DC | - | - | - | - | - |
| | Wide Range DC | - | - | - | - | - |
| 20 | 50/60 | - | - | - | - | - |
| | 50 | - | - | - | - | - |
| | 60 | - | - | - | - | - |
| | DC | - | - | - | - | - |
| | Low Consump DC | - | - | - | - | - |
| 24 | 50/60 | - | - | - | - | - |
| | 50 | B5 | - | - | - | - |
| | 60 | B6 | - | - | - | - |
| | 40-400 | - | B7 Note F4 | - | - | - |
| | DC | BD | BD Note F4 | - | - | - |
| | Low Consump DC | - | - | - | - | - |
| | Wide Range DC | - | - | - | - | - |
| 36 | 50/60 | - | - | - | - | - |
| | DC | - | - | - | - | - |
| | Wide Range DC | - | - | - | - | - |
| 42 | 50/60 | - | - | - | - | - |
| | 50 | D5 | - | - | - | - |
| | 60 | - | - | - | - | - |
| 48 | 50/60 | - | - | - | - | - |
| | 50 | E5 | - | - | - | - |
| | 60 | E6 | - | - | - | - |
| | 40-400 | E7 | E7 | E7 | - | - |
| | DC | ED | ED | ED | - | - |
| | Low Consump DC | - | - | - | - | - |
| 60 | 50/60 | - | - | - | - | - |
| | DC | - | - | - | - | - |
| 72 | DC | - | - | - | - | - |
| | Low Consump DC | - | - | - | - | - |
| | Wide Range DC | - | - | - | - | - |

F-line Voltage Code

| Voltage | Frequency | F-line (see notes at end of table) | | | | |
|---------|-------------------|-------------------------------------|-------------------------------------|-------------------------------------|---------------------------|-------------------------------|
| | | LC1F115 - F225 Note F1, F2 | LC1F265 - F400 Note F1, F2 | LC1F500 - F630 Note F1, F2 | LC1F780 Note F1, F2 | LC1F800 Note F1, F2, F3 |
| 96 | Low Consump DC | - | - | - | - | - |
| 100 | 50/60 | - | - | - | - | - |
| | DC | - | - | - | - | - |
| 110 | 50/60 | - | - | - | - | - |
| | 50 | F5 | - | - | - | - |
| | 60 | F6 | - | - | - | - |
| | 40-400 | F7 | F7 | F7 | F7 | - |
| | DC | FD | FD | FD | FD | FW |
| | Low Consump DC | - | - | - | - | - |
| | Wide Range DC | - | - | - | - | - |
| 110/127 | 40-400 | - | - | - | - | FE7 |
| 115 | 50/60 | - | - | - | - | - |
| | 50 | FE5 | - | - | - | - |
| | 40-400 | FE7 | FE7 | FE7 | FE7 | - |
| 120 | 50/60 | - | - | - | - | - |
| | 50 | - | - | - | - | - |
| | 60 | G6 | - | - | - | - |
| | 40-400 | G7 | G7 Note F5 | F7 | F7 | - |
| | DC | - | - | - | - | FW |
| | Low Consump DC | - | - | - | - | - |
| | 125 | DC | GD | GD | GD | GD |
| 127 | 50/60 | - | - | - | - | - |
| | 60 | G5 | - | - | - | - |
| 155 | 40-400 | G7 | G7 | G7 | G7 | - |
| 174 | DC | - | - | - | - | - |
| 200 | 50/60 | - | - | - | - | - |
| | DC | - | - | - | - | - |
| 200/208 | 50/60 | - | - | - | - | - |
| | 60 | L6 | - | - | - | - |
| | 40-400 | - | L7 | L7 | L7 | - |
| 208 | 50/60 | - | - | - | - | - |
| | 60 | - | - | - | - | - |
| | 40-400 | L7 | - | - | - | - |

TeSys™ F-Line Contactors and Starters

F-line Voltage Code Table

F-line Voltage Code

| Voltage | Frequency | F-line (see notes at end of table) | | | | |
|---------|----------------|-------------------------------------|-------------------------------------|-------------------------------------|---------------------------|-------------------------------|
| | | LC1F115 - F225 Note F1, F2 | LC1F265 - F400 Note F1, F2 | LC1F500 - F630 Note F1, F2 | LC1F780 Note F1, F2 | LC1F800 Note F1, F2, F3 |
| 220 | 50/60 | - | - | - | - | - |
| | 50 | M5 | - | - | - | - |
| | 60 | M6 | - | - | - | - |
| | 40-400 | M7 | M7 | M7 | M7 | - |
| | DC | - | MD | MD | MD | - |
| | Low Consump DC | - | - | - | - | - |
| | Wide Range DC | - | - | - | - | - |
| 220/230 | 50/60 | - | - | - | - | - |
| | 50 | - | - | - | - | - |
| | 60 | - | - | - | - | - |
| | 40-400 | - | - | - | - | - |
| | DC | MD | - | - | - | - |
| 220/240 | 40-400 | - | - | - | - | P7 |
| | DC | - | - | - | - | MW |
| 230 | 50/60 | - | - | - | - | - |
| | 50 | P5 | - | - | - | - |
| | 60 | - | - | - | - | - |
| | 40-400 | P7 | P7 | P7 | P7 | - |
| | DC | - | - | - | - | - |
| 230/240 | 50/60 | - | - | - | - | - |
| | 50/60 | - | - | - | - | - |
| 240 | 50 | U5 | - | - | - | - |
| | 60 | U6 | - | - | - | - |
| | 40-400 | U7 | U7 | U7 | U7 | - |
| | DC | - | - | - | - | - |
| | DC | UD | UD | UD | UD | - |
| 250 | Low Consump DC | - | - | - | - | - |
| | 50/60 | - | - | - | - | - |
| 256 | 50 | - | - | - | - | - |
| | 50 | - | - | - | - | - |
| 277 | 50/60 | - | - | - | - | - |
| | 50 | W5 | - | - | - | - |
| | 40-400 | - | W7 | W7 | W7 | - |
| 380 | 50/60 | - | - | - | - | - |
| | 50 | Q5 | - | - | - | - |
| | 60 | Q6 | - | - | - | - |
| | 40-400 | Q7 | Q7 | Q7 | Q7 | - |
| 380/400 | 50/60 | - | - | - | - | - |
| | 50 | - | - | - | - | - |
| | 60 | - | - | - | - | - |
| | 40-400 | - | - | - | - | - |
| | DC | - | - | - | - | QW |
| 380/440 | 40-400 | - | - | - | - | V7 |

F-line Voltage Code

| Voltage | Frequency | F-line (see notes at end of table) | | | | |
|---------|-----------|-------------------------------------|-------------------------------------|-------------------------------------|---------------------------|-------------------------------|
| | | LC1F115 - F225 Note F1, F2 | LC1F265 - F400 Note F1, F2 | LC1F500 - F630 Note F1, F2 | LC1F780 Note F1, F2 | LC1F800 Note F1, F2, F3 |
| 400 | 50/60 | - | - | - | - | - |
| | 50 | V5 | - | - | - | - |
| | 40-400 | V7 | V7 | V7 | V7 | - |
| 400/415 | 50/60 | - | - | - | - | - |
| 415 | 50/60 | - | - | - | - | - |
| | 50 | N5 | - | - | - | - |
| | 40-400 | N7 | N7 | N7 | N7 | - |
| 415-440 | 50 | - | - | - | - | - |
| | 40-400 | - | - | - | - | - |
| 440 | 50/60 | - | - | - | - | - |
| | 50 | - | - | - | - | - |
| | 60 | R6 | - | - | - | - |
| | 40-400 | R7 | R7 | R7 | R7 | - |
| | DC | - | RD | RD | RD | - |
| 440/460 | DC | RD | - | - | - | - |
| 460/480 | 60 | Q5 | - | - | - | - |
| 480 | 50/60 | - | - | - | - | - |
| | 50 | - | - | - | - | - |
| | 60 | - | - | - | N7 | - |
| | 40-400 | - | S7, Note F4 | - | - | - |
| 500 | 50/60 | - | - | - | - | - |
| | 50 | S5 | - | - | - | - |
| | 40-400 | S7 | S7 | S7 | S7 | - |
| 575 | 50/60 | - | - | - | - | - |
| | 60 | - | - | - | - | - |
| 600 | 50/60 | - | - | - | - | - |
| | 60 | - | - | - | - | - |
| | 40-400 | - | - | X7 | - | - |
| 660 | 50 | - | - | - | - | - |
| | 60 | Y6 | - | - | - | - |
| 660/690 | 50/60 | - | - | - | - | - |

F-line Notes:

- F1 For operating ranges refer to technical data section of the F-line contactors. Ranges vary as a function of the supply (AC/DC).
- F2 For non-stock voltage codes, order contactor and coil separately. See page 234 for coils.
- F3 Built in surge suppressor included on LC1F800 coils.
- F4 For use with LC1F265 and LC1F330 only.
- F5 For LC1F400 contactor with 120 Vac coil, use F7 code.

TeSys™ F-Line Contactors and Starters


Selection - Coils

Contactors Type LC1F

Coils for LC1F115 to F225, AC supply 50 to 60 Hz

Maximum ambient air temperature: 55 °C (131 °F); above this, use an **LX9F** coil, see page 208 to 209.
Operating cycles/hour ($\theta \leq 55$ °C [131 °F]): ≤ 2400 .

| Control Circuit Voltage | | Average resistance at 20 °C (68 °F) $\pm 10\%$ | Inductance of Closed Circuit | Voltage Code | Catalog Number | Weight lb (kg) |
|-------------------------|----------|--|------------------------------|--------------|----------------|----------------|
| Vc 50 Hz | Vc 60 Hz | | | | | |
| V | V | Ω | H | | | |




LX1FF...

For Contactors LC1F115 and LC1F150

| | | | | | | |
|---------|---------|------|------|----|-----------|--------------|
| 24 | – | 0.27 | 0.04 | B5 | LX1FF024 | 0.95 (0.430) |
| 42 | – | 0.94 | 0.13 | – | LX1FF042 | 0.95 (0.430) |
| – | 48 | 0.78 | 0.11 | E6 | LX1FF040 | 0.95 (0.430) |
| 48 | – | 1.17 | 0.16 | E5 | LX1FF048 | 0.95 (0.430) |
| – | 110 | 4.55 | 0.59 | F6 | LX1FF092 | 0.95 (0.430) |
| – | 115/120 | 4.77 | 0.64 | G6 | LX1FF095 | 0.95 (0.430) |
| 110/115 | – | 6.38 | 0.86 | F5 | LX1FF110 | 0.95 (0.430) |
| 127 | – | 9.14 | 1.15 | G5 | LX1FF127 | 0.95 (0.430) |
| – | 200/208 | 14.5 | 1.87 | L6 | LX1FF162 | 0.95 (0.430) |
| – | 220 | 18.4 | 2.38 | M6 | LX1FF184 | 0.95 (0.430) |
| – | 230/240 | 18.9 | 2.5 | U6 | LX1FF187 | 0.95 (0.430) |
| 220/230 | 265/277 | 28.1 | 3.44 | M5 | LX1FF220 | 0.95 (0.430) |
| 240 | – | 31.1 | 4.1 | U5 | LX1FF240 | 0.95 (0.430) |
| – | 380 | 57.2 | 7.05 | Q6 | LX1FF316 | 0.95 (0.430) |
| – | 415 | 67.9 | 8.21 | N6 | LX1FF340 | 0.95 (0.430) |
| – | 440 | 72.6 | 9.21 | R6 | LX1FF360 | 0.95 (0.430) |
| 380/400 | 460/480 | 86.9 | 10.3 | Q5 | LX1FF380 | 0.95 (0.430) |
| 415/440 | – | 95.1 | 12 | N5 | LX1FF415 | 0.95 (0.430) |
| 500 | – | 141 | 17 | S5 | LX1FF500 | 0.95 (0.430) |
| – | 660 | 172 | 20.3 | Y6 | LX1FF550 | 0.95 (0.430) |
| 660 | – | 254 | 28.9 | Y5 | LX1FF660 | 0.95 (0.430) |
| – | 1000 | 414 | 48.9 | – | LX1FF850 | 0.95 (0.430) |
| 1000 | – | 610 | 68.5 | – | LX1FF1000 | 0.95 (0.430) |

Specifications

Average consumption at 20 °C (68 °F):
- inrush 50 Hz: 550 VA; 60 Hz: 660 VA.
- sealed 50 Hz: 45 VA; 60 Hz: 55 VA, $\cos \varphi = 0.32$.
Heat dissipation: 12 to 16 W
Operating time at Vc: closing = 23 to 35 ms; Opening = 5 to 15 ms



LX1FG...

For Contactors LC1F185 and LC1F225

| | | | | | | |
|---------|---------|------|------|----|-----------|--------------|
| 24 | – | 0.18 | 0.03 | B5 | LX1FG024 | 1.21 (0.550) |
| 42 | – | 0.57 | 0.09 | – | LX1FG042 | 1.21 (0.550) |
| – | 48 | 0.47 | 0.08 | E6 | LX1FG040 | 1.21 (0.550) |
| 48 | – | 0.71 | 0.12 | E5 | LX1FG048 | 1.21 (0.550) |
| – | 110 | 2.74 | 0.44 | F6 | LX1FG092 | 1.21 (0.550) |
| – | 115/120 | 2.87 | 0.49 | G6 | LX1FG095 | 1.21 (0.550) |
| 110/115 | – | 4.18 | 0.65 | F5 | LX1FG110 | 1.21 (0.550) |
| 127 | – | 5.35 | 0.86 | G5 | LX1FG127 | 1.21 (0.550) |
| – | 200/208 | 8.8 | 1.41 | L6 | LX1FG162 | 1.21 (0.550) |
| – | 220 | 11.1 | 1.8 | M6 | LX1FG184 | 1.21 (0.550) |
| – | 230/240 | 11.4 | 1.87 | U6 | LX1FG187 | 1.21 (0.550) |
| 220/230 | 265/277 | 16.5 | 2.59 | M5 | LX1FG220 | 1.21 (0.550) |
| 240 | – | 20.1 | 3.09 | U5 | LX1FG240 | 1.21 (0.550) |
| – | 380 | 34 | 5.32 | Q6 | LX1FG316 | 1.21 (0.550) |
| – | 415 | 40.8 | 6.2 | N6 | LX1FG340 | 1.21 (0.550) |
| – | 440 | 43.5 | 6.94 | R6 | LX1FG360 | 1.21 (0.550) |
| 380/400 | 460/480 | 51.3 | 7.75 | Q5 | LX1FG380 | 1.21 (0.550) |
| 415/440 | – | 62.3 | 9.06 | N5 | LX1FG415 | 1.21 (0.550) |
| 500 | – | 82.7 | 12.8 | S5 | LX1FG500 | 1.21 (0.550) |
| – | 660 | 103 | 15.3 | Y6 | LX1FG550 | 1.21 (0.550) |
| 660 | – | 154 | 21.8 | Y5 | LX1FG660 | 1.21 (0.550) |
| – | 1000 | 249 | 36.6 | – | LX1FG850 | 1.21 (0.550) |
| 1000 | – | 370 | 51.6 | – | LX1FG1000 | 1.21 (0.550) |

Specifications

Average consumption at 20 °C (68 °F):
- inrush 50 Hz: 805 VA; 60 Hz: 970 VA.
- sealed 50 Hz: 55 VA; 60 Hz: 66 VA, $\cos \varphi = 0.34$.
Heat dissipation: 18 to 24 W
Operating time at Vc: closing = 20 to 35 ms; Opening = 7 to 15 ms

TeSys™ F-Line Contactors and Starters

Selection - Coils


Contactors Type LC1F

Coils for LC1F265 to F500, AC supply 40 to 400 Hz

Low sealed consumption.
Operate on networks with harmonic numbers ≤ 7
Operating cycles/hour ($\theta \leq 55^\circ\text{C}$ [131°F]) ≤ 2400 .

| Control circuit voltage Vc | Average resistance at 20 °C (68 °F) $\pm 10\%$ | | Inductance of Closed Circuit | Voltage Code | Catalog Number | Weight lb (kg) |
|-------------------------------|--|----------|------------------------------|--------------|----------------|----------------|
| | Inrush | Sealed | | | | |
| V | Ω | Ω | H | | | |

For Contactors LC1F265 and LC1F330




LX1FH...2

| | | | | | | |
|---------|-------|--------|---|----|------------|--------------|
| 24 | 0.8 | 20 | ■ | B7 | LX1FH0242 | 1.65 (0.750) |
| 48 | 2.96 | 72 | ■ | E7 | LX1FH0482 | 1.65 (0.750) |
| 110/115 | 18.7 | 415 | ■ | F7 | LX1FH1102 | 1.65 (0.750) |
| 120/127 | 22.9 | 536 | ■ | G7 | LX1FH1272 | 1.65 (0.750) |
| 200/208 | 57.8 | 1285 | ■ | L7 | LX1FH2002 | 1.65 (0.750) |
| 220/230 | 71.6 | 1621 | ■ | M7 | LX1FH2202 | 1.65 (0.750) |
| 240 | 71.6 | 1621 | ■ | U7 | LX1FH2402 | 1.65 (0.750) |
| 277 | 114.3 | 2425 | ■ | W7 | LX1FH2772 | 1.65 (0.750) |
| 380/415 | 222 | 5075 | ■ | Q7 | LX1FH3802 | 1.65 (0.750) |
| 480/500 | 345 | 7990 | ■ | S7 | LX1FH5002 | 1.65 (0.750) |
| 600/660 | 521 | 11 988 | ■ | X7 | LX1FH6002 | 1.65 (0.750) |
| 1000 | 1218 | 30 124 | ■ | - | LX1FH10002 | 1.65 (0.750) |

Specifications

Average consumption at 20 °C (68 °F) for 50 or 60 Hz and $\cos \varphi = 0.9$:
- inrush: 600 to 700 VA.
- sealed: 8 to 10 VA.
Heat dissipation: 8 W
Operating time at Vc: closing = 40 to 65 ms; Opening = 100 to 170 ms




LX1FJ...2

For Contactor LC1F400

| | | | | | | |
|---------|------|--------|------|----|-----------|--------------|
| 48 | 1.6 | 29.5 | 0.18 | E7 | LX1FJ048 | 2.20 (1.000) |
| 110/120 | 9.8 | 230 | 1.35 | F7 | LX1FJ110 | 2.20 (1.000) |
| 127 | 12.8 | 280 | 1.75 | G7 | LX1FJ127 | 2.20 (1.000) |
| 200/208 | 30 | 815 | 4.1 | L7 | LX1FJ200 | 2.20 (1.000) |
| 220/230 | 37 | 1030 | 5.1 | M7 | LX1FJ220 | 2.20 (1.000) |
| 230/240 | 47.5 | 1320 | 6.4 | U7 | LX1FJ240 | 2.20 (1.000) |
| 265/277 | 61 | 1700 | 8.1 | W7 | LX1FJ280 | 2.20 (1.000) |
| 380/400 | 120 | 3310 | 15.8 | Q7 | LX1FJ380 | 2.20 (1.000) |
| 415/480 | 145 | 4070 | 19.4 | N7 | LX1FJ415 | 2.20 (1.000) |
| 500 | 190 | 4980 | 25.5 | S7 | LX1FJ500 | 2.20 (1.000) |
| 550/600 | 243 | 6310 | 27.4 | X7 | LX1FJ600 | 2.20 (1.000) |
| 1000 | 720 | 19 420 | 84.6 | - | LX1FJ1000 | 2.20 (1.000) |

Specifications

Average consumption at 20 °C (68 °F) for 50 or 60 Hz and $\cos \varphi = 0.9$:
- inrush: 1000 to 1150 VA.
- sealed: 12 to 18 VA.
Heat dissipation: 14 W
Operating time at Vc: closing = 40 to 75 ms; Opening = 100 to 170 ms



LX1FK...2

For Contactor LC1F500

| | | | | | | |
|---------|------|--------|------|----|-----------|--------------|
| 48 | 1.9 | 33.5 | 0.19 | E7 | LX1FK048 | 2.53 (1.150) |
| 110/120 | 9.55 | 260 | 1.25 | F7 | LX1FK110 | 2.53 (1.150) |
| 127 | 11.5 | 315 | 1.5 | G7 | LX1FK127 | 2.53 (1.150) |
| 200/208 | 29 | 735 | 3.75 | L7 | LX1FK200 | 2.53 (1.150) |
| 220/230 | 35.5 | 915 | 4.55 | M7 | LX1FK220 | 2.53 (1.150) |
| 230/240 | 44.5 | 1160 | 5.75 | U7 | LX1FK240 | 2.53 (1.150) |
| 265/277 | 56.5 | 1490 | 7.3 | W7 | LX1FK280 | 2.53 (1.150) |
| 380/400 | 112 | 2980 | 14.7 | Q7 | LX1FK380 | 2.53 (1.150) |
| 415/480 | 143 | 3730 | 18.4 | N7 | LX1FK415 | 2.53 (1.150) |
| 500 | 172 | 4590 | 22.8 | S7 | LX1FK500 | 2.53 (1.150) |
| 550/600 | 232 | 5660 | 23.9 | X7 | LX1FK600 | 2.53 (1.150) |
| 1000 | 679 | 16 960 | 72 | - | LX1FK1000 | 2.53 (1.150) |

Specifications

Average consumption at 20 °C (68 °F) for 50 or 60 Hz, $\cos \varphi = 0.9$:
- inrush: 1050 to 1150 VA.
- sealed: 16 to 20 VA.
Heat dissipation: 18 W
Operating time at Vc: closing = 40 to 75 ms; Opening = 100 to 170 ms

■ Please consult your Local Square D Field Sales Office.

TeSys™ F-Line Contactors and Starters

Selection - Coils

Contactors Type LC1F

Coils for LC1F630 to F800, AC supply 40 to 400 Hz

Low sealed consumption.
Operate on networks with harmonic numbers ≤ 7 .


| Control circuit voltage Vc | Average resistance at 20 °C (68 °F) $\pm 10\%$ | | Inductance of Closed Circuit | Voltage Code | Catalog Number | Weight lb (kg) |
|-------------------------------|--|----------|------------------------------|--------------|----------------|----------------|
| | Inrush | Sealed | | | | |
| V | Ω | Ω | H | | | |

For Contactor LC1F630

| | | | | | | |
|---------|------|--------|------|----|-----------|--------------|
| 48 | 1.1 | 17.1 | 0.09 | E7 | LX1FL048 | 3.30 (1.500) |
| 110/120 | 6.45 | 165 | 1.85 | F7 | LX1FL110 | 3.30 (1.500) |
| 127 | 8.1 | 205 | 1.05 | G7 | LX1FL127 | 3.30 (1.500) |
| 200/208 | 20.5 | 605 | 2.65 | L7 | LX1FL200 | 3.30 (1.500) |
| 220/240 | 25.5 | 730 | 3.35 | M7 | LX1FL220 | 3.30 (1.500) |
| 265/277 | 31 | 900 | 4.1 | W7 | LX1FL260 | 3.30 (1.500) |
| 380/400 | 78 | 2360 | 10.5 | Q7 | LX1FL380 | 3.30 (1.500) |
| 415/480 | 96 | 2960 | 13 | N7 | LX1FL415 | 3.30 (1.500) |
| 500 | 120 | 3660 | 16.5 | S7 | LX1FL500 | 3.30 (1.500) |
| 550/600 | 155 | 4560 | 19.5 | X7 | LX1FL600 | 3.30 (1.500) |
| 1000 | 474 | 12 880 | 56.2 | - | LX1FL1000 | 3.30 (1.500) |

Specifications

Average consumption at 20 °C (68 °F) for 50 or 60 Hz, $\cos \phi = 0.9$:
 - inrush: 1500 to 1730 VA.
 - sealed: 20 to 25 VA.
 Operating cycles/hour ($\theta \leq 55$ °C [131 °F]): 1200.
 Heat dissipation: 20 W
 Operating time at Vc: closing = 40 to 80 ms; Opening = 100 to 200 ms



LX1FL●●●

For Contactor LC1F780

Replacement rectifier for use with LX1FX●●● coils: DR5TX5S.

| | | | | | | |
|---------|--------|--------|------|----|------------|--------------|
| 110/120 | 4.95 ▲ | 230 ▲ | 0.21 | F7 | LX1FX110 ■ | 6.61 (3.000) |
| 127 | 6.1 ▲ | 280 ▲ | 0.26 | G7 | LX1FX127 ■ | 6.61 (3.000) |
| 200/208 | 15.5 ▲ | 750 ▲ | 0.66 | L7 | LX1FX200 ■ | 6.61 (3.000) |
| 220/240 | 19.5 ▲ | 920 ▲ | 0.82 | M7 | LX1FX220 ■ | 6.61 (3.000) |
| 265/277 | 29.8 ▲ | 1330 ▲ | 1.25 | W7 | LX1FX280 ■ | 6.61 (3.000) |
| 380 | 60.9 ▲ | 2780 ▲ | 2.3 | Q7 | LX1FX380 ■ | 6.61 (3.000) |
| 415/480 | 74.3 ▲ | 3340 ▲ | 2.8 | N7 | LX1FX415 ■ | 6.61 (3.000) |
| 500 | 92 ▲ | 4180 ▲ | 3.5 | S7 | LX1FX500 ■ | 6.61 (3.000) |

Specifications

Average consumption at 20 °C (68 °F) for 50 or 60 Hz, $\cos \phi = 0.9$:
 - inrush: 1900 to 2300 VA.
 - sealed: 44 to 55 VA.
 Operating cycles/hour ($\theta \leq 55$ °C [131 °F]): 600.
 Heat dissipation: 2 x 22 W
 Operating time at Vc: closing = 40 to 80 ms; Opening = 130 to 230 ms

For Contactor LC1F800

| | | | | | | |
|---------|---|---|---|----|-----------|--------------|
| 110/127 | - | - | - | FW | LX4F8FW * | 3.64 (1.650) |
| 220/240 | - | - | - | MW | LX4F8MW * | 3.64 (1.650) |
| 380/440 | - | - | - | QW | LX4F8QW * | 3.64 (1.650) |

Specifications

Operating cycles/hour ($\theta \leq 55$ °C [131 °F]): 600.
 Heat dissipation: 25 W
 Operating time at Vc: closing = 40 to 80 ms; Opening = 20 to 40 ms


- Catalog number includes a set of 2 identical coils, to be connected in series.
- ▲ Value for the 2 coils in series.
- * Coil circuit requires a separately mounted rectifier catalog number DR5 TE4U.

TeSys™ F-Line Contactors and Starters Selection - Coils

Contactors Type LC1F Coils for LC1F115 to F400, DC supply

Low sealed consumption.
Operate on networks with harmonic numbers ≤ 7 .
Operating cycles/hour ($\theta \leq 55\text{ °C}$ [131 °F]) ≤ 2400 .

| Control circuit voltage Vc | Average resistance at 20 °C (68 °F) $\pm 10\%$ | | Inductance of Closed Circuit | Voltage Code | Catalog Number | Weight lb (kg) |
|-------------------------------|--|----------|------------------------------|--------------|----------------|----------------|
| | Inrush | Sealed | | | | |
| V | Ω | Ω | H | | | |



LX4FF...

For Contactors LC1F115 and LC1F150

| | | | | | | |
|---------|------|--------|------|----|----------|--------------|
| 24 | 1.12 | 177 | 11 | BD | LX4FF024 | 0.95 (0.430) |
| 48 | 4.52 | 715 | 42.7 | ED | LX4FF048 | 0.95 (0.430) |
| 110 | 21.7 | 2940 | 179 | FD | LX4FF110 | 0.95 (0.430) |
| 125 | 26.8 | 3560 | 223 | GD | LX4FF125 | 0.95 (0.430) |
| 220/230 | 84 | 11 100 | 704 | MD | LX4FF220 | 0.95 (0.430) |
| 250 | 105 | 13 000 | 868 | UD | LX4FF250 | 0.95 (0.430) |
| 440/460 | 301 | 48 200 | 4000 | RD | LX4FF440 | 0.95 (0.430) |

Specifications

Average consumption:
- inrush: 543 to 665 W.
- sealed: 3.94 to 4.83 W.
Operating time at Vc: closing = 30 to 40 ms; Opening = 30 to 50 ms

For Contactors LC1F185 and LC1F225

| | | | | | | |
|---------|------|--------|------|----|----------|--------------|
| 24 | 0.79 | 169 | 14.9 | BD | LX4FG024 | 1.21 (0.550) |
| 48 | 3.2 | 662 | 55.3 | ED | LX4FG048 | 1.21 (0.550) |
| 110 | 14.9 | 2810 | 241 | FD | LX4FG110 | 1.21 (0.550) |
| 125 | 19. | 3320 | 289 | GD | LX4FG125 | 1.21 (0.550) |
| 220/230 | 57.7 | 10 200 | 890 | MD | LX4FG220 | 1.21 (0.550) |
| 250 | 76. | 12 400 | 1140 | UD | LX4FG250 | 1.21 (0.550) |
| 440/460 | 223 | 39 700 | 4210 | RD | LX4FG440 | 1.21 (0.550) |

Specifications


Average consumption:
- inrush: 737 to 902 W.
- sealed: 4.13 to 5.07 W.
Operating time at Vc: closing = 30 to 40 ms; Opening = 30 to 50 ms

For Contactors LC1F265 and LC1F330

| | | | | | | |
|---------|------|--------|------|----|----------|--------------|
| 24 | 0.9 | 192 | 26.3 | BD | LX4FH024 | 1.63 (0.740) |
| 48 | 3.49 | 707 | 92.9 | ED | LX4FH048 | 1.63 (0.740) |
| 110 | 16.8 | 3180 | 424 | FD | LX4FH110 | 1.63 (0.740) |
| 125 | 20.8 | 3840 | 530 | GD | LX4FH125 | 1.63 (0.740) |
| 220/230 | 65.7 | 11 500 | 1590 | MD | LX4FH220 | 1.63 (0.740) |
| 250 | 84 | 13 900 | 1910 | UD | LX4FH250 | 1.63 (0.740) |
| 440/460 | 255 | 44 000 | 7570 | RD | LX4FH440 | 1.63 (0.740) |

Specifications

Average consumption:
- inrush: 655 to 803 W.
- sealed: 3.68 to 4.53 W.
Operating time at Vc: closing = 40 to 50 ms; Opening = 40 to 65 ms



LX4FH...

For Contactor LC1F400

| | | | | | | |
|-----|------|--------|------|----|----------|--------------|
| 48 | 2.5 | 558 | 56 | ED | LX4FJ048 | 2.14 (0.970) |
| 110 | 12.7 | 2660 | 270 | FD | LX4FJ110 | 2.14 (0.970) |
| 125 | 15.8 | 3130 | 330 | GD | LX4FJ125 | 2.14 (0.970) |
| 220 | 47 | 8820 | 910 | MD | LX4FJ220 | 2.14 (0.970) |
| 250 | 61 | 10 500 | 1200 | UD | LX4FJ250 | 2.14 (0.970) |
| 440 | 236 | 33 750 | 4435 | RD | LX4FJ440 | 2.14 (0.970) |

Specifications

Average consumption:
- inrush: 920 to 1140 W.
- sealed: 4 to 7.5 W.
Operating time at Vc: closing = 50 to 60 ms; Opening = 45 to 60 ms

TeSys™ F-Line Contactors and Starters


Selection - Coils

Contactors Type LC1F

Coils for LC1F500 to F800, DC Supply

Low sealed consumption.

| Control circuit voltage Vc | Average resistance at 20 °C (68 °F) ±10% | | Inductance of Closed Circuit | Voltage Code | Catalog Number | Weight lb (kg) |
|----------------------------|--|--------|------------------------------|--------------|----------------|----------------|
| | Inrush | Sealed | | | | |
| V | Ω | Ω | H | | | |



LX4FK...

For Contactor LC1F500

| | | | | | | |
|-----|------|--------|------|----|----------|--------------|
| 48 | 2.35 | 515 | 67 | ED | LX4FK048 | 2.40 (1.080) |
| 110 | 11.5 | 2450 | 280 | FD | LX4FK110 | 2.40 (1.080) |
| 125 | 15 | 2930 | 400 | GD | LX4FK125 | 2.40 (1.080) |
| 220 | 44 | 8150 | 1080 | MD | LX4FK220 | 2.40 (1.080) |
| 250 | 56 | 9650 | 1350 | UD | LX4FK250 | 2.40 (1.080) |
| 440 | 225 | 31 300 | 5270 | RD | LX4FK440 | 2.40 (1.080) |

Specifications

Average consumption:
 - inrush: 990 to 1220 W.
 - sealed: 4.5 to 8 W.
 Operating cycles/hour ($\theta \leq 55$ °C [131 °F]): 2400
 Operating time at Vc: closing = 50 to 60 ms; Opening = 45 to 60 ms

For Contactor LC1F630

| | | | | | | |
|-----|-----|--------|------|----|----------|--------------|
| 48 | 1.7 | 353 | 40.5 | ED | LX4FL048 | 3.21 (1.450) |
| 110 | 8.1 | 1680 | 180 | FD | LX4FL110 | 3.21 (1.450) |
| 125 | 10 | 2110 | 230 | GD | LX4FL125 | 3.21 (1.450) |
| 220 | 31 | 5160 | 650 | MD | LX4FL220 | 3.21 (1.450) |
| 250 | 38 | 6080 | 815 | UD | LX4FL250 | 3.21 (1.450) |
| 440 | 152 | 23 120 | 2910 | RD | LX4FL440 | 3.21 (1.450) |

Specifications

Average consumption:
 - inrush: 1420 to 1920 W.
 - sealed: 6.5 to 72.5 W.
 Operating cycles/hour ($\theta \leq 55$ °C [131 °F]): 1200
 Operating time at Vc: closing = 60 to 70 ms; Opening = 40 to 50 ms

For contactor LC1F780

| | | | | | | |
|-----|--------|--------|------|----|------------|--------------|
| 110 | 6.1 ▲ | 280 ▲ | 0.26 | FD | LX4FX110 ■ | 6.61 (3.000) |
| 125 | 7.7 ▲ | 410 ▲ | 0.33 | GD | LX4FX125 ■ | 6.61 (3.000) |
| 220 | 24.6 ▲ | 1100 ▲ | 1 | MD | LX4FX220 ■ | 6.61 (3.000) |
| 250 | 29.8 ▲ | 1330 ▲ | 1.25 | UD | LX4FX250 ■ | 6.61 (3.000) |
| 440 | 92 ▲ | 4180 ▲ | 3.5 | RD | LX4FX440 ■ | 6.61 (3.000) |

Specifications

Average consumption:
 - inrush: 1960 to 2420 W.
 - sealed: 42 to 52 W.
 Operating cycles/hour ($\theta \leq 55$ °C [131 °F]): 600
 Operating time at Vc: closing = 70 to 80 ms; Opening = 100 to 130 ms

For Contactor LC1F800

| | | | | | | |
|---------|---|---|---|----|-----------|--------------|
| 110/127 | – | – | – | FW | LX4F8FW * | 3.64 (1.650) |
| 220/240 | – | – | – | MW | LX4F8MW * | 3.64 (1.650) |
| 380/440 | – | – | – | QW | LX4F8QW * | 3.64 (1.650) |

Specifications

Operating cycles/hour ($\theta \leq 55$ °C [131 °F]): 600
 Heat dissipation: 25 W
 Operating time at Vc: closing = 40 to 80 ms; Opening = 20 to 40 ms

- Catalog number includes a set of 2 identical coils, to be connected in series.
- ▲ Value of the 2 coils in series.
- * Coil circuit requires a separately mounted rectifier catalog number DR5 TE4U.

Contactors Type LC1F
Coils for LC1F115 to F330 (specific applications ■)
AC Supply, 40 to 400 Hz

Low sealed consumption.
High tolerance to inrush voltage drops.
Immune to micro-breaks (mains supply or contact chain).
Operate on networks with harmonic numbers ≤ 7.


| Control circuit voltage Vc | Average resistance at 20 °C (68 °F) ±10% | | Inductance of Closed Circuit | Voltage Code | Catalog Number | Weight lb (kg) |
|-------------------------------|--|--------|------------------------------|--------------|----------------|----------------|
| | Inrush | Sealed | | | | |
| V | Ω | Ω | H | | | |

For Contactors LC1F115 and LC1F150

| | | | | | | |
|---------|------|--------|------|----|----------|--------------|
| 48 | 3.03 | 80.2 | 0.3 | E7 | LX9FF048 | 0.95 (0.430) |
| 110/115 | 14.8 | 579 | 2.08 | F7 | LX9FF110 | 0.95 (0.430) |
| 127 | 19 | 746 | 2.65 | G7 | LX9FF127 | 0.95 (0.430) |
| 220/230 | 59.4 | 2190 | 7.7 | M7 | LX9FF220 | 0.95 (0.430) |
| 240 | 73.5 | 2750 | 9.68 | U7 | LX9FF240 | 0.95 (0.430) |
| 380/400 | 173 | 6540 | 23 | Q7 | LX9FF380 | 0.95 (0.430) |
| 415/440 | 218 | 8460 | 30 | N7 | LX9FF415 | 0.95 (0.430) |
| 500 | 262 | 10 300 | 36 | S7 | LX9FF500 | 0.95 (0.430) |

Specifications

Average consumption at 20 °C (68 °F):
- inrush: 690 to 855 VA.
- sealed: 6.6 to 8.1 VA.
Heat dissipation: 5.9 to 7.2 W.
Operating time at Vc: Closing = 35 ms; Opening = 130 ms.
Operating cycles/hour (θ ≤ 55 °C [131 °F]): < 2400.




LX9FF...

For Contactors LC1F185 and LC1F225

| | | | | | | |
|---------|------|------|------|----|----------|--------------|
| 48 | 2.2 | 60 | 0.23 | E7 | LX9FG048 | 1.21 (0.550) |
| 110/115 | 10.4 | 411 | 1.46 | F7 | LX9FG110 | 1.21 (0.550) |
| 127 | 13 | 520 | 1.85 | G7 | LX9FG127 | 1.21 (0.550) |
| 220/230 | 42.1 | 1680 | 5.84 | M7 | LX9FG220 | 1.21 (0.550) |
| 240 | 50.6 | 2060 | 7.22 | U7 | LX9FG240 | 1.21 (0.550) |
| 380/400 | 128 | 4730 | 16.4 | Q7 | LX9FG380 | 1.21 (0.550) |
| 415/440 | 157 | 5930 | 20.6 | N7 | LX9FG415 | 1.21 (0.550) |
| 500 | 194 | 7550 | 26.3 | S7 | LX9FG500 | 1.21 (0.550) |

Specifications

Average consumption at 20 °C (68 °F):
- inrush: 950 to 1180 VA.
- sealed: 8.9 to 10.9 VA.
Heat dissipation: 8 to 9.8 W.
Operating time at Vc: Closing = 35 ms; Opening = 130 ms.
Operating cycles/hour (θ ≤ 55 °C [131 °F]): < 2400.



LX9FG...

For Contactors LC1F265 and LC1F330

| | | | | | | |
|---------|------|------|---|---|-----------|--------------|
| 48 | 2.96 | 72 | ▲ | – | LX9FH0482 | 1.65 (0.750) |
| 110/115 | 18.7 | 415 | ▲ | – | LX9FH1102 | 1.65 (0.750) |
| 120/127 | 22.9 | 156 | ▲ | – | LX9FH1272 | 1.65 (0.750) |
| 220/230 | 71.6 | 1621 | ▲ | – | LX9FH2202 | 1.65 (0.750) |
| 380/415 | 222 | 5075 | ▲ | – | LX9FH3802 | 1.65 (0.750) |
| 500 | 345 | 7990 | ▲ | – | LX9FH5002 | 1.65 (0.750) |

Specifications

Average consumption at 20 °C (68 °F):
- inrush: 560 to 660 VA.
- sealed: 8 to 10 VA.
Heat dissipation: 8.4 to 10.4 W.
Operating time at Vc: Closing = 45 ms; Opening = 25 ms.
Operating cycles/hour (θ ≤ 55 °C [131 °F]): < 3600.

- Application examples:
 - Hoisting (inching, high operating rate).
 - Normal Standby (distributed power supplies).
 These coils are specifically designed for use at high ambient temperature (mounting in MCCs, non ventilated enclosures, etc.).
- ▲ Please consult your Local Square D Field Sales Office.

TeSys™ F-Line Contactors and Starters

Selection - Coils

Contactors Type LC1F

Coils for LC1F400 to F630 (specific applications)


AC Supply, 40 to 400 Hz

| | | |
|---|----------|--|
| Coils with short operating times (at Vc): | Closing: | 60 ms |
| | Opening: | 50 ms (c side); 20 ms (a side) |
| Coils for high operating rates ($\theta \leq 70\text{ }^{\circ}\text{C}$ [158 °F]): | | 3600 operating cycles/hour 1800 for LC1F630 |

Coils with low inrush consumption

| Control circuit voltage Vc | Average resistance at 20 °C (68 °F) $\pm 10\%$ | | Inductance of closed circuit | Rectifier Catalog Number ■ | Coil | |
|-------------------------------|--|----------|------------------------------|-------------------------------|----------------|----------------|
| | Inrush | Sealed | | | Catalog Number | Weight lb (kg) |
| V | Ω | Ω | H | | | |

For Contactor LC1F400




LX9FJ...

| | | | | | | |
|---------|------|------|------|---------|----------|--------------|
| 48 | 4.03 | 43 | 0.22 | DR5TF4V | LX9FJ917 | 2.14 (0.970) |
| 110 | 25.7 | 246 | 1.3 | DR5TE4U | LX9FJ925 | 2.14 (0.970) |
| 127 | 32.3 | 302 | 1.7 | DR5TE4U | LX9FJ926 | 2.14 (0.970) |
| 220/230 | 99.5 | 919 | 5 | DR5TE4U | LX9FJ931 | 2.14 (0.970) |
| 380/415 | 311 | 3011 | 15 | DR5TE4S | LX9FJ936 | 2.14 (0.970) |
| 440 | 386 | 3690 | 19 | DR5TE4S | LX9FJ937 | 2.14 (0.970) |
| 500 | 478 | 4380 | 23 | DR5TE4S | LX9FJ938 | 2.14 (0.970) |

Specifications

Average consumption:
 - inrush: 500 VA.
 - sealed: 23 VA.
 Heat dissipation: 11.4 to 13.9 W.

For Contactor LC1F500




LX9FK...

| | | | | | | |
|---------|------|------|------|---------|----------|--------------|
| 48 | 3.73 | 30.7 | 0.18 | DR5TF4V | LX9FK917 | 2.38 (1.080) |
| 110 | 24 | 204 | 1.1 | DR5TE4U | LX9FK925 | 2.38 (1.080) |
| 127 | 29.8 | 250 | 1.4 | DR5TE4U | LX9FK926 | 2.38 (1.080) |
| 220/230 | 89.9 | 770 | 4 | DR5TE4U | LX9FK931 | 2.38 (1.080) |
| 380/415 | 274 | 2075 | 12 | DR5TE4S | LX9FK936 | 2.38 (1.080) |
| 440 | 361 | 3060 | 16 | DR5TE4S | LX9FK937 | 2.38 (1.080) |
| 500 | 448 | 3750 | 19 | DR5TE4S | LX9FK938 | 2.38 (1.080) |

Specifications

Average consumption:
 - inrush: 550 VA.
 - sealed: 31 VA.
 Heat dissipation: 15 to 18.3 W.

For Contactor LC1F630



LX9FL...

| | | | | | | |
|---------|------|------|------|---------|----------|--------------|
| 48 | 2.81 | 20.8 | 0.17 | DR5TF4V | LX9FL917 | 3.20 (1.450) |
| 110 | 13.5 | 114 | 0.77 | DR5TE4U | LX9FL924 | 3.20 (1.450) |
| 127 | 20.8 | 167 | 1.2 | DR5TE4U | LX9FL926 | 3.20 (1.450) |
| 220 | 52 | 425 | 2.9 | DR5TE4U | LX9FL930 | 3.20 (1.450) |
| 220/240 | 64.5 | 518 | 3.6 | DR5TE4U | LX9FL931 | 3.20 (1.450) |
| 380/400 | 163 | 1360 | 8.8 | DR5TE4S | LX9FL935 | 3.20 (1.450) |
| 415/440 | 204 | 1670 | 11 | DR5TE4S | LX9FL936 | 3.20 (1.450) |
| 500 | 312 | 2510 | 17 | DR5TE4S | LX9FL938 | 3.20 (1.450) |

Specifications

Average consumption:
 - inrush: 830 VA.
 - sealed: 47 VA.
 Heat dissipation: 22.8 to 27.8 W.

■ Rectifier to be ordered separately; weight of rectifier: 0.100 kg (0.22 lbs).

Contactors Type LC1F
Coils for LC1F400 to F630 (specific applications)
DC Supply

Coils with short operating times (at Vc): Closing: 60 ms
Opening: 20 ms

Coils with high operating rates
($\theta \leq 70\text{ }^{\circ}\text{C}$ [158 $^{\circ}\text{F}$]): 3600 operating cycles/hour
1800 for LC1F630

Coils with low inrush consumption


| Control circuit voltage Vc | Average resistance at 20 °C (68 °F) $\pm 10\%$ | | Inductance of closed circuit | Resistor | Coil | |
|-------------------------------|--|----------|------------------------------|-------------------------------|----------------|----------------|
| | Inrush | Sealed | | Quantity and Catalog Number ■ | Catalog Number | Weight lb (kg) |
| V | Ω | Ω | H | | | |

For Contactor LC1F400

| | | | | | | |
|---------|------|------|------|---------------|----------|--------------|
| 48 | 5.11 | 99 | 0.27 | 1 x DR2SC0047 | LX9FJ918 | 2.14 (0.970) |
| 110 | 32.3 | 632 | 1.7 | 1 x DR2SC0330 | LX9FJ926 | 2.14 (0.970) |
| 125 | 39.4 | 760 | 2 | 1 x DR2SC0390 | LX9FJ927 | 2.14 (0.970) |
| 220 | 123 | 2320 | 6.1 | 1 x DR2SC1200 | LX9FJ932 | 2.14 (0.970) |
| 440/460 | 478 | 9080 | 23 | 1 x DR2SC4700 | LX9FJ938 | 2.14 (0.970) |

Specifications

Average consumption:
- inrush: 430 W.
- sealed: 22 W.




LX9FJ...

For Contactor LC1F500

| | | | | | | |
|---------|------|------|------|---------------|----------|--------------|
| 48 | 4.67 | 76.7 | 0.22 | 1 x DR2SC0039 | LX9FK918 | 2.38 (1.080) |
| 110 | 29.8 | 470 | 1.4 | 1 x DR2SC0220 | LX9FK926 | 2.38 (1.080) |
| 125 | 37.4 | 637 | 1.7 | 1 x DR2SC0330 | LX9FK927 | 2.38 (1.080) |
| 220 | 115 | 1935 | 5.1 | 1 x DR2SC1000 | LX9FK932 | 2.38 (1.080) |
| 440/460 | 448 | 7050 | 19 | 1 x DR2SC3300 | LX9FK938 | 2.38 (1.080) |

Specifications

Average consumption:
- inrush: 470 W.
- sealed: 29 W.



LX9FK...


For Contactor LC1F630

| | | | | | | |
|---------|------|------|------|---------------|----------|--------------|
| 48 | 3.43 | 52.9 | 0.20 | 2 x DR2SC0047 | LX9FL918 | 3.20 (1.450) |
| 110 | 17.2 | 272 | 0.98 | 2 x DR2SC0270 | LX9FL925 | 3.20 (1.450) |
| 125 | 20.8 | 333 | 1.2 | 2 x DR2SC0330 | LX9FL926 | 3.20 (1.450) |
| 220 | 64.5 | 1018 | 3.6 | 2 x DR2SC1000 | LX9FL931 | 3.20 (1.450) |
| 440/460 | 260 | 4010 | 14 | 2 x DR2SC3900 | LX9FL937 | 3.20 (1.450) |

Specifications

Average consumption:
- inrush: 733 W.
- sealed: 48 W.

■ Resistors to be ordered separately, weight of resistor: 0.030 kg (0.06 lbs).



LX9FL...


TeSys™ F-Line Contactors and Starters

Dimensions and Mounting

Contactors Type LC1F Dimensions

Dimensions shown in mm (mm x 0.0394 = inches)

LC1F115 to F330

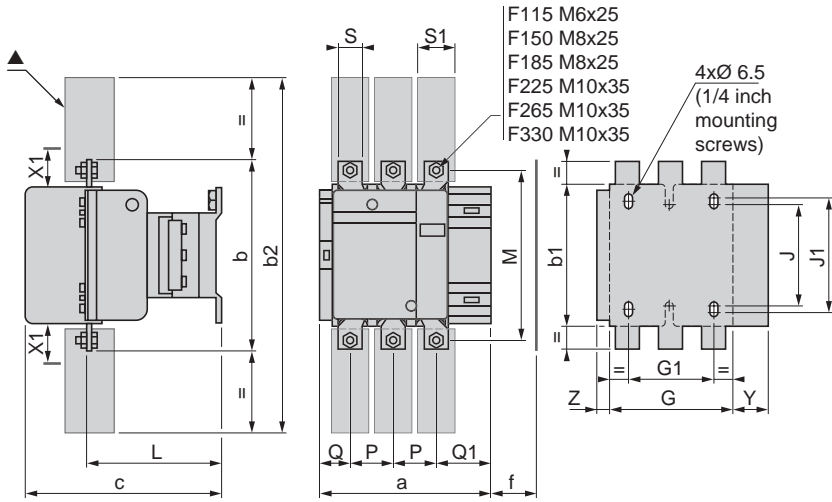

X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity


| | 200 to 500 V | 600 to 1000 V |
|------------------|--------------|---------------|
| LC1F115, LC1F150 | 10 | 15 |
| LC1F185 | 10 | 15 |
| LC1F225, LC1F265 | 10 | 15 |
| LC1F330 | 10 | 15 |

- ▲ Power terminal protection shroud (see page 198).
- f Minimum distance required for coil removal.

| LC1- | | a | b | b1 | b2 | c | f | G | G1 | J | J1 | L | M | P | Q | Q1 | S | S1 | Y | Z |
|------|----|-------|-----|-----|-----|-----|-----|-------|----|-----|-----|-------|-----|----|------|------|----|------|----|------|
| F115 | 3P | 163.5 | 162 | 137 | 265 | 171 | 131 | 106 | 80 | 106 | 120 | 107 | 147 | 37 | 29.5 | 60 | 20 | 26 | 44 | 13.5 |
| | 4P | 200.5 | 162 | 137 | 265 | 171 | 131 | 143 | 80 | 106 | 120 | 107 | 147 | 37 | 29.5 | 60 | 20 | 26 | 44 | 13.5 |
| F150 | 3P | 163.5 | 170 | 137 | 301 | 171 | 131 | 106 | 80 | 106 | 120 | 107 | 150 | 40 | 26 | 57.5 | 20 | 34 | 44 | 13.5 |
| | 4P | 200.5 | 170 | 137 | 301 | 171 | 131 | 143 | 80 | 106 | 120 | 107 | 150 | 40 | 26 | 55.5 | 20 | 34 | 44 | 13.5 |
| F185 | 3P | 168.5 | 174 | 137 | 305 | 181 | 130 | 111 | 80 | 106 | 120 | 113.5 | 154 | 40 | 29 | 59.5 | 20 | 34 | 44 | 13.5 |
| | 4P | 208.5 | 174 | 137 | 305 | 181 | 130 | 151 | 80 | 106 | 120 | 113.5 | 154 | 40 | 29 | 59.5 | 20 | 34 | 44 | 13.5 |
| F225 | 3P | 168.5 | 197 | 137 | 364 | 181 | 130 | 111 | 80 | 106 | 120 | 113.5 | 172 | 48 | 21 | 51.5 | 25 | 44.5 | 44 | 13.5 |
| | 4P | 208.5 | 197 | 137 | 364 | 181 | 130 | 151 | 80 | 106 | 120 | 113.5 | 172 | 48 | 17 | 47.5 | 25 | 44.5 | 44 | 13.5 |
| F265 | 3P | 201.5 | 203 | 145 | 375 | 213 | 147 | 142 | 96 | 106 | 120 | 141 | 178 | 48 | 39 | 66.5 | 25 | 44.5 | 38 | 21.5 |
| | 4P | 244.5 | 203 | 145 | 375 | 213 | 147 | 190 | 96 | 106 | 120 | 141 | 178 | 48 | 34 | 66.5 | 25 | 44.5 | 38 | 21.5 |
| F330 | 3P | 213 | 206 | 145 | 375 | 219 | 147 | 154.5 | 96 | 106 | 120 | 145 | 181 | 48 | 43 | 74 | 25 | 44.5 | 38 | 20.5 |
| | 4P | 261 | 206 | 145 | 375 | 219 | 147 | 202.5 | 96 | 106 | 120 | 145 | 181 | 48 | 43 | 74 | 25 | 44.5 | 38 | 20.5 |

f = minimum distance required for coil removal

LC1F400 and F500

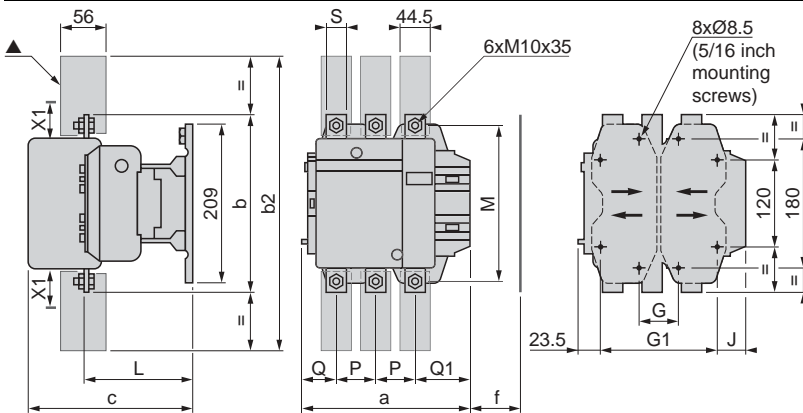

Dimensions shown in mm
mm x 0.0394 = inches

X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity

| | 200 to 500 V | 600 to 1000 V |
|---------|--------------|---------------|
| LC1F400 | 15 | 20 |
| LC1F500 | 15 | 20 |

- ▲ Power terminal protection shroud (see page 198).
- f Minimum distance required for coil removal.

| LC1- | | a | b | b2 | c | f | G* | G min | G max | G1 ■ | G1 min | G1 max | J | L | M | P | Q | Q1 | S |
|------|----|-----|-----|-----|-----|-----|-----|-------|-------|------|--------|--------|------|-----|-----|----|----|-----|----|
| F400 | 2P | 213 | 206 | 375 | 219 | 119 | 80 | 66 | 102 | 170 | 156 | 192 | 19.5 | 145 | 181 | 48 | 69 | 96 | 25 |
| | 3P | 213 | 206 | 375 | 219 | 119 | 80 | 66 | 102 | 170 | 156 | 192 | 19.5 | 145 | 181 | 48 | 43 | 74 | 25 |
| | 4P | 261 | 206 | 375 | 219 | 119 | 80 | 66 | 150 | 170 | 156 | 240 | 67.5 | 145 | 181 | 48 | 43 | 74 | 25 |
| F500 | 2P | 233 | 238 | 400 | 232 | 141 | 80 | 66 | 120 | 170 | 156 | 210 | 39.5 | 146 | 208 | 55 | 76 | 102 | 30 |
| | 3P | 233 | 238 | 400 | 232 | 141 | 80 | 66 | 120 | 170 | 156 | 210 | 39.5 | 146 | 208 | 55 | 46 | 77 | 30 |
| | 4P | 288 | 238 | 400 | 232 | 141 | 140 | 66 | 175 | 230 | 156 | 265 | 34.5 | 146 | 208 | 55 | 46 | 77 | 30 |


■ Supplied.

TeSys™ F-Line Contactors and Starters Dimensions and Mounting

Contactors Type LC1F Dimensions

Dimensions shown in mm (mm x 0.0394 = inches)


LC1F630 and F800

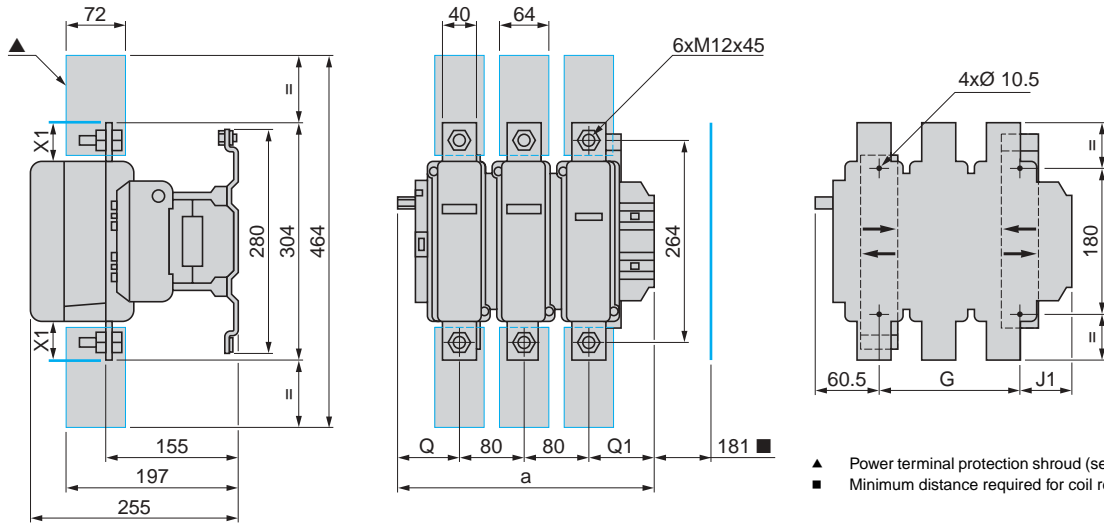

- ▲ Power terminal protection shroud (see page 220).
- Minimum distance required for coil removal.

| | | a | G supplied | G min | G max | J1 | Q | Q1 | X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity | | | | |
|---------|----|-----|------------|-------|-------|------|-----|-----|---|---------------------|----------------------|---------------------|---------------|
| LC1F630 | 2P | 309 | 180 | 100 | 195 | 68.5 | 102 | 127 | Voltage | 200 to 500 V | 690 to 1000 V | 200 to 690 V | 1000 V |
| LC1F630 | 3P | 309 | 180 | 100 | 195 | 68.5 | 60 | 89 | LC1F630 | 20 | 30 | – | – |
| LC1F800 | 3P | 309 | 180 | 100 | 195 | 68.5 | 60 | 89 | LC1F800 | – | – | 10 | 20 |
| LC1F630 | 4P | 389 | 240 | 150 | 275 | 68.5 | 60 | 89 | | | | | |

LC1F780

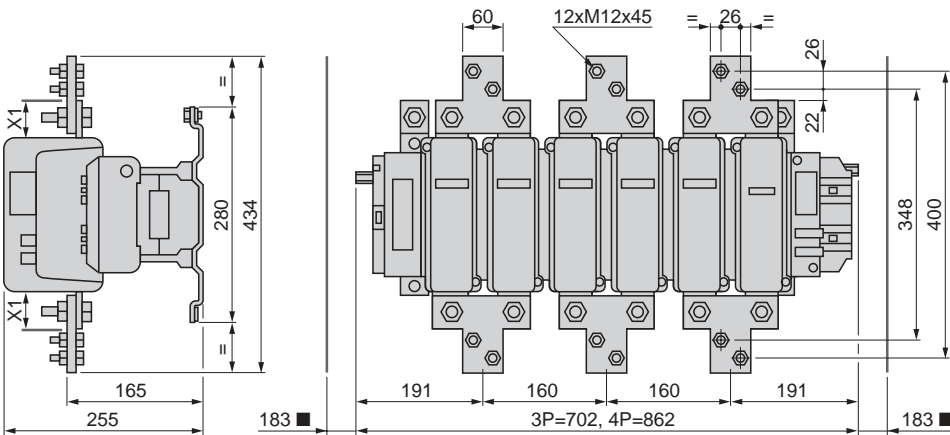


X1 (mm) = Min. electrical clearance according to operating voltage and breaking capacity


| Voltage | 200 to 500 V | 690 to 1000 V |
|---------|--------------|---------------|
| X1 (mm) | 30 | 35 |

- Minimum distance required for coil removal.

Mounting holes of LC1F7804

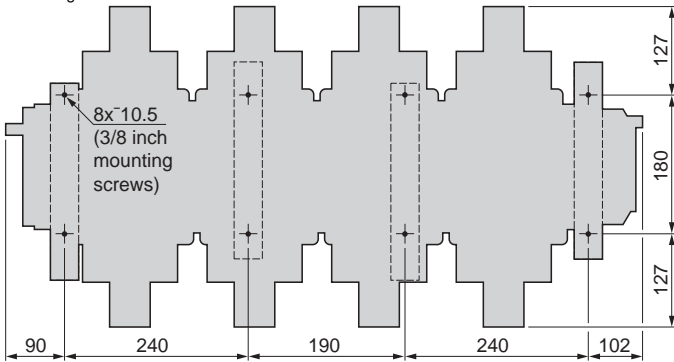

Mounting holes of LC1F780

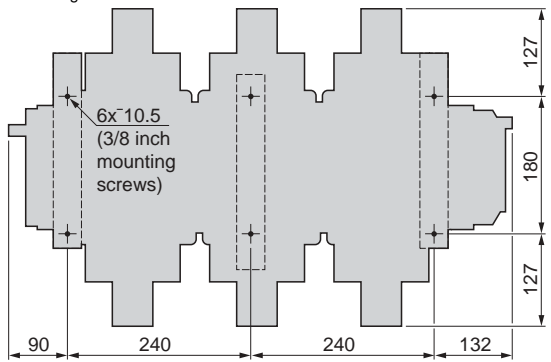

TeSys™ F-Line Contactors and Starters

Dimensions and Mounting


Reversing contactors and changeover contactor pairs LC2F

Horizontally mounted


Dimensions shown in mm (mm x 0.0394 = inches)

For customer assembly, see pages 190 to 193.

2 x LC1F115 to LC1F330

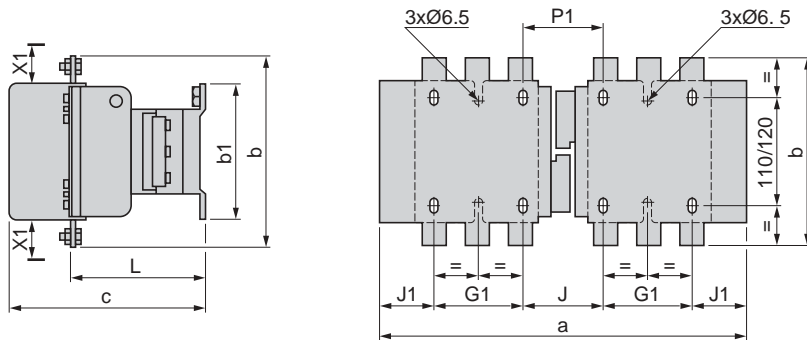

2 x LC1F400, F500, F630, F800

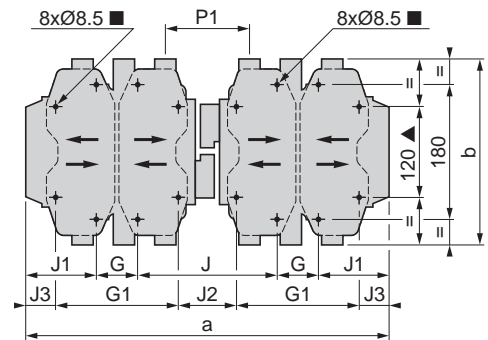

X1 (mm) = Minimum electrical clearance according to operational voltage and breaking capacity

| | 200 to 500 V | 660 to 1000 V | 200 to 690 V | 1000 V |
|------------------|--------------|---------------|--------------|--------|
| LC1F115, LC1F150 | 10 | 15 | - | - |
| LC1F185 | 10 | 15 | - | - |
| LC1F225, LC1F265 | 10 | 15 | - | - |
| LC1F330 | 10 | 15 | - | - |
| LC1F400 | 15 | 20 | - | - |
| LC1F500 | 15 | 20 | - | - |
| LC1F630 | 20 | 30 | - | - |
| LC1F800 | - | - | 10 | 20 |

| 2 x | | a | b | b1 | c | G | G1 | J | J1 | J2 | J3 | L | P1 |
|---------|----|-----|-----|-----|-----|-----|-----|-----|-------|----|------|-------|-----|
| LC1F115 | 3P | 345 | 162 | 137 | 171 | - | 80 | 71 | 57 | - | - | 107 | 77 |
| | 4P | 419 | 162 | 137 | 171 | - | 80 | 108 | 75.5 | - | - | 107 | 77 |
| LC1F150 | 3P | 345 | 170 | 137 | 171 | - | 80 | 71 | 57 | - | - | 107 | 71 |
| | 4P | 422 | 170 | 137 | 171 | - | 80 | 111 | 75.5 | - | - | 107 | 71 |
| LC1F185 | 3P | 357 | 174 | 137 | 181 | - | 80 | 78 | 59.5 | - | - | 113.5 | 78 |
| | 4P | 437 | 174 | 137 | 181 | - | 80 | 118 | 79.5 | - | - | 113.5 | 78 |
| LC1F225 | 3P | 357 | 197 | 137 | 181 | - | 80 | 78 | 59.5 | - | - | 113.5 | 62 |
| | 4P | 437 | 197 | 137 | 181 | - | 80 | 118 | 79.5 | - | - | 113.5 | 54 |
| LC1F265 | 3P | 425 | 203 | 145 | 213 | - | 96 | 109 | 61.5 | - | - | 141 | 100 |
| | 4P | 521 | 203 | 145 | 213 | - | 96 | 157 | 85.5 | - | - | 141 | 100 |
| LC1F330 | 3P | 447 | 206 | 145 | 219 | - | 96 | 124 | 65.5 | - | - | 145 | 107 |
| | 4P | 543 | 206 | 145 | 219 | - | 96 | 172 | 89.5 | - | - | 145 | 107 |
| LC1F400 | 3P | 446 | 206 | 209 | 219 | 80 | 170 | 157 | 64.5 | 67 | 19.5 | 145 | 107 |
| | 4P | 542 | 206 | 209 | 219 | 80 | 170 | 157 | 112.5 | 67 | 67.5 | 145 | 107 |
| LC1F500 | 3P | 485 | 238 | 209 | 232 | 80 | 170 | 156 | 84.5 | 66 | 39.5 | 146 | 112 |
| | 4P | 595 | 238 | 209 | 232 | 140 | 230 | 156 | 79.5 | 66 | 34.5 | 146 | 112 |
| LC1F630 | 3P | 636 | 304 | 280 | 255 | 180 | - | 139 | 68.5 | - | - | 155 | 137 |
| | 4P | 796 | 304 | 280 | 255 | 240 | - | 139 | 88.5 | - | - | 155 | 137 |
| LC1F800 | 3P | 636 | 304 | 280 | 255 | 180 | - | 139 | 68.5 | - | - | 155 | 137 |

■ Except LC1F630 and LC1F800: 4 x Ø 10.5.

▲ Except LC1F630 and LC1F800

TeSys™ F-Line Contactors and Starters Dimensions and Mounting


Reversing contactors and changeover contactor pairs LC2F Vertically mounted

Dimensions shown in mm (mm x 0.0394 = inches)

For customer assembly, with mechanical interlock (MI) LA9F***.


2 x LC1 identical or different ratings (LC1F115 to LC1F800). See pages 190 to 193.

Assembly A

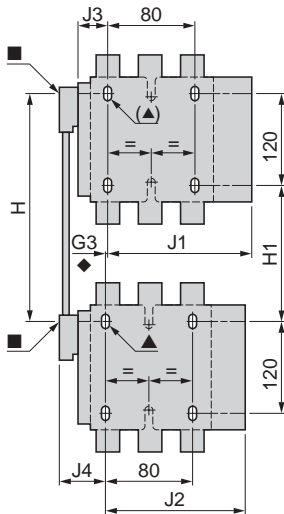


- Mechanical interlock shaft.
- ▲ 4 x Ø6.5 for LC1F115 to LC1F225
- ◆ For assembly of contactors of different ratings only.
- ▼ Mechanical interlock guide bracket.
- * 4 x Ø8.5 for LC1F400, LC1F500 or 4 x Ø10.5 for LC1F630, LC1F800.
- 4 x Ø6.5 for LC1F265.

Assembly B

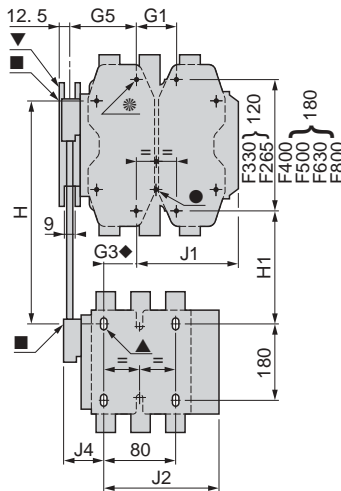

Assembly C

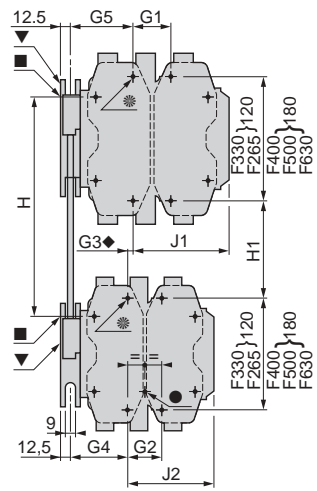


Assembly A (F800 in 3-pole only)

| MI | G3 | | H | | H1 | | J1 | |
|-----------|----|----|-----|-----|-----|-----|-------|-------|
| Catalog # | 3P | 4P | min | max | min | max | 3P | 4P |
| LA9FF4F | 0 | 0 | 200 | 310 | 80 | 190 | 137 | 155.5 |
| LA9FG4F | 3 | 4 | 210 | 300 | 90 | 180 | 139.5 | 159.5 |
| LA9FG4G | 0 | 0 | 220 | 310 | 100 | 190 | 139.5 | 159.5 |

| | J2 | | J3 | | J4 | |
|---------|-------|-------|------|----|------|----|
| | 3P | 4P | 3P | 4P | 3P | 4P |
| LA9FF4F | 137 | 155.5 | 48.5 | 67 | 48.5 | 67 |
| LA9FG4F | 137 | 155.5 | 53 | 73 | 54 | 69 |
| LA9FG4G | 139.5 | 159.5 | 53 | 73 | 53 | 73 |

For customer assembly, mounting recommended on AM1EC*** uprights, 2 x LC1F780

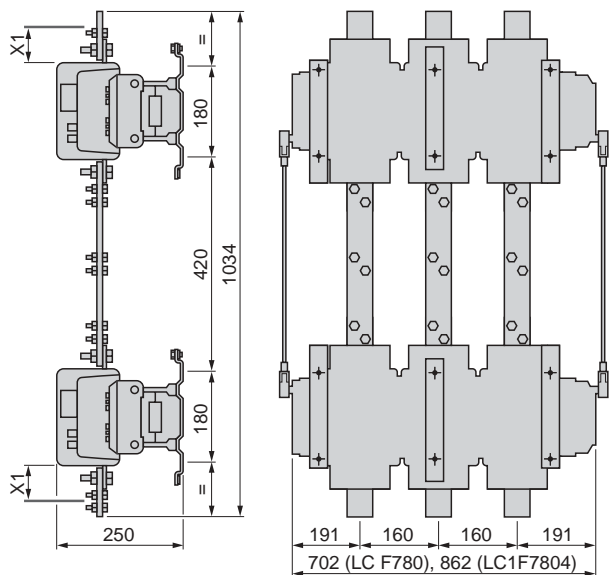

X1 and mounting holes, see page 211.

Assembly B (F800 in 3-pole only)

| MI | G1 | | G3 | | G5 | | H | |
|-----------|-----|-----|----|----|----|----|-----|-----|
| Catalog # | 3P | 4P | 3P | 4P | 3P | 4P | min | max |
| LA9FH4F | 96 | 96 | 21 | 27 | 60 | 83 | 240 | 380 |
| LA9FJ4F | 80 | 80 | 45 | 26 | 83 | 83 | 250 | 380 |
| LA9FK4F | 80 | 140 | 45 | 26 | 83 | 83 | 270 | 380 |
| LA9FL4F | 180 | 240 | 35 | 17 | 74 | 74 | 310 | 380 |
| LA9FH4G | 96 | 96 | 19 | 23 | 60 | 83 | 250 | 380 |
| LA9FJ4G | 80 | 80 | 42 | 22 | 83 | 83 | 250 | 380 |
| LA9FK4G | 80 | 140 | 42 | 22 | 83 | 83 | 270 | 380 |
| LA9FL4G | 180 | 240 | 33 | 13 | 74 | 74 | 310 | 380 |

| | H1 | | J1 | | J2 | | J4 | |
|---------|-----|-----|-------|-------|-------|-------|------|----|
| | min | max | 3P | 4P | 3P | 4P | 3P | 4P |
| LA9FH4F | 110 | 250 | 157.5 | 181.5 | 137 | 155.5 | 48.5 | 67 |
| LA9FJ4F | 80 | 210 | 144.5 | 192.5 | 137 | 155.5 | 48.5 | 67 |
| LA9FK4F | 100 | 210 | 164.5 | 219.5 | 137 | 155.5 | 48.5 | 67 |
| LA9FL4F | 140 | 210 | 248.5 | 328.5 | 137 | 155.5 | 48.5 | 67 |
| LA9FH4G | 120 | 250 | 157.5 | 181.5 | 139.5 | 159.5 | 53 | 73 |
| LA9FJ4G | 90 | 220 | 144.5 | 192.5 | 139.5 | 159.5 | 53 | 73 |
| LA9FK4G | 110 | 220 | 164.5 | 219.5 | 139.5 | 159.5 | 53 | 73 |
| LA9FL4G | 150 | 220 | 248.5 | 328.5 | 139.5 | 159.5 | 53 | 73 |

Assembly C (F800 in 3-pole only)

| MI | G1 | | G2 | | G3 | | G4 | | G5 | |
|-----------|-----|-----|-----|-----|-----|-----|----|----|----|----|
| Catalog # | 3P | 4P | 3P | 4P | 3P | 4P | 3P | 4P | 3P | 4P |
| LA9FH4H | 96 | 96 | 96 | 96 | 0 | 0 | 60 | 83 | 60 | 83 |
| LA9FJ4H | 80 | 80 | 96 | 96 | 23 | 0 | 60 | 83 | 83 | 83 |
| LA9FK4H | 80 | 140 | 96 | 96 | 23 | 0 | 60 | 83 | 83 | 83 |
| LA9FL4H | 180 | 240 | 96 | 96 | 14 | 9 ▼ | 60 | 83 | 74 | 74 |
| LA9FJ4J | 80 | 80 | 80 | 80 | 0 | 0 | 83 | 83 | 83 | 83 |
| LA9FK4J | 80 | 140 | 80 | 80 | 0 | 0 | 83 | 83 | 83 | 83 |
| LA9FL4J | 180 | 240 | 80 | 80 | 9 ▼ | 9 ▼ | 83 | 83 | 74 | 74 |
| LA9FK4K | 80 | 140 | 80 | 140 | 0 | 0 | 83 | 83 | 83 | 83 |
| LA9FL4K | 180 | 240 | 80 | 140 | 9 ▼ | 9 ▼ | 83 | 83 | 74 | 74 |
| LA9FL4L | 180 | 240 | 180 | 240 | 0 | 0 | 74 | 74 | 74 | 74 |

| | H | | H1 | | J1 | | J2 | |
|---------|-----|-----|-----|-----|-------|-------|-------|-------|
| | min | max | min | max | 3P | 4P | 3P | 4P |
| LA9FH4H | 250 | 380 | 130 | 260 | 157.5 | 181.5 | 157.5 | 181.5 |
| LA9FJ4H | 260 | 380 | 110 | 230 | 144.5 | 192.5 | 157.5 | 181.5 |
| LA9FK4H | 280 | 380 | 130 | 230 | 164.5 | 219.5 | 157.5 | 181.5 |
| LA9FL4H | 330 | 380 | 170 | 220 | 248.5 | 328.5 | 157.5 | 181.5 |
| LA9FJ4J | 260 | 380 | 60 | 200 | 144.5 | 192.5 | 144.5 | 192.5 |
| LA9FK4J | 280 | 380 | 100 | 200 | 164.5 | 219.5 | 144.5 | 192.5 |
| LA9FL4J | 325 | 380 | 140 | 195 | 248.5 | 329.5 | 144.5 | 192.5 |
| LA9FK4K | 300 | 380 | 120 | 200 | 164.5 | 329.5 | 164.5 | 219.5 |
| LA9FL4K | 345 | 380 | 160 | 195 | 248.5 | 328.5 | 164.5 | 219.5 |
| LA9FL4L | 380 | 380 | 200 | 200 | 248.5 | 328.5 | 248.5 | 328.5 |

▼ In this case, G4 is greater than G5

TeSys™ F-Line Contactors and Starters


Dimensions and Mounting

Contactors Type LC1F Mounting

Dimensions shown in mm (mm x 0.0394 = inches)

LC1F115 to LC1F330


On panel

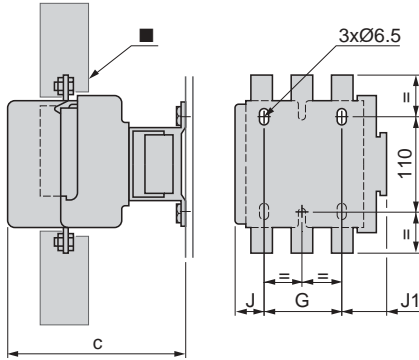

| | | LC1F115, LC1F150 | LC1F185, LC1F225 | LC1 F265 | LC1 F330 |
|-----|----|---------------------|---------------------|-------------|-------------|
| c ▲ | 3P | 171 | 181 | 213 | 219 |
| | 4P | 171 | 181 | 213 | 219 |
| G | 3P | 80 | 80 | 96 | 96 |
| | 4P | 80 | 80 | 96 | 96 |
| J | 3P | 26.5 | 29 | 44.5 | 44.5 |
| | 4P | 45 | 49 | 68.5 | 68.5 |
| J1 | 3P | 57 | 59.5 | 61.5 | 61.5 |
| | 4P | 75.5 | 79.5 | 85.5 | 85.5 |


- Power terminal protection shroud (see page 198)
- ▲ See X1, minimum electrical clearance on pages 210 and 211.

On pre-slotted mounting plate **AM1PA, AM1PB, AM1PC**

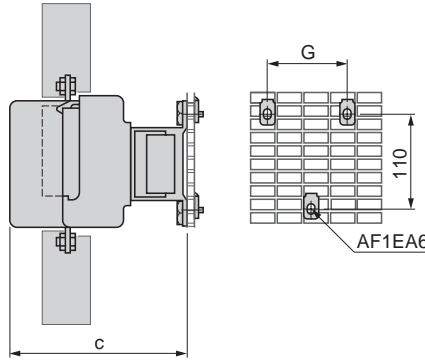

| | | LC1F115, LC1F150 | LC1F185, LC1F225 | LC1 F265 | LC1 F330 |
|-----|----|---------------------|---------------------|-------------|-------------|
| c ▲ | 3P | 171 | 181 | 213 | 219 |
| | 4P | 171 | 181 | 213 | 219 |
| G | 3P | 80 | 80 | 96 | 96 |
| | 4P | 80 | 80 | 96 | 96 |

On rails **DZ5MB** on 120 mm center

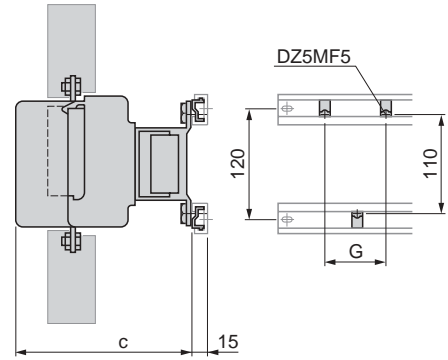


| | | LC1F115, LC1F150 | LC1F185, LC1F225 | LC1 F265 | LC1 F330 |
|-----|----|---------------------|---------------------|-------------|-------------|
| c ▲ | 3P | 171 | 181 | 213 | 219 |
| | 4P | 171 | 181 | 213 | 219 |
| G | 3P | 80 | 80 | 96 | 96 |
| | 4P | 80 | 80 | 96 | 96 |

LC1F

On 2 notched rails **AM1-EC...**

LC1F115 to LC1F330

LC1F400 to LC1F800

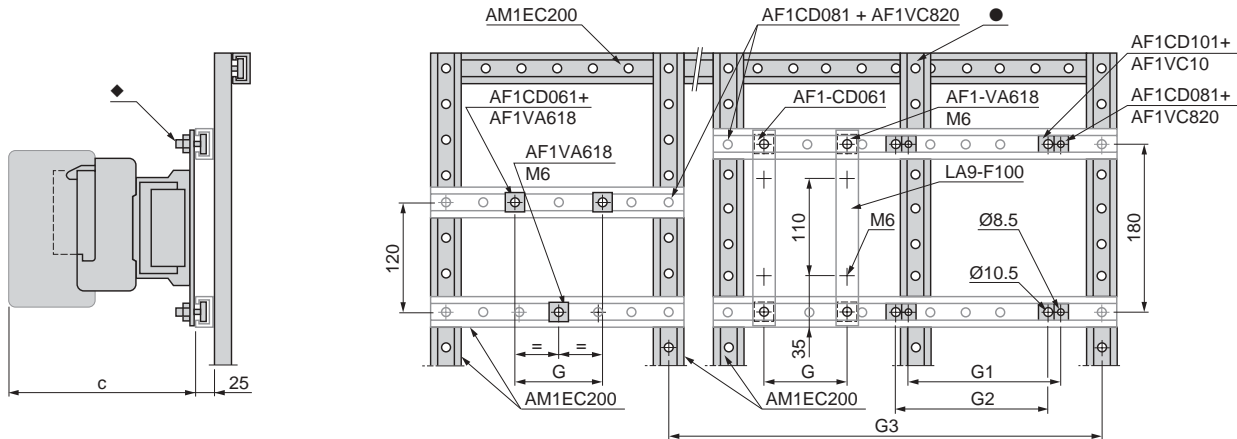

| | | LC1F115, LC1F150 | LC1F185, LC1F225 | LC1F265 | LC1F330 | LC1F400 | LC1F500 | LC1F630 | LC1F780 | LC1F800 |
|-------------|----|---------------------|---------------------|---------|---------|---------|---------|---------|--------------|---------|
| c | 3P | 165 ▼ | 176 | 207 | 213 | 219 | 232 | 255 | 255 | 255 |
| | 4P | 165 ▼ | 176 | 207 | 213 | 219 | 232 | 255 | 255 | — |
| G (M6) | 3P | 80 | 80 | 96 | 96 | — | — | — | — | — |
| | 4P | 80 | 80 | 96 | 96 | — | — | — | — | — |
| G1 (Ø 8.5) | 3P | — | — | — | — | 80 | 80 | — | — | — |
| | 4P | — | — | — | — | 80 | 140 | — | — | — |
| G2 (Ø 10.5) | 3P | — | — | — | — | — | — | 180 | See page 211 | |
| | 4P | — | — | — | — | — | — | 240 | 1/129 | — |


- ◆ **AF1CD...** and **AF1VA...**
- This **AM1EC200** upright is required when G2 or G3 is greater than 700 mm.
- ▼ Add 6 mm with timer block on **LC1F**.

TeSys™ F-Line Contactors and Starters Dimensions and Mounting


Contactors Type LC1F Cabling Accessories

Dimensions shown in mm (mm x 0.0394 = inches)

Paralleling links (set of 4)
LA9FF, FG, FH602




LA9FK, LA9FL602




| | LA9FF602 | LA9FG602 | LA9FH602 | LA9FK602 | LA9FL602 |
|----|----------|----------|----------|----------|----------|
| a | 25 | 30 | 40 | 50 | 60 |
| b | 45 | 55 | 60 | 85 | 100 |
| b1 | 30 | 35 | 40 | 55 | 65 |
| c | 4 | 5 | 8 | 10 | 10 |
| G | - | - | - | 22 | 26 |
| H | 37.5 | 45 | 52.5 | 70 | 85 |
| H1 | 12.5 | 15 | 15 | 14 | 17 |
| H2 | - | - | - | 22 | 26 |
| Ø1 | 6.5 | 9 | 11 | 11 | 13 |
| Ø2 | 11 | 11 | 13 | 11 | 14 |

Bars for 3-pole star connection LA9F•601




| | LA9FF601 | LA9FG601 | LA9FH601 | LA9FK601 | LA9FL601 |
|---|-----------|------------|-----------|----------|----------|
| a | 89 | 100 | 121 | 140 | 200 |
| b | 15 | 20 | 20 | 30 | 40 |
| c | 3 | 3 | 5 | 5 | 8 |
| Ø | 6.5 x 8.5 | 8.5 x 10.5 | 10.5 x 13 | 11 | 13 |

Brackets LA9F•981 (set of 3) for back connection

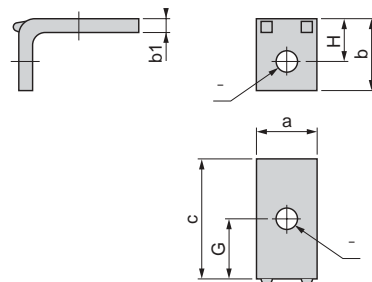


| | LA9FF981 | LA9FG981 | LA9FJ981 | LA9FK981 | LA9FL981 |
|----|----------|----------|----------|----------|----------|
| a | 15 | 20 | 25 | 30 | 40 |
| b | 18 | 23 | 29 | 35 | 48 |
| b1 | 3 | 3 | 4 | 5 | 8 |
| c | 42 | 45 | 55 | 52 | 86 |
| G | 24 | 26 | 32.5 | 26 | 45 |
| H | 10.5 | 13 | 16.5 | 20 | 28 |
| Ø | 6.5 | 9 | 11 | 11 | 13 |

Brackets LA9F•979 (set of 3) for side connection

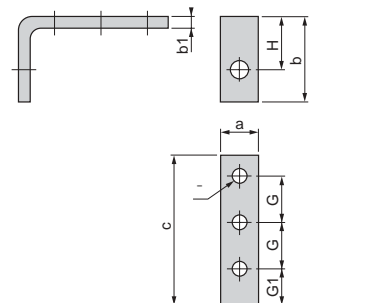

| | LA9FF979 | LA9FG979 | LA9FJ979 | LA9FK979 | LA9FL979 |
|----|----------|----------|----------|----------|----------|
| a | 15 | 20 | 25 | 30 | 40 |
| b | 54 | 58 | 63.5 | 68 | 117 |
| b1 | 5 | 5 | 6 | 6 | 10 |
| c | 80 | 92 | 120 | 120 | 130 |
| G | 24 | 28 | 37 | 37 | 37.5 |
| G1 | 20 | 22 | 29 | 29 | 35 |
| H | 36 | 39 | 41 | 42 | 76 |
| Ø | 6.5 | 9 | 11 | 11 | 13 |

Wide range brackets LA9F•980 (set of 3)

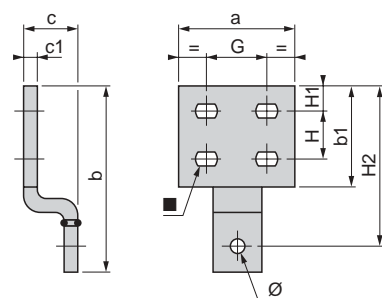

| | LA9FF980 | LA9FG980 | LA9FJ980 | LA9FK980 | LA9FL980 |
|----|----------|----------|----------|------------|------------|
| a | 35 | 40 | 50 | 60 | 100 |
| b | 70.5 | 82.5 | 98.5 | 114 | 154 |
| b1 | 40 | 45 | 55 | 65 | 85 |
| c | 29 | 29 | 33 | 33 | 43 |
| c1 | 3 | 3 | 5 | 5 | 10 |
| G | 18 | 20 | 25 | 29 | 53 |
| H | 18 | 20 | 22 | 26 | 40 |
| H1 | 10 | 12 | 14 | 17 | 20 |
| H2 | 60.5 | 72.5 | 84.5 | 97 | 132 |
| Ø | 6.5 | 9 | 11 | 11 | 13 |
| ■ | Ø7 x 10 | Ø9 x 12 | Ø11 x 14 | Ø12.5 x 15 | Ø12.5 x 15 |

TeSys™ F-Line Contactors and Starters Schematics




Contactors Type LC1F Schematics

2-, 3-, and 4-pole contactors

LC1F115 to LC1F630 (coil LX1F AC)

LC1F115 to LC1F630 (coil LX4F DC)
LC1F115 to LC1F265 (coil LX9F AC)
LC1F800 (coil LX8F AC/DC)

LC1F780, 3- and 4-poles AC or DC



Front-mounting contact blocks

Instantaneous auxiliary contacts

1 N.O. LA1DN10 ■







1 N.C. LA1DN01 ■

1 N.O. + 1 N.C. LA1DN11

2 N.O. LA1DN20

2 N.C. LA1DN02

2 N.O. + 2 N.C. LA1DN22







1 N.O. + 3 N.C. LA1DN13

4 N.O. LA1DN40

4 N.C. LA1DN04

2 N.O. + 2 N.C. including 1 N.O. + 1 N.C. make before break LA1DC22

3 N.O. + 1 N.C. LA1DN31



■ Items in brackets are for blocks mounted on right-hand side of contactor.

Front-mounting contact blocks

Instantaneous auxiliary contacts with terminal referencing conforming to standard EN 50012 (References: pages 218 and 219)

1 N.O. + 1 N.C. LA1DN11P







1 N.O. + 1 N.C. LA1DN11G

1 N.O. + 1 N.C. LA1DN11M

2 N.O. + 2 N.C. LA1DN22P

2 N.O. + 2 N.C. LA1DN22G

2 N.O. + 2 N.C. LA1DN22M



Front-mounting contact blocks





Dust and damp protected instantaneous auxiliary contacts

2 N.O. (24-50 V) LA1DX20

2 N.O. (5-24 V) LA1DY20

2 N.O. protected (24-50 V) + 2 N.O. standard LA1DZ40

2 N.O. protected (24-50 V) + 1 N.O. + 1 N.C. standard LA1DZ31






Front-mounting contact blocks

Time delay auxiliary contacts

OnDelay 1 N.O. + 1 N.C. LA2DT•


Off Delay 1 N.O. + 1 N.C. LA3DR•

On Delay N.C. contact with N.O. break before make contact LA2DS•



Interface module

LA4FWB






Standard AC coils

LX1FF, FG, FJ to LX1FL
LX1FH0422 to LX1FH3802

LX1FH0202 to LX1FH0362
LX1FH4402 to LX1FH10002
LX8F8•W (AC / DC)

LX1FX

Rectifier supplied and attached to the contactor



Special AC coils




LX9FF, LX9FG

LX9FH•••2


LX9FJ, LX9FK, LX9FL

DC coils

LX4FF, FG, FH, FJ, FK, FL, FX ■




- ◆ Breaking on AC side
Drop-out time 50 ms
- ▲ Breaking on DC side
Drop-out time 20 ms



■ 2 coils in series


Reversing Contactors and Changeover Contactors

Reversing contactors for motor control, horizontally mounted
2 x LC1F

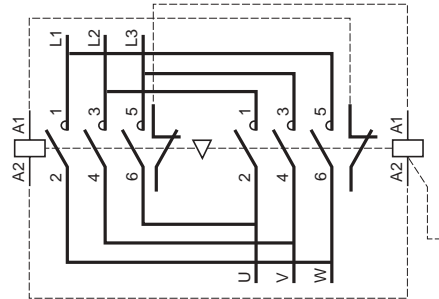


Dashed lines indicate suggested customer wiring to electrically interlock coils using quantity of 2 LA1DN•1 auxiliary contact blocks.


Reversing contactors for motor control, vertically mounted
2 x LC1F




Changeover contactor pairs for distribution, horizontally mounted
2 x LC1F

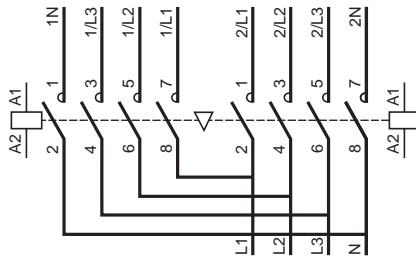

Changeover contactor pairs for distribution, vertically mounted
2 x LC1F

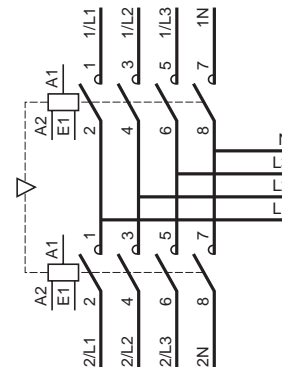

Electrical interlocking of reversers with:
mechanical interlock LA9F•••
without integrated electrical contacts



Note: Must use quantity of 2 LA1DN•1 auxiliary contact blocks to provide electrical interlocking of coils. See diagram with dashed lines above.

TeSys™ F-Line Contactors and Starters

LR9F Solid State Overload Relays - Characteristics

Introduction


The LR9F solid state overload relay provides the accurate, repeatable protection of a solid state device, while still maintaining the ease of installation of a traditional overload relay.

The LR9F provides protection against:



- Motor Overload
- Failure or Phase unbalance of 30% or greater
- Prolonged starting times
- Locked rotor conditions

The LR9F overload relays have 8 current ranges, spanning 30 amps up to 630 amps. They are available in Class 10 trip or Class 20 trip models. The device is manually reset via a clearly labeled button on the front face. A separate attachment is available for remote reset or test tripping of the relay. All units incorporate both a normally open and normally closed contact for control circuit wiring.

The LR9F is designed to directly mount on the load side of a LC1F contactor, minimizing space and wiring time. Lugs for the LR9F are ordered separately (see page 220 for selection). For LR9F relays up to 185 amps, an interposing touch-safe terminal block may be ordered in place of lugs, making power wiring even easier.

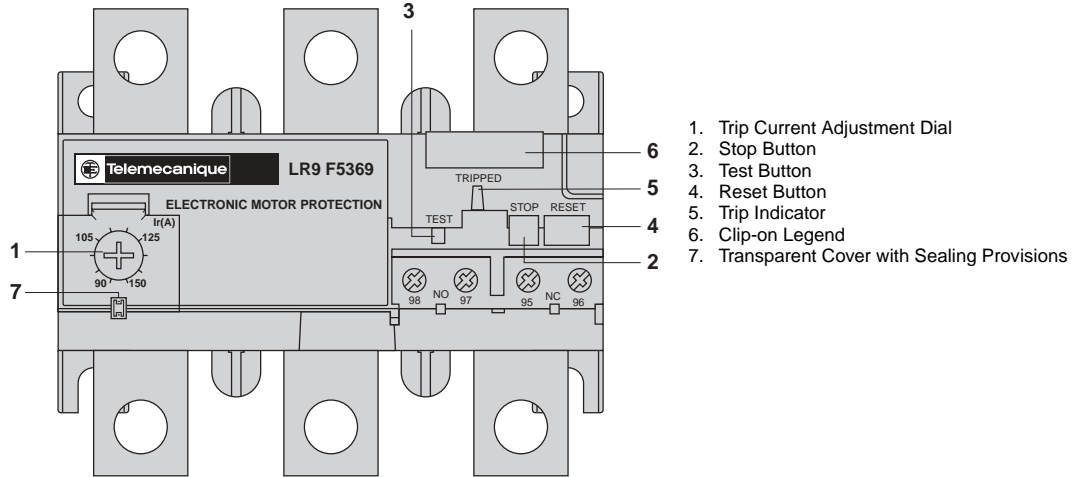

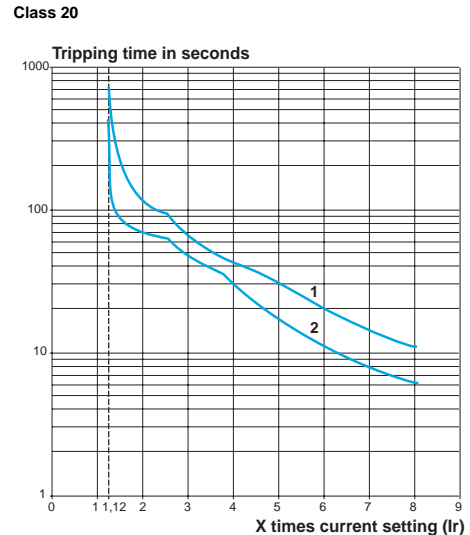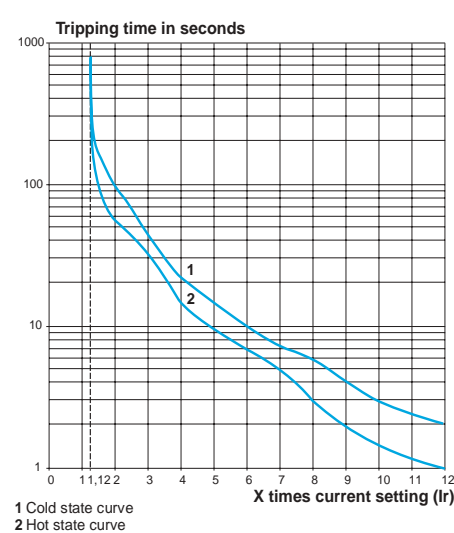


LR9F Tripping Curve
Average operating times depending on multiples of the current setting



TeSys™ F-Line Contactors and Starters

LR9F Solid State Overload Relays - Characteristics

Environment

| | | | |
|---|--|-----|--|
| Conforming to standards |  Meets the essential requirements of LV & EMC directives. | | IEC 60947-1, 60947-4-1, 255-8, and VDE 0660EN 60947-1. 60947-4-1 |
| Approvals |  E164353 NKCR  LR43364 3211 03 | | UL508; CSA 22-2, No.14; PTB Pending |
| Degree of protection | Conforming to VDE 0106 | | IP 20 - Protection against direct finger contact with LA9F103 insulated terminal blocks or LA9F7/LA7F7 shrouds |
| Protective treatment | Standard version | | "TH" |
| Ambient air temperature around the device (conforming to IEC 60255-8) | Storage | | -40 to + 85 °C (-40 to +185 °F) |
| | Normal operation | | -20 to + 55 °C (-4 to +131 °F) |
| Maximum operating altitude | Without derating | m | 2000 |
| Operating positions without derating | In relation to normal vertical mounting plane | | All positions |
| Shock resistance | Permissible acceleration conforming to IEC 60068-2-7 | | 13 g - 11 ms |
| Vibration resistance | Permissible acceleration conforming to IEC 60068-2-6 | | 2 g |
| Dielectric strength at 50 Hz | Conforming to IEC 60255-5 | kV | 6 |
| Impulse withstand voltage | Conforming to IEC 60801-5 | kV | 4 |
| Resistance to electrostatic discharges | Conforming to IEC 60801-2 | kV | 8 (in air) 6 (in indirect mode) |
| Resistance to radio-frequency conducted disturbances | Conforming to IEC 60801-3 and NF C 46-022 | V/m | 10 |
| Resistance to fast transient currents | Conforming to IEC 60801-4 | kV | 2 |
| Electromagnetic compatibility | EN50081-1 & 2, EN50082-2 | | Meets test requirements |

Power Circuit Characteristics

| Relay Type | | LR9F | F5•57 | F5•63 F5•67 F5•69 | F5•71 | F7•75 | F7•79 | F7•81 |
|--|-----------------------------|------------------|-----------|-------------------------|-----------|-----------|-----------|-----------|
| Rated insulation voltage (Vi) | Conforming to IEC 60947-4 | V | 1000 | | | | | |
| Rated operational voltage (Ve) | Conforming to VDE 0110 gr C | V | 1000 | | | | | |
| Rated impulse withstand voltage (Vimp) | Conforming to IEC 60947-1 | kV | 8 | | | | | |
| Rated operational current (Ie) | | A | 30 to 630 | | | | | |
| Frequency limits | Of the operating current | Hz | 50/60 | | | | | |
| Power circuit connections | Width of terminal lug | mm (in) | 20 (0.78) | 25 (0.98) | 25 (0.98) | 30 (1.18) | 40 (1.57) | 40 (1.57) |
| | Clamping screw | | M6 | M8 | M10 | M10 | M10 | M12 |
| | Tightening torque | lb • in N • m | 90 10 | 160 18 | 310 35 | 310 35 | 310 35 | 515 58 |

Auxiliary contact characteristics


| Rated thermal current | | A | 5 | | | | | |
|--|----------------------------------|------------------|-----------------|----------|---------|---------|-----|-----|
| Control circuit connections | Stranded cable without cable end | 1 conductor | mm ² | Minimum | | Maximum | | |
| | | | | 1 x 0.75 | 1 x 4.0 | | | |
| | | 2 conductors | mm ² | 2 x 1.0 | | 2 x 2.5 | | |
| | | | | 2 x 1.0 | | 2 x 2.5 | | |
| | 1 conductor | AWG | 1 x 18 | | 2 x 12 | | | |
| | | | 2 x 16 | | 2 x 14 | | | |
| | Stranded cable with cable end | 1 conductor | mm ² | 1 x 0.75 | | 1 x 2.5 | | |
| | | | | 2 x 1.0 | | 2 x 1.5 | | |
| | Solid cable | 1 conductor | mm ² | 1 x 0.75 | | 1 x 2.5 | | |
| | | | | 2 x 1.0 | | 2 x 1.0 | | |
| Tightening torque | | lb • in N • m | 11 1.2 | | | | | |
| | | | | | | | | |
| Maximum sealed consumption of coils on controlled contactors | AC control | V | 24 | 48 | 110 | 220 | 380 | 600 |
| | | VA | 100 | 200 | 400 | 600 | 600 | 600 |
| | DC control | V | 24 | 48 | 110 | 220 | 440 | - |
| | | W | 100 | 100 | 50 | 45 | 25 | - |

TeSys™ F-Line Contactors and Starters

LR9F Solid State Overload Relays - Selection



LR9F53...




LR9F73...

Three-Phase Overload Relays ■

| Current Setting Range Amps | For Direct Mounting To Contactor LC1.../CR1F... | Class 10 Trip ▲ Catalog Number | Class 20 Trip ▲ Catalog Number |
|-------------------------------|--|-----------------------------------|-----------------------------------|
| 30 to 50 | F115 to F185 | LR9F5357 | LR9F5557 |
| 48 to 80 | F115 to F185 | LR9F5363 | LR9F5563 |
| 60 to 100 | F115 to F185 | LR9F5367 | LR9F5567 |
| 90 to 150 | F115 to F185 | LR9F5369 | LR9F5569 |
| 132 to 220 | F185 ♦, F265 | LR9F5371 | LR9F5571 |
| 200 to 330 | F265 to F500 | LR9F7375 | LR9F7575 |
| 300 to 500 | F265 to F500 | LR9F7379 | LR9F7579 |
| 380 to 630 | F400 to F630 | LR9F7381 | LR9F7581 |

- When mounting overload relays **LR9F5•57** to **LR9F5•71** directly beneath the contactor it is recommended that the relays be additionally supported by a mounting plate. For sizes **LR9F5•75** to **LR9F7•81** use of the supporting mounting plate is mandatory. See page 221 for selection table.
- ▲ IEC standard 60947-4 specifies the following trip times when the overload relay senses 7.2 times the setting current:
Class 10: between 4 and 10 seconds
Class 20: between 6 and 20 seconds
- ♦ Interconnection kit **LA7F407** is required to mount an **LR9F•71** to an **LC1F185**.

Lug Kits




DZ2F..

Lugs can be ordered either individually or in sets of six. In some cases the LR9F overload relay mounted directly on the bottom of LC1F contactor will require a different size lug than the contactor itself. Refer to the table below to select the appropriate size lug for your choice of contactor and overload. If all 6 lugs (three for line side of contactor, three for load side of overload relay) are the same, Square D offers a pre-packaged set of six lugs. If the two sizes are different, order 3 of each size lug. Mounting hardware (screws, washers, nuts) are provided with the contactors and overload relays, not with the lugs.

| Overload Relay | Directly mounted to contactor LC1.... | Cable size AWG range | | Lug Catalog Number | |
|-------------------|--|--------------------------|-------------------------|-----------------------------|----------------------------|
| | | Line side (of contactor) | Load side (of overload) | Line side (of contactor) | Load side (of overload) |
| LR9F5•57 to F5•69 | F115 | 14 to 2/0 | 6 to 3/0 | 3 ea. DZ2FF1 | 3 ea. DZ2FG1 |
| LR9F5•57 to F5•71 | F150 or F185 | 6 to 3/0 | | 1 ea. DZ2FG6 | |
| LR9F5•71 | F265 | 6 to 300 MCM | | 1 ea. DZ2FH6 | |
| LR9F7•75 to F7•79 | F265 or F330 | 6 to 300 MCM | 4 to 500 MCM | 3 ea. DZ2FH1 | ★ |
| LR9F7•75 to F7•81 | F400 | 4 to 500 MCM | 4 to 500 MCM | 3 ea. DZ2FJ1 | ★ |
| LR9F7•75 to F7•81 | F500 | 2 x 2 to 600 MCM | 4 to 500 MCM | 3 ea. DZ2FK1 | ★ |
| LR9F7•81 | F630 | 3 x 2 to 600 MCM | 4 to 500 MCM | DZ2FL1 DZ2FL2 DZ2FL3 | ★ |

★ Customer to obtain from local supplier.

Insulated Terminal Blocks



LR9F73...


For contactors LC1F115, LC1F150, and LC1F185, an available touch-safe terminal block may be used in place of lugs for power connections

| Insulated terminal block | Cable size AWG range | Suitable for contactor LC1.../CR1.... | Suitable for overload relay LR9..... |
|--------------------------|-------------------------|--|---|
| LA9F103 | #6 to 300 MCM | F115, F150, F185 | 5•57, F5•63, F5•67, F5•69 |


TeSys™ F-Line Contactors and Starters

LR9F Solid State Overload Relays - Accessories


Mounting Plate for Overload Relay

| | | |
|--|---|----------------|
|  <p>LA7F90•</p> | Provides overload relay support when mounted directly to F-Line Contactor For use with relays: | Catalog Number |
| | LR9F5•57, F5•63, F5•67, F5•69 and F5•71 | LA7F901 |
| | LR9F7•75, F7•79 and F7•81 | LA7F902 |

Power Terminal Protection Shrouds, Single-Pole

| | | |
|--|---|----------------|
|  <p>LA9F70•</p> | These clear plastic protection shrouds are an effective means to meet international touch-safe requirements for power terminals. They are designed to be used with power cables that have been bolted to the terminal. <i>NOTE: The protection shrouds do not attach to contactors or overload relays utilizing DZ2F lug kits.</i> | |
| | For use with relays | Catalog Number |
| | LR9F5•57 | LA9F701 |
| | LR9F5•63, F5•67, F5•69 | LA9F702 |
| | LR9F5•71 | LA9F705 |
| LR9F7•75, F7•79, F7•81 | LA9F703 | |

Power Terminal Protection Shrouds, 3-Poles
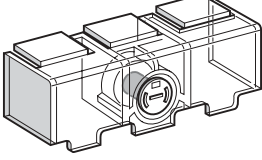
| | | |
|--|-------------------------------|----------------|
|  <p>LA7F70•</p> | For use with relays | Catalog Number |
| | LR9F5•57, F5•63, F5•67, F5•69 | LA7F701 |
| | LR9F5•71 | LA7F702 |
| | LR9F7•75, F7•79, F7•81 | LA7F703 |

Connection Accessories Required (for mounting overload relays beneath reversing contactors)

| Application | For relays | For contactor | Set of 3 bars Catalog Number |
|----------------------------|-------------------------------|------------------|---------------------------------|
| | LR9F5•57, F5•63, F5•67, F5•69 | LC1F115 | LA7F401 |
| | LR9F5•57, F5•63 | LC1F150 and F185 | LA7F402 |
| | LR9F5•71 | LC1F185 | LA7F407 |
| | LR9F5•71 | LC1F265 | LA7F403 |
| | LR9F7•75, F7•79 | LC1F265 to F400 | LA7F404 |
| | LR9F7•81 | LC1F400 | LA7F404 |
| | LR9F7•75, F7•79, F7•81 | LC1F500 | LA7F405 |
| | LR9F7•81 | LC1F630 | LA7F406 |
| Marking accessories | | | |
| | | | |
| Description | Sold in units of: | | Catalog Number |
| Marker holder, snap-in | 100 | | LA7D903 |

Control Accessories

| Description | Sold in lots of | Catalog Number | | | | | | |
|--|---|----------------|-----------|----|-----|---------|---------|---------|
| Remote electrical reset snap-on module ■ | 1 | LA7D03• ▲ | | | | | | |
| Remote reset function control by flexible cable (length = 0.5 m / 0.02") | 1 | LA7D305 | | | | | | |
| Locking Device for "Stop" button | 10 | LA7D901 | | | | | | |
| Remote Stop and/or Reset function control | Adaptor for door mounted operator | 1 | LA7D1020 | | | | | |
| | Rod (snap-off end to obtain required length, between 17 and 120 mm) | 1 | ZA2BZ13 | | | | | |
| | Operating head for spring return pushbutton | 1 | ZA2BA8602 | | | | | |
| Standard control circuit voltages | | | | | | | | |
| Volts | 12 | 24 | 48 | 96 | 110 | 220/230 | 380/400 | 415/440 |
| AC 50/60 Hz | – | B | E | – | F | M | Q | N |
| Consumption, inrush and sealed: < 100 VA | | | | | | | | |
| DC | J | B | E | DD | F | M | – | – |
| Consumption, inrush and sealed: < 100 W | | | | | | | | |

■ Part number to be completed by adding coil voltage code.


▲ The time for which the coil of remote electrical reset device LA7D03 can remain energized depends on its rest time: 1 s pulse duration with 9 s rest time; 5 s pulse duration with 30 s rest time; 10 s pulse duration with 90 s rest time: maximum pulse duration of 20 s with rest time of 300 s. Minimum impulse time: 200 ms.

TeSys™ F-Line Contactors and Starters

LR9F Solid State Overload Relays - Dimensions


Common side view

LR9F5•71

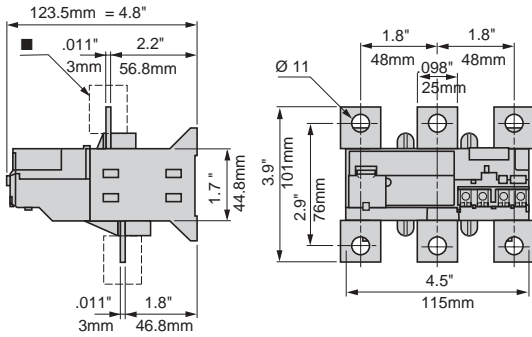

■ Terminal shroud LA9F70•.


LR9F5•57, F5•63, F5•67, F5•69

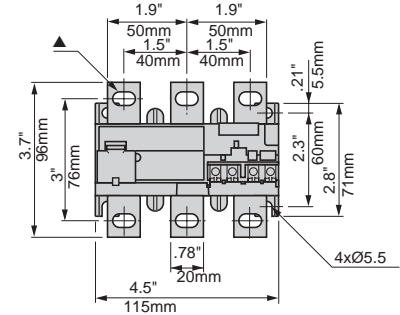

▲ 6.5 x 13.5 for LR9F5•57 and 8.5 x 13.5 for LR9F5•63, F5•67, F5•69.


Common side view

LR9F7•75, F7•79, F7•81

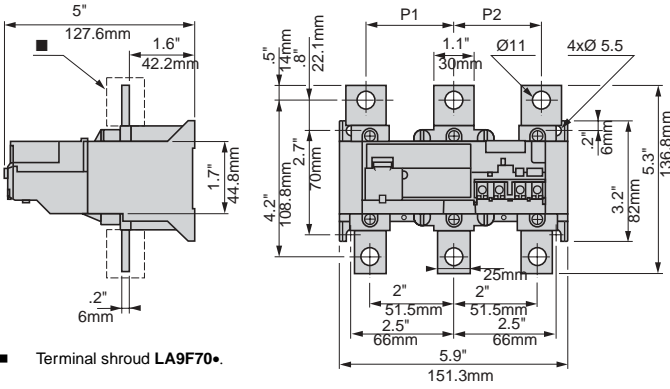

■ Terminal shroud LA9F70•.


LR9F7•81 (for mounting beneath LC1F630)

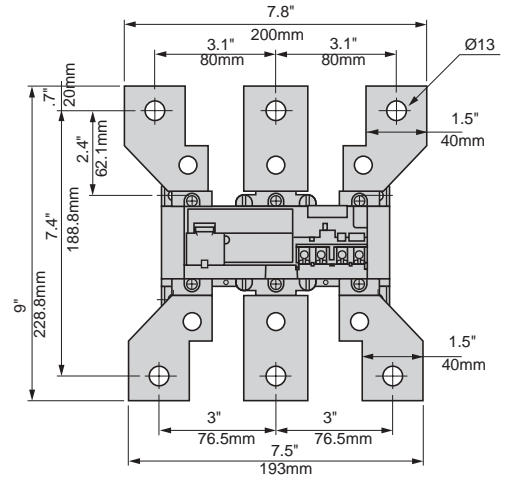

| | P1 | P2 |
|-----------------|----|----|
| LR9F7•75 | 48 | 48 |
| LR9F7•79, F7•81 | 55 | 55 |


TeSys™ F-Line Contactors and Starters LR9F Solid State Overload Relays - Mounting

Direct mounting beneath contactor LC1F

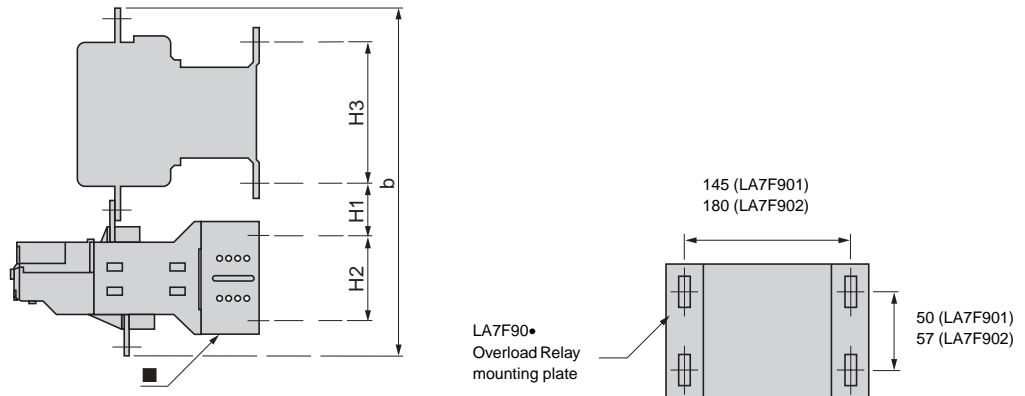

| LC1 contactors | With LR9 relays | b | H1 | H2 | H3 |
|----------------|----------------------------|-----|-----|-------|-----|
| F115 | F5•57, F5•63, F5•67, F5•69 | 240 | 30 | 76 | 120 |
| F150 | F5•57, F5•63, F5•67, F5•69 | 246 | 30 | 76 | 120 |
| F185 | F5•57, F5•63, F5•67, F5•69 | 250 | 30 | 76 | 120 |
| F225 | F5•71 | 273 | 40 | 76 | 120 |
| | F7•75, F7•79 | 308 | 50 | 108.8 | 120 |
| F265 | F5•71 | 279 | 40 | 76 | 120 |
| | F7•75, F7•79 | 314 | 60 | 108.8 | 120 |
| F330 | F7•75, F7•79 | 317 | 60 | 108.8 | 120 |
| F400 | F7•75, F7•79, F7•81 | 317 | 60 | 108.8 | 180 |
| F500 | F7•75, F7•79, F7•81 | 346 | 70 | 108.8 | 180 |
| F630 | F7•81 | 510 | 110 | 108.8 | 180 |

Direct mounting beneath reversing contactors or star-delta contactors

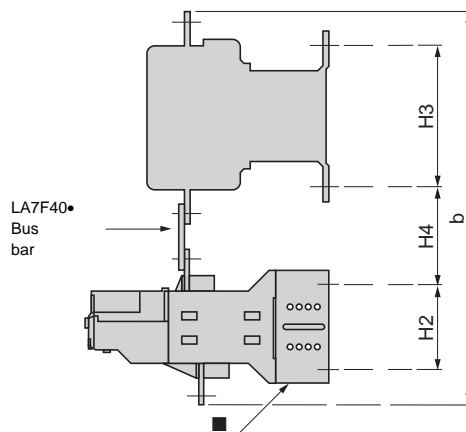

Dimensions shown in mm
mm x.0394 = in


| LC1 contactors | With LR9 relays | b | H4 | H2 | H3 |
|----------------|----------------------------|-----|-----|-------|-----|
| F115 | F5•57, F5•63, F5•67, F5•69 | 279 | 60 | 76 | 120 |
| F150 | F5•57, F5•63, F5•67, F5•69 | 283 | 60 | 76 | 120 |
| F185 | F5•57, F5•63, F5•67, F5•69 | 285 | 60 | 76 | 120 |
| F225 | F5•71 | 319 | 80 | 76 | 120 |
| | F7•75, F7•79 | 360 | 100 | 108.8 | 120 |
| F265 | F5•71 | 332 | 90 | 76 | 120 |
| | F7•75, F7•79 | 363 | 100 | 108.8 | 120 |
| F330 | F7•75, F7•79 | 364 | 100 | 108.8 | 120 |
| F400 | F7•75, F7•79, F7•81 | 364 | 100 | 108.8 | 180 |
| F500 | F7•75, F7•79, F7•81 | 390 | 110 | 108.8 | 180 |
| F630 | F7•81 | 509 | 120 | 108.8 | 180 |

■ Relay mounting plate, see page 221.

TeSys™ F-Line Contactors and Starters


LR9F Solid State Overload Relays - Wiring Diagrams

Wiring Diagram LR9F

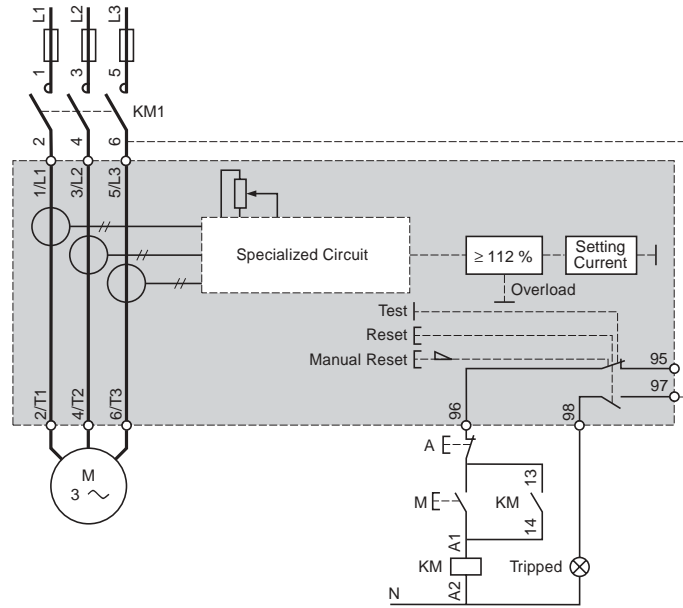

Setting the special functions of LR9F thermal overload relays

Setting the Relay

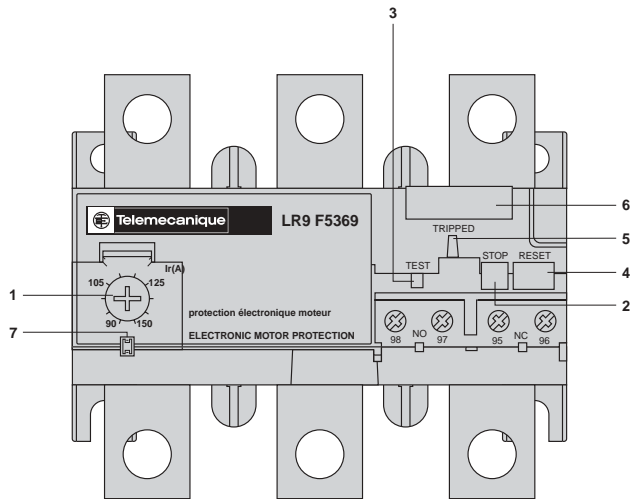


- Lift the transparent cover (7) to gain access to the settings and controls.
- Adjust relay by turning dial (1), which is graduated directly in amperes.
- The setting can be locked by sealing of the cover (7).


2: Stop Function

- The Stop function is obtained by pressing the red "STOP" button (2).
- Pressing the "STOP" button actuates the N.C. contact, but does not affect the N.O. contact.
- The "STOP" button can be locked by installing a "U" clip (catalog number LA7D901).

3: Test Function



Test



Trip Indicator

- The Test function is activated by pressing the red "TEST" button (3) with a screwdriver.
- Pressing the "TEST" button simulates tripping of the relay and actuates both N.O. and N.C. contacts, and also actuates the trip indicator (5).

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors – Characteristics

Magnetic latching contactors of both block and bar mounted types include a special electromagnet which enables them to remain in the “on” position when the coil is no longer energized.

The special properties of magnetic latching contactors make them suitable for a large number of applications:

Properties

- Retention of the sequence memory in automatic control equipment in the event of a control circuit failure.
- Energy saving, since the source of supply to the coil does not need to supply current when the contactor is latched in the closed state.
- Change of state from “Closed” to “Open” by current signal through the coil.
- Unaffected by line interference.
- Utilization of contactors beyond their breaking capacity as operations are performed off Load.
- Contactors are silent in the latched position.

Applications

- Refineries, power stations, excitation circuits.
- Contactors remaining in the closed state for long periods.
Example: refineries, power supplies, low voltage distribution.
- Selective opening control.
- No unwanted opening and closing of the main power poles.
- Current carrying at voltages up to 1000 Volts.

Operation of the electromagnet

CR1F contactors

CR1F magnetic latching contactors include a double coil with 3 terminals comprising a latching winding and an unlatching winding. The 2 windings have a common point which can necessitate special wiring precautions when the latching supply is separate from the unlatching supply.

The power supplies may be AC or DC. For DC operation, the polarities indicated must be complied with.

Operating precautions:

- the 2 windings must not be energized simultaneously,
- a winding must not be energized continuously,
- supply to the coils must be via momentary contacts.

Manual opening: If the control voltage is not present, the contactor can be unlatched manually.

CR1B contactors

CR1B magnetic latching contactors included a single coil, supplied with DC or AC through a rectifier.

Latching is obtained by direct supply of the coil in one direction of current flow.




Unlatching is obtained by a reverse current, adjusted by resistors.

LC1D contactors

For applications using smaller contactor sizes than those described in the following pages, it is possible to obtain the same function by the addition of a mechanical latching block type **LA6DK**, which can be mounted on **LC1D** contactors (information on D-line contactors starts on page 79).

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors – Characteristics

| Type | | CR1F150 | CR1F185 | CR1F265 | CR1F400 | CR1F500 | CR1F630 | CR1BL | CR1BM | CR1BP | CR1BR | |
|---|--|---------|--|---------|---------|---------|---------|-------|--|----------------------------|-------|------|
| Environment | | | | | | | | | | | | |
| Rated insulation voltage (Vi) | Conforming to IEC 60947-4-1, BS 775, 60947-4 | V | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| | Conforming to VDE 0110 grC | V | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 |
| Conforming to standards |  Meets the essential requirements of the LV & EMC directives | | IEC 60947-4, NFC 63-110, VDE 0660, BS 5424, JEM 1038 | | | | | | | | | |
| Approvals |  E164862 NLDX ▾  LR43364 3211 04 ▾ | | ASE, CSA, UL, BV, GL, LROS, USSR, NORSE VERITAS, RINA | | | | | | | | | |
| Degree of protection | Conforming to IEC 60529 | | IP 20 front face with shrouds LA9F | | | | | | | | | |
| | Conforming to VDE 0106 | | Protection against direct finger contact with shrouds LA9F | | | | | | | | | |
| Protective treatment | Standard version | | "TH" | | | | | | "TC" | | | |
| | Special version | | – | | | | | | "TH" | | | |
| Ambient air temperature around the device | Storage | | -60 to +80 °C (-76 to +176 °F) | | | | | | | | | |
| | For operation at Vc | | -15 to +70 °C (5 to +158 °F) | | | | | | | -15 to +60°C (5 to +158°F) | | |
| Maximum operating altitude | Without derating | | 3000m (9800 ft.) | | | | | | | | | |
| Operating positions | Without derating | | ± 5° in relation to normal vertical mounting position | | | | | | ± 30° in relation to normal vertical mounting position | | | |

Pole characteristics

| Number of poles | | | 3 or 4 | 3 or 4 | 3 or 4 | 3 or 4 | 3 or 4 | 3 or 4 | 3 or 4 | 1, 2, 3 or 4 | 1, 2, 3 or 4 | 1, 2, 3 or 4 | 1, 2, 3 or 4 |
|--|-------------------------------|--------------|-----------|-----------|--------------|--------------|------------------|------------------|---------------------|---------------------|----------------------|-----------------------|--------------|
| Rated operational current (Ie) (Ve ≤ 440 V) | AC-3, q ≤ 40 °C (104 °F) | A | 150 | 185 | 265 | 400 | 500 | 630 | 750 | 1000 | 1500 | 1800 | |
| | AC-1, q ≤ 40 °C (104 °F) | A | 250 | 275 | 350 | 500 | 700 | 1000 | 800 | 1250 | 2000 | 2750 | |
| | AC-4, q ≤ 40 °C (104 °F) | A | 138 | 170 | 245 | 370 | 460 | 560 | 700 | 800 | 1250 | 1500 | |
| Rated operational current (Ve) | Up to | V | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | |
| Frequency limits (sine wave) | of the operational current | Hz | 25 to 200 | 25 to 200 | 25 to 200 | 25 to 200 | 25 to 200 | 25 to 200 | 25 to 200 | 50 to 60 | 50 to 60 | 50 to 60 | 50 to 60 |
| Rated making capacity | I rms | A | 1700 | 2100 | 2940 | 4500 | 5500 | 6740 | 10 000 | 10 000 | 15 000 | 18 000 | |
| Rated breaking capacity | I rms | 220 to 440 V | A | 1500 | 1800 | 2450 | 4000 | 5000 | 6300 | 10 000 | 10 000 | 15 000 | 18 000 |
| | | 500 V | A | 1200 | 1600 | 2200 | 3500 | 4500 | 5400 | 9000 | 9000 | 12 000 | 15 000 |
| | | 660/690 V | A | 1100 | 1200 | 1700 | 3000 | 3560 | 4600 | 8000 | 8000 | 9000 | 11 000 |
| | | 1000 V | A | 450 | 600 | 800 | 1200 | 2500 | 3200 | 4000 | 4000 | 5000 | 6000 |
| Permissible short time rating from cold state, no current flowing for preceding 60 minutes at q ≤ 40 °C (104 °F) | For 1 s | A | 1200 | 1500 | 2200 | 3600 | 4200 | 5050 | 9600 | 9600 | 12 000 | 15 000 | |
| | For 5 s | A | 1200 | 1500 | 2200 | 3600 | 4200 | 5050 | 9600 | 9600 | 12 000 | 15 000 | |
| | For 10 s | A | 1200 | 1500 | 2200 | 3600 | 4200 | 5050 | 7000 | 8000 | 9600 | 12 000 | |
| | For 30 s | A | 700 | 920 | 1230 | 2400 | 3200 | 4400 | 4800 | 5200 | 6400 | 8000 | |
| | For 1 min | A | 600 | 740 | 950 | 1700 | 2400 | 3400 | 3500 | 3800 | 5200 | 6300 | |
| | For 3 min | A | 450 | 500 | 620 | 1200 | 1500 | 2200 | 2100 | 2400 | 3600 | 4400 | |
| Short-circuit protection by fuses q ≤ 440 V ● | Motor circuit AC-3 (type aM) | A | 160 | 200 | 315 | 400 | 500 | 630 | 800 | 1200 | 800 x 2 ♦ | 1000 x 2 ♦ | |
| | AC-1 circuit (type gl, BS 88) | A | 250 | 315 | 400 | 500 | 800 | 1000 | 800 | 1200 | 1000 x 2 ♦ | 1200 x 2 ♦ | |
| Average impedance per pole | At Ith and 50 Hz | mΩ | 0.45 | 0.36 | 0.32 | 0.28 | 0.18 | 0.12 | 0.18 | 0.18 | 0.13 | 0.09 | |
| Power dissipated per pole for the above operational currents | AC-3 | W | 6 | 12 | 22 | 45 | 45 | 48 | 88 | 180 | 290 | 360 | |
| | AC-1 | W | 18 | 26 | 39 | 70 | 88 | 120 | 115 | 280 | 520 | 680 | |
| Cabling | Cable size (min - max) | AWG | #6 to 3/0 | #6 to 3/0 | #6 to 300mcm | #4 to 500mcm | 2 x #2 to 600mcm | 3 x #2 to 600mcm | – | – | – | – | |
| | Lug | | DZ2 FG | DZ2 FG | DZ2 FH | DZ2 FJ | DZ2 FK | DZ2 FL | – | – | – | – | |
| Tightening torque using DZ2F●● Lug | Bolt lug to contactor | lb-in | 160 | 160 | 310 | 310 | 310 | 510 | – | – | – | – | |
| | Wire pressure screw | lb-in | 200 | 200 | 275 | 500 | 500 | 500 | – | – | – | – | |
| Bus bar connections | Number of bars | | – | – | – | – | – | – | 2 | 2 | 3 | 4 | |
| | Bar c.s.a. | mm in | – | – | – | – | – | – | 50 x 5 1.9 x 0.2 | 80 x 5 3.1 x 0.2 | 100 x 5 3.9 x 0.2 | 100 x 10 3.9 x 0.2 | |
| | Bolt diameter | | – | – | – | – | – | – | 4 x Ø 8 | 4 x Ø 10 | 4 x Ø 10 | 4 x Ø 10 | |
| | Tightening torque | lb-in | – | – | – | – | – | – | – | 185 | 310 | 310 | 310 |

- ▼ CR1F150 to CR1F630 only. CR1B contactors are not UL listed or CSA certified.
- ♦ Paralleling of poles must be carried out only in accordance with the fuse manufacturer's recommendations.
- Select short circuit protection to meet the National Electrical Code or other local codes and standards.

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors – Characteristics

| Type | CR1F150 | CR1F185 | CR1F265 | CR1F400 | CR1F500 | CR1F630 | CR1BL | CR1BM | CR1BP | CR1BR | | | |
|---|---------------------------------|----------|----------------|-----------|-----------|-----------|-----------|------------|-----------|------------|------------|------------|------------|
| Control circuit characteristics | | | | | | | | | | | | | |
| Rated control circuit voltage (Vc) | AC 50 or 60 Hz | V | 48 to 415 | | | | | 110 to 500 | | | | | |
| | AC 400 Hz | V | 48 to 220 | | | | | 110 to 500 | | | | | |
| | DC | V | 48 to 220 | | | | | 110 to 500 | | | | | |
| | DC low consumption | V | 48 to 220 | | | | | – | | | | | |
| Control voltage limits AC and DC | Energization | | 0.85 to 1.1 Vc | | | | | | | | | | |
| | De-energization | | 0.85 to 1.1 Vc | | | | | | | | | | |
| Max. operating rate at ambient temperature ≤ 40 °C (104 °F) | In operating cycles/hour | | 600 | | | | | | 120 | | | | |
| Mechanical durability | In millions of operating cycles | | 1 | | | | | | | | | | |
| Average consumption | | | | | | | | | | | | | |
| 50/60 Hz | Energization | 1-pole | VA | – | – | – | – | – | – | 650 | 650 | 650 | 650 |
| | | 2-pole | VA | – | – | – | – | – | – | 1100 | 1100 | 1100 | 1100 |
| | | 3-pole | VA | 1100 | 1600 | 1650 | 1450 | 1650 | 2100 | 1650 | 1650 | 1650 | 1650 |
| | | 4-pole | VA | 1100 | 1600 | 1650 | 1450 | 1650 | 2100 | 1850 | 1850 | 1850 | 1850 |
| | De-energization | 1-pole | VA | – | – | – | – | – | – | 110 | 110 | 110 | 110 |
| | | 2-pole | VA | – | – | – | – | – | – | 125 | 125 | 125 | 125 |
| | | 3-pole | VA | 7.3 | 8 | 9 | 12 | 9.5 | 8 | 165 | 165 | 165 | 165 |
| | | 4-pole | VA | 7.3 | 8 | 9 | 12 | 9.5 | 8 | 175 | 175 | 175 | 175 |
| 400 Hz and DC | Energization | 1-pole | VA | – | – | – | – | – | – | 600 | 600 | 600 | 600 |
| | | 2-pole | VA | – | – | – | – | – | – | 1000 | 1000 | 1000 | 1000 |
| | | 3-pole | VA | 1260 | 1750 | 1800 | 1600 | 1800 | 2300 | 1500 | 1500 | 1500 | 1500 |
| | | 4-pole | VA | 1260 | 1750 | 1800 | 1600 | 1800 | 2300 | 1700 | 1700 | 1700 | 1700 |
| | De-energization | 1-pole | VA | – | – | – | – | – | – | 100 | 100 | 100 | 100 |
| | | 2-pole | VA | – | – | – | – | – | – | 115 | 115 | 115 | 115 |
| | | 3-pole | VA | 10 | 11 | 12 | 16 | 13 | 11 | 150 | 150 | 150 | 150 |
| | | 4-pole | VA | 10 | 11 | 12 | 16 | 13 | 11 | 160 | 160 | 160 | 160 |
| DC low consumption | Energization | 3/4-pole | W | 500 | 500 | 500 | 500 | 550 | 620 | – | – | – | – |
| | De-energization | 3/4-pole | W | 15 | 20 | 40 | 70 | 60 | 45 | – | – | – | – |
| Average operating time at Vc ▲ | Energization | | ms | 35 to 40 | 35 to 40 | 45 to 50 | 40 to 75 | 40 to 80 | 40 to 80 | 100 to 150 | 100 to 150 | 100 to 150 | 100 to 150 |
| | De-energization | | ms | 50 to 100 | 50 to 100 | 50 to 100 | 50 to 100 | 50 to 100 | 50 to 100 | 20 to 40 | 20 to 40 | 20 to 40 | 20 to 40 |

▲ The closing time is measured from the moment the coil supply is switched on to initial contact of the main poles. The opening time is measured from the moment the coil supply is switched off to the moment the main poles separate.

NOTE: The arcing time depends on the circuit switched by the poles. For normal 3-phase applications the arcing time is usually less than 10 ms. The load is isolated from the supply after a time equal to the sum of the opening time and the arcing time.

Auxiliary contact characteristics

| Type | | | LA1D for contactors CR1F | ZC4GM for contactors CR1B |
|------------------------------------|---|-----------------|---|---------------------------|
| Conventional rated thermal current | | A | 10 | 20 |
| Rated insulation voltage (Vi) | Conforming to IEC 60947-5-1 | V | 660 | |
| | Conforming to VDE 0110 grC | V | 750 | |
| Cabling | Flexible or solid conductor with or without cable end | mm ² | 1 x 1 min/2 x 2.5 max (1 - #16 min / 2 - #14 max) | |
| | | | 2 min/4 max (#14 min / #10 max) | |

Operational power of contacts LA1D for contactors CR1F

| | AC supply | | | | | |
|----------------------------|-----------|------|---------|---------|---------|------|
| | V | 48 | 110/127 | 220/230 | 380/400 | 600 |
| 1 million operating cycles | VA | 300 | 400 | 480 | 500 | 500 |
| Occasional making capacity | VA | 2600 | 7000 | 13 000 | 15 000 | 9000 |

DC supply

Electrical durability (valid for up to 1200 operating cycles/h) on an inductive load such as the coil of an electromagnet without economy resistor, the time constant increasing with the load.

| | V | 48 | 110 | 220 | 440 | 600 |
|--|---|-----|-----|-----|-----|-----|
| | W | 90 | 75 | 68 | 61 | 58 |
| | W | 700 | 400 | 260 | 220 | 170 |

Operational power of contacts ZC4GM for contactors CR1B

| | AC supply | | | | | |
|----------------------------|-----------|---------|-------|-------|---------|-------|
| | V | 110/127 | 220 | 380 | 415/440 | 500 |
| 1 million operating cycles | VA | 2000 | 4000 | 4000 | 4000 | 3500 |
| Occasional making capacity | VA | 14000 | 23000 | 35000 | 45000 | 35000 |

DC supply

Electrical durability (valid for up to 1200 operating cycles/h) on an inductive load such as the coil of an electromagnet without economy resistor, the time constant increasing with the load.

| | V | 110 | 120 | 440 | 500 |
|--|---|------|-----|-----|-----|
| | W | 250 | 250 | 230 | 200 |
| | W | 1600 | 800 | 400 | 360 |

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors – Characteristics

For Utilization Category AC-1 and According to Required Electrical Durability
Maximum Operational Current (on-load factor ≥ 0.95)

| Maximum operating rate: 120 operating cycles/hour | | | | | | | | | | | |
|---|--|------------------|------------------|------------------|----------------------|----------------------|----------------------|----------------------|----------------------|-----------------------|-----------------------|
| Contactor size | | CR1 F150 | CR1 F185 | CR1 F265 | CR1 F400 | CR1 F500 | CR1 F630 | CR1 BL | CR1 BM | CR1 BP | CR1 BR |
| Cable c.s.a. | mm ² | 120 (250 MCM) | 150 (300 MCM) | 185 (350 MCM) | – | – | – | – | – | – | – |
| Number of bars | | – | – | – | 2 | 2 | 2 | 2 | 2 | 3 | 4 |
| Bar c.s.a. | | mm | in | – | 30 x 5 1.18 x 0.2 | 40 x 5 1.57 x 0.2 | 60 x 5 2.36 x 0.2 | 50 x 5 1.96 x 0.2 | 80 x 5 3.14 x 0.2 | 100 x 5 3.93 x 0.2 | 100 x 5 3.93 x 0.2 |
| Operational current in category AC-1 at ambient temperature | $\leq 40\text{ }^{\circ}\text{C}$ (104 °F) A | 250 | 275 | 350 | 500 | 700 | 1000 | 800 | 1250 | 2000 | 2750 |
| | $\leq 55\text{ }^{\circ}\text{C}$ (131 °F) A | 250 | 275 | 300 | 430 | 580 | 850 | 700 | 1100 | 1750 | 2400 |
| | $\leq 70\text{ }^{\circ}\text{C}$ (158 °F) A | 170 | 180 | 250 | 340 | 500 | 700 | 600 | 900 | 1500 | 2000 |


Increase in Operational Current by Paralleling of Poles

Apply the following multiplying factors to the current values given above; these factors take into account the often unbalanced current distribution between poles:

- 2 poles in parallel: K = 1.6
- 3 poles in parallel: K = 2.25
- 4 poles in parallel: K = 2.8

Electrical durability ($V_e \leq 440\text{ V}$)

NOTE: For 660 V, multiply the number of operating cycles by 0.8.

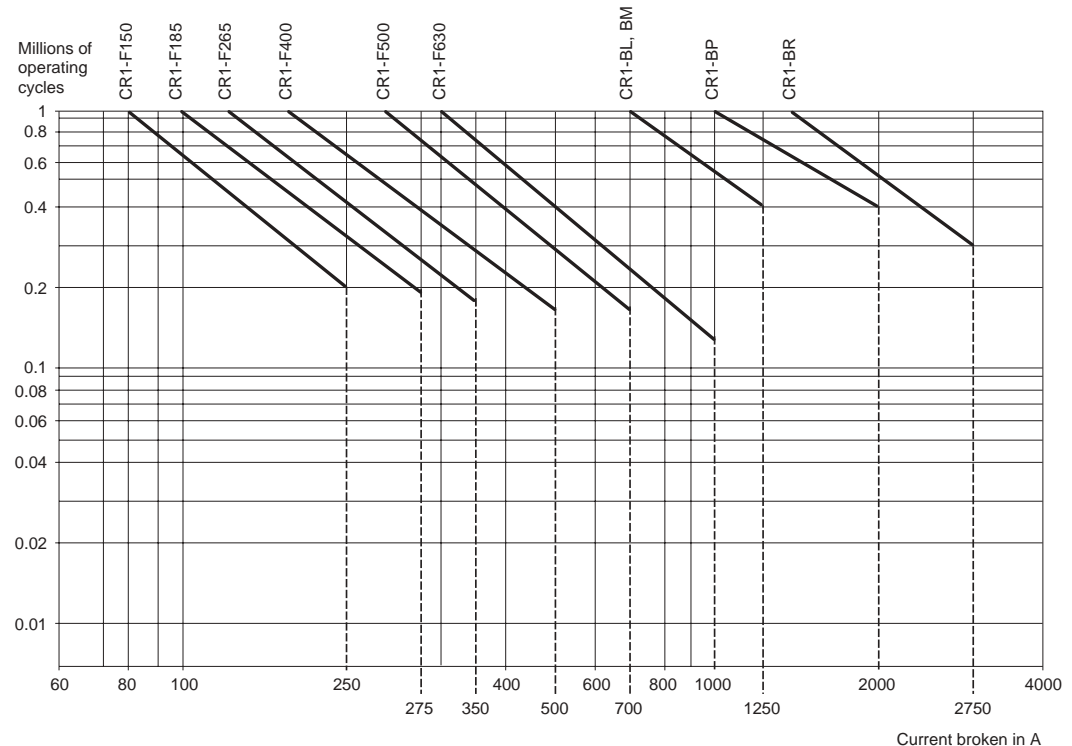

Example

$V_e = 220\text{ V}$, $I_e = 200\text{ A}$, $q = 40\text{ }^{\circ}\text{C}$ (104 °F), $I_c = I_e = 200\text{ A}$. 600,000 operating cycles required.

The above selection curves show the contactor rating needed: **CR1F400**.

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors – Characteristics

For Switching the Primaries of 3-Phase Transformers

International applications only (not UL Listed or CSA certified for transformer switching)

Operating Conditions

Maximum ambient temperature: 55 °C (131 °F)

Maximum operational voltage: 1000 V, 50 to 60 Hz

When a transformer is switched on, there is generally an initial current surge which reaches its peak value almost instantaneously and then decreases in a largely exponential manner to quickly reach its steady state value.

The value of this current depends on:

- The characteristics of the magnetic circuit and of the windings (cross sectional area of the core, rated inductance, number of turns, size of the windings).
- the performance of the magnetic laminations used (residual induction and saturation inductance).
- the magnetic state of the circuit and the instantaneous value of the AC mains voltage at the moment of switch-on.

The inrush current at the moment of switch-on can reach 20 to 40 times the rated current for the various kVA power ratings in the tables below. This value is independent of the “no-load” or “on-load” state of the transformer (the tables are based on 30 In).

The peak magnetizing current of the transformer must be lower than the values given in the tables below.

Contactor Selection

| Maximum Operating Rate: 120 operating cycles /hour | | | | | | | |
|--|--------------|---------|---------|---------|---------|---------|---------|
| Contactor size | | CR1F150 | CR1F185 | CR1F265 | CR1F400 | CR1F500 | CR1F630 |
| Maximum permissible closing current peak | A | 1700 | 2800 | 3500 | 5500 | 6800 | 9000 |
| Maximum operational power in kVA ■ | 220 to 230 V | 25 | 40 | 50 | 75 | 100 | 140 |
| | 380 to 400 V | 50 | 75 | 90 | 130 | 170 | 225 |
| | 415 to 440 V | 55 | 80 | 100 | 140 | 190 | 250 |
| | 500 V | 65 | 95 | 110 | 170 | 225 | 280 |
| | 660 V | 80 | 120 | 140 | 200 | 270 | 315 |
| | 1000 V | 100 | 150 | 200 | 250 | 375 | 470 |
| Contactor size | | CR1BL | CR1BM | CR1BP | CR1BR | | |
| Maximum permissible closing current peak | A | 18 000 | 18 000 | 24 000 | 30 000 | | |
| Maximum operational power in kVA ■ | 220 to 230 V | 230 | 230 | 300 | 380 | | |
| | 380 to 400 V | 400 | 400 | 530 | 660 | | |
| | 415 to 440 V | 450 | 450 | 560 | 700 | | |
| | 500 V | 480 | 480 | 600 | 750 | | |
| | 660 V | 600 | 600 | 800 | 950 | | |
| | 1000 V | 700 | 700 | 1000 | 1200 | | |

■ Maximum operational power corresponding to a current peak at switch-on of 30 In.

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors – AC or DC – Selection



CR1F1854•



CR1F500



CR1BP33

| Maximum thermal current in category AC-1 | Rated operational current in category AC-3 | Power Poles | | | Auxiliary Contacts | | Catalog Number ▼ | Weight lb (kg) |
|--|--|-------------|-------------|-------------|--------------------|----------------|---------------------|----------------|
| | | | | | | | | |
| A | A | N.O. | N.O. | N.C. | | | | |
| 250 | 150 | 3 | – | – | CR1F150• | 0.14 (3.500) | | |
| | | 4 | – | – | CR1F1504• | 0.15 (3.800) | | |
| 275 | 185 | 3 | – | – | CR1F185• | 0.18 (4.600) | | |
| | | 4 | – | – | CR1F1854• | 0.21 (5.400) | | |
| 350 | 265 | 3 | – | – | CR1F265• | 0.29 (7.400) | | |
| | | 4 | – | – | CR1F2654• | 0.33 (8.500) | | |
| 500 | 400 | 3 | – | – | CR1F400• | 0.36 (9.100) | | |
| | | 4 | – | – | CR1F4004• | 0.40 (10.200) | | |
| 700 | 500 | 3 | – | – | CR1F500• | 0.44 (11.300) | | |
| | | 4 | – | – | CR1F5004• | 0.51 (12.900) | | |
| 1000 | 630 | 3 | – | – | CR1F630• | 0.73 (18.600) | | |
| | | 4 | – | – | CR1F6304• | 0.84 (21.500) | | |
| 800 | 750 | 1 | 1 | 2 | CR1BL31•12 | 1.26 (32.000) | | |
| | | | 2 | 1 | CR1BL31•21 | 1.26 (32.000) | | |
| | | | 3 | – | CR1BL31•30 | 1.26 (32.000) | | |
| | | 2 | 1 | 2 | CR1BL32•12 | 1.77 (45.000) | | |
| | | | 2 | 1 | CR1BL32•21 | 1.77 (45.000) | | |
| | | | 3 | – | CR1BL32•30 | 1.77 (45.000) | | |
| | | 3 | 1 | 2 | CR1BL33•12 | 2.30 (58.000) | | |
| | | | 2 | 1 | CR1BL33•21 | 2.30 (58.000) | | |
| | | | 3 | – | CR1BL33•30 | 2.30 (58.000) | | |
| | | 4 | 1 | 2 | CR1BL34•12 | 2.83 (72.000) | | |
| | | | 2 | 1 | CR1BL34•21 | 2.83 (72.000) | | |
| | | | 3 | – | CR1BL34•30 | 2.83 (72.000) | | |
| 1250 | 1000 | 1 | 1 | 2 | CR1BM31•12 | 1.22 (31.000) | | |
| | | | 2 | 1 | CR1BM31•21 | 1.22 (31.000) | | |
| | | | 3 | – | CR1BM31•30 | 1.22 (31.000) | | |
| | | 2 | 1 | 2 | CR1BM32•12 | 1.73 (44.000) | | |
| | | | 2 | 1 | CR1BM32•21 | 1.73 (44.000) | | |
| | | | 3 | – | CR1BM32•30 | 1.73 (44.000) | | |
| | | 3 | 1 | 2 | CR1BM33•12 | 2.24 (57.000) | | |
| | | | 2 | 1 | CR1BM33•21 | 2.24 (57.000) | | |
| | | | 3 | – | CR1BM33•30 | 2.24 (57.000) | | |
| | | 4 | 1 | 2 | CR1BM34•12 | 2.79 (71.000) | | |
| | | | 2 | 1 | CR1BM34•21 | 2.79 (71.000) | | |
| | | | 3 | – | CR1BM34•30 | 2.79 (71.000) | | |
| 2000 | 1500 | 1 | 1 | 2 | CR1BP31•12 | 1.61 (41.000) | | |
| | | | 2 | 1 | CR1BP31•21 | 1.61 (41.000) | | |
| | | | 3 | – | CR1BP31•30 | 1.61 (41.000) | | |
| | | 2 | 1 | 2 | CR1BP32•12 | 2.55 (65.000) | | |
| | | | 2 | 1 | CR1BP32•21 | 2.55 (65.000) | | |
| | | | 3 | – | CR1BP32•30 | 2.55 (65.000) | | |
| | | 3 | 1 | 2 | CR1BP33•12 | 3.70 (94.000) | | |
| | | | 2 | 1 | CR1BP33•21 | 3.70 (94.000) | | |
| | | | 3 | – | CR1BP33•30 | 3.70 (94.000) | | |
| | | 4 | 1 | 2 | CR1BP34•12 | 4.72 (120.000) | | |
| | | | 2 | 1 | CR1BP34•21 | 4.72 (120.000) | | |
| | | | 3 | – | CR1BP34•30 | 4.72 (120.000) | | |
| 2750 | 1800 | 1 | 1 | 2 | CR1BR31•12 | 2.05 (52.000) | | |
| | | | 2 | 1 | CR1BR31•21 | 2.05 (52.000) | | |
| | | | 3 | – | CR1BR31•30 | 2.05 (52.000) | | |
| | | 2 | 1 | 2 | CR1BR32•12 | 3.34 (85.000) | | |
| | | | 2 | 1 | CR1BR32•21 | 3.34 (85.000) | | |
| | | | 3 | – | CR1BR32•30 | 3.34 (85.000) | | |
| | | 3 | 1 | 2 | CR1BR33•12 | 5.07 (129.000) | | |
| | | | 2 | 1 | CR1BR33•21 | 5.07 (129.000) | | |
| | | | 3 | – | CR1BR33•30 | 5.07 (129.000) | | |
| | | 4 | 1 | 2 | CR1BR34•12 | 6.29 (160.000) | | |
| | | | 2 | 1 | CR1BR34•21 | 6.29 (160.000) | | |
| | | | 3 | – | CR1BR34•30 | 6.29 (160.000) | | |

▼ For standard control circuit voltages, see page 231.

CR1F/CR1B Contactors and Accessories Magnetic Latching Contactors – Accessories – Selection



LA1DN22

For Contactors CR1F

| Description | Number of contacts or shrouds | For use on | Catalog Number | Weight lb (kg) |
|---|-------------------------------|--|----------------|----------------|
| Instantaneous auxiliary contacts | 1 to 9 | CR1F | LA1D ■ | 1.27 (0.580) |
| Time delay auxiliary contacts | 2 to 4 | CR1F | LA•D ■ | 1.27 (0.580) |
| Insulated Terminal Blocks provides IP20 touch-safe protection | Set of 2 blocks | CR1F150 and CR1F185 AWG cable size #6 to 300mcm | LA9F103 | 0.66 (0.300) |

■ For selection, see pages 194 through 197.

Lug Kits

Lugs can be ordered either individually (for 2- and 4-pole contactors) or in sets of 6 (for 3-pole contactors). Mounting hardware is provided with the contactors, not the kits.




LA•DT, DS

| Single lug | Set of six lugs | Cable size AWG range | Suitable for contactor LC1••••/CR1•••• | Suitable for overload relay LR9••••▲ |
|------------|-----------------|----------------------|--|--------------------------------------|
| DZ2FF1 | DZ2FF6 | 14 to 2/0 | F115 | none |
| DZ2FG1 | DZ2FG6 | 6 to 3/0 | F150, F185 | F5•57, F5•63, F5•67, F5•69 |
| DZ2FH1 | DZ2FH6 | 6 to 300 MCM | F265, F330 | LR9F•71 |
| DZ3FJ1 | DZ3FJ6 | 4 to 500 MCM | F400 | none |
| DZ2FK1 | DZ2FK6 | 2 x 2 to 600 MCM | F500 | F7•75, F7•79 |
| DZ2FL•◆ | DZ2FL6 | 3 x 2 to 600 MCM | F630, F800 | F7•81 |
| DZ2FX | DZ2FX6 | 4 x 1/0 to 750 MCM | F780 | none |

▲ When direct mounting the LR9F to an LC1F or CR1F contactor, lugs of different sizes may be required. See page 220 for additional information.

◆ For 3-pole F630 contactors, order DZ2FL1 for L1 and T3, DZ2FL2 for L2 and T2 and DZ2PL3 for L3 and T1 terminals.

For 4-pole F6304 contactors, order DZ2FL1 for L1 and T4, DZ2FL2 for L2, T2, L3 and T3 and DZ2FL3 for L4 and T1 terminals.



LA9F103

| Description | Application | Catalog Number |
|--|---|-----------------------|
| Mechanical interlock and power connections | For assembly of reversing contactors and changeover contactor pairs | See pages 190 to 193. |


For Contactors CR1B

| Description | Application | Catalog number | Weight lb (kg) |
|--|--|----------------|----------------|
| Mechanical interlock with mounting accessories ▼ | For vertical assembly of reversing contactors and changeover contactor pairs | EZ2LB0601 | 3.44 (1.560) |
| Kit containing 2 bar mounting brackets | For mounting on 120 or 150 mm center (4.72" or 5.91") | LA9B103 | 3.57 (1.620) |


▼ Positive mechanical interlocking between two vertically-mounted contactors with identical or different ratings. Connecting rods and cranks assembled on right-hand side, crank pins on the pole side. Vertical mounting center distance between the two contactors: 600 mm (23.62").

Coil Selection

| Volts | 48 | 110 | 125 | 127 | 220 | 230 | 240 | 250 | 380 | 400 | 415 | 440 | 500 |
|----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| For contactors CR1F | | | | | | | | | | | | | |
| AC 50/60 Hz | E7 | F7 | – | G7 | M7 | M7 | U7 | – | Q7 | Q7 | N7 | – | – |
| AC 400 Hz | E7 | F7 | – | G7 | M7 | M7 | – | – | – | – | – | – | – |
| DC | E7 | F7 | – | G7 | M7 | M7 | – | – | – | – | – | – | – |
| DC low consumption | EZ7 | FZ7 | – | GZ7 | MZ7 | – | – | – | – | – | – | – | – |
| For contactors CR1B | | | | | | | | | | | | | |
| AC 50 to 400 Hz | F | – | G | M | M | U | – | Q | V | N | R | S | – |
| DC | FD | GD | – | MD | – | UD | VcD | – | – | – | RD | SD | – |



DZ2F••





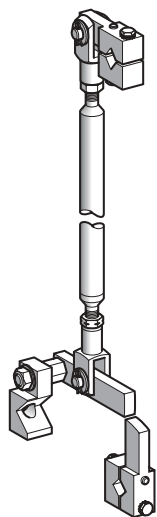




EZ2LB0601




CR1F/CR1B Contactors and Accessories



Magnetic Latching Contactors – Mechanical Interlocks and Power Connections

Horizontally or Vertically Mounted
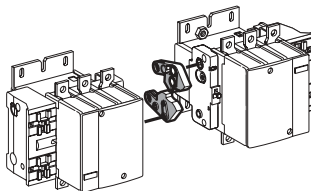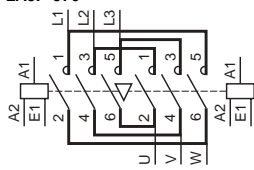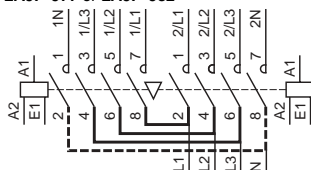
| Horizontally mounted | Mechanical interlocks | Sets of power connections |
|--|--|--|
| Reversers assembled using 2 contactors of identical rating type: CR1F150 CR1F185 CR1F265 CR1F400 CR1F500 CR1F630 | LA9F•970  | Reversing contactors LA9F•976   |
| | | 3 or 4-pole changeover contactor pairs LA9F•977 or LA9F•982   |
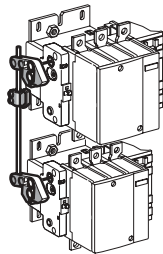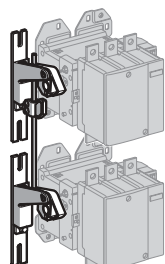
| Vertically mounted | Mechanical interlocks |
|--|--|
| Reversers assembled using 2 contactors of identical rating type: CR1F150 CR1F185 CR1F265 CR1F400 CR1F500 CR1F630 | LA9FF4F LA9FG4G Assembly A  |
| | LA9FH4H LA9FJ4J LA9FK4K LA9FL4L Assembly C  |
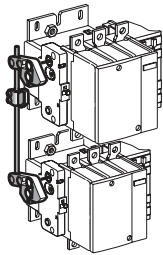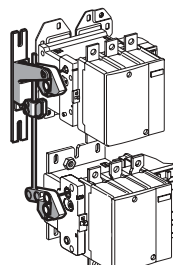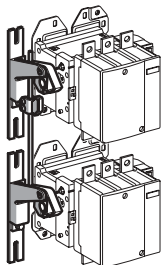
| | | | |
|---|---|--|---|
| Reversers assembled using 2 contactors of different ratings type: CR1F150 CR1F185 CR1F265 CR1F400 CR1F500 CR1F630 | LA9FG4F Assembly A  | LA9FH4F LA9FJ4F LA9FK4F LA9FL4F LA9FH4G LA9FJ4G LA9FK4G LA9FL4G Assembly B  | LA9FJ4H LA9FK4H LA9FL4H LA9FK4J LA9FL4J LA9FK4K Assembly C  |
|---|---|--|---|
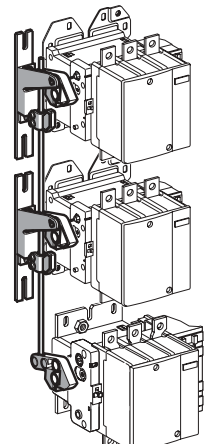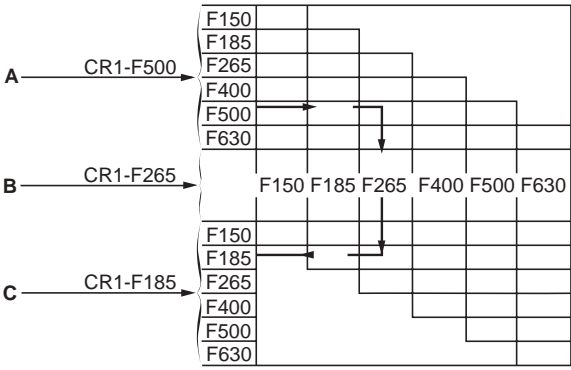
| | | |
|---|--|--|
| Reversers assembled using 3 contactors of identical or different ratings LA9F•4•4•  |  | Warning: the contactor ratings must be in descending order from top to bottom. |
|---|--|--|

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors – Mechanical Interlocks and Power Connections

Components for Assembling Reversing Contactors and Changeover Pairs CR1F

Reversers assembled using 2 contactors of identical rating

| | Contactor Type | Set of power connections | | Mechanical Interlock | |
|--|----------------------|--------------------------|----------------|----------------------|----------------|
| | | Catalog Number | Weight lb (kg) | Kit Catalog Number | Weight lb (kg) |
| For assembly of 3-pole reversing contactors for motor control ■ | Horizontally mounted | | | | |
| | CR1F150 | LA9FF976 | 0.02 (0.600) | LA9FF970 | 0.13 (0.060) |
| | CR1F185 | LA9FG976 | 0.03 (0.780) | LA9FG970 | 0.13 (0.060) |
| | CR1F265 | LA9FH976 | 0.05 (1.500) | LA9FJ970 | 0.31 (0.140) |
| | CR1F400 | LA9FJ976 | 0.08 (2.100) | LA9FJ970 | 0.31 (0.140) |
| | CR1F500 | LA9FK976 | 0.09 (2.350) | LA9FJ970 | 0.31 (0.140) |
| | CR1F630 | LA9FL976 | 0.15 (3.800) | LA9FL970 | 0.33 (0.150) |
| | Vertically mounted | | | | |
| | CR1F150 | ● | | LA9FF4F | 0.76 (0.345) |
| | CR1F185 | ● | | LA9FG4G | 0.77 (0.350) |
| | CR1F265 | ● | | LA9FH4H | 2.33 (1.060) |
| | CR1F400 | ● | | LA9FJ4J | 2.64 (1.200) |
| | CR1F500 | ● | | LA9FK4K | 2.64 (1.200) |
| | CR1F630 | ● | | LA9FL4L | 2.68 (1.220) |
| For assembly of 4-pole changeover contactor pairs for distribution | Horizontally mounted | | | | |
| | CR1F1504 | LA9FF977 | 0.01 (0.460) | LA9FF970 | 0.13 (0.060) |
| | CR1F1854 | LA9FG977 | 0.02 (0.610) | LA9FG970 | 0.13 (0.060) |
| | CR1F2654 | LA9FH977 | 0.04 (1.200) | LA9FJ970 | 0.31 (0.140) |
| | CR1F4004 | LA9FJ977 | 0.07 (1.800) | LA9FJ970 | 0.31 (0.140) |
| | CR1F5004 | LA9FK977 | 0.09 (2.300) | LA9FJ970 | 0.31 (0.140) |
| | CR1F6304 | LA9FL977 | 0.13 (3.400) | LA9FL970 | 0.33 (0.150) |
| | Vertically mounted | | | | |
| | CR1F1504 | ● | | LA9FF4F | 0.76 (0.345) |
| | CR1F1854 | ● | | LA9FG4G | 0.77 (0.350) |
| | CR1F2654 | ● | | LA9FH4H | 2.33 (1.060) |
| | CR1F4004 | ● | | LA9FJ4J | 2.64 (1.200) |
| | CR1F5004 | ● | | LA9FK4K | 2.64 (1.200) |
| | CR1F6304 | ● | | LA9FL4L | 2.68 (1.220) |

Reversers assembled using 2 contactors of different ratings

| | Contactor Type (vertically-mounted) ▲ | Set of Power Connections | | Mechanical Interlock | |
|---|--|--|--|---|------------------------------|
| | | Catalog Number | | Kit Catalog Number | Weight (kg) (kg x 2.2 = lbs) |
| For assembly of 3 or 4-pole changeover contactor pairs for distribution | at bottom | at top | | | |
| | | | | | |
| | CR1F150 or F1504 | CR1F185 or F1854 | | LA9FG4F | 0.77 (0.350) |
| | | CR1F265 or F2654 | | LA9FH4F | 1.92 (0.870) |
| | | CR1F400 or F4004 | | LA9FJ4F | 2.05 (0.930) |
| | | CR1F500 or F5004 | | LA9FK4F | 2.07 (0.940) |
| | | CR1F630 or F6304 | | LA9FL4F | 2.07 (0.940) |
| | CR1F185 or F1854 | CR1F265 or F2654 | | LA9FH4G | 1.89 (0.860) |
| | | CR1F400 or F4004 | | LA9FJ4G | 2.07 (0.940) |
| | | CR1F500 or F5004 | | LA9FK4G | 2.07 (0.940) |
| | | CR1F630 or F6304 | | LA9FL4G | 2.09 (0.950) |
| | CR1F265 or F2654 | CR1F400 or F4004 | | LA9FJ4H | 2.49 (1.130) |
| | | CR1F500 or F5004 | | LA9FK4H | 2.49 (1.130) |
| | | CR1F630 or F6304 | | LA9FL4H | 2.51 (1.140) |
| | CR1F400 or F4004 | CR1F500 or F5004 | | LA9FK4J | 2.64 (1.200) |
| | | CR1F630 or F6304 | | LA9FL4J | 2.66 (1.210) |
| | CR1F500 or F5004 | CR1F630 or F6304 | | LA9FL4K | 2.66 (1.210) |
| | For assembly of 3 or 4-pole reversing contactors | Using 3 contactors (vertically mounted) of identical or different rating | | Mechanical interlock kit catalog number ♦ | |
| The contactor ratings must be in descending order from top to bottom | | LA9F•4•4• | | | |

- A 3-pole reversing contactor for motor control can be converted into a 3-pole changeover contactor pair by removing the upper connecting links.
- All power connections to be made by the customer.
- ▲ With identical or different number of poles. Power connections to be made by the customer.
- ♦ Complete the catalog number by replacing the first dot with the code for the upper contactor, the second dot with the code for the middle contactor, and the third dot with the code for the lower contactor; see the table below for the codes for the contactors.


| Contactor | CR1F150 | CR1F185 | CR1F265 | CR1F400 | CR1F500 | CR1F630 |
|-----------|---------|---------|---------|---------|---------|---------|
| Code | F | G | H | J | K | L |

For example, mechanical interlock for reversing contactor made up of 3 different contactors: CR1F500 top, CR1F265 middle, and CR1F185 lower:

LA9F•4•4• becomes LA9FK4H4G.

CR1F/CR1B Contactors and Accessories


Magnetic Latching Contactors – Coils for Contactors CR1F



LX0FF009

Standard Coils

| Usual voltages | | Resistance of winding at 20 °C (68 °F) | | Catalog Number | Voltage Code | Weight lb (kg) |
|-------------------------------|--------------|--|------------|----------------|--------------|----------------|
| 50 to 400 Hz or DC | 50 Hz, 60 Hz | Latching | Unlatching | | | |
| V | V | Ω | Ω | | | |
| For contactors CR1F150 | | | | | | |
| 48 | – | 1.98 | 230.8 | LX0FF005 | E7 | 0.97 (0.440) |
| 110 | – | 9.35 | 1453 | LX0FF006 | F7 | 0.97 (0.440) |
| 127 | – | 11.61 | 1788 | LX0FF007 | G7 | 0.97 (0.440) |
| 208 | – | 23.50 | 4098 | LX0FF020 | L7 | 0.97 (0.440) |
| 220/230 | – | 37.55 | 5139 | LX0FF008 | M7 | 0.97 (0.440) |
| – | 240 | 45.16 | 6544 | LX0FF009 | U7 | 0.97 (0.440) |
| – | 380/400 | 114.10 | 12447 | LX0FF010 | Q7 | 0.97 (0.440) |
| – | 415 | 139.50 | 16717 | LX0FF011 | N7 | 0.97 (0.440) |
| For contactors CR1F185 | | | | | | |
| 48 | – | 1.42 | 220 | LX0FG005 | E7 | 1.23 (0.560) |
| 110 | – | 6.92 | 1339 | LX0FG006 | F7 | 1.23 (0.560) |
| 127 | – | 8.45 | 1676 | LX0FG007 | G7 | 1.23 (0.560) |
| 208 | – | 21.30 | 3169 | LX0FG020 | L7 | 1.23 (0.560) |
| 220/230 | – | 26.27 | 4729 | LX0FG008 | M7 | 1.23 (0.560) |
| – | 240 | 32.95 | 4729 | LX0FG009 | U7 | 1.23 (0.560) |
| – | 380/400 | 82.29 | 11885 | LX0FG010 | Q7 | 1.23 (0.560) |
| – | 415 | 102.30 | 14305 | LX0FG011 | N7 | 1.23 (0.560) |
| For contactors CR1F265 | | | | | | |
| 48 | – | 1.34 | 183.4 | LX0FH005 | E7 | 1.71 (0.780) |
| 110 | – | 6.90 | 1031 | LX0FH006 | F7 | 1.71 (0.780) |
| 127 | – | 8.56 | 1325 | LX0FH007 | G7 | 1.71 (0.780) |
| 208 | – | 20.20 | 2654 | LX0FH020 | L7 | 1.71 (0.780) |
| 220/230 | – | 25.77 | 4090 | LX0FH008 | M7 | 1.71 (0.780) |
| – | 240 | 33.03 | 5002 | LX0FH009 | U7 | 1.71 (0.780) |
| – | 380/400 | 78.39 | 11803 | LX0FH010 | Q7 | 1.71 (0.780) |
| – | 415 | 102.9 | 15006 | LX0FH011 | N7 | 1.71 (0.780) |
| For contactors CR1F400 | | | | | | |
| 48 | – | 1.32 | 90.5 | LX0FJ005 | E7 | 2.47 (1.120) |
| 110 | – | 8.09 | 813 | LX0FJ006 | F7 | 2.47 (1.120) |
| 127 | – | 9.79 | 1027 | LX0FJ007 | G7 | 2.47 (1.120) |
| 208 | – | 24.40 | 2643 | LX0FJ020 | L7 | 2.47 (1.120) |
| 220/230 | – | 30.14 | 3309 | LX0FJ008 | M7 | 2.47 (1.120) |
| – | 240 | 37.02 | 4074 | LX0FJ009 | U7 | 2.47 (1.120) |
| – | 380/400 | 94.80 | 9380 | LX0FJ010 | Q7 | 2.47 (1.120) |
| – | 415 | 121.10 | 11 763 | LX0FJ011 | N7 | 2.47 (1.120) |
| For contactors CR1F500 | | | | | | |
| 48 | – | 1.57 | 166 | LX0FK005 | E7 | 2.70 (1.220) |
| 110 | – | 7.53 | 916 | LX0FK006 | F7 | 2.70 (1.220) |
| 127 | – | 9.56 | 1159 | LX0FK007 | G7 | 2.70 (1.220) |
| 208 | – | 23.60 | 2981 | LX0FK020 | L7 | 2.70 (1.220) |
| 220/230 | – | 28.81 | 3733 | LX0FK008 | M7 | 2.70 (1.220) |
| – | 240 | 35.67 | 4595 | LX0FK009 | U7 | 2.70 (1.220) |
| – | 380/400 | 89.56 | 10 570 | LX0FK010 | Q7 | 2.70 (1.220) |
| – | 415 | 112.06 | 13 256 | LX0FK011 | N7 | 2.70 (1.220) |
| For contactors CR1F630 | | | | | | |
| 48 | – | 0.87 | 204 | LX0FL005 | E7 | 3.21 (1.460) |
| 110 | – | 5.20 | 1423 | LX0FL006 | F7 | 3.21 (1.460) |
| 127 | – | 6.45 | 1830 | LX0FL007 | G7 | 3.21 (1.460) |
| 208 | – | 20.20 | 2961 | LX0FL020 | L7 | 3.21 (1.460) |
| 220/230 | – | 25.36 | 4603 | LX0FL008 | M7 | 3.21 (1.460) |
| – | 240 | 25.36 | 5658 | LX0FL009 | U7 | 3.21 (1.460) |
| – | 380/400 | 60.95 | 10 676 | LX0FL010 | Q7 | 3.21 (1.460) |
| – | 415 | 77.97 | 13 003 | LX0FL011 | N7 | 3.21 (1.460) |




LX0FH009

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors – Coils for Contactors CR1F

Special Coils

Coils with two windings with common point, allowing the use of two separate power sources for latching and unlatching.



LX0FF020


| For contactors | Coil voltages at 50 Hz, 60 Hz, 400 Hz or DC | | Resistance of winding at $\theta = 20\text{ }^{\circ}\text{C}$ (68 $^{\circ}\text{F}$) | | Catalog Number | Voltage code | Weight lb (kg) |
|----------------|---|------------|---|------------|----------------|--------------|----------------|
| | Latching | Unlatching | Latching | Unlatching | | | |
| | V | V | Ω | Ω | | | |
| CR1F150 | 220 | 24 | 29.5 | 39.5 | LX0FF224 | MB7 | 0.01 (0.440) |
| CR1F185 | 220 | 24 | 26.5 | 19 | LX0FG224 | MB7 | 0.02 (0.560) |
| CR1F265 | 220 | 24 | 26 | 29.5 | LX0FH224 | MB7 | 0.03 (0.780) |
| CR1F400 | 220 | 24 | 30 | 23 | LX0FJ224 | MB7 | 0.04 (1.120) |
| CR1F500 | 220 | 24 | 29 | 26 | LX0FK224 | MB7 | 0.05 (1.220) |
| CR1F630 | 220 | 24 | 26 | 41 | LX0FL224 | MB7 | 0.06 (1.460) |

Coils with Low-Inrush Consumption

| Usual voltages DC | Resistance of winding at $\theta = 20\text{ }^{\circ}\text{C}$ (68 $^{\circ}\text{F}$) | | Catalog Number | Voltage code | Weight lb (kg) |
|-------------------------------|---|------------|----------------|--------------|----------------|
| | Latching | Unlatching | | | |
| V | Ω | Ω | | | |
| For contactors CR1F150 | | | | | |
| 48 | 4.56 | 140.56 | LX0FF055 | EZ7 | 0.01 (0.440) |
| 110 | 22.37 | 706.44 | LX0FF056 | FZ7 | 0.01 (0.440) |
| 127 | 35.54 | 1086.36 | LX0FF057 | GZ7 | 0.01 (0.440) |
| 220 | 89.85 | 3342.51 | LX0FF058 | MZ7 | 0.01 (0.440) |
| For contactors CR1F185 | | | | | |
| 48 | 5.19 | 106.54 | LX0FG055 | EZ7 | 0.02 (0.570) |
| 110 | 25.50 | 536.26 | LX0FG056 | FZ7 | 0.02 (0.570) |
| 127 | 32.75 | 732.64 | LX0FG057 | GZ7 | 0.02 (0.570) |
| 220 | 102.44 | 2378.62 | LX0FG058 | MZ7 | 0.02 (0.570) |
| For contactors CR1F265 | | | | | |
| 48 | 5.19 | 74.26 | LX0FH055 | EZ7 | 0.03 (0.800) |
| 110 | 25 | 364.61 | LX0FH056 | FZ7 | 0.03 (0.800) |
| 127 | 30.98 | 458.45 | LX0FH057 | GZ7 | 0.03 (0.800) |
| 220 | 97.89 | 1344.46 | LX0FH058 | MZ7 | 0.03 (0.800) |
| For contactors CR1F400 | | | | | |
| 48 | 5.05 | 36.36 | LX0FJ055 | EZ7 | 0.04 (1.150) |
| 110 | 25.39 | 171.49 | LX0FJ056 | FZ7 | 0.04 (1.150) |
| 127 | 31.86 | 221.20 | LX0FJ057 | GZ7 | 0.04 (1.150) |
| 220 | 98.19 | 648.79 | LX0FJ058 | MZ7 | 0.04 (1.150) |
| For contactors CR1F500 | | | | | |
| 48 | 4.42 | 41 | LX0FK055 | EZ7 | 0.05 (1.270) |
| 110 | 22.74 | 193.36 | LX0FK056 | FZ7 | 0.05 (1.270) |
| 127 | 28.25 | 313.60 | LX0FK057 | GZ7 | 0.05 (1.270) |
| 220 | 85.12 | 918.68 | LX0FK058 | MZ7 | 0.05 (1.270) |
| For contactors CR1F630 | | | | | |
| 48 | 3.94 | 59.17 | LX0FL055 | EZ7 | 0.06 (1.500) |
| 110 | 19.36 | 365.33 | LX0FL056 | FZ7 | 0.06 (1.500) |
| 127 | 25.39 | 452.27 | LX0FL057 | GZ7 | 0.06 (1.500) |
| 220 | 74.44 | 1071.43 | LX0FL058 | MZ7 | 0.06 (1.500) |

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors – Coils for Contactors CR1B



WB1KB...

Coils with “TC” Treatment ◆

| Usual voltages | | Resistance at $\theta = 20\text{ }^{\circ}\text{C}$ (68 °F) | Catalog Number | Weight lb (kg) |
|-------------------------------|-----------------|--|----------------|----------------|
| DC | AC 50 to 400 Hz | | | |
| V | V | Ω | | |
| For contactors CR1B•31 | | | | |
| – | 110 to 120 | 19.7 | WB1KB140 | 2.47 (1.120) |
| 110 to 125 | – | 25.2 | WB1KB134 | 2.47 (1.120) |
| – | 220 to 240 | 77.2 | WB1KB136 | 2.47 (1.120) |
| 220 | – | 94 | WB1KB139 | 2.47 (1.120) |
| 250 | – | 128 | WB1KB125 | 2.47 (1.120) |
| – | 380 to 400 | 197 | WB1KB126 | 2.47 (1.120) |
| – | 415 to 440 | 257 | WB1KB138 | 2.47 (1.120) |
| For contactors CR1B•32 | | | | |
| – | 110 | 9.6 | WB1KB133 | 2.47 (1.120) |
| 110 | 120 to 127 | 11.4 | WB1KB121 | 2.47 (1.120) |
| 125 | – | 19.7 | WB1KB140 | 2.47 (1.120) |
| – | 220/230 | 32.5 | WB1KB124 | 2.47 (1.120) |
| 220 | 240 | 49.7 | WB1KB122 | 2.47 (1.120) |
| 250 | – | 77.2 | WB1KB136 | 2.47 (1.120) |
| – | 380 to 400 | 128 | WB1KB125 | 2.47 (1.120) |
| – | 415 to 440 | 160 | WB1KB137 | 2.47 (1.120) |
| For contactors CR1B•33 | | | | |
| – | 110 | 7.2 | WB1KB123 | 2.47 (1.120) |
| 110 | 120 to 127 | 9.6 | WB1KB133 | 2.47 (1.120) |
| 125 | – | 11.4 | WB1KB121 | 2.47 (1.120) |
| 220 | 240 | 32.5 | WB1KB124 | 2.47 (1.120) |
| 250 | – | 61 | WB1KB135 | 2.47 (1.120) |
| – | 380 to 415 | 94 | WB1KB139 | 2.47 (1.120) |
| – | 440 | 128 | WB1KB125 | 2.47 (1.120) |
| For contactors CR1B•34 | | | | |
| – | 110 | 5.8 | WB1KB132 | 2.47 (1.120) |
| 110 | 120 to 127 | 7.2 | WB1KB123 | 2.47 (1.120) |
| 125 | – | 11.4 | WB1KB121 | 2.47 (1.120) |
| – | 220/230 | 25.2 | WB1KB134 | 2.47 (1.120) |
| – | 240 | 32.5 | WB1KB124 | 2.47 (1.120) |
| 250 | – | 49.7 | WB1KB122 | 2.47 (1.120) |
| – | 380 | 77.2 | WB1KB136 | 2.47 (1.120) |
| – | 400 to 440 | 94 | WB1KB139 | 2.47 (1.120) |

Coils with “TH” Treatment ▼

Add suffix TH to the above catalog numbers; for example, **WB1KB140TH**.

- ◆ “TC” treatment is standard environmental protection equivalent to tropicalization.
 - ▼ “TH” treatment is improved environmental protection equivalent to fungus-proof and insect-proof.
- See page 10 for additional information regarding protective treatments.


CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors – Coils for Contactors CR1B


Accessories for use with coils




DR2SC0220



ZC4GM2



DR5TE1U

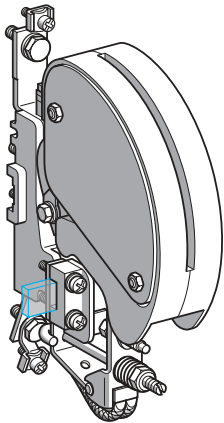

PR4FB0014

| Coils ("TC" or "TH") | Additional resistors ■ | | | | Automatic coil cut-out contact ▲ | | Rectifier ♦ |
|-------------------------------|------------------------|----------------|-----|----------------|----------------------------------|------------------|----------------|
| | R1 | Catalog Number | R2 | Catalog Number | No. | Catalog Number | Catalog Number |
| | Ω | | Ω | | | | |
| For contactors CR1B•31 | | | | | | | |
| WB1KB140 | 68 | DR2SC0068 | 47 | DR2SC0047 | 2 | ZC4GM2 or ZC4GM8 | DR5TE1U |
| WB1KB134 | 68 | DR2SC0068 | 68 | DR2SC0068 | 2 | ZC4GM2 or ZC4GM8 | – |
| WB1KB136 | 220 | DR2SC0220 | 180 | DR2SC0180 | 2 | ZC4GM2 or ZC4GM8 | DR5TE1U |
| WB1KB139 | 270 | DR2SC0270 | 220 | DR2SC0220 | 2 | ZC4GM2 or ZC4GM8 | – |
| WB1KB125 | 330 | DR2SC0330 | 270 | DR2SC0270 | 3 | ZC4GM2 or ZC4GM8 | – |
| WB1KB126 | 470 | DR2SC0470 | 470 | DR2SC0470 | 3 | ZC4GM2 or ZC4GM8 | DR5TE1S |
| WB1KB138 | 1000 | DR2SC1000 | 470 | DR2SC0470 | 3 | ZC4GM2 or ZC4GM8 | DR5TE1S |
| For contactors CR1B•32 | | | | | | | |
| WB1KB133 | 10 | DR2SC0010 | 33 | DR2SC0033 | 1 | PR4FB0011 | DR5TE1U |
| WB1KB121 | 47 | DR2SC0047 | 39 | DR2SC0039 | 1 | PR4FB0010 | DR5TE1U |
| WB1KB140 | 100 | DR2SC0100 | 47 | DR2SC0047 | 1 | PR4FB0009 | – |
| WB1KB124 | 120 | DR2SC0120 | 120 | DR2SC0120 | 1 | PR4FB0007 | DR5TE1U |
| WB1KB122 | 220 | DR2SC0220 | 150 | DR2SC0150 | 1 | PR4FB0007 | DR5TE1U |
| WB1KB136 | 330 | DR2SC0330 | 220 | DR2SC0220 | 1 | PR4FB0006 | – |
| WB1KB125 | 470 | DR2SC0470 | 470 | DR2SC0470 | 1 | PR4FB0005 | DR5TE1S |
| WB1KB137 | 680 | DR2SC0680 | 560 | DR2SC0560 | 1 | PR4FB0004 | DR5TE1S |
| For contactors CR1B•33 | | | | | | | |
| WB1KB123 | 39 | DR2SC0039 | 27 | DR2SC0027 | 1 | PR4FB0012 | DR5TE1U |
| WB1KB133 | 47 | DR2SC0047 | 39 | DR2SC0039 | 1 | PR4FB0011 | DR5TE1U |
| WB1KB121 | 56 | DR2SC0056 | 47 | DR2SC0047 | 1 | PR4FB0010 | – |
| WB1KB124 | 180 | DR2SC0180 | 120 | DR2SC0120 | 1 | PR4FB0008 | DR5TE1U |
| WB1KB135 | 270 | DR2SC0270 | 270 | DR2SC0270 | 1 | PR4FB0006 | – |
| WB1KB139 | 470 | DR2SC0470 | 390 | DR2SC0390 | 1 | PR4FB0005 | DR5TE1S |
| WB1KB125 | 680 | DR2SC0680 | 470 | DR2SC0470 | 1 | PR4FB0004 | DR5TE1S |
| For contactors CR1B•34 | | | | | | | |
| WB1KB132 | 33 | DR2SC0033 | 27 | DR2SC0027 | 1 | PR4FB0014 | DR5TE1U |
| WB1KB123 | 47 | DR2SC0047 | 33 | DR2SC0033 | 1 | PR4FB0012 | DR5TE1U |
| WB1KB121 | 56 | DR2SC0056 | 56 | DR2SC0056 | 1 | PR4FB0010 | – |
| WB1KB134 | 150 | DR2SC0150 | 120 | DR2SC0120 | 1 | PR4FB0008 | DR5TE1U |
| WB1KB124 | 180 | DR2SC0180 | 150 | DR2SC0150 | 1 | PR4FB0007 | DR5TE1U |
| WB1KB122 | 270 | DR2SC0270 | 220 | DR2SC0220 | 1 | PR4FB0007 | – |
| WB1KB136 | 390 | DR2SC0390 | 390 | DR2SC0390 | 1 | PR4FB0006 | DR5TE1S |
| WB1KB139 | 560 | DR2SC0560 | 470 | DR2SC0470 | 1 | PR4FB0005 | DR5TE1S |

■ Weight of resistors DR2SC••••: 0.030 kg (0.07 lbs).


▲ Weight of automatic coil cut-out contacts: ZC4GM•: 0.030 kg (0.07 lbs) and PR4FB00••: 0.600 kg (1.32 lbs).

♦ Weight of rectifier DR5TE1•: 0.100 kg (0.22 lbs). The rectifier is for use on AC only.


CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors – Accessories and Replacement Parts


For Contactors CR1F




LA5FG431




LA5F40050




PA1LB80
(PALB76 + PA1LB75)



ZC4GM1 PA1LB89



PA1LB50

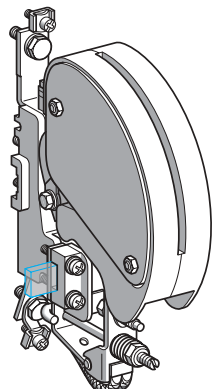

PR4FB00••

| Description | For Contactors | Catalog Number | Weight lb (kg) | |
|-------------------------------------|----------------|----------------|----------------|--------------|
| Sets of contacts for 3 or 4 poles ♦ | 3-pole | CR1F150 | LA5FF431 | 0.59 (0.270) |
| | | CR1F185 | LA5FG431 | 0.77 (0.350) |
| | | CR1F265 | LA5FH431 | 1.45 (0.660) |
| | | CR1F400 | LA5F400803 | 1.45 (0.660) |
| | | CR1F500 | LA5F500803 | 1.45 (0.660) |
| | | CR1F630 | LA5F630803 | 1.45 (0.660) |
| | 4-pole | CR1F1504 | LA5FF441 | 0.79 (0.360) |
| | | CR1F1854 | LA5FG441 | 1.02 (0.465) |
| | | CR1F2654 | LA5FH441 | 1.94 (0.880) |
| | | CR1F4004 | LA5F400804 | 1.02 (0.465) |
| | | CR1F5004 | LA5F500804 | 1.02 (0.465) |
| | | CR1F6304 | LA5F630804 | 1.02 (0.465) |
| Arc chambers | 3-pole | CR1F150 | LA5F15050 | 1.08 (0.490) |
| | | CR1F185 | LA5F18550 | 1.47 (0.670) |
| | | CR1F265 | LA5F26550 | 2.02 (0.920) |
| | | CR1F400 | LA5F40050 | 2.86 (1.300) |
| | | CR1F500 | LA5F50050 | 4.07 (1.850) |
| | | CR1F630 | LA5F63050 | 6.94 (3.150) |
| | 4-pole | CR1F1504 | LA5F150450 | 1.45 (0.660) |
| | | CR1F1854 | LA5F185450 | 2.00 (0.910) |
| | | CR1F2654 | LA5F265450 | 2.68 (1.220) |
| | | CR1F4004 | LA5F400450 | 3.83 (1.740) |
| | | CR1F5004 | LA5F500450 | 5.51 (2.500) |
| | | CR1F6304 | LA5F630450 | 9.25 (4.200) |

♦ Set containing the following (per pole): 2 fixed contacts, 1 moving contact, 2 deflectors, 1 back-plate, clamping screws and washers.

For Contactors CR1B

| Description | For contactors | Number of sets required per pole | Unit catalog Number of set | Weight lb (kg) |
|---|----------------|----------------------------------|----------------------------|----------------|
| Set of contacts (1 moving contact, 1 fixed contact) | CR1BL | 1 | PA1LB80 | 0.92 (0.420) |
| | CR1BM | 1 | PA1LB80 | 0.92 (0.420) |
| | CR1BP | 2 | PA1LB80 | 0.92 (0.420) |
| | CR1BR | 3 | PA1LB80 | 0.92 (0.420) |

| Description | For contactors | Composition | Catalog Number | Weight lb (kg) |
|--|----------------|-----------------------------|----------------|----------------|
| Moving contact only (for one finger) | All ratings | – | PA1LB75 | 0.48 (0.220) |
| Fixed contact only (for one finger) | All ratings | – | PA1LB76 | 0.44 (0.200) |
| Blow-out horn only (for one finger) | All ratings | – | PA1LB89 | 0.26 (0.120) |
| Arc chambers (for a single pole) | CR1BL | – | PA1LB50 | 8.15 (3.700) |
| | CR1BM | – | PA1LB50 | 8.15 (3.700) |
| | CR1BP | – | PA1PB50 | 13.6 (6.200) |
| | CR1BR | – | PA1RB50 | 18.7 (8.500) |
| Auxiliary contact blocks | All ratings | 1 N.O. contact normal | ZC4GM1 | 0.06 (0.030) |
| | All ratings | 1 N.C. contact normal | ZC4GM2 | 0.06 (0.030) |
| | All ratings | 1 N.O. contact gold flashed | ZC4GM9 | 0.06 (0.030) |
| | All ratings | 1 N.C. contact gold flashed | ZC4GM8 | 0.06 (0.030) |
| N.C. pole for automatic cut-out coil | All ratings | – | PR4FB00•• ■ | 1.32 (0.600) |
| Set of moving and fixed contacts for N.C. pole | All ratings | – | PV1FA80 | 0.07 (0.035) |
| Arc chamber for N.C. pole | All ratings | – | PN1FB50 | 0.48 (0.220) |
| Electromagnet | All ratings | – | ET1KB50 | 23.3 (10.600) |

| Description | For contactors | No. of parts required | Catalog number | Weight lb (kg) |
|---|------------------------|-----------------------|----------------|----------------|
| Return springs for moving part of electromagnet | CR1B (1 pole) | 1 | DV1RT292 | 0.11 (0.050) |
| | CR1B (2, 3 or 4 poles) | 2 | DV1RT292 | 0.11 (0.050) |
| N.O. pole springs | CR1BL, BM or BP | 1 per pole | DV1RC201 | 0.04 (0.020) |
| | CR1BR | 1 per pole | DV1RC155 | 0.04 (0.020) |

■ Select complete catalog number from page 259.

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors Type CR1F – Dimensions


Dimensions shown in millimeters (mm x .0394 = inches)

CR1F150 to CR1F500

Common side view

CR1F150, CR1F185, CR1F265

CR1F400, CR1F500

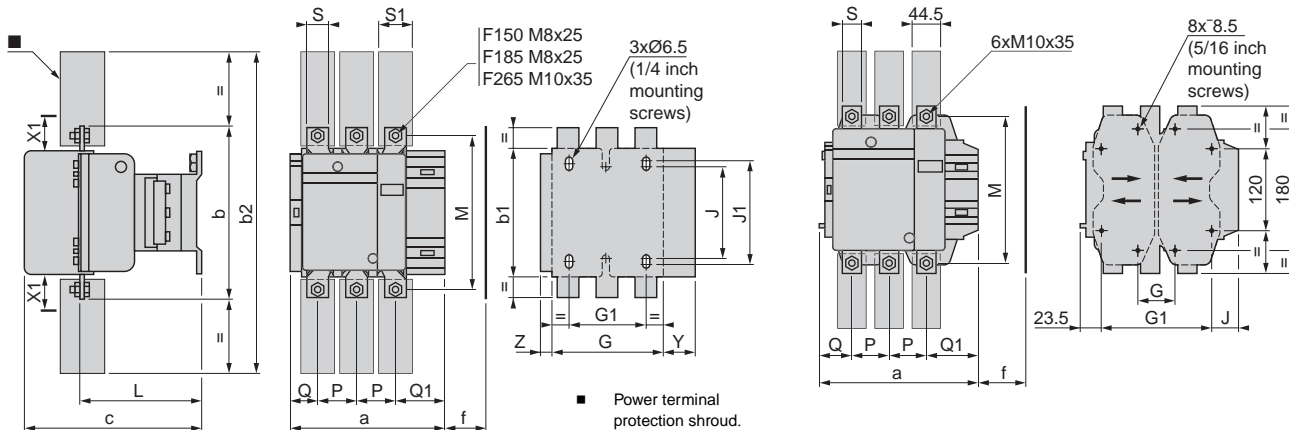


| | CR1F150 | | CR1F185 | | CR1F265 | |
|----|---------|--------|---------|--------|---------|--------|
| | 3 Pole | 4 Pole | 3 Pole | 4 Pole | 3 Pole | 4 Pole |
| a | 163.5 | 201.5 | 168.5 | 208.5 | 201.5 | 244.5 |
| b | 170 | 170 | 174 | 174 | 203 | 203 |
| b1 | 137 | 137 | 137 | 137 | 145 | 145 |
| b2 | 301 | 301 | 305 | 305 | 370 | 370 |
| c | 171 | 171 | 181 | 181 | 213 | 213 |
| f | 131 | 131 | 130 | 130 | 147 | 147 |
| G | 106 | 143 | 111 | 151 | 142 | 190 |
| G1 | 80 | 80 | 80 | 80 | 96 | 96 |
| J | 106 | 106 | 106 | 106 | 106 | 106 |
| J1 | 120 | 120 | 120 | 120 | 120 | 120 |
| L | 107 | 107 | 113.5 | 113.5 | 141 | 141 |
| M | 150 | 150 | 154 | 154 | 178 | 178 |
| P | 40 | 40 | 40 | 40 | 48 | 48 |
| Q | 26 | 26 | 29 | 29 | 39 | 34 |
| Q1 | 57.5 | 55.5 | 59.5 | 59.5 | 66.5 | 66.5 |
| S | 20 | 20 | 20 | 20 | 25 | 25 |
| S1 | 27 | 27 | 34 | 34 | 38 | 38 |
| Y | 44 | 44 | 38.5 | 30.5 | 30.5 | 21.5 |
| Z | 13.5 | 13.5 | 13.5 | 13.5 | 15.5 | 15.5 |

f = minimum distance required for coil removal

X1: Minimum electrical clearance according to operational voltage and breaking capacity

| Voltage in V | 200 to 500 | | 660 to 1000 | |
|--------------|------------|----|-------------|----|
| | CR1F150 | 10 | | 15 |
| CR1F185 | 10 | | 15 | |
| CR1F265 | 10 | | 15 | |

CR1F630

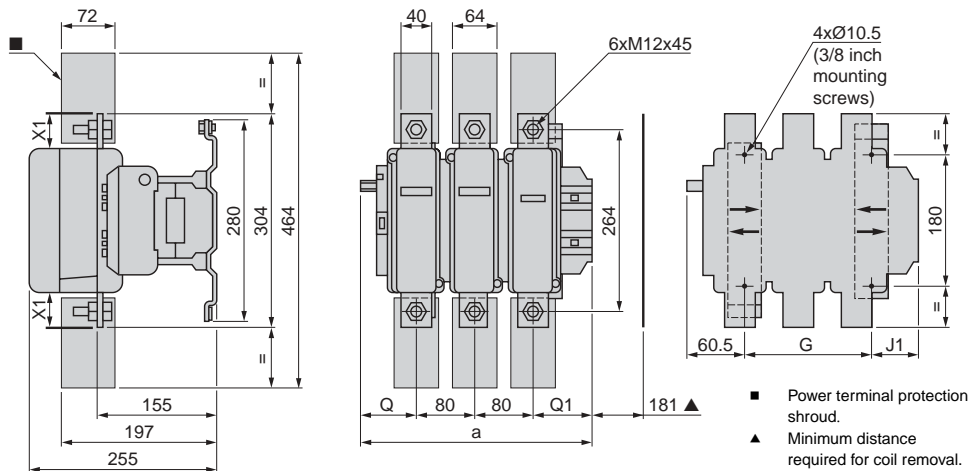

| | CR1F630 | |
|------------|---------|-----|
| | 3 P | 4 P |
| a | 309 | 389 |
| G supplied | 180 | 240 |
| G min | 100 | 150 |
| G max | 195 | 275 |
| J1 | 61 | 81 |
| Q | 60 | 60 |
| Q1 | 89 | 89 |

X1: Minimum electrical clearance according to operational voltage and breaking capacity

| Voltage in V | X1 | |
|--------------|------------|----|
| | 200 to 500 | 20 |
| 690 to 1000 | 30 | |


CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors Type CR1F – Mounting


Dimensions shown in millimeters (mm x.0394 = inches)

CR1F150 to F265


On panel

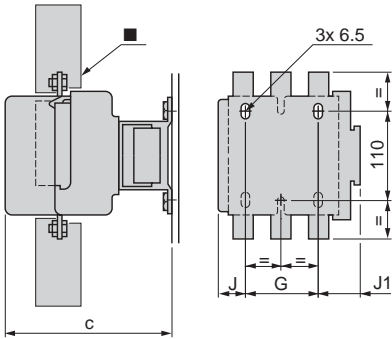

On pre-slotted mounting plate **AM1PA, AM1PB, AM1PC**

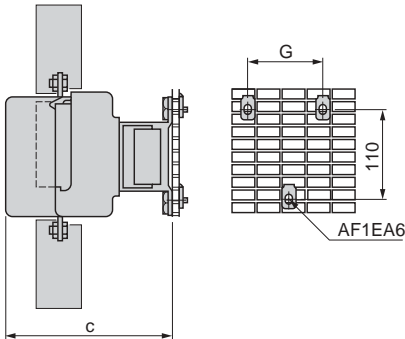

On rails **DZ5MB** at 120 mm mounting center

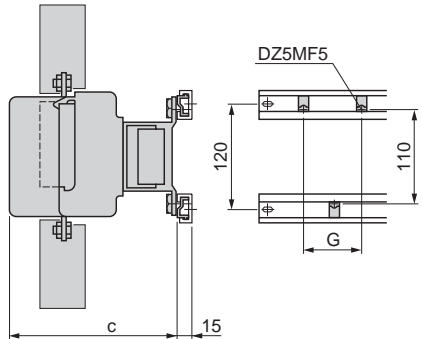

■ Power terminal protection shroud.


| | | CR1F150 | CR1F185 | CR1F265 |
|----|----|---------|---------|---------|
| c | 3P | 171 | 181 | 213 |
| | 4P | 171 | 181 | 213 |
| G | 3P | 80 | 80 | 96 |
| | 4P | 80 | 80 | 96 |
| J | 3P | 26.5 | 29 | 44.5 |
| | 4P | 45 | 49 | 68.5 |
| J1 | 3P | 57 | 59.5 | 61.5 |
| | 4P | 75.5 | 79.5 | 85.5 |

| | | CR1F150 | CR1F185 | CR1F265 |
|---|----|---------|---------|---------|
| c | 3P | 171 | 181 | 213 |
| | 4P | 171 | 181 | 213 |
| G | 3P | 80 | 80 | 96 |
| | 4P | 80 | 80 | 96 |

| | | CR1F150 | CR1F185 | CR1F265 |
|---|----|---------|---------|---------|
| c | 3P | 171 | 181 | 213 |
| | 4P | 171 | 181 | 213 |
| G | 3P | 80 | 80 | 96 |
| | 4P | 80 | 80 | 96 |

CR1F150 to F650

On 2 notched uprights **AM1EC...**

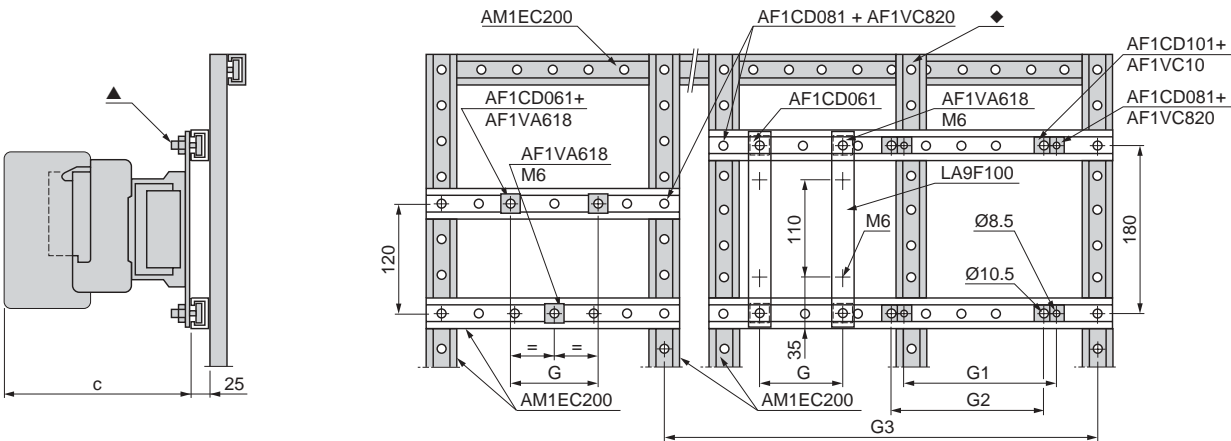

▲ AF1CD... or AF1VA...

◆ This upright **AM1EC200** is required when G2 or G3 is greater than 700 mm.


| | | CR1F150 | CR1F185 | CR1F265 | CR1F400 | CR1F500 | CR1F630 |
|-------------|----|---------|---------|---------|---------|---------|---------|
| c | 3P | 171 | 181 | 213 | 213 | 226 | 250 |
| | 4P | 171 | 181 | 213 | 213 | 226 | 250 |
| G (M6) | 3P | 80 | 80 | 96 | - | - | - |
| | 4P | 80 | 80 | 96 | - | - | - |
| G1 (Ø 8.5) | 3P | - | - | - | 80 | 80 | - |
| | 4P | - | - | - | 80 | 140 | - |
| G2 (Ø 10.5) | 3P | - | - | - | - | - | 180 |
| | 4P | - | - | - | - | - | 240 |

CR1F/CR1B Contactors and Accessories


Magnetic Latching Contactors Type CR1F – Mounting

Dimensions shown in millimeters (mm x .0394 = inches)

Reversing contactors
2 x CR1F150 to CR1F265
Horizontally mounted

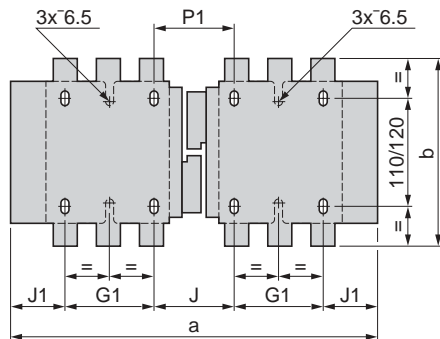

Reversing contactors
2 x CR1F400 to CR1F630

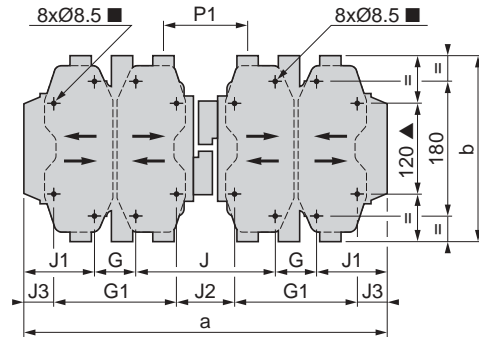

■ Except F630: 4 x Ø 10.5.
▲ Except F630.

| 2 x CR1- | | a | b | G | J | J1 | P1 |
|----------|----|-----|-----|----|-----|------|-----|
| F150 | 3P | 345 | 170 | 80 | 71 | 57 | 71 |
| | 4P | 422 | 170 | 80 | 111 | 75.5 | 71 |
| F185 | 3P | 357 | 174 | 80 | 78 | 59.5 | 78 |
| | 4P | 437 | 174 | 80 | 118 | 79.5 | 78 |
| F265 | 3P | 425 | 203 | 96 | 109 | 61.5 | 100 |
| | 4P | 521 | 203 | 96 | 157 | 85.5 | 100 |

| 2 x CR1- | | a | b | G | G1 | J | J1 | J2 | J3 | P1 |
|----------|----|-----|-----|-----|-----|-----|-------|----|------|-----|
| F400 | 3P | 446 | 206 | 80 | 170 | 157 | 64.5 | 67 | 19.5 | 107 |
| | 4P | 542 | 206 | 80 | 170 | 157 | 112.5 | 67 | 67.5 | 107 |
| F500 | 3P | 485 | 238 | 80 | 170 | 156 | 84.5 | 66 | 39.5 | 112 |
| | 4P | 595 | 238 | 140 | 230 | 156 | 79.5 | 66 | 34.5 | 112 |
| F630 | 3P | 636 | 304 | 180 | - | 139 | 68.5 | - | - | 137 |
| | 4P | 796 | 304 | 240 | - | 139 | 88.5 | - | - | 137 |

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors Type CR1F – Mounting


Dimensions shown in millimeters (mm x .0394 = inches)

Changeover contactor pairs


Vertically mounted with mechanical interlock LA9F***

2 contactors CR1F of identical or different ratings (CR1F150 to CR1F630), see page 240.


Assembly A

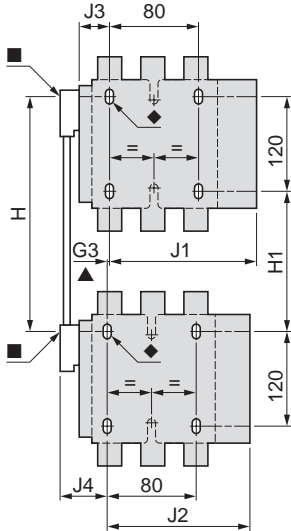

Assembly B

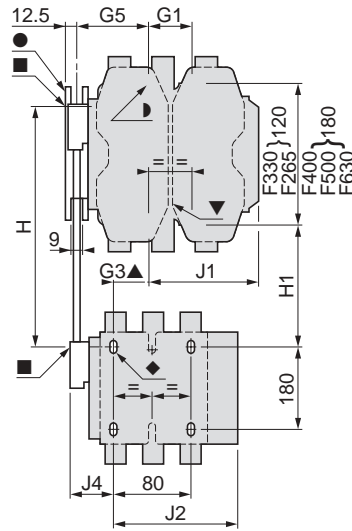

Assembly C

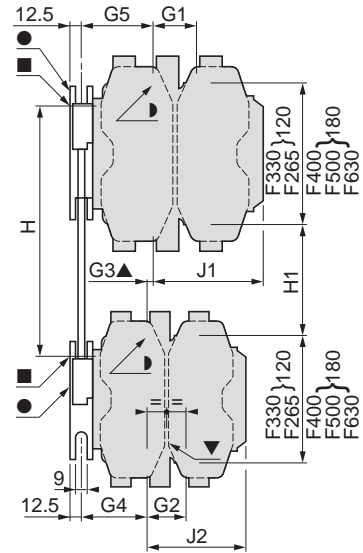

- Mechanical interlock shaft.
- ▲ For assembly of contactors with different ratings only.
- ◆ 3 x Ø 6.5 mm for CR1F150 to F265.
- ▼ 3 x Ø 6.5 mm for CR1F265.
- Mechanical interlock guide bracket.
- 4 x Ø 8.5 mm for CR1F400, F500 or 4 x Ø 10.5 mm.

| Assembly Type | A | | | B | | | | | | | | C | | | | | | | | | |
|---------------|------|------|------|------|-------|------|------|------|-------|------|------|-------|-------|-------|-------|------|------|------|------|------|------|
| | FF4F | FG4F | FG4G | FH4F | FJ4F | FK4F | FL4F | FH4G | FJ4G | FK4G | FL4G | FH4H | FJ4H | FK4H | FL4H | FJ4J | FK4J | FL4J | FK4K | FL4K | FL4L |
| LA9- | 3P | - | - | 96 | 80 | 80 | 180 | 96 | 80 | 80 | 180 | 96 | 80 | 80 | 180 | 80 | 180 | 80 | 180 | 180 | 180 |
| | 4P | - | - | 96 | 80 | 140 | 240 | 96 | 80 | 140 | 240 | 96 | 80 | 140 | 240 | 80 | 140 | 140 | 240 | 240 | 240 |
| G1 | 3P | - | - | - | - | - | - | - | - | - | - | 96 | 96 | 96 | 96 | 80 | 80 | 80 | 80 | 80 | 180 |
| | 4P | - | - | - | - | - | - | - | - | - | - | 96 | 96 | 96 | 96 | 80 | 80 | 80 | 140 | 140 | 240 |
| G2 | 3P | - | - | 21 | 45 | 45 | 35 | 19 | 42 | 42 | 33 | 0 | 23 | 23 | 14 | 0 | 0 | 9* | 0 | 9* | 0 |
| | 4P | - | - | 27 | 26 | 26 | 17 | 23 | 22 | 22 | 13 | 0 | 0 | 0 | 9* | 0 | 0 | 9* | 0 | 9* | 0 |
| G3 | 3P | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 60 | 60 | 60 | 60 | 83 | 83 | 83 | 83 | 83 | 74 |
| | 4P | 0 | 4 | 0 | - | - | - | - | - | - | - | 83 | 83 | 83 | 83 | 83 | 83 | 83 | 83 | 83 | 74 |
| G4 | 3P | - | - | 60 | 83 | 83 | 74 | 60 | 83 | 83 | 74 | 60 | 83 | 83 | 74 | 83 | 83 | 74 | 83 | 74 | 74 |
| | 4P | - | - | 83 | 83 | 83 | 74 | 83 | 83 | 83 | 74 | 83 | 83 | 83 | 74 | 83 | 74 | 83 | 74 | 74 | 74 |
| G5 | 3P | - | - | 240 | 250 | 270 | 310 | 250 | 250 | 270 | 310 | 250 | 260 | 280 | 330 | 260 | 280 | 325 | 300 | 345 | 380 |
| | 4P | - | - | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 |
| H | min | 200 | 210 | 220 | 110 | 80 | 100 | 140 | 120 | 90 | 110 | 130 | 110 | 130 | 170 | 60 | 100 | 140 | 120 | 160 | 200 |
| | max | 310 | 300 | 310 | 250 | 210 | 210 | 210 | 250 | 220 | 220 | 260 | 230 | 230 | 220 | 200 | 200 | 195 | 200 | 195 | 200 |
| H1 | min | 80 | 90 | 100 | 149.5 | 137 | 157 | 241 | 149.5 | 137 | 157 | 149.5 | 137 | 157 | 24 | 137 | 157 | 241 | 157 | 244 | 241 |
| | max | 190 | 180 | 190 | 164.5 | 185 | 212 | 321 | 164.5 | 185 | 212 | 164.5 | 185 | 212 | 321 | 185 | 212 | 321 | 212 | 321 | 321 |
| J1 | 3P | 133 | 134 | 134 | 183 | 133 | 183 | 133 | 134 | 134 | 134 | 142.5 | 149.5 | 149.5 | 149.5 | 137 | 137 | 137 | 157 | 157 | 241 |
| | 4P | 145 | 146 | 146 | 145 | 145 | 145 | 145 | 146 | 146 | 146 | 164.5 | 164.5 | 164.5 | 164.5 | 185 | 185 | 185 | 212 | 212 | 312 |
| J2 | 3P | 133 | 133 | 134 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| | 4P | 145 | 145 | 146 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| J3 | 3P | 48.5 | 53 | 53 | 48.5 | 48.5 | 48.5 | 48.5 | 53 | 53 | 53 | - | - | - | - | - | - | - | - | - | - |
| | 4P | 67 | 73 | 73 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| J4 | 3P | 48.5 | 54 | 53 | 67 | 67 | 67 | 67 | 73 | 73 | 73 | - | - | - | - | - | - | - | - | - | - |
| | 4P | 67 | 69 | 73 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |


* In this case G4 is larger than G5.

CR1F/CR1B Contactors and Accessories


Magnetic Latching Contactors Type CR1F – Mounting

Dimensions shown in millimeters (mm x .0394 = inches)


Common side view

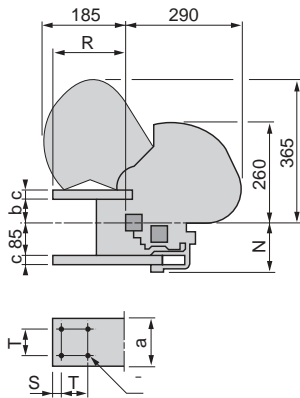

Single-pole, 2-pole, or 3-pole contactors

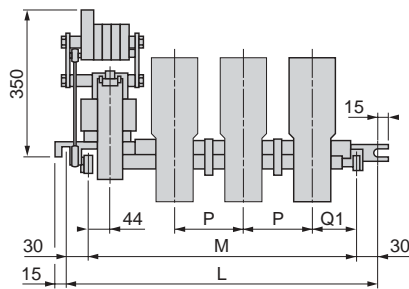


4-pole contactors

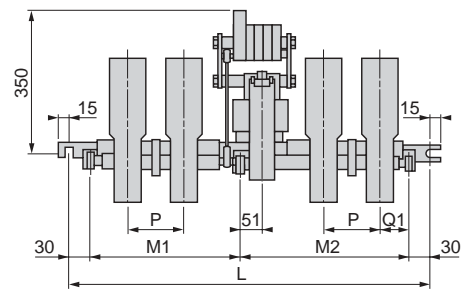

| Number of poles | CR1BL | | | | CR1BM | | | | CR1BP | | | | CR1BR | | | |
|-----------------|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|------|-------|-----|-----|------|
| | 1 | 2 | 3 | 4 | 1 | 2 | 3 | 4 | 1 | 2 | 3 | 4 | 1 | 2 | 3 | 4 |
| a | 50 | 50 | 50 | 50 | 63 | 63 | 63 | 63 | 100 | 100 | 100 | 100 | 125 | 125 | 125 | 125 |
| b | 59 | 59 | 59 | 59 | 55 | 55 | 55 | 55 | 55 | 55 | 55 | 55 | 50 | 50 | 50 | 50 |
| c | 16 | 16 | 16 | 16 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 25 | 25 | 25 | 25 |
| L | 345 | 445 | 540 | 760 | 345 | 445 | 540 | 760 | 385 | 540 | 760 | 1065 | 445 | 635 | 885 | 1065 |
| M | 285 | 385 | 480 | — | 285 | 385 | 480 | — | 325 | 480 | 700 | — | 385 | 575 | 825 | — |
| M1 | — | — | — | 308 | — | — | — | 308 | — | — | — | 455 | — | — | — | 455 |
| M2 | — | — | — | 392 | — | — | — | 392 | — | — | — | 550 | — | — | — | 550 |
| N | 121 | 121 | 121 | 121 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 130 | 130 | 130 | 130 |
| P | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 150 | 150 | 150 | 150 | 195 | 195 | 195 | 195 |
| Q1 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 110 | 110 | 110 | 110 | 123 | 123 | 123 | 123 |
| R | 122 | 122 | 122 | 122 | 157 | 157 | 157 | 157 | 173 | 173 | 173 | 173 | 173 | 173 | 173 | 173 |
| S | 10 | 10 | 10 | 10 | 17 | 17 | 17 | 17 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| T | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 60 | 60 | 60 | 60 | 60 | 60 | 60 | 60 |
| Ø | 9 | 9 | 9 | 9 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 |

Electrical safety clearance

Values X1 and X2 are given for a breaking capacity of 10 In (3-phase AC current).




| 3-phase AC voltage | | CR1BL | CR1BM | CR1BP | CR1BR |
|--------------------|----|-------|-------|-------|-------|
| 380-415-440 V | X1 | 100 | 100 | 150 | 200 |
| | X2 | 150 | 150 | 200 | 250 |
| 500 V | X1 | 100 | 100 | 150 | 200 |
| | X2 | 150 | 150 | 220 | 250 |
| 600 V | X1 | 150 | 150 | 200 | 200 |
| | X2 | 200 | 200 | 250 | 250 |
| 1000 V | X1 | 200 | 200 | 200 | 250 |
| | X2 | 250 | 250 | 250 | 300 |

Mechanical interlock


for assembly of vertically mounted reversing contactors

EZ2LB0601

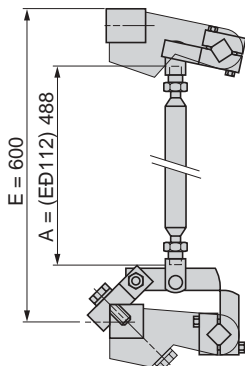

CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors Type CR1B – Adjustment Characteristics

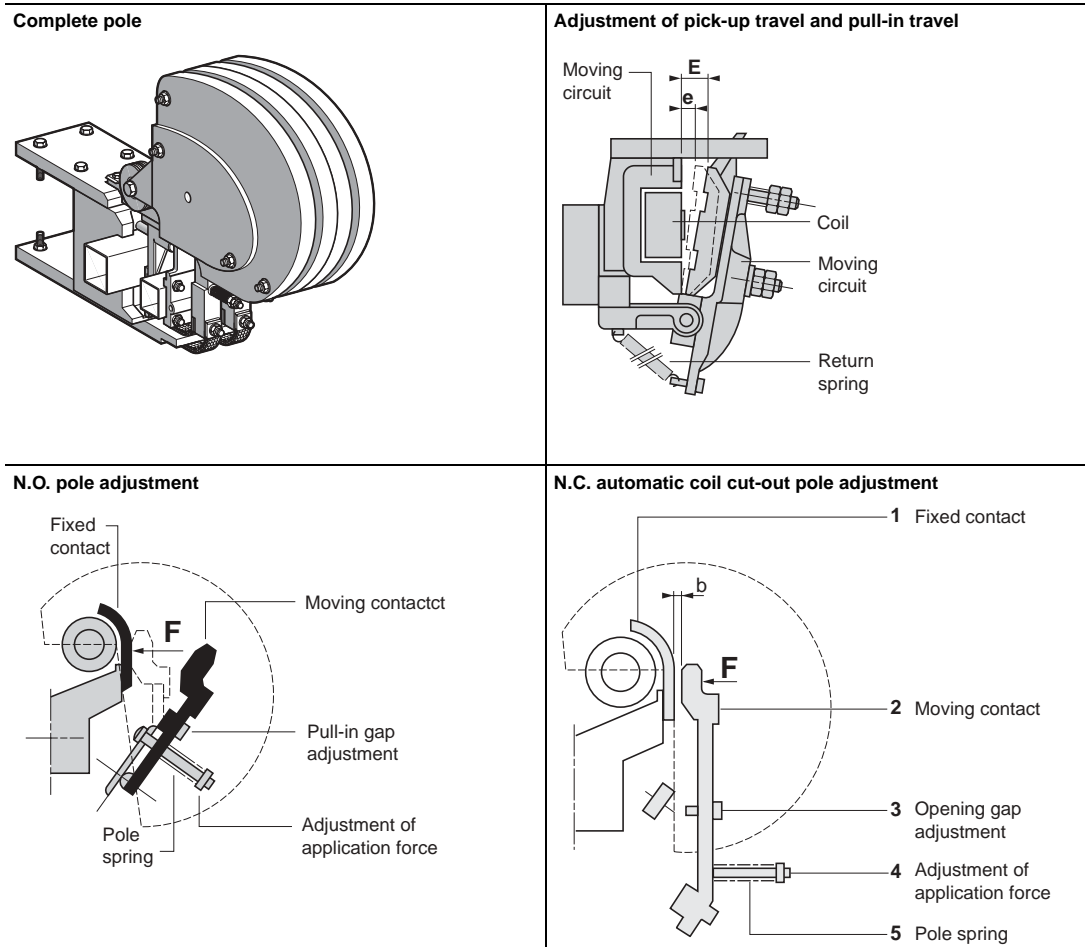

AC or DC supply with economy resistor (and rectifier on AC supply)

| Contactor Type | | | CR1BL | CR1BM | CR1BP | CR1BR |
|--|---|----------|------------|------------|------------|------------|
| Electromagnet (EB5KB50) | Pick-up travel (E) | mm ♦ | 30 | 30 | 30 | 30 |
| | Pull-in travel (e) | mm ♦ | 10 | 10 | 10 | 10 |
| Coil WB1KB | Pull-in voltage | V | 0.75 Vc | 0.75 Vc | 0.75 Vc | – |
| | Drop-out voltage | V | 0.3 to 0.5 | 0.3 to 0.5 | 0.3 to 0.5 | 0.3 to 0.5 |
| N.O. power pole (PA1) | Application force (F) to contact per pole | daN / lb | 30/67 | 30/67 | 30/67 ■ | 30/67 ▲ |
| N.C. automatic coil cut-out pole (PR4) | Application force (F) | daN / lb | 0.9/2 | 0.9/2 | 0.9/2 | 0.9/2 |
| | Opening gap (b) with electromagnet closed | mm ♦ | 3.5 ± 0.5 | 3.5 ± 0.5 | 3.5 ± 0.5 | 3.5 ± 0.5 |

- ♦ millimeters x 0.394 = inches.
- Each pole has 2 contacts: the force must be applied evenly to each of these contacts.
- ▲ Each pole has 3 contacts: the force must be applied evenly to each of these contacts.



CR1F/CR1B Contactors and Accessories

Magnetic Latching Contactors Type CR1F – Schematics


Contactors Type CR1F

3-pole CR1F••33


4-pole CR1F••34




Front mounting add-on contact blocks - Instantaneous auxiliary contacts (References: pages 16 and 17)

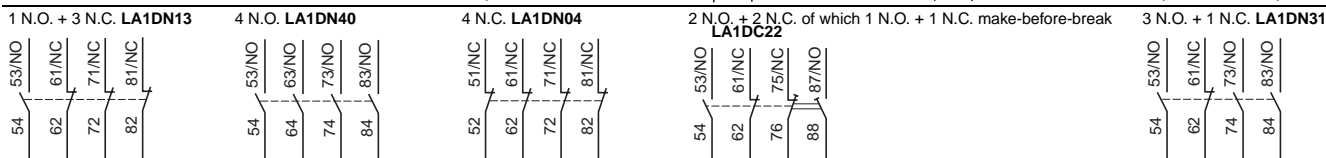


Front mounting add-on contact blocks - Instantaneous auxiliary contacts conforming to standard EN 50012 (References: pages 218 to 219)

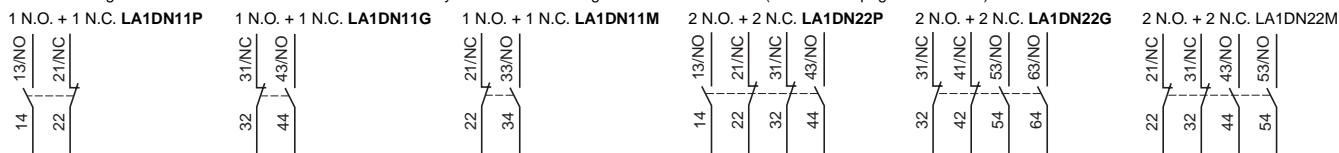

Front mounting add-on contact blocks - Dust and damp protected instantaneous auxiliary contacts (References: pages 218 to 219)

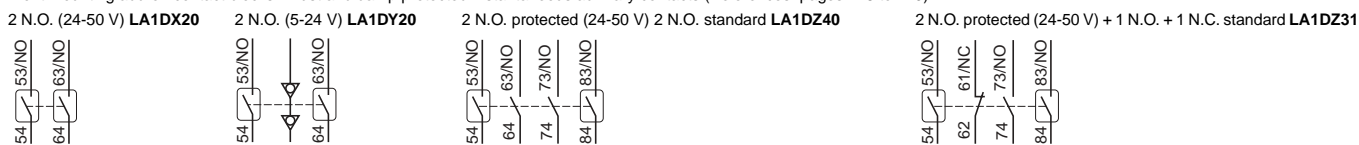


Front mounting add-on contact blocks - Time delay auxiliary contacts (References: pages 218 to 219)

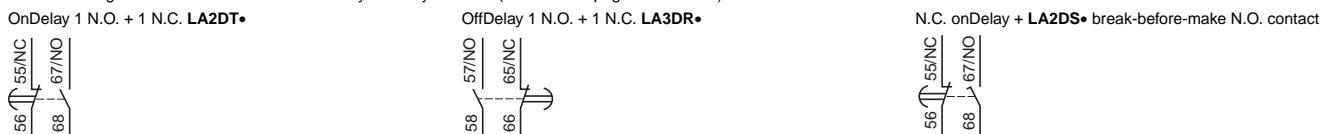


3-pole reversing contactors 2 x CR1F150 to CR1F630

4-pole reversing contactors 2 x CR1F1504 to CR1F6304

Horizontally mounted

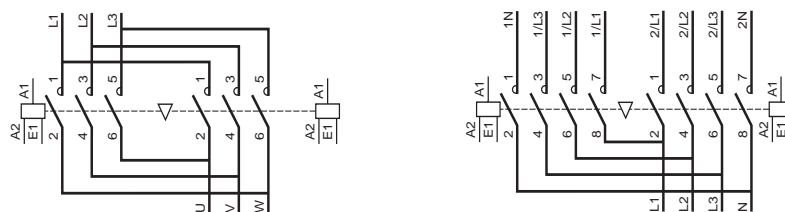

Vertically mounted contactors using 2 contactors of identical or different rating

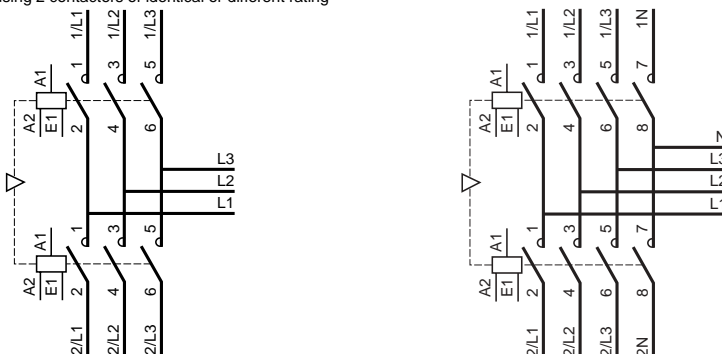


CR1F/CR1B Contactors and Accessories


Magnetic Latching Contactors Type CR1F – Schematics

Contactors Type CR1B


CR1B•31•12




CR1B•31•21




CR1B•31•30




CR1B•32•12




CR1B•32•21




CR1B•32•30




CR1B•33•12



CR1B•33•21




CR1B•33•30



CR1B•34•12



CR1B•34•21




CR1B•34•30




Wiring schematics


Contactors CR1F and CR1B with thermal overload relay

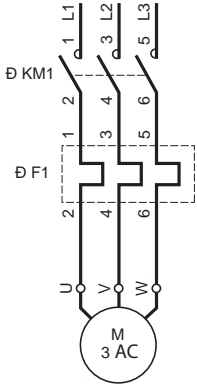

Contactors CR1F

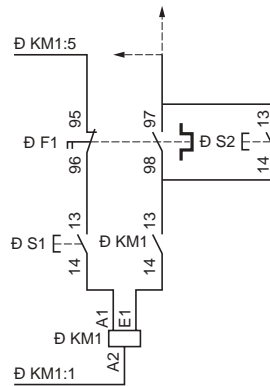


Contactors CR1B

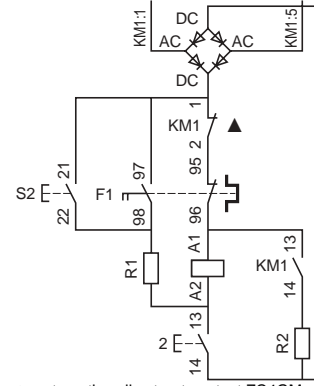


▲: automatic coil cut-out contact ZC4GM or PR4FB00●●
 S1: latching pushbutton
 S2: unlatching pushbutton

Coils for contactors CR1F


Pushbutton control

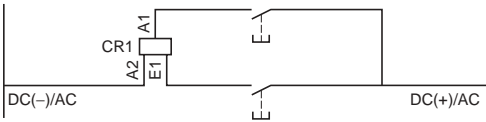

Switch control

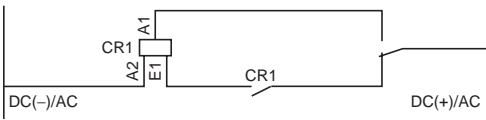

Schematic of internal circuit

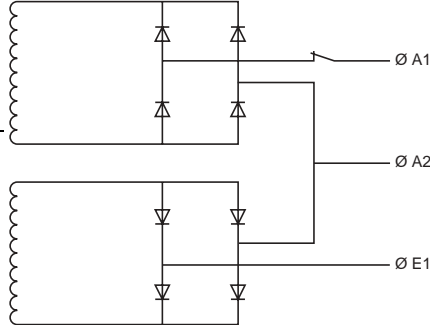

Warning: terminal A2 is common to both windings in all cases.

| | | | | | | | |
|-----------|------------------|-----------|--------------------|-------------|----------|-------------|----------|
| A | | DZ3HA3 | 196 | LA4DE3U | 112 | LA6DK10 | 108 |
| AB1G | 56, 72 | DZ3JA3 | 196 | LAD4RCE | 112 | LA6DK20 | 108 |
| AB1R | 56, 72 | DZF2FX1 | 198 | LAD4RCU | 112 | LA7D03 | 137, 221 |
| AM1DP200 | 56, 72 | E | | LAD4TB | 112 | LA7D1020 | 137, 221 |
| AM1ED200 | 56, 72 | ET1KB50 | 238 | LAD4TS | 112 | LA7D1064 | 137 |
| C | | EZ2LB0601 | 231 | LAD4VE | 112 | LA7D2064 | 137 |
| CR1BL31 | 230 | G | | LAD4VG | 112 | LA7D305 | 137, 221 |
| CR1BL32 | 230 | GV1G09 | 114 | LAD4VU | 112 | LA7D3064 | 137 |
| CR1BL33 | 230 | GV2G245 | 114 | LA4DFBQ | 111 | LA7D3058 | 137 |
| CR1BL34 | 230 | GV2G445 | 114 | LA4DFB | 111 | LA7D901 | 137, 221 |
| CR1BM31 | 230 | GV2ME01 | 177 | LA4DFE | 111 | LA7D902 | 137 |
| CR1BM32 | 230 | GV2ME02 | 177 | LA4DLB | 111 | LA7D903 | 137, 221 |
| CR1BM33 | 230 | GV2ME03 | 177 | LA4DLE | 111 | LA7F401 | 197, 221 |
| CR1BM34 | 230 | GV2ME04 | 177 | LA4DMK | 111 | LA7F402 | 197, 221 |
| CR1BP31 | 230 | GV2ME05 | 177 | LA4DMU | 111 | LA7F403 | 197, 221 |
| CR1BP32 | 230 | GV2ME06 | 177 | LA4DT0U | 111 | LA7F404 | 197, 221 |
| CR1BP33 | 230 | GV2ME07 | 177 | LA4DT2U | 111 | LA7F405 | 197, 221 |
| CR1BP34 | 230 | GV2ME08 | 177 | LA4DT4U | 111 | LA7F406 | 197, 221 |
| CR1BR31 | 230 | GV2ME10 | 177 | LA4DWB | 111 | LA7F407 | 221 |
| CR1BR32 | 230 | GV2ME14 | 177 | LA4FRCE | 196 | LA7F701 | 221 |
| CR1BR33 | 230 | GV2ME16 | 177 | LA4FRCF | 196 | LA7F702 | 221 |
| CR1BR34 | 230 | GV2ME20 | 177 | LA4FRCP | 196 | LA7F703 | 221 |
| CR1F150 | 230 | GV2ME21 | 177 | LA4FRCV | 196 | LA7F901 | 221 |
| CR1F1504 | 230 | GV2ME22 | 177 | LA4FRVE | 196 | LA7F902 | 221 |
| CR1F185 | 230, 233 | GV2ME32 | 177 | LA4FRVF | 196 | LA7K0064 | 63 |
| CR1F1854 | 230, 233 | GV3A01 | 177 | LA4FRVP | 196 | LA9AADIS3 | 155 |
| CR1F265 | 230, 233 | GV3A02 | 177 | LA4FRVV | 196 | LA9AADIS4 | 155 |
| CR1F2654 | 230, 233 | GV3A03 | 177 | LA4FTE | 196 | LA9AADIS5 | 155 |
| CR1F400 | 230, 233 | GV3A05 | 177 | LA4FTF | 196 | LA9AADIS7 | 155 |
| CR1F4004 | 230, 233 | GV3A06 | 177 | LA4FTP | 196 | LA9B103 | 231 |
| CR1F500 | 230, 233 | GV3A08 | 177 | LA4FTV | 196 | LA9CA06DT | 155 |
| CR1F5004 | 230, 233 | GV3A09 | 177 | LA4FDE | 196 | LA9CA06ET | 155 |
| CR1F630 | 230, 233 | GV3A7 | 177 | LA4FDF | 196 | LA9CA06FT | 155 |
| CR1F6304 | 230, 233 | GV3ME06 | 177 | LA4FDP | 196 | LA9CA06GT | 155 |
| D | | L | | LA4FDV | 196 | LA9CA06HT | 155 |
| DE1DS1 | 166 | LA | 231 | LA4KA1U | 56 | LA9CA06IO | 155 |
| DE1DS1A04 | 166 | LA1D | 231 | LA4KC1B | 56 | LA9CA06JT | 155 |
| DE1DS1A05 | 166 | LA1DN11G | 176 | LA4KC1E | 56 | LA9CA06LT | 155 |
| DE1DS1A13 | 166 | LA1DX02 | 107 | LA4KE1B | 56 | LA9CA06NT | 155 |
| DE1DS2 | 166 | LA1DX20 | 107, 195, 216, 245 | LA4KE1E | 56 | LA9CA06ST | 155 |
| DE1DS2A04 | 166 | LA1DY20 | 107, 195, 216, 245 | LA4KE1FC | 56 | LA9CA06UT | 155 |
| DE1DS2A05 | 166 | LA1DZ31 | 107, 195, 216, 245 | LA4KE1UG | 56 | LA9CA06VT | 155 |
| DE1DS2A13 | 166 | LA1DZ40 | 107, 195, 216, 245 | LA4SPX | 108 | LA9CA06WT | 155 |
| DR2SC0010 | 237 | LA1KN02 | 55, 72 | LA5D1158031 | 114 | LA9CA16ST | 155 |
| DR2SC0027 | 237 | LA1KN023 | 55, 72 | LA5D150803 | 114 | LA9CA16UT | 155 |
| DR2SC0033 | 237 | LA1KN027 | 55, 72 | LA5D115804 | 114 | LA9CA16VT | 155 |
| DR2SC0039 | 209, 237 | LA1KN02M | 55, 72 | LA5D11550 | 114 | LA9CA16WT | 155 |
| DR2SC0047 | 209, 237 | LA1KN04 | 55 | LA5D15050B | 114 | LA9D09907 | 160 |
| DR2SC0056 | 237 | LA1KN043 | 55 | LA5D115450B | 114 | LA9D09966 | 113 |
| DR2SC0068 | 237 | LA1KN047 | 55 | LA5F115450 | 199 | LA9D09980 | 196 |
| DR2SC0100 | 237 | LA1KN11 | 55, 72 | LA5F11550 | 199 | LA9D09981 | 196 |
| DR2SC0120 | 237 | LA1KN113 | 55, 72 | LA5F150450 | 199, 238 | LA9D91 | 137 |
| DR2SC0150 | 237 | LA1KN117 | 55, 72 | LA5F15050 | 199, 238 | LA9D11502 | 98 |
| DR2SC0180 | 237 | LA1KN11M | 55, 72 | LA5F185450 | 199, 238 | LA9D115503B | 113 |
| DR2SC0220 | 209, 237 | LA1KN11P | 55, 72 | LA5F18550 | 199, 238 | LA9D115504 | 113 |
| DR2SC0270 | 209, 237 | LA1KN13 | 55 | LA5F225450 | 199 | LA9D115603B | 113 |
| DR2SC0330 | 209, 237 | LA1KN133 | 55 | LA5F22550 | 199 | LA9D115604 | 113 |
| DR2SC0390 | 209, 237 | LA1KN137 | 55 | LA5F265450 | 199, 238 | LA9D115703 | 113 |
| DR2SC0470 | 237 | LA1KN13M | 55 | LA5F26550 | 199, 238 | LA9D11569 | 98 |
| DR2SC0560 | 237 | LA1KN20 | 55, 72 | LA5F330450 | 199 | LA9D115704 | 113 |
| DR2SC0680 | 237 | LA1KN203 | 55, 72 | LA5F33050 | 199 | LA9D1260 | 113 |
| DR2SC1000 | 209, 237 | LA1KN207 | 55, 72 | LA5F400250 | 199 | LA9D1261 | 113 |
| DR2SC1200 | 209 | LA1KN22 | 55 | LA5F400450 | 199, 238 | LA9D1263 | 113 |
| DR2SC3300 | 209 | LA1KN223 | 55 | LA5F40050 | 199, 238 | LA9D12974 | 149 |
| DR2SC3900 | 209 | LA1KN227 | 55 | LA5F400802 | 199 | LA9D2561 | 113 |
| DR2SC4700 | 209 | LA1KN22M | 55 | LA5F400803 | 199, 238 | LA9D11569 | 98 |
| DR5TE1S | 237 | LA1KN22P | 55 | LA5F400804 | 199, 238 | LA9D3260 | 113 |
| DR5TE1U | 237 | LA1KN31 | 55 | LA5F500250 | 199 | LA9D32974 | 149 |
| DV1RC155 | 238 | LA1KN313 | 55 | LA5F500450 | 199, 238 | LA9D4002 | 98 |
| DV1RC201 | 238 | LA1KN317 | 55 | LA5F50050 | 199, 238 | LA9D40961 | 113 |
| DV1RT292 | 238 | LA1KN31M | 55 | LA5F500802 | 199 | LA9D40963 | 113 |
| DX1AP25 | 56, 72, 134, 137 | LA1KN40 | 55 | LA5F500803 | 199, 238 | LA9D4017 | 149 |
| DX1AP26 | 134 | LA1KN403 | 55 | LA5F500804 | 199, 238 | LA9D40961 | 113 |
| DZ2FF1 | 198, 220 | LA1KN407 | 55 | LA5F630250 | 199 | LA9D40963 | 113 |
| DZ2FF6 | 198 | LA2KT2E | 55, 72 | LA5F630450 | 199, 238 | LA9D40973 | 149 |
| DZ2FG1 | 198 | LA2KT2U | 55, 72 | LA5F63050 | 199, 238 | LA9D5017 | 149 |
| DZ2FG6 | 198, 220 | LA4DA2E | 112 | LA5F630802 | 199 | LA9D50978 | 98 |
| DZ2FH1 | 198, 220 | LA4DA2G | 112 | LA5F630803 | 199, 238 | LA9D511 | 114 |
| DZ2FH6 | 198, 220 | LA4DA2U | 112 | LA5F630804 | 199, 238 | LA9D6567 | 113 |
| DZ2FJ1 | 198, 220 | LA4DA2N | 112 | LA5F780150 | 199 | LA9D6569 | 98 |
| DZ2FJ6 | 198 | LA4DB2B | 112 | LA5F780801 | 199 | LA9D730 | 114 |
| DZ2FK1 | 198, 220 | LA4DB2S | 112 | LA5F780803 | 199 | LA9D8002 | 98 |
| DZ2FK6 | 198 | LA4DB3B | 112 | LA5F780804 | 199 | LA9D8017 | 149 |
| DZ2FL | 198 | LA4DB3S | 112 | LA5F80050 | 199 | LA9D8067 | 113 |
| DZ2FL1 | 220 | LA4DC1U | 112 | LA5F800803 | 199 | LA9D8069 | 98 |
| DZ2FL2 | 220 | LA4DC3U | 112 | LA5FF431 | 199, 238 | LA9D80961 | 113 |
| DZ2FL3 | 220 | LA4DE2E | 112 | LA5FF441 | 199, 238 | LA9D80962 | 113 |
| DZ2FL6 | 198 | LA4DE2G | 112 | LA5FG431 | 199, 238 | LA9D80963 | 113 |
| DZ2FX6 | 198 | LA4DE2U | 112 | LA5FG441 | 199, 238 | LA9D80973 | 149 |
| DZ3FA3 | 196 | LA4DE3E | 112 | LA5FH431 | 199, 238 | LA9D80978 | 98 |
| DZ3GA3 | 196 | LA4DE3G | 112 | LA5FH441 | 199, 238 | LA9D90 | 56, 72 |

Catalog Number Index

| | | | | | | | |
|-----------|---------------|-------------|-----------------------|------------|-----------------------|---------------------------|-------------|
| LA9D901 | 114 | LA9FL980 | 197 | LC1D12 | 88, 91, 149, 175, 176 | LC1F630 | 188, 189 |
| LA9D92 | 114 | LA9FL981 | 197 | LC1D123 | 89, 91 | LC1F6302 | 188, 189 |
| LA9D93 | 114 | LA9FL982 | 191 | LC1D126 | 90, 92, 175 | LC1F6304 | 188, 189 |
| LA9D941 | 114 | LA9FX970 | 191 | LC1D128 | 91, 175 | LC1F780 | 188, 189 |
| LA9D973 | 56, 72 | LA9FX971u | 193 | LC1D1283 | 91 | LC1F7804 | 188, 189 |
| LA9D9PVG | 98 | LA9K0969 | 56, 72 | LC1D1286 | 92 | LC1F800 | 188, 189 |
| LA9E01 | 56, 72 | LA9K0970 | 56, 72 | LC1D129 | 175 | LC1K0601 | 43 |
| LA9E02 | 56, 72 | LA9P5152 | 114 | LC1D150 | 88, 91, 149, 175 | LC1K06013 | 43 |
| LA9F | 233 | LA9TD32 | 155 | LC1D1506 | 90, 92, 175 | LC1K06015 | 43 |
| LA9F103 | 137, 198, 231 | LA9TD80 | 155 | LC1D18 | 88, 91, 149, 175, 176 | LC1K06017 | 43 |
| LA9F15076 | 191 | LAD21 | 114 | LC1D183 | 89, 91 | LC1K0610 | 43 |
| LA9F15077 | 193 | LAD22 | 114 | LC1D186 | 90, 92, 175 | LC1K06103 | 43 |
| LA9F15082 | 191 | LAD23 | 114 | LC1D25 | 88, 91, 175, 176 | LC1K06105 | 43 |
| LA9F22576 | 191 | LAD24 | 114 | LC1D253 | 89, 91 | LC1K06107 | 43 |
| LA9F22577 | 193 | LAD3PVP | 98 | LC1D256 | 90, 92, 175 | LC1K09004 | 46 |
| LA9F22582 | 191 | LAD4 | 112 | LC1D258 | 91, 175 | LC1K090043 | 46, 47 |
| LA9F701 | 198, 221 | LAD4BB | 109, 111, 114 | LC1D2583 | 91 | LC1K090045 | 46 |
| LA9F702 | 198, 221 | LAD4BBVE | 114 | LC1D2586 | 92, 175 | LC1K090047 | 46 |
| LA9F703 | 198, 221 | LAD4BBVG | 114 | LC1D32 | 88, 91, 149, 175 | LC1K09008 | 46 |
| LA9F704 | 198 | LAD4BBVU | 114 | LC1D323 | 89 | LC1K090083 | 46, 47 |
| LA9F705 | 221 | LAD6K10 | 108 | LC1D326 | 90, 92, 175 | LC1K090085 | 46 |
| LA9F706 | 198 | LAD8N11 | 107, 176 | LC1D38 | 88, 91, 175 | LC1K090087 | 46 |
| LA9F707 | 198 | LAD8N20 | 107, 176 | LC1D383 | 89 | LC1K0901 | 43, 46 |
| LA9F708 | 198 | LAD8N02 | 107 | LC1D386 | 90, 92, 175 | LC1K09013 | 43, 46, 47 |
| LA9F709 | 198 | LAD7C | 137 | LC1D40 | 88, 91, 149, 175 | LC1K09015 | 43, 46 |
| LA9F980 | 196 | LAD7C2 | 137 | LC1D40004 | 91 | LC1K09017 | 43, 46 |
| LA9FF4F | 191, 193, 233 | LAD7B10 | 137 | LC1D400046 | 92 | LC1K0910 | 43, 46 |
| LA9FF601 | 196 | LAD7B105 | 137 | LC1D40008 | 91 | LC1K09103 | 43, 46, 47 |
| LA9FF602 | 196 | LAD7305 | 137 | LC1D400086 | 92 | LC1K09105 | 43, 46 |
| LA9FF970 | 191, 193, 233 | LAD703 | 137 | LC1D406 | 90, 92, 175 | LC1K09107 | 43, 46 |
| LA9FF976 | 191, 233 | LAD8 | 100 | LC1D50 | 88, 91, 149, 175 | LC1K1201 | 43 |
| LA9FF977 | 193, 233 | LAD9091 | 165 | LC1D506 | 90, 175 | LC1K12013 | 43 |
| LA9FF979 | 197 | LAD9092 | 165 | LC1D6LE7 | 118 | LC1K12015 | 43 |
| LA9FF980 | 197 | LAD91217 | 149 | LC1D65 | 88, 91, 175 | LC1K12017 | 43 |
| LA9FF981 | 197 | LAD912GVq | 149 | LC1D65004 | 91 | LC1K1210 | 43 |
| LA9FF982 | 191 | LAD91810 | 165 | LC1D800046 | 92 | LC1K12103 | 43 |
| LA9FG4F | 193, 233 | LAD93217 | 149 | LC1D65008 | 91 | LC1K12105 | 43 |
| LA9FG4G | 191, 193, 233 | LAD96060 | 113 | LC1D800086 | 92 | LC1K12107 | 43 |
| LA9FG601 | 196 | LAD9P3 | 113 | LC1D806 | 90, 92, 175 | LC1K1601 | 43 |
| LA9FG602 | 196 | LAD9ECT1 | 114 | LC1D80 | 88, 91, 149, 175 | LC1K16013 | 43 |
| LA9FG970 | 191, 193, 233 | LAD9ET1 | 114 | LC1D80004 | 91 | LC1K16015 | 43 |
| LA9FG976 | 191, 233 | LAD9ET2 | 114 | LC1D800046 | 92 | LC1K16017 | 43 |
| LA9FG977 | 193, 233 | LAD9ET3 | 114 | LC1D80008 | 91 | LC1K1610 | 43 |
| LA9FG979 | 197 | LAD9ET4 | 114 | LC1D800086 | 92 | LC1K16103 | 43 |
| LA9FG980 | 197 | LAD9R1 | 98 | LC1D806 | 90, 92, 175 | LC1K16105 | 43 |
| LA9FG981 | 197 | LAD9R1V | 98 | LC1D95 | 88, 91, 92, 175 | LC1K16107 | 43 |
| LA9FG982 | 193 | LAD9T4 | 165 | LC1D956 | 90, 175 | LC2D09 | 93, 176 |
| LA9FH4F | 193, 233 | LAD9V1 | 98 | LC1DFK02 | 142 | LC2D0906 | 176 |
| LA9FH4G | 193, 233 | LAD9V10 | 98 | LC1DFK11 | 142 | LC2D093 | 94 |
| LA9FH4H | 191, 193, 233 | LAD9V11 | 98 | LC1DGG02 | 142 | LC2D096 | 95, 176 |
| LA9FH601 | 196 | LAD9V12 | 98 | LC1DGGK11 | 142 | LC2D099 | 176 |
| LA9FH602 | 196 | LAD9V13 | 98 | LC1DLK02 | 142 | LC2D115 | 176 |
| LA9FH976 | 191, 233 | LAD9V2 | 98 | LC1DLK11 | 142 | LC2D11500 | 93 |
| LA9FH977 | 193, 233 | LAD9V5 | 98 | LC1DMK02 | 142 | LC2D115004 | 96 |
| LA9FH982 | 191 | LAD9V6 | 98 | LC1DMK11 | 142 | LC2D1150046 ²² | 97 |
| LA9FJ4F | 193, 233 | LADC22 | 107, 176, 195 | LC1DPK12 | 142 | LC2D1156 | 95, 176 |
| LA9FJ4G | 193, 233 | LADLVRT | 109 | LC1DT188 | 91 | LC2D12 | 93, 176 |
| LA9FJ4H | 193, 233 | LADN01 | 107, 176, 195 | LC1DT1886 | 92 | LC2D123 | 94 |
| LA9FJ4J | 191, 193, 233 | LADN02 | 107, 176, 195 | LC1DT20 | 91 | LC2D126 | 95, 176 |
| LA9FJ970 | 191, 193, 233 | LADN04 | 107, 176, 195 | LC1DT203 | 91 | LC2D129 | 176 |
| LA9FJ976 | 191, 233 | LADN10 | 107, 176, 195 | LC1DT206 | 92 | LC2D150 | 176 |
| LA9FJ977 | 193, 233 | LADN11 | 107, 176, 195 | LC1DT25 | 91, 175 | LC2D15000 | 93 |
| LA9FJ979 | 197 | LADN11G | 107, 176, 195 | LC1DT253 | 91 | LC2D1506 | 95, 176 |
| LA9FJ980 | 197 | LADN11P | 107, 176, 195 | LC1DT256 | 92, 175 | LC2D18 | 93, 176 |
| LA9FJ981 | 197 | LADN13 | 107, 176, 195 | LC1DT2583 | 91 | LC2D183 | 94 |
| LA9FJ982 | 191 | LADN20 | 107, 176, 195 | LC1DT32 | 91 | LC2D186 | 95, 176 |
| LA9FK4F | 193, 233 | LADN22 | 107, 176, 195 | LC1DT323 | 91 | LC2D25 | 93, 176 |
| LA9FK4G | 193, 233 | LADN22G | 107, 176, 195 | LC1DT326 | 92 | LC2D253 | 94 |
| LA9FK4H | 193, 233 | LADN22P | 107, 176, 195 | LC1DT40 | 91, 175 | LC2D256 | 95, 176 |
| LA9FK4J | 193, 233 | LADN31 | 107, 176, 195 | LC1DT403 | 91 | LC2D32 | 93, 176 |
| LA9FK4K | 191, 193, 233 | LADN31G | 176 | LC1DT406 | 92, 175 | LC2D323 | 94 |
| LA9FK601 | 196 | LADN31P | 176 | LC1DTK12 | 142 | LC2D326 | 95, 176 |
| LA9FK602 | 196 | LADN40 | 107, 176, 195 | LC1DWWK12 | 142 | LC2D38 | 93, 176 |
| LA9FK976 | 191, 233 | LADR0 | 108, 176, 195 | LC1F115 | 188, 189 | LC2D383 | 94 |
| LA9FK977 | 193, 233 | LADR2 | 108, 176, 195 | LC1F1154 | 188, 189 | LC2D386 | 95, 176 |
| LA9FK979 | 197 | LADR4 | 108, 176, 195 | LC1F150 | 188, 189 | LC2D40 | 93, 176 |
| LA9FK980 | 197 | LADS2 | 108, 176, 195 | LC1F1504 | 188, 189 | LC2D50 | 93, 176 |
| LA9FK981 | 197 | LADT0 | 108, 176, 195 | LC1F185 | 188, 189 | LC2D65 | 93, 176 |
| LA9FK982 | 191 | LADT2 | 108, 176, 195 | LC1F1854 | 188, 189 | LC2D65004 | 96 |
| LA9FL4F | 193, 233 | LADT4 | 108, 176, 195 | LC1F225 | 188, 189 | LC2D650046 | 97 |
| LA9FL4G | 193, 233 | LC1D09 | 88, 91, 149, 175, 176 | LC1F2254 | 188, 189 | LC2D80 | 93, 176 |
| LA9FL4H | 193, 233 | LC1D093 | 89, 91 | LC1F265 | 188, 189 | LC2D80004 | 96 |
| LA9FL4J | 193, 233 | LC1D096 | 90, 92, 175 | LC1F2654 | 188, 189 | LC2D800046 | 97 |
| LA9FL4K | 193, 233 | LC1D098 | 91 | LC1F330 | 188, 189 | LC2D95 | 93, 176 |
| LA9FL4L | 191, 193, 233 | LC1D0983 | 91 | LC1F3304 | 188, 189 | LC2DT20 | 96, 97 |
| LA9FL601 | 196 | LC1D0986 | 92 | LC1F400 | 188, 189 | LC2DT25 | 96, 97, 176 |
| LA9FL602 | 196 | LC1D099 | 175 | LC1F4002 | 188, 189 | LC2DT256 | 176 |
| LA9FL970 | 191, 193, 233 | LC1D115 | 88, 91, 149, 175 | LC1F4004 | 188, 189 | LC2DT32 | 96, 97 |
| LA9FL976 | 191, 233 | LC1D115004 | 91 | LC1F500 | 188, 189 | LC2DT40 | 96, 97, 176 |
| LA9FL977 | 193, 233 | LC1D1150046 | 92 | LC1F5002 | 188, 189 | LC2DT406 | 176 |
| LA9FL979 | 197 | LC1D1156 | 90, 92, 175 | LC1F5004 | 188, 189 | LC2DT60 | 96, 97 |

| | | | | | | | |
|------------|--------|------------|--------|------------|----------|------------|--------|
| LC2K0601 | 48 | LC8K090045 | 51 | LE2D256 | 162 | LP1K090047 | 47 |
| LC2K06013 | 48 | LC8K090047 | 51 | LE2D256B6 | 153 | LP1K09008 | 47 |
| LC2K06015 | 48 | LC8K0901 | 49, 51 | LE2D256B7 | 153 | LP1K090085 | 47 |
| LC2K06017 | 48 | LC8K09015 | 49, 51 | LE2D257E6 | 153 | LP1K090087 | 47 |
| LC2K0610 | 48 | LC8K09017 | 49, 51 | LE2D257E7 | 153 | LP1K0901 | 45, 47 |
| LC2K06103 | 48 | LC8K0910 | 49, 51 | LE2D323A6 | 151 | LP1K09013 | 45 |
| LC2K06105 | 48 | LC8K09105 | 49, 51 | LE2D323A7 | 151 | LP1K09015 | 45, 47 |
| LC2K06107 | 48 | LC8K09107 | 49, 51 | LE2D326 | 162 | LP1K09017 | 45, 47 |
| LC2K09004 | 51 | LC8K1201 | 49 | LE2D326C6 | 153 | LP1K0910 | 45, 47 |
| LC2K090043 | 51 | LC8K12015 | 49 | LE2D326C7 | 153 | LP1K09103 | 45 |
| LC2K090045 | 51 | LC8K12017 | 49 | LE2D327F6 | 153 | LP1K09105 | 45, 47 |
| LC2K090047 | 51 | LC8K1210 | 49 | LE2D327F7 | 153 | LP1K09107 | 45, 47 |
| LC2K0901 | 48, 51 | LC8K12105 | 49 | LE2D35 | 159 | LP1K1201 | 45 |
| LC2K09013 | 48, 51 | LC8K12107 | 49 | LE2D403A6 | 151 | LP1K12013 | 45 |
| LC2K09015 | 48, 51 | LE1D09 | 159 | LE2D403A7 | 151 | LP1K12015 | 45 |
| LC2K09017 | 48, 51 | LE1D093A6 | 151 | LE2D406 | 159, 162 | LP1K12017 | 45 |
| LC2K0910 | 48, 51 | LE1D093A7 | 151 | LE2D406C6 | 153 | LP1K1210 | 45 |
| LC2K09103 | 48, 51 | LE1D096B6 | 153 | LE2D406C7 | 153 | LP1K12103 | 45 |
| LC2K09105 | 48, 51 | LE1D096B7 | 153 | LE2D407F6 | 153 | LP1K12105 | 45 |
| LC2K09107 | 48, 51 | LE1D097D6 | 153 | LE2D407F7 | 153 | LP1K12107 | 45 |
| LC2K1201 | 48 | LE1D097D7 | 153 | LE2D503A6 | 151 | LP2D40004 | 96 |
| LC2K12013 | 48 | LE1D12 | 159 | LE2D503A7 | 151 | LP2400046 | 97 |
| LC2K12015 | 48 | LE1D123A6 | 151 | LE2D506 | 159, 162 | LP2D80004 | 96 |
| LC2K12017 | 48 | LE1D126B6 | 153 | LE2D653A6 | 151 | LP2D800046 | 97 |
| LC2K1210 | 48 | LE1D126B7 | 153 | LE2D653A7 | 151 | LP2K0601 | 50 |
| LC2K12103 | 48 | LE1D127D6 | 153 | LE2D656 | 159 | LP2K06015 | 50 |
| LC2K12105 | 48 | LE1D127D7 | 153 | LE2D803A6 | 151 | LP2K06017 | 50 |
| LC2K12107 | 48 | LE1D18 | 159 | LE2D803A7 | 151 | LP2K06103 | 50 |
| LC2K1601 | 48 | LE1D183A6 | 151 | LE2D805 | 159 | LP2K06105 | 50 |
| LC2K16013 | 48 | LE1D183A7 | 151 | LE2D806 | 159 | LP2K06107 | 50 |
| LC2K16015 | 48 | LE1D186B7 | 153 | LE2D655 | 161 | LP2K09004 | 52 |
| LC2K16017 | 48 | LE1D187E6 | 153 | LE2D656 | 162 | LP2K090045 | 52 |
| LC2K1610 | 48 | LE1D187E7 | 153 | LE2D805 | 163 | LP2K090047 | 52 |
| LC2K16103 | 48 | LE1D25 | 159 | LE2D806 | 162 | LP2K09013 | 50, 52 |
| LC2K16105 | 48 | LE1D253A6 | 151 | LE2D955 | 159 | LP2K09015 | 50, 52 |
| LC2K16107 | 48 | LE1D253A7 | 151 | LE2K065 | 159 | LP2K09017 | 50, 52 |
| LC3D090A | 146 | LE1D256B6 | 153 | LE2K095 | 159 | LP2K09103 | 50, 52 |
| LC3D09A | 146 | LE1D256B7 | 153 | LE3D09 | 163 | LP2K09105 | 50, 52 |
| LC3D115 | 146 | LE1D257E7 | 153 | LE3D12 | 163 | LP2K09107 | 50, 52 |
| LC3D120A | 146 | LE1D323A6 | 151 | LE3D32 | 163 | LP2K12013 | 50 |
| LC3D12A | 146 | LE1D323A7 | 151 | LE3D405 | 163 | LP2K12015 | 50 |
| LC3D150 | 146 | LE1D326C6 | 153 | LE3D406 | 164 | LP2K12017 | 50 |
| LC3D180A | 146 | LE1D326C7 | 153 | LE3D505 | 163 | LP2K1210 3 | 50 |
| LC3D18A | 146 | LE1D327F6 | 153 | LE3D506 | 164 | LP2K12105 | 50 |
| LC3D320A | 146 | LE1D327F7 | 153 | LE3D805 | 163 | LP2K12107 | 50 |
| LC3D32A | 146 | LE1D35 | 159 | LE3D806 | 164 | LP4K0601 | 68 |
| LC3D40 | 146 | LE1D403A6 | 151 | LE3K065 | 163 | LP4K06013 | 68 |
| LC3D50 | 146 | LE1D403A7 | 151 | LE3K095 | 163 | LP4K06015 | 68 |
| LC3D80 | 146 | LE1D405 | 159 | LE4K065 | 159 | LP4K06017 | 68 |
| LC3K06 | 146 | LE1D406C6 | 153 | LE4K095 | 159 | LP4K0610 | 68 |
| LC3K09 | 146 | LE1D406C7 | 153 | LE4D09 | 159 | LP4K06103 | 68 |
| LC4D09A | 144 | LE1D407F6 | 153 | LE4D09 | 159 | LP4K06105 | 68 |
| LC4D12A | 144 | LE1D407F7 | 153 | LE4D12 | 159 | LP4K06107 | 68 |
| LC4D18A | 144 | LE1D503A6 | 151 | LE4D18 | 159 | LP4K09004 | 70 |
| LC4D25A | 144 | LE1D503A7 | 151 | LE4D25 | 159 | LP4K090043 | 70 |
| LC4D32A | 144 | LE1D505 | 159 | LE4D35 | 159 | LP4K090045 | 70 |
| LC4D40 | 144 | LE1D653A6 | 151 | LE4D406 | 159 | LP4K090047 | 70 |
| LC4D50 | 144 | LE1D653A7 | 151 | LE4D506 | 159 | LP4K09008 | 70 |
| LC4D65 | 144 | LE1D655 | 159 | LE4D656 | 159 | LP4K090083 | 70 |
| LC4D80 | 144 | LE1D803A6 | 151 | LE4D806 | 159 | LP4K090085 | 70 |
| LC7K0601 | 44 | LE1D803A7 | 151 | LE6D09 | 164 | LP4K090087 | 70 |
| LC7K06015 | 44 | LE1D805 | 159 | LE6D12 | 164 | LP4K0901 | 68, 70 |
| LC7K06017 | 44 | LE1D955 | 159 | LE6D18 | 164 | LP4K09013 | 68, 70 |
| LC7K0610 | 44 | LE2D09 | 159 | LE6D326 | 164 | LP4K09015 | 68, 70 |
| LC7K06105 | 44 | LE2D093A6 | 151 | LE8K065 | 159, 162 | LP4K09017 | 68, 70 |
| LC7K06107 | 44 | LE2D093A7 | 151 | LE8K095 | 159, 162 | LP4K0910 | 68, 70 |
| LC7K09004 | 46 | LE2D096 | 162 | LE8D09 | 159 | LP4K09103 | 68, 70 |
| LC7K090045 | 46 | LE2D096B6 | 153 | LE8D12 | 159 | LP4K09105 | 68, 70 |
| LC7K090047 | 46 | LE2D096B7 | 153 | LE8D18 | 159 | LP4K09107 | 68, 70 |
| LC7K09008 | 46 | LE2D097D6 | 153 | LE8D25 | 159 | LP4K1201 | 68 |
| LC7K090085 | 46 | LE2D097D7 | 153 | LE8D35 | 159 | LP4K12013 | 68 |
| LC7K090087 | 46 | LE2D12 | 159 | LP1D40004 | 91, 92 | LP4K12015 | 68 |
| LC7K0901 | 44, 46 | LE2D123A6 | 151 | LP1D40008 | 91, 92 | LP4K12017 | 68 |
| LC7K09015 | 44, 46 | LE2D123A7 | 151 | LP1D65004 | 91 | LP4K1210 | 68 |
| LC7K09017 | 44, 46 | LE2D126 | 162 | LP1D800046 | 92 | LP4K12103 | 68 |
| LC7K0910 | 44, 46 | LE2D126B6 | 153 | LP1D65008 | 91 | LP4K12105 | 68 |
| LC7K09105 | 44, 46 | LE2D126B7 | 153 | LP1D650086 | 92 | LP4K12107 | 68 |
| LC7K09107 | 44, 46 | LE2D127D6 | 153 | LP1D80004 | 91 | LP5K0601 | 69 |
| LC7K1201 | 44 | LE2D127D7 | 153 | LP1D800046 | 92 | LP5K06013 | 69 |
| LC7K12015 | 44 | LE2D18 | 159 | LP1D80008 | 91 | LP5K06015 | 69 |
| LC7K12017 | 44 | LE2D183A6 | 151 | LP1D800086 | 92 | LP5K06017 | 69 |
| LC7K1210 | 44 | LE2D183A7 | 151 | LP1K0601 | 45 | LP5K0610 | 69 |
| LC7K12105 | 44 | LE3D18 | 163 | LP1K06013 | 45 | LP5K06103 | 69 |
| LC7K12107 | 44 | LE2D186 | 162 | LP1K06015 | 45 | LP5K06105 | 69 |
| LC8K0601 | 49 | LE2D186B6 | 153 | LP1K06017 | 45 | LP5K06107 | 69 |
| LC8K06015 | 49 | LE2D186B7 | 153 | LP1K0610 | 45 | LP5K09004 | 71 |
| LC8K06017 | 49 | LE2D187E6 | 153 | LP1K06103 | 45 | LP5K090043 | 71 |
| LC8K0610 | 49 | LE2D187E7 | 153 | LP1K06105 | 45 | LP5K090045 | 71 |
| LC8K06105 | 49 | LE2D25 | 159 | LP1K06107 | 45 | LP5K090047 | 71 |
| LC8K06107 | 49 | LE2D253A6 | 151 | LP1K09004 | 47 | LP5K0901 | 69, 71 |
| LC8K09004 | 51 | LE2D253A7 | 151 | LP1K090045 | 47 | LP5K09013 | 69, 71 |

Catalog Number Index

| | | | | | | | |
|-----------|--------|------------|-----|----------|-----|------------|-----|
| LP5K09015 | 69, 71 | LRD1510 | 177 | LX0FJ008 | 234 | LX1D8F7 | 119 |
| LP5K09017 | 69, 71 | LRD1512 | 177 | LX0FJ009 | 234 | LX1D8FC5 | 119 |
| LP5K0910 | 69, 71 | LRD1514 | 177 | LX0FJ010 | 234 | LX1D8FC7 | 119 |
| LP5K09103 | 69, 71 | LRD1516 | 177 | LX0FJ011 | 234 | LX1D8FE5 | 119 |
| LP5K09105 | 69, 71 | LRD1521 | 177 | LX0FJ020 | 234 | LX1D8FE7 | 119 |
| LP5K09107 | 69, 71 | LRD1522 | 177 | LX0FJ055 | 235 | LX1D8G6 | 119 |
| LP5K1201 | 69 | LRD1530 | 177 | LX0FJ056 | 235 | LX1D8G7 | 119 |
| LP5K12013 | 69 | LRD1531 | 177 | LX0FJ057 | 235 | LX1D8L6 | 119 |
| LP5K12015 | 69 | LRD16 | 177 | LX0FJ058 | 235 | LX1D8LE7 | 119 |
| LP5K12017 | 69 | LRD163 | 134 | LX0FJ224 | 235 | LX1D8M5 | 119 |
| LP5K1210 | 69 | LRD21 | 177 | LX0FK005 | 234 | LX1D8M6 | 119 |
| LP5K12103 | 69 | LRD213 | 134 | LX0FK006 | 234 | LX1D8M7 | 119 |
| LP5K12105 | 69 | LRD22 | 177 | LX0FK007 | 234 | LX1D8N5 | 119 |
| LP5K12107 | 69 | LRD223 | 134 | LX0FK008 | 234 | LX1D8N7 | 119 |
| LR2K0301 | 63 | LRD32 | 177 | LX0FK009 | 234 | LX1D8P5 | 119 |
| LR2K0302 | 63 | LRD3301A66 | 177 | LX0FK010 | 234 | LX1D8P7 | 119 |
| LR2K0303 | 63 | LRD3302A66 | 177 | LX0FK011 | 234 | LX1D8Q5 | 119 |
| LR2K0304 | 63 | LRD3303A66 | 177 | LX0FK020 | 234 | LX1D8Q6 | 119 |
| LR2K0305 | 63 | LRD3304A66 | 177 | LX0FK055 | 235 | LX1D8Q7 | 119 |
| LR2K0306 | 63 | LRD3305A66 | 177 | LX0FK056 | 235 | LX1D8R5 | 119 |
| LR2K0307 | 63 | LRD3306A66 | 177 | LX0FK057 | 235 | LX1D8R6 | 119 |
| LR2K0308 | 63 | LRD3307A66 | 177 | LX0FK058 | 235 | LX1D8R7 | 119 |
| LR2K0310 | 63 | LRD3308A66 | 177 | LX0FK224 | 235 | LX1D8S5 | 119 |
| LR2K0312 | 63 | LRD3310A66 | 177 | LX0FL005 | 234 | LX1D8S7 | 119 |
| LR2K0314 | 63 | LRD3312A66 | 177 | LX0FL006 | 234 | LX1D8T6 | 119 |
| LR2K0316 | 63 | LRD3314A66 | 177 | LX0FL007 | 234 | LX1D8T7 | 119 |
| LR2K0321 | 63 | LRD3316A66 | 177 | LX0FL008 | 234 | LX1D8U5 | 119 |
| LR2K0322 | 63 | LRD3321A66 | 177 | LX0FL009 | 234 | LX1D8U6 | 119 |
| LR3D01 | 177 | LRD3322 | 177 | LX0FL010 | 234 | LX1D8U7 | 119 |
| LR3D02 | 177 | LRD3322A66 | 177 | LX0FL011 | 234 | LX1D8UE7 | 119 |
| LR3D03 | 177 | LRD3353 | 177 | LX0FL020 | 234 | LX1D8V5 | 119 |
| LR3D04 | 177 | LRD3355 | 177 | LX0FL055 | 235 | LX1D8V7 | 119 |
| LR3D05 | 177 | LRD3357 | 177 | LX0FL056 | 235 | LX1D8W6 | 119 |
| LR3D06 | 177 | LRD3359 | 177 | LX0FL057 | 235 | LX1FF024 | 202 |
| LR3D07 | 177 | LRD3361 | 177 | LX0FL058 | 235 | LX1FF040 | 202 |
| LR3D08 | 177 | LRD3363 | 177 | LX0FL224 | 235 | LX1FF042 | 202 |
| LR3D10 | 177 | LRD3365 | 177 | LX1D6B5 | 118 | LX1FF048 | 202 |
| LR3D12 | 177 | LRD33X6A66 | 177 | LX1D6B6 | 118 | LX1FF092 | 202 |
| LR3D14 | 177 | LRD35 | 177 | LX1D6B7 | 118 | LX1FF095 | 202 |
| LR3D16 | 177 | LRD3522 | 135 | LX1D6C5 | 118 | LX1FF1000 | 202 |
| LR3D21 | 177 | LRD4365 | 177 | LX1D6D5 | 118 | LX1FF110 | 202 |
| LR3D22 | 177 | LRD4367 | 177 | LX1D6D7 | 118 | LX1FF127 | 202 |
| LR3D32 | 177 | LRD4369 | 177 | LX1D6E5 | 118 | LX1FF162 | 202 |
| LR3D3322 | 177 | LR9D5367 | 135 | LX1D6E6 | 118 | LX1FF184 | 202 |
| LR3D3353 | 177 | LR9D5369 | 135 | LX1D6E7 | 118 | LX1FF187 | 202 |
| LR3D3355 | 177 | LR9D5567 | 135 | LX1D6F5 | 118 | LX1FF220 | 202 |
| LR3D3357 | 177 | LR9D5569 | 135 | LX1D6F6 | 118 | LX1FF240 | 202 |
| LR3D3359 | 177 | LR9D67 | 135 | LX1D6F7 | 118 | LX1FF316 | 202 |
| LR3D3361 | 177 | LR9D69 | 135 | LX1D6FE5 | 118 | LX1FF340 | 202 |
| LR3D3363 | 177 | LX0FF005 | 234 | LX1D6FE7 | 118 | LX1FF360 | 202 |
| LR3D3365 | 177 | LX0FF006 | 234 | LX1D6G5 | 118 | LX1FF380 | 202 |
| LR3D35 | 177 | LX0FF007 | 234 | LX1D6G6 | 118 | LX1FF415 | 202 |
| LR9F5357 | 220 | LX0FF008 | 234 | LX1D6G7 | 118 | LX1FF500 | 202 |
| LR9F5363 | 220 | LX0FF009 | 234 | LX1D6L6 | 118 | LX1FF550 | 202 |
| LR9F5367 | 220 | LX0FF010 | 234 | LX1D6M5 | 118 | LX1FF660 | 202 |
| LR9F5369 | 220 | LX0FF011 | 234 | LX1D6M6 | 118 | LX1FF850 | 202 |
| LR9F5371 | 220 | LX0FF020 | 234 | LX1D6M7 | 118 | LX1FG024 | 202 |
| LR9F5557 | 220 | LX0FF055 | 235 | LX1D6N5 | 118 | LX1FG040 | 202 |
| LR9F5563 | 220 | LX0FF056 | 235 | LX1D6N7 | 118 | LX1FG042 | 202 |
| LR9F5567 | 220 | LX0FF057 | 235 | LX1D6P5 | 118 | LX1FG048 | 202 |
| LR9F5569 | 220 | LX0FF058 | 235 | LX1D6P7 | 118 | LX1FG092 | 202 |
| LR9F5571 | 220 | LX0FF224 | 235 | LX1D6Q5 | 118 | LX1FG095 | 202 |
| LR9F7375 | 220 | LX0FG005 | 234 | LX1D6Q6 | 118 | LX1FG1000 | 202 |
| LR9F7379 | 220 | LX0FG006 | 234 | LX1D6Q7 | 118 | LX1FG110 | 202 |
| LR9F7381 | 220 | LX0FG007 | 234 | LX1D6R5 | 118 | LX1FG127 | 202 |
| LR9F7575 | 220 | LX0FG008 | 234 | LX1D6R6 | 118 | LX1FG162 | 202 |
| LR9F7579 | 220 | LX0FG009 | 234 | LX1D6R7 | 118 | LX1FG184 | 202 |
| LR9F7581 | 220 | LX0FG010 | 234 | LX1D6S5 | 118 | LX1FG187 | 202 |
| LRD01 | 177 | LX0FG011 | 234 | LX1D6S6 | 118 | LX1FG220 | 202 |
| LRD013 | 134 | LX0FG020 | 234 | LX1D6T6 | 118 | LX1FG240 | 202 |
| LRD02 | 177 | LX0FG055 | 235 | LX1D6U5 | 118 | LX1FG316 | 202 |
| LRD023 | 134 | LX0FG056 | 235 | LX1D6U6 | 118 | LX1FG340 | 202 |
| LRD03 | 177 | LX0FG057 | 235 | LX1D6U7 | 118 | LX1FG360 | 202 |
| LRD033 | 134 | LX0FG058 | 235 | LX1D6V5 | 118 | LX1FG380 | 202 |
| LRD04 | 134 | LX0FG224 | 235 | LX1D6V7 | 118 | LX1FG415 | 202 |
| LRD043 | 134 | LX0FH005 | 234 | LX1D6W5 | 118 | LX1FG500 | 202 |
| LRD05 | 177 | LX0FH006 | 234 | LX1D6W6 | 118 | LX1FG550 | 202 |
| LRD053 | 134 | LX0FH007 | 234 | LX1D6X6 | 118 | LX1FG660 | 202 |
| LRD06 | 177 | LX0FH008 | 234 | LX1D6Y5 | 118 | LX1FG850 | 202 |
| LRD063 | 134 | LX0FH009 | 234 | LX1D8B5 | 119 | LX1FH0482 | 203 |
| LRD07 | 177 | LX0FH010 | 234 | LX1D8B6 | 119 | LX1FH10002 | 203 |
| LRD073 | 134 | LX0FH011 | 234 | LX1D8B7 | 119 | LX1FH1102 | 203 |
| LRD08 | 177 | LX0FH020 | 234 | LX1D8C5 | 119 | LX1FH1272 | 203 |
| LRD083 | 134 | LX0FH055 | 235 | LX1D8C7 | 119 | LX1FH2002 | 203 |
| LRD10 | 177 | LX0FH056 | 235 | LX1D8D5 | 119 | LX1FH2202 | 203 |
| LRD103 | 134 | LX0FH057 | 235 | LX1D8D7 | 119 | LX1FH2402 | 203 |
| LRD12 | 177 | LX0FH058 | 235 | LX1D8E5 | 119 | LX1FH2772 | 203 |
| LRD123 | 134 | LX0FH224 | 235 | LX1D8E6 | 119 | LX1FH3802 | 203 |
| LRD14 | 134 | LX0FJ005 | 234 | LX1D8E7 | 119 | LX1FH5002 | 203 |
| LRD143 | 134 | LX0FJ006 | 234 | LX1D8F5 | 119 | LX1FH6002 | 203 |
| LRD1508 | 177 | LX0FJ007 | 234 | LX1D8F6 | 119 | LX1FJ048 | 203 |

| | | | | | |
|-----------|----------|-----------|----------|---------------|----------|
| LX1FJ1000 | 203 | LX4FF048 | 205 | LX9FL931 | 208, 209 |
| LX1FJ110 | 203 | LX4FF110 | 205 | LX9FL935 | 208 |
| LX1FJ127 | 203 | LX4FF125 | 205 | LX9FL936 | 208 |
| LX1FJ200 | 203 | LX4FF220 | 205 | LX9FL937 | 209 |
| LX1FJ220 | 203 | LX4FF250 | 205 | LX9FL938 | 208 |
| LX1FJ240 | 203 | LX4FF440 | 205 | LXD1B7 | 117 |
| LX1FJ280 | 203 | LX4FG024 | 205 | LXD1C7 | 117 |
| LX1FJ380 | 203 | LX4FG048 | 205 | LXD1CC7 | 117 |
| LX1FJ415 | 203 | LX4FG110 | 205 | LXD1D7 | 117 |
| LX1FJ500 | 203 | LX4FG125 | 205 | LXD1E7 | 117 |
| LX1FJ600 | 203 | LX4FG220 | 205 | LXD1EE7 | 117 |
| LX1FK048 | 203 | LX4FG250 | 205 | LXD1F7 | 117 |
| LX1FK1000 | 203 | LX4FG440 | 205 | LXD1FC7 | 117 |
| LX1FK110 | 203 | LX4FH024 | 205 | LXD1FE7 | 117 |
| LX1FK127 | 203 | LX4FH048 | 205 | LXD1G7 | 117 |
| LX1FK200 | 203 | LX4FH110 | 205 | LXD1J7 | 117 |
| LX1FK220 | 203 | LX4FH125 | 205 | LXD1K7 | 117 |
| LX1FK240 | 203 | LX4FH220 | 205 | LXD1L7 | 117 |
| LX1FK280 | 203 | LX4FH250 | 205 | LXD1LE7 | 117 |
| LX1FK380 | 203 | LX4FH440 | 205 | LXD1M7 | 117 |
| LX1FK415 | 203 | LX4FJ048 | 205 | LXD1N7 | 117 |
| LX1FK500 | 203 | LX4FJ110 | 205 | LXD1P7 | 117 |
| LX1FK600 | 203 | LX4FJ125 | 205 | LXD1Q7 | 117 |
| LX1FL048 | 204 | LX4FJ220 | 205 | LXD1R7 | 117 |
| LX1FL1000 | 204 | LX4FJ250 | 205 | LXD1SC7 | 117 |
| LX1FL110 | 204 | LX4FJ440 | 205 | LXD1T7 | 117 |
| LX1FL127 | 204 | LX4FK048 | 206 | LXD1U7 | 117 |
| LX1FL200 | 204 | LX4FK110 | 206 | LXD1V7 | 117 |
| LX1FL220 | 204 | LX4FK125 | 206 | LXD1W7 | 117 |
| LX1FL260 | 204 | LX4FK220 | 206 | LXD1X7 | 117 |
| LX1FL380 | 204 | LX4FK250 | 206 | LXD1Y7 | 117 |
| LX1FL415 | 204 | LX4FK440 | 206 | LXD1Z7 | 117 |
| LX1FL500 | 204 | LX4FL048 | 206 | P | |
| LX1FL600 | 204 | LX4FL110 | 206 | PA1LB50 | 238 |
| LX1FX110 | 204 | LX4FL125 | 206 | PA1LB75 | 238 |
| LX1FX127 | 204 | LX4FL220 | 206 | PA1LB76 | 238 |
| LX1FX200 | 204 | LX4FL250 | 206 | PA1LB80 | 238 |
| LX1FX220 | 204 | LX4FL440 | 206 | PA1LB89 | 238 |
| LX1FX280 | 204 | LX4FX110 | 206 | PA1PB50 | 238 |
| LX1FX380 | 204 | LX4FX125 | 206 | PA1RB50 | 238 |
| LX1FX415 | 204 | LX4FX220 | 206 | PN1FB50 | 238 |
| LX1FX500 | 204 | LX4FX250 | 206 | PR4FB00 | 238 |
| LX4D6BD | 120 | LX4FX440 | 206 | PR4FB0004 | 237 |
| LX4D6BW | 121 | LX9FF048 | 207 | PR4FB0005 | 237 |
| LX4D6CD | 120 | LX9FF110 | 207 | PR4FB0006 | 237 |
| LX4D6CW | 121 | LX9FF127 | 207 | PR4FB0007 | 237 |
| LX4D6ED | 120 | LX9FF220 | 207 | PR4FB0008 | 237 |
| LX4D6EW | 121 | LX9FF240 | 207 | PR4FB0009 | 237 |
| LX4D6FD | 120 | LX9FF380 | 207 | PR4FB0010 | 237 |
| LX4D6FW | 121 | LX9FF415 | 207 | PR4FB0011 | 237 |
| LX4D6GD | 120 | LX9FF500 | 207 | PR4FB0012 | 237 |
| LX4D6JD | 120 | LX9FG048 | 207 | PR4FB0014 | 237 |
| LX4D6JW | 121 | LX9FG110 | 207 | W | |
| LX4D6MD | 120 | LX9FG127 | 207 | WB1KB121 | 236 |
| LX4D6MW | 121 | LX9FG220 | 207 | WB1KB122 | 236 |
| LX4D6ND | 120 | LX9FG240 | 207 | WB1KB123 | 236 |
| LX4D6RD | 120 | LX9FG380 | 207 | WB1KB124 | 236 |
| LX4D6SD | 120 | LX9FG415 | 207 | WB1KB125 | 236 |
| LX4D6SW | 121 | LX9FG500 | 207 | WB1KB126 | 236 |
| LX4D6UD | 120 | LX9FH0482 | 207 | WB1KB132 | 236 |
| LX4D7BD | 120 | LX9FH1102 | 207 | WB1KB133 | 236 |
| LX4D7BW | 121 | LX9FH1272 | 207 | WB1KB134 | 236 |
| LX4D7CD | 120 | LX9FH2202 | 207 | WB1KB135 | 236 |
| LX4D7CW | 121 | LX9FH3802 | 207 | WB1KB136 | 236 |
| LX4D7ED | 120 | LX9FH5002 | 207 | WB1KB137 | 236 |
| LX4D7EW | 121 | LX9FJ917 | 208 | WB1KB138 | 236 |
| LX4D7FD | 120 | LX9FJ918 | 209 | WB1KB139 | 236 |
| LX4D7FW | 121 | LX9FJ925 | 208 | WB1KB140 | 236 |
| LX4D7GD | 120 | LX9FJ926 | 208, 209 | W816366180111 | 137 |
| LX4D7JD | 120 | LX9FJ927 | 209 | X | |
| LX4D7JW | 121 | LX9FJ931 | 208 | XYB1U | 114 |
| LX4D7MD | 120 | LX9FJ932 | 209 | XB5AL84101 | 137 |
| LX4D7MW | 121 | LX9FJ936 | 208 | XB5AA86102 | 137 |
| LX4D7ND | 120 | LX9FJ937 | 208 | Z | |
| LX4D7RD | 120 | LX9FJ938 | 208, 209 | ZA2BA8602 | 221 |
| LX4D7SD | 120 | LX9FK917 | 208 | ZA2BZ13 | 221 |
| LX4D7SW | 121 | LX9FK918 | 209 | ZB5AA0 | 165 |
| LX4D7UD | 120 | LX9FK925 | 208 | ZB5AA331 | 165 |
| LX4D8BD | 121 | LX9FK926 | 208, 209 | ZB5AL432 | 165 |
| LX4D8ED | 121 | LX9FK927 | 209 | ZB5A639 | 165 |
| LX4D8FD | 121 | LX9FK931 | 208 | ZB5AD2 | 165 |
| LX4D8GD | 121 | LX9FK932 | 208 | ZB5AD3 | 165 |
| LX4D8MD | 121 | LX9FK936 | 208 | ZB5AD5 | 165 |
| LX4D8ND | 121 | LX9FK937 | 208 | ZC4GM1 | 238 |
| LX4D8RD | 121 | LX9FK938 | 208, 209 | ZC4GM2 | 237, 238 |
| LX4D8SD | 121 | LX9FL917 | 208 | ZC4GM8 | 237, 238 |
| LX4D8UD | 121 | LX9FL918 | 209 | ZC4GM9 | 238 |
| LX4F8FW | 204, 206 | LX9FL924 | 208 | | |
| LX4F8MW | 204, 206 | LX9FL925 | 209 | | |
| LX4F8QW | 204, 206 | LX9FL926 | 208, 209 | | |
| LX4FF024 | 205 | LX9FL930 | 208 | | |

Schneider Electric
8001 Highway 64 East
Knightdale, NC 27545
1-888-SquareD
(1-888-778-2733)
www.SquareD.com

Schneider Canada Inc.
19 Waterman Avenue,
M4B 1 Y2
Toronto, Ontario
1-800-565-6699
www.schneider-electric.ca

Catalog No. 8502CT9901R5/03 January 2004 © 2001-2004 Schneider Electric All Rights Reserved
Replaces 8502CT9901R9/02 dated 11/02.