




GE
Lighting

47725 - 120R40FL/STG PQ6

GE saf-t-gard® 120 watt R40 1-pack

- Use original GE's Soft White when you need a light without glare and harsh shadows.
- Replace ordinary light bulbs with GE Flood and Spotlight in all your track and recessed lighting fixtures.
- Estimated yearly energy costs \$14.45 based on 3 hours per day \$0.11 per kWh
- GE saf-t-gard® bulbs feature a protective Teflon® coating that helps contain glass fragments if broken. Designed with heavy-duty, all-weather construction, these bulbs protect against shattering, rain breakage and splatter from oil and lubricants. GE saf-t-gard® bulbs are perfect for home use in kitchens, basements garages, workshops and enclosed exterior fixtures
- Lasts 1.8 years based on 3 hours per day usage
- 130/120 volts
- R40 shape with medium base for use in rough service applications

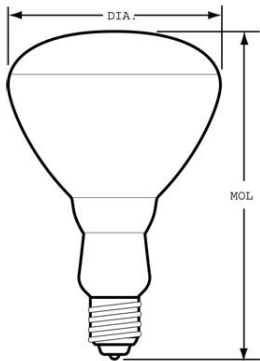

GENERAL CHARACTERISTICS

Lamp Type	Incandescent - Reflector
Bulb	BR40
Base	Medium Screw (E26)
Filament	C-11
Rated Life (NOM)	2000.0 h
Primary Application	Indoor Floodlight;Shatter-Resistant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1025.0
Center Beam Candlepower (CBCP) (NOM)	1200.0
Nominal Initial Lumens per Watt (NOM)	8.5

ELECTRICAL CHARACTERISTICS


Wattage (NOM)	120.0
Voltage (NOM)	130.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	6.560 in(166.6 mm)
Bulb Diameter (DIA) (NOM)	5.000 in(127.0 mm)

PRODUCT INFORMATION

Product Code	47725
Description	120R40FL/STG PQ6
Standard Package	BUNDLE
Standard Package GTIN	00043168477253
Standard Package Quantity	30
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	30
UPC	043168274289



CAUTIONS & WARNINGS

Warning

- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

NOTES

- Burning position - base up.
- Will operate in any burning position, but fixed-socket usage other than base up or continuous burning in any position in ambient temperatures above 150 degrees F (66 degrees C), may result in some loss of protective coating. Reflectors and accessories may raise bulb temperature and cause some loss of protective coating.