



Preventa safety modules

For Emergency stop and switch monitoring -
Category 1

XPSABV, XPSATR, XPSAV, XPSATE

Catalog

October 2015



How can you fit a 6000-page catalog in your pocket ?


Schneider Electric provides you with the complete set of industrial automation catalogs all on a handy USB key for PC or in an application for tablets



Digi-Cat, a handy USB key for PC



- > Convenient to carry
- > Always up-to-date
- > Environmentally friendly
- > Easy-to-share format

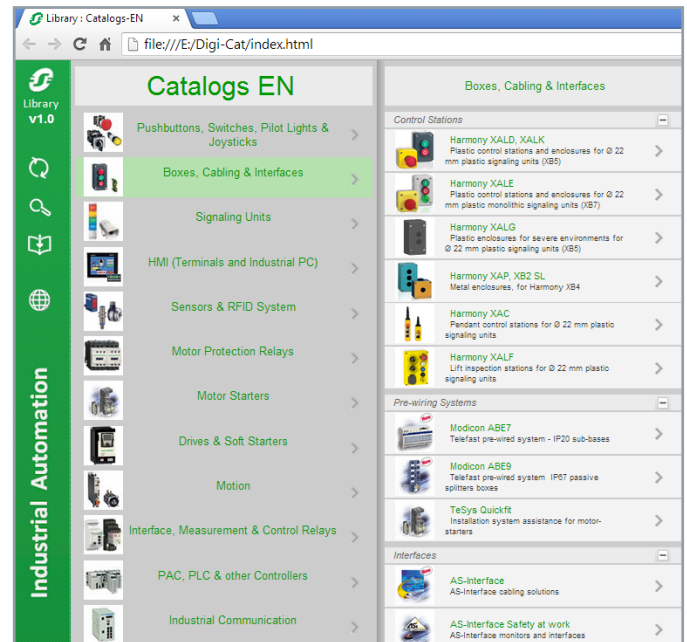

Contact your local representative to get your own Digi-Cat



e-Library, the app for tablets


If you have an iPad®:

- > Go to the App Store and search for e-Library
- > or scan the QR code



If you have an Android tablet:

- > Go to the Google Play Store™ and search for eLibrary
- > or scan the QR code


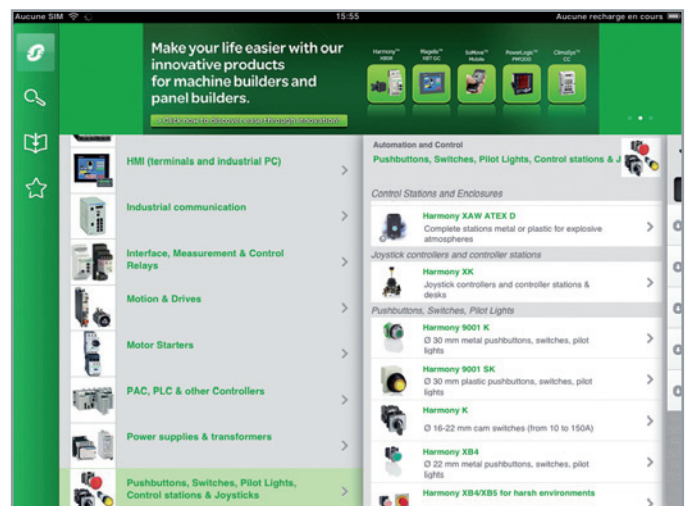


General contents

Preventa safety modules

For Emergency stop and switch monitoring - Category 1

■ Type XPSBV, For Emergency stop, switch and safety light curtain monitoring	
- Operating principle,	
- References	page 4
■ Type XPSATR, For Emergency stop, switch or safety light curtain	
- Operating principle,	
- References	page 5
■ Type XPSAV, For Emergency stop, switch, sensing mat/edges or safety light curtain monitoring	
- Operating principle,	
- References	page 6
■ Type XPSATE, For Emergency stop and switch monitoring	
- Operating principle,	
- References	page 7
■ Product reference index	
- Index.....	page 8



Operating principle

Safety modules **XPSABV** are used for monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1 and also meet the safety requirements for the electrical monitoring of switches in protection devices conforming to standard EN/ISO 14119.

They provide protective for both the machine operator and the machine by immediately stopping the dangerous movement on receipt of a stop instruction from the operator, or on detection of a fault in the safety circuit itself.

In addition to the stop category 0 instantaneous opening safety outputs (2 for **XPSABV**), the modules incorporate stop category 1 time delay outputs (1 for **XPSABV**) which allow for controlled deceleration of the motor components until a complete stop is achieved (for example, motor braking by variable speed drive).

At the end of the preset delay, the supply is disconnected by opening the time delay output circuits.

- The time delay of the 3 output circuits is adjustable between 0.15 and 3 seconds or 1.5 and 30 seconds, depending on the model, using a selector switch.
- To aid diagnostics, the modules have LEDs which provide information on the monitoring circuit status.
- The Start button monitoring function is configurable depending on the wiring.

Maximum achievable safety level

- PL e/Category 4 (instantaneous safety outputs) and PL d/Category 3 (time delay safety outputs) conforming to EN/ISO 13849-1
- SILCL3 (instantaneous safety outputs) and SILCL2 (time delay safety outputs) conforming to EN/IEC 61508 and EN/IEC 62061

Product certifications

- UL
- CSA
- BG

References



Description	Connection	Number of safety circuits	Additional outputs	Setting range of time delay	Supply	Reference	Weight kg/lb
Safety modules for Emergency stop and switch monitoring	Captive screw clamp terminals	3 NO (1 NO time delay)	–	0,15...3 s	≡ 24 V	XPSABV1133P	0.280/ 0.617
	Terminal block removable from module						
	Spring terminals	3 NO (1 NO time delay)	–	0,15...3 s	≡ 24 V	XPSABV1133C	0.275/ 0.606
	Terminal block removable from module						
	Captive screw clamp terminals	3 NO (1 NO time delay)	–	1,5...30 s	≡ 24 V	XPSABV11330P	0.280/ 0.617
	Terminal block removable from module						
	Spring terminals	3 NO (1 NO time delay)	–	1,5...30 s	≡ 24 V	XPSABV11330C	0.275/ 0.606
	Terminal block removable from module						



XPSABV●●●●P



XPSABV●●●●C



Operating principle

Safety modules **XPSATR** meet the requirements of Performance Level PL e/Category 4 conforming to standard EN ISO 13849-1.

- Safety modules **XPSATR** are electronic, redundant and self-monitoring devices with positively driven relays.
- They are used for monitoring Emergency stop circuits (single or two-channel) and protective guard applications.
- The modules are conforming to standards EN/ISO 13850 and EN 60204-1.
- They provide protection for both the machine operator and the machine by immediately stopping the dangerous movement on receipt of a stop instruction from the operator, or on detection of a fault in the safety circuit itself.
- **XPSATR** incorporate 3 NO and 1 NC not delayed contacts and 3 delayed NO contacts.
- To aid diagnostics, the modules have 5 LEDs on the front face which provide information on the monitoring circuit status.

Maximum achievable safety level

- PL e/Category 4 conforming to EN ISO 13849-1
- SILCL3 conforming to EN/IEC 62061

Product certifications

- UL
- CSA
- TÜV

References


Description	Connection	Number of safety circuits	Additional outputs	Time setting range	Supply	Reference	Weight kg/lb
Safety modules for emergency stop and safety guards monitoring	Captive screw clamp terminals Terminal block removable from module	3 NO + 3 NO time delay	1 NC	0.1...3 s	≡ 24 V	XPSATR1153P	0.330/ 0.728
				0.1...3 s	~ 115...230 V	XPSATR3953P	0.350/ 0.772
				0...30 s	≡ 24 V	XPSATR11530P	0.330/ 0.728
				0...30 s	~ 115...230 V	XPSATR39530P	0.350/ 0.772
	Cage clamp terminals Terminal block removable from module	3 NO + 3 NO time delay	1 NC	0.1...3 s	≡ 24 V	XPSATR1153C	0.330/ 0.728
				0.1...3 s	~ 115...230 V	XPSATR3953C	0.350/ 0.772
				0...30 s	≡ 24 V	XPSATR11530C	0.330/ 0.728
				0...30 s	~ 115...230 V	XPSATR39530C	0.350/ 0.772



XPSATR●●●●P



XPSATR●●●●C



Operating principle

Safety modules **XPSAV** are used for monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1 and also meet the safety requirements for the electrical monitoring of switches in protection devices conforming to standard EN/ISO 14119.

They provide protective for both the machine operator and the machine by immediately stopping the dangerous movement on receipt of a stop instruction from the operator, or on detection of a fault in the safety circuit itself.

In addition to the stop category 0 instantaneous opening safety outputs (3 for **XPSAV**), the modules incorporate stop category 1 time delay outputs (3 for **XPSAV**) which allow for controlled deceleration of the motor components until a complete stop is achieved (for example, motor braking by variable speed drive).

At the end of the preset delay, the supply is disconnected by opening the time delay output circuits.

- The time delay of the 3 output circuits is adjustable, in 15 preset values, between 0 and 300 seconds using selector buttons.
- Module **XPSAV** also incorporates 3 solid-state signalling outputs for signalling to the process PLC.
- To aid diagnostics, the modules have LEDs which provide information on the monitoring circuit status.
- The Start button monitoring function is configurable depending on the wiring.

Maximum achievable safety level

- PL e/Category 4 conforming to EN/ISO 13849-1
- SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061

Product certifications

- UL
- CSA
- TÜV

References




Description	Connection	Number of safety circuits	Additional outputs	Setting range of time delay	Supply	Reference	Weight kg/lb
Safety modules for Emergency stop and switch monitoring	Captive screw clamp terminals Terminal block integrated in module	6 NO (3 NO time delay)	3 solid-state	0...300 s	~ 24 V	XPSAV11113	0.320/ 0.705
	Captive screw clamp terminals Terminal block removable from module	6 NO (3 NO time delay)	3 solid-state	0...300 s	~ 24 V	XPSAV11113P	0.320/ 0.705
	Captive screw clamp terminals Terminal block integrated in module	6 NO (3 NO time delay)	3 solid-state	0...300 s (Start delay 0,5 s)	~ 24 V	XPSAV11113T050	0.320/ 0.705
	Captive screw clamp terminals Terminal block integrated in module	6 NO (3 NO time delay)	3 solid-state	0.1 ... 2 s	~ 24 V	XPSAV11113Z002	0.320/ 0.705



XPSAV11113



XPSAV11113P



Operating principle

Safety modules **XPSATE** are used for monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1 and also meet the safety requirements for the electrical monitoring of switches in protection devices conforming to standard EN/ISO 14119.

They provide protective for both the machine operator and the machine by immediately stopping the dangerous movement on receipt of a stop instruction from the operator, or on detection of a fault in the safety circuit itself.

In addition to the stop category 0 instantaneous opening safety outputs (2 for **XPSATE**), the modules incorporate stop category 1 time delay outputs (3 for **XPSATE**) which allow for controlled deceleration of the motor components until a complete stop is achieved (for example, motor braking by variable speed drive).

At the end of the preset delay, the supply is disconnected by opening the time delay output circuits.

- The time delay of the 3 output circuits is adjustable between 0 and 30 seconds using a 12-position selector switch.
- Module **XPSATE** incorporates 4 solid-state signalling outputs for signalling to the process PLC.
- To aid diagnostics, the modules have LEDs which provide information on the monitoring circuit status.
- The Start button monitoring function is configurable depending on the wiring.

Maximum achievable safety level

- PL e/Category 4 (instantaneous safety outputs) and PL d/Category 3 (time delay safety outputs) conforming to EN/ISO 13849-1
- SILCL3 (instantaneous safety outputs) and SILCL2 (time delay safety outputs) conforming to EN/IEC 61508 and EN/IEC 62061

Product certifications

- UL
- CSA
- TÜV

References

Description	Connection	Number of safety circuits	Additional outputs	Setting range of time delay	Supply	Reference	Weight kg/lb
Safety modules for Emergency stop and switch monitoring	Captive screw clamp terminals	5 NO (3 NO time delay)	4 solid-state	0...30 s	~ and = 24 V	XPSATE5110	0.280/0.617
	Terminal block integrated in module						
	Captive screw clamp terminals	5 NO (3 NO time delay)	4 solid-state	0...30 s	~ and = 24 V	XPSATE5110P	0.280/0.617
	Terminal block removable from module						
	Captive screw clamp terminals	5 NO (3 NO time delay)	4 solid-state	0...30 s	~ 115 V	XPSATE3410	0.380/0.838
	Terminal block integrated in module						
	Captive screw clamp terminals	5 NO (3 NO time delay)	4 solid-state	0...30 s	~ 115 V	XPSATE3410P	0.380/0.838
	Terminal block removable from module						
Captive screw clamp terminals	5 NO (3 NO time delay)	4 solid-state	4 solid-state	0...30 s	~ 230 V	XPSATE3710	0.380/0.838
Terminal block integrated in module							
Captive screw clamp terminals	5 NO (3 NO time delay)	4 solid-state	4 solid-state	0...30 s	~ 230 V	XPSATE3710P	0.380/0.838
Terminal block removable from module							



XPSATE5110

X	
XPSABV11330C	4
XPSABV11330P	4
XPSABV1133C	4
XPSABV1133P	4
XPSATE3410	7
XPSATE3410P	7
XPSATE3710	7
XPSATE3710P	7
XPSATE5110	7
XPSATE5110P	7
XPSATR11530C	5
XPSATR11530P	5
XPSATR1153C	5
XPSATR1153P	5
XPSATR39530C	5
XPSATR39530P	5
XPSATR3953C	5
XPSATR3953P	5
XPSAV11113	6
XPSAV11113P	6
XPSAV11113T050	6
XPSAV11113Z002	6



More information on
<http://www.schneider-electric.com/machinesafety>

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric

DIABED2151009EN