


ARMOR-GRIP® Suspension

For use on:
ACSR, All-Aluminum, Aluminum Alloy,
AWAC®, Compacted All-Aluminum,
Compacted ACSR, ACSS (AW & TW)
for Continuous Operating Temperatures
up to 200° C

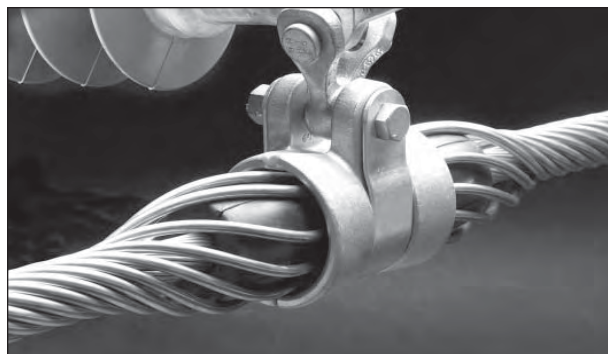

Catalog Number	Diameter Range (Inches)		Nominal Conductor Size	AGS® Rods				AGS Hardware Sets Per Carton	AGS Rods & Hardware Wt./Lbs. Per Carton	Color Code
	Min.	Max.		Length (Inches)	Rod Diameter (Inches)	Rods Per Set	Sets Per Carton			
AGS-5156	.304	.315	#4, 3/4AWAC	26	.102	10	24	24	55	Brown
AGS-5157	.316	.327	#2, 6/1	26	.102	11	24	24	56	Red
AGS-5158	.328	.342	#4, 2/5AWAC	26	.102	11	24	24	57	Orange
AGS-5159	.343	.355	#3, 3/4AWAC	26	.102	11	24	24	58	Black
AGS-5160	.356	.374	#1, 5/2AWAC	26	.102	12	24	24	59	Green
AGS-5161	.375	.389	#3, 2/5AWAC	26	.102	12	24	24	59	Purple
AGS-5162	.390	.404	1/0, 6/1	36	.128	11	24	24	79	Yellow
AGS-5163	.405	.418	1/0, 5/2AWAC	36	.128	11	24	24	79	Brown
AGS-5164	.419	.434	#1, 3/4AWAC	36	.128	11	24	24	79	Green
AGS-5165	.435	.450	2/0, 6/1	36	.128	11	24	24	79	Blue
AGS-5166	.451	.470	2/0, 5/2AWAC	36	.128	12	24	24	83	White
AGS-5167	.471	.481	110.8, 12/7	36	.128	12	24	24	83	Green
AGS-5155	.482	.499	#1, 2/5AWAC	40	.167	10	18	18	44	Red
AGS-5100	.500	.512	3/0, 6/1	40	.167	10	18	18	44	Blue
AGS-5101	.513	.530	4/0, 7W All-Alum.	41	.167	11	18	18	47	Green
AGS-5102	.531	.542	159, 12/7AWAC	41	.167	11	18	18	47	Yellow
AGS-5103	.543	.555	2/0, 3/4AWAC	44	.182	10	18	18	53	Black
AGS-5104	.556	.573	4/0, 6/1	44	.182	11	18	18	55	White
AGS-5105	.574	.594	266.8, 7-19W All-Alum.	45	.182	11	18	18	56	Brown
AGS-5106	.595	.606	266.8, 18/1AWAC	46	.182	11	18	18	53	Orange
AGS-5107	.607	.619	266.8, 18/1	46	.182	11	18	18	56	Purple
AGS-5108	.620	.645	266.8, 26/7	50	.182	12	18	18	61	Red
AGS-5109	.646	.673	336.4, 17-37W All-Alum.	54	.204	11	15	15	60	Blue
AGS-5110	.674	.690	300, 26/7	54	.204	11	15	15	61	Green
AGS-5111	.691	.710	300, 30/7	54	.204	12	15	15	64	Yellow
AGS-5112	.711	.731	336.4, 26/7	55	.204	12	15	15	65	Black
AGS-5113	.732	.750	336.4, 30/7	56	.204	12	15	15	66	White
AGS-5114	.751	.768	397.5, 26/7AWAC	60	.250	10	12	12	68	Brown
AGS-5115	.769	.795	397.5, 26/7	60	.250	11	12	12	68	Orange
AGS-5116	.796	.824	477, 18/1	61	.250	11	12	12	73	Purple
AGS-5117	.825	.845	477, 26/7AWAC	64	.250	11	12	12	76	Red
AGS-5118	.846	.870	477, 26/7	64	.250	11	12	12	76	Blue
AGS-5119	.871	.893	600, 37W All-Alum.	65	.250	12	12	12	81	Green
AGS-5120	.894	.907	500, 30/7	65	.250	12	12	12	82	Green
AGS-5121	.908	.920	556.5, 24/7	66	.250	12	12	9	81	Yellow
AGS-5122	.921	.937	556.5, 26/7	66	.250	12	9	9	81	Black
AGS-5123	.938	.962	605, 24/7	67	.250	12	9	9	81	White

(Continued on next page)

Right-hand lay standard


EXPLANATORY NOTES:

- (1) Nominal Conductor Size indicates one of various conductors within each range.
- (2) Reference general dimensional information for physical dimensions other than length.
- (3) Standard ARMOR-GRIP Suspension does not include AGS® FITTINGS, i.e., AGS Socket Eye, AGS Clevis Eye or AGS Y-Clevis Eye. See tables following AGS Catalog information for catalog numbers and dimensions of AGS FITTINGS.
- (4) AWAC is a registered trademark of the Copperweld Co.



ARMOR-GRIP® Suspension

For use on:
ACSR, All-Aluminum, Aluminum Alloy,
AWAC® Compacted All-Aluminum
Compacted ACSR, ACSS (AW & TW) for
Continuous Operating Temperatures
up to 200° C

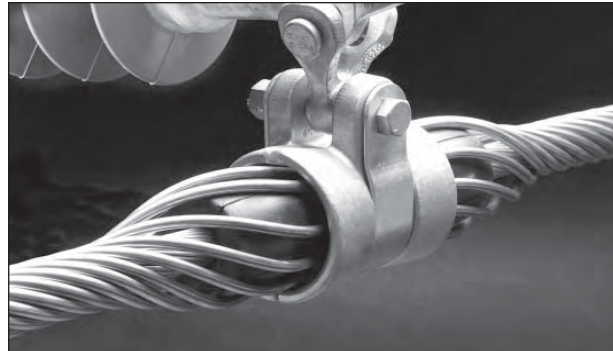

Catalog Number	Diameter Range (Inches)		Nominal Conductor Size	AGS® Rods				AGS Hardware Sets Per Carton	AGS Rods & Hardware Wt./Lbs. Per Carton	Color Code
	Min.	Max.		Length (Inches)	Rod Diameter (Inches)	Rods Per Set	Sets Per Carton			
AGS-5124	.963	.986	636, 24/7	68	.250	13	9	9	87	Brown
AGS-5125	.987	1.005	636, 26/7	69	.250	13	9	9	87	Orange
AGS-5126	1.006	1.022	636, 30/19	80	.310	11	6	6	73	Purple
AGS-5127	1.023	1.040	795, 37-61W All-Alum.	82	.310	11	6	6	75	Red
AGS-5128	1.041	1.074	715.5, 26/7	82	.310	11	6	6	75	Blue
AGS-5129	1.075	1.090	874.5, 37W	82	.310	12	6	6	78	Green
AGS-5130	1.091	1.118	795, 26/7	82	.310	12	6	6	78	Yellow
AGS-5131	1.119	1.136	954, 37W All-Alum.	82	.310	12	6	6	78	Black
AGS-5132	1.137	1.152	795, 30/19	82	.310	12	6	6	78	White
AGS-5133	1.153	1.175	954, 45/7	82	.310	12	6	6	79	Brown
AGS-5134	1.176	1.208	954, 54/7	82	.310	12	6	6	79	Orange
AGS-5135	1.209	1.226	1113, 61W	88	.365	11	3	3	55	Purple
AGS-5136	1.227	1.259	1192.5, 61W All-Alum.	88	.365	11	3	3	55	Red
AGS-5137	1.260	1.286	1113, 48/7	88	.365	12	3	3	58	Blue
AGS-5138	1.287	1.314	1272, 61W	88	.365	12	3	3	58	Green
AGS-5139	1.315	1.355	1272, 45/7	88	.365	12	3	3	58	Yellow
AGS-5140	1.356	1.394	1272, 54/19	88	.365	12	3	3	60	Black
AGS-5141	1.395	1.416	1351.5, 54/19 AWAC	88	.365	13	3	3	61	White
AGS-5142	1.417	1.442	1510.5, 61W	88	.365	13	3	3	62	Brown
AGS-5143	1.443	1.477	1431, 54/19	88	.365	13	3	3	64	Orange
AGS-5144	1.478	1.516	1590, 45/7	88	.365	13	3	3	64	Purple
AGS-5145	1.517	1.557	1590, 54/19	88	.365	13	3	3	64	Red
AGS-5146	1.558	1.579	1780, 72/7	100	.365	14	3	3	78	Blue
AGS-5147	1.580	1.612	1780, 84/19	100	.365	14	3	3	78	Green
AGS-5148	1.613	1.650	2000, 91W	100	.365	14	3	3	79	Yellow
AGS-5149	1.651	1.688	2000, 72/7	100	.365	15	3	3	83	Black
AGS-5150	1.689	1.711	2000, 84/19	100	.365	15	3	3	83	White
AGS-5151	1.712	1.752	2129, 84/19	100	.365	15	3	3	83	Brown
AGS-5152	1.753	1.790	2156, 84/19	100	.365	15	3	3	83	Orange
AGS-5153	1.791	1.828	2300, 84/19	100	.365	15	3	3	83	Purple
AGS-5168	1.829	1.882	2515MCM76/19	100	.365	16	3	3	85	Red
AGS-5177	2.193	2.233		100	.365	18	3	3	88	Red

Right-hand lay standard

EXPLANATORY NOTES:

- (1) Nominal Conductor Size indicates one of various conductors within each range.
- (2) Reference general dimensional information for physical dimensions other than length.
- (3) Standard ARMOR-GRIP Suspension does not include AGS® FITTINGS, i.e., AGS Socket Eye, AGS Clevis Eye or AGS Y-Clevis Eye. See tables following AGS Catalog information for catalog numbers, prices and dimensions of AGS FITTINGS.
- (4) AWAC is a registered trademark of the Copperweld Co.