



Carlon®

Circuit Safe Pushbutton Enclosures T&B Catalog Number:

CP300N
UPC Number: 03448110610
Status: Active
Description:

Non-metallic 30.5mm (3) hole pushbutton enclosure.

Features

- Integrally molded mounting flange.
- Brass screw inserts
- 304 stainless steel screws.
- High-impact strength
- Grounding plate is included on the cover.

Standards

- Screw cover pushbutton enclosures with 1, 2 and 3 hole openings are listed per UL 50 for industrial controls.
- Non-metallic hinged cover enclosures with multiple hole openings are UL Listed.

Application

- Standard oil-tight pushbuttons, switches and pilot lights.
- Conduit entries
- Junction boxes
- MRO and OEM applications
- Wall mount enclosures are resistant to most corrosive agents.
- Universal pushbutton holes are designed to accommodate all standard oil-tight pushbuttons, switches and pilot lights.

General



Material Thermoplastic

Dimension Information

| | |
|-----------------|------|
| Width (inches) | 3.5 |
| Height (inches) | 9.38 |
| Depth (inches) | 3.38 |
| A (inches) | 7.38 |
| B (inches) | 2.81 |
| C (inches) | 3 |
| F (inches) | 7.88 |
| G (inches) | 3.25 |
| J (inches) | 2.38 |
| L (inches) | 8.5 |
| R (inches) | 0.63 |
| S (inches) | 2.5 |

Packaging

| | |
|--------------------|----------------|
| Package in Units | 6 |
| T&B Sold in UOM | Each |
| T&B Weight Per UOM | 1.27 lbs. Each |

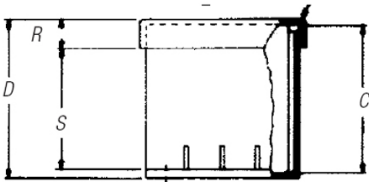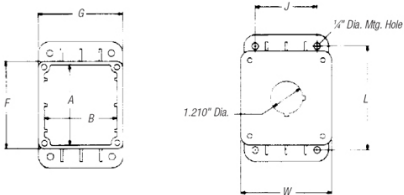

Application Support

T&B Sales Drawings

wsd-ac01672

Notes

All Circuit Safe® pushbutton enclosures are furnished with standard hole dimensions; 1/32 in. diameter with keyways at 12 o'clock and 3 o'clock.

Certifications



File Nbr:

E108856

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email:techsupport@tnb.com