
POWER SYSTEMS, INC.

Guy Strains - Clevis / Thimble-Eye

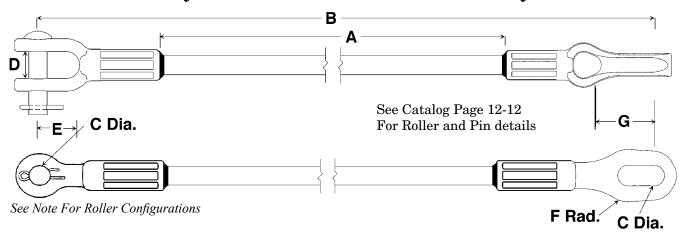

- C Dimension is 5/8" (16 mm) for 16,000 lbs. series and 3/4" (19 mm) for 21,000 lbs. series
- **D** Dimension is 0.88" (22 mm) for 16,000 lbs. series and 1" (25 mm) for 21,000 lbs. series
- E Dimension is 1.38" (35 mm) for 16,000 lbs. series and 1.88" (48 mm) for 21,000 lbs. series Dimension is 1.6" (41 mm) for 16,000 lbs. series and 1.8" (46 mm) for 21,000 lbs. series

Castings are hot-dip galvanized ductile iron.

 \mathbf{G}

Catalog Number	Length A	Length B	Radius F	Weight (Each)
1	16,000 lbs. (7258 kg) Min	imum Ultimate Strength	1 - 5/8" (16 mm) Dia. R	od
GS16012CP	12" (30.5 cm)	21.3" (54.1 cm)	0.75" (19 mm)	2.8 lbs. (1.3 kg)
GS16018CP	18" (45.7 cm)	27.3" (69.3 cm)	0.75" (19 mm)	2.9 lbs. (1.3 kg)
GS16024CP	24" (61 cm)	33.3" (84.6 cm)	0.75" (19 mm)	3.1 lbs. (1.4 kg)
GS16036CP	36" (91.4 cm)	45.3" (115.1 cm)	0.75" (19 mm)	3.3 lbs. (1.5 kg)
GS16042CP	42" (106.7 cm)	51.3" (130.3 cm)	0.75" (19 mm)	3.5 lbs. (1.6 kg)
GS16054CP	54" (137.2 cm)	63.3" (160.8 cm)	0.75" (19 mm)	3.7 lbs. (1.7 kg)
GS16078CP	78" (198.1 cm)	87.3" (221.7 cm)	0.75" (19 mm)	4.2 lbs. (1.9 kg)
GS16096CP	96" (243.8 cm)	105.3" (267.5 cm)	0.75" (19 mm)	4.6 lbs. (2.1 kg)
GS16120CP	120" (304.8 cm)	129.3" (328.4 cm)	0.75" (19 mm)	5.1 lbs. (2.3 kg)
GS16144CP	144" (365.8 cm)	153.3" (389.4 cm)	0.75" (19 mm)	5.6 lbs. (2.5 kg)
2	21,000 lbs. (9525 kg) Min	imum Ultimate Strength	a - 3/4" (19 mm) Dia. R	od
GS21012CP	12" (30.5 cm)	22" (55.9 cm)	0.88" (22 mm)	4.5 lbs. (2 kg)
GS21018CP	18" (45.7 cm)	28" (71.1 cm)	0.88" (22 mm)	4.6 lbs. (2.1 kg)
GS21024CP	24" (61 cm)	34" (86.4 cm)	0.88" (22 mm)	4.8 lbs. (2.2 kg)
GS21036CP	36" (91.4 cm)	46" (116.8 cm)	0.88" (22 mm)	5.1 lbs. (2.3 kg)
GS21054CP	54" (137.2 cm)	64" (162.6 cm)	0.88" (22 mm)	5.7 lbs. (2.6 kg)
GS21060CP	60" (152.4 cm)	70" (177.8 cm)	0.88" (22 mm)	5.8 lbs. (2.6 kg)
GS21078CP	78" (198.1 cm)	88" (223.5 cm)	0.88" (22 mm)	6.4 lbs. (2.9 kg)
GS21096CP	96" (243.8 cm)	106" (269.2 cm)	0.88" (22 mm)	6.9 lbs. (3.1 kg)
GS21120CP	120" (304.8 cm)	130" (330.2 cm)	0.88" (22 mm)	7.6 lbs. (3.4 kg)
GS21144CP	144" (365.8 cm)	154" (391.2 cm)	0.88" (22 mm)	8.3 lbs. (3.7 kg)

GS—CP series has No Roller as detailed in drawing For 1 Roller, replace "CP" in number with "CP1"