

Commercial Grade


IllumaTech™ Decora®

Specifications and Features

- Fluid slide movement allows fine adjustment of light level with minimum effort
- Captive wraparound slide bar remains securely attached
- Easy to use push button switch with conveniently positioned green LED locator
- Provides single pole and multi-location lighting control when used with a 3-way switch
- Streamlined, popular Decora styling complements interiors and is compatible with other Decora devices
- Compatible with Decora Plus™ screwless wallplates and Decora wallplates
- Power failure recovery ensures retention of last setting before power interruption
- Built-in radio/TV interference filter
- Quiet 1.5 amp fan speed controls are ideal for bedrooms, libraries, study rooms and any area where ceiling fan noise could become distracting. Full range 5 amp fan speed controls also available
- Color change kits are available to allow fast color changeover to simplify stocking inventory and feature a self aligning mechanism that automatically connects it to internal slider
- Limited Five-Year Warranty

ILLUMATECH DECORA PRESET SLIDE CONTROLS - SINGLE POLE OR 3-WAY

Dimmers

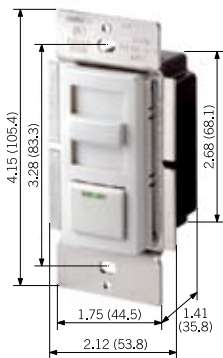

IPI10-1L7

Description	Rating	Cat. No.	Color
Incandescent Dimmer with LED locator	600W-120VAC	IPI06-1L	X, Z
Incandescent Dimmer with LED locator	1000W-120VAC	IPI10-1L	X, Z
Magnetic Low Voltage Dimmer with LED locator	600VA (450W)-120VAC	IPM06-1L	X, Z
Magnetic Low Voltage Dimmer with LED locator	1000VA (800W)-120VAC	IPM10-1L	X, Z
Electronic Low Voltage Dimmer with LED locator, neutral required	400VA (320W)-120VAC	IPE04-1L	X, Z
Fluorescent Dimmer for Mark 10® Powerline Ballast, no LED; neutral required	600VA-120VAC	IPX06-10	X, Z
Fluorescent Dimmer Mark 10® Powerline Ballast, no LED; neutral required	1000VA-120VAC	IPX10-10	X, Z
Fluorescent Dimmer for Mark 10® Powerline Ballast, no LED; neutral required	600VA-277VAC	IPX06-70	X, Z
Fluorescent Dimmer for Mark 10® Powerline Ballast, no LED; neutral required	1200VA-277VAC	IPX12-70	X, Z
Fluorescent Dimmer for Mark 7® 0-10V Ballast with LED locator; neutral required	1200VA @ 120VAC 1500VA @ 277VAC	IP710-DL	X, Z

Fan Speed Controls

Description	Rating	Cat. No.	Color
Quiet Fan Speed Control with LED locator; neutral required	1.5A-120VAC	IPF01-1L	X, Z
Fully Variable Fan Speed Control with LED locator, neutral required	5A-120VAC	IPF05-1L	X, Z

COLOR CHANGE KITS FOR ILLUMATECH CONTROLS

Description	Cat. No.	Color
Color Change Kit with LED locator	IPKIT-00	W, I, A, T, G, E, B, R
Color Change Kit; no LED	IPKIT-0N	W, I, A, T, G, E, B, R
Color Change Kit for Fan Speed Control with LED locator	IPQFK-00	W, I, A, T, G, E, B, R