



# HALO Commercial


## HC Series

4-inch, 6-inch & 8-inch  
LED Downlight & Wall Wash

# HC Series

## Recessed Downlights

HALO Commercial offers HC4, HC6, HC8 LED downlights in 4-inch, 6-inch, 8-inch apertures. The HC recessed downlights are offered with narrow, medium, or wide beam reflectors or wall wash reflector. Installation options include new construction/remodel and retrofit kit. Available in multiple lumen packages and color temperatures, The HC Series is ideal for general area lighting in commercial construction.

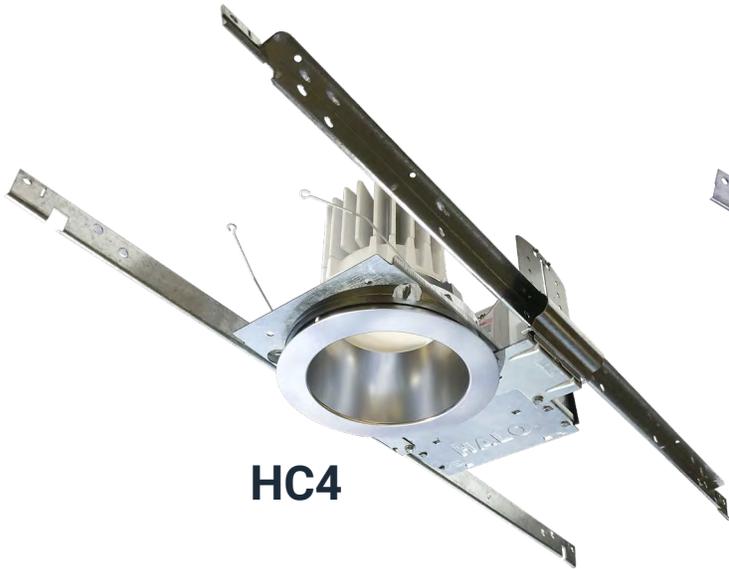

**HC4**



**HC6**



**HC8**





The HC Series downlights offer narrow, medium, wide beam self-flanged reflectors and LED modules that match the HCC cylinders in reflector finishes, LED color metrics and photometric performance for a coordinated lighting design.

## Installation Options



## Reflector Finish Options



## Standard Features



### 1. Housing Mounting Frame

- Boat-shaped galvanized steel frames with die-formed aperture
- New construction or remodeling installation with boat shaped frame
- Plaster lip collar pre-set to 1/2" and adjusts for ceilings up to 1-1/2" thick

### 2. No Fuss Bar Hangers

- Pre-installed and centered mounting bars
- Bars lock to tee grid with screwdriver or pliers
- Centering marks on the bar bracket

### 3. Adjustable Mounting Brackets

- Bar brackets adjust 2" vertically from above the ceiling or through the aperture
- Brackets for use with the included "No Fuss" mounting bars or with 1/2" EMT
- Brackets are removable for remodel installation from below the ceiling

### 4. Junction Box

- Listed for (8) #12 AWG 90° C conductors (4-in/4-out)
- Listed for feed through branch wiring
- (3) 1/2" and (2) 3/4" trade size pry-outs
- Low voltage barrier section for 0-10V dimming wires
- (3) 4-port push wire nuts (1-port is fixture connection)

# HC4 Series

## 4-inch LED Downlight and Wall Wash

Versatile 4-inch commercial downlight optimized for lumen efficiency and optical performance. Reflectors offered in narrow, medium, wide distribution for efficiency in lumen delivery. Contractor installation friendly with connected lighting options available.



**HM4 Low Lumen LED Module**  
Lumens  
500 | 750 | 1000 | 1500 | 2000 | 2500




**HM4 Mid Lumen LED Module**  
Lumens  
3000 | 3500 | 4000




**HM4 High Lumen LED Module**  
Lumens  
4500 | 5000 | 5500 | 6000

### Color temperature


The HC4 LED modules are available in a discrete selection of correlated color temperatures (CCT). The user can choose color temperatures 2700K, 3000K, 3500K, 4000K and 5000K in 80 or 90 CRI.

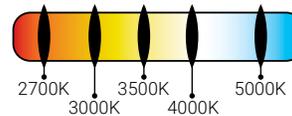

### 80 CRI Color Metric Summary - 3500K\*

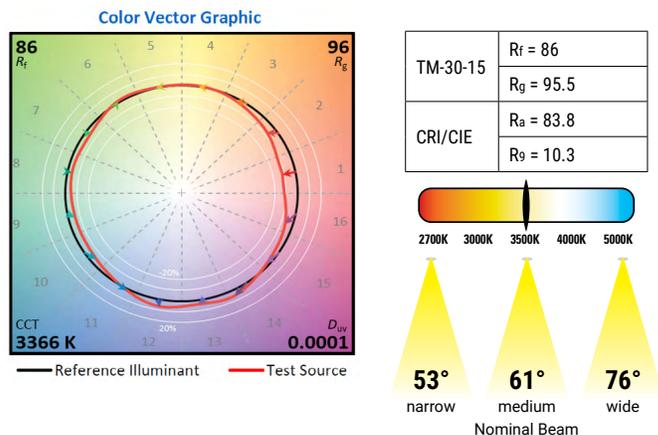

### 90 CRI Color Metric Summary - 3500K\*

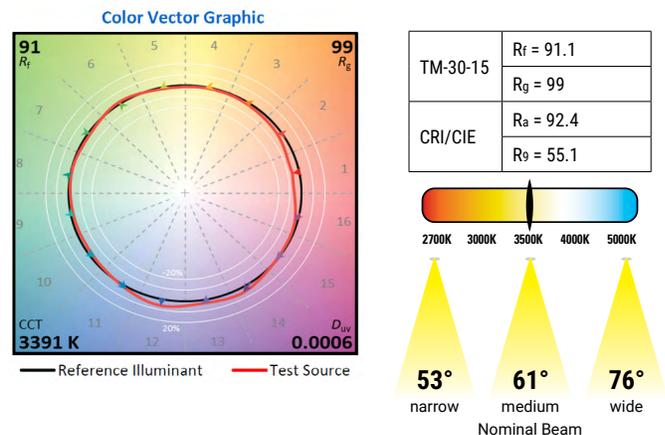

# Order Information - HC4

Sample Number : HC420D010REM7 - HM43040930 - 41MDC

A complete luminaire consists of a housing frame, LED module, and reflector (ordered separately)

Mounting Frame	Lumens	Driver Options	Factory Installed Emergency & Connected Lighting Options	Accessories (Order & Install Separately)
<b>HC4</b> = 4" new construction downlight housing  <b>HC4CP</b> = 4" new construction housing, Chicago Plenum - CCEA compliant	<b>05</b> = 500 lm <b>07</b> = 750 lm <b>10</b> = 1000 lm <b>15</b> = 1500 lm <b>20</b> = 2000 lm <b>25</b> = 2500 lm <b>30</b> = 3000 lm <b>35</b> = 3500 lm <b>40</b> = 4000 lm <b>45</b> = 4500 lm <sup>(7)</sup> <b>50</b> = 5000 lm <sup>(7)</sup> <b>55</b> = 5500 lm <sup>(7)</sup> <b>60</b> = 6000 lm <sup>(7)</sup>	<b>D010</b> =UNV 120-277V, 50/60Hz, 0-10V 1%-100% dimming at 120-277V on 0-10V controls  <b>Canada Option 500-5000 lumens:</b> <b>D010347</b> = 347VAC 50/60Hz 0-10V 1%-100% dimming. For 500, 750, 1000, 1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000lm models only <sup>(1)</sup>  <b>Canada Option 5500-6000 lumens:</b> <b>D010X347</b> = step down transformer factory installed (with standard "D010" 120V-277V LED driver). For 5500, 6000lm models only <sup>(1)</sup>  <b>DLV</b> = Distributed Low Voltage driver 1%-100% dimming. DLV for use with DLVP system only. Refer to DLVP low-voltage power module and DLVP specifications for details. <sup>(1)</sup>	<b>REM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)(6)</sup> <b>REM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)(6)</sup> <b>IEM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)(6)</sup> <b>IEM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)(6)</sup> <b>BOD7ST</b> = 7.5 watt Bodine self-test emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)(6)</sup> <b>WTA</b> = Factory WaveLinX Tilemount Sensor Kit <sup>(4)</sup> <b>WTK</b> = Factory WaveLinX Lite Commercial Tilemount Sensor Kit <sup>(5)</sup>  <b>REM7V</b> = 7 watt emergency battery pack with remote test / indicator light, use with DLV only <sup>(1)(2)(3)(6)</sup> <b>REM14V</b> = 14 watt emergency battery pack with remote test / indicator light, use with DLV only <sup>(1)(2)(3)(6)</sup> <b>IEM7V</b> = 7 watt emergency battery pack with remote test / indicator light, use with DLV only <sup>(1)(2)(3)(6)</sup> <b>IEM14V</b> = 14 watt emergency battery pack with remote test / indicator light, use with DLV only <sup>(1)(2)(3)(6)</sup>	<b>HB128APK</b> = L channel hanger bar, 26", pair (replacement) <b>RMB22</b> = Adjustable wood joist mounting bars, pair, extend to 22" long <b>H347</b> = 347 to 120V step down transformer, 75VA <b>H347200</b> = 347 to 120V step down transformer, 200VA <b>WTA</b> = Field WaveLinX Tilemount Sensor Kit <sup>(4)</sup> <b>WTK</b> = Field WaveLinX Lite Commercial Tilemount Sensor Kit <sup>(5)</sup>

LED Module	Lumens	CRI/CCT	
<b>HM4</b> = 4" LED module	<b>0525</b> = 500 - 2500 lumen <b>3040</b> = 3000-4000 lumen <b>4560</b> = 4500-6000 lumen	<b>827</b> = 80CRI, 2700K <b>830</b> = 80CRI, 3000K <b>835</b> = 80CRI, 3500K <b>840</b> = 80CRI, 4000K <b>850</b> = 80CRI, 5000K	<b>927</b> = 90CRI, 2700K <b>930</b> = 90CRI, 3000K <b>935</b> = 90CRI, 3500K <b>940</b> = 90CRI, 4000K <b>950</b> = 90CRI, 5000K

Reflector	Distribution <sup>(6)</sup>	Finish	Flange	Accessories
<b>41</b> = 4" conical reflector	<b>ND</b> = narrow 50° beam angle 0.84 SC (nominal) <b>MD</b> = medium 60° beam angle 1.00 SC (nominal) <b>WD</b> = wide 75° beam angle 1.24 SC (nominal) <b>RWW</b> = rotatable wall wash with linear spread lens	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors	<b>41RWWPK</b> = Replacement part kit - wall wash lens insert - for use with 41RWW* only.

Baffle	Distribution <sup>(6)</sup>	Finish	Flange	Accessories
<b>41</b> = 4" baffle reflector	<b>WD</b> = wide 75° beam angle 1.24 SC (nominal) <b>RWW</b> = rotatable wall wash with linear spread lens	<b>BB</b> = Black baffle <b>WB</b> = White baffle	<b>Blank</b> = White flange standard with BB, & WB <b>BF</b> = Black flange option available with BB	<b>41RWWPK</b> = Replacement part kit - wall wash lens insert - for use with 41RWW* only.

IEM Reflector	Distribution <sup>(6)</sup>	Finish	Flange	Integral Emergency
<b>41</b> = 4" conical reflector for integral emergency only	<b>ND</b> = narrow 50° beam angle 0.84 SC (nominal) <b>MD</b> = medium 60° beam angle 1.00 SC (nominal) <b>WD</b> = wide 75° beam angle 1.24 SC (nominal)	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors	<b>IEM</b> = Reflector for integral emergency only

IEM Baffle	Distribution <sup>(6)</sup>	Finish	Flange	Integral Emergency
<b>41</b> = 4" baffle reflector for integral emergency only	<b>WD</b> = wide 75° beam angle 1.24 SC (nominal)	<b>BB</b> = Black baffle <b>WB</b> = White baffle	<b>Blank</b> = White flange standard with BB, & WB <b>BF</b> = Black flange option with BB	<b>IEM</b> = Reflector for integral emergency only

Reflector	Distribution <sup>(6)</sup>	Finish	Flange
<b>41PS</b> = 4" non-conductive polymer 'dead front' conical reflector <sup>(9)</sup>	<b>MD</b> = medium 60° beam angle 1.00 SC (nominal)	<b>W</b> = White	<b>Blank</b> = White flange standard with W reflector

**Notes:** (1) Not available with CP models. (2) Not available with D010347 (347V models). (3) ULUS for U.S. only. (4) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX specifications). (5) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite specifications). (6) Emergency battery backup options are Non-IC only, and rated for a minimum starting temperature of 0°C. (7) Marked Spacing: Center to Center of Adjacent Luminaires = 36" / Center of Luminaire to Building Member = 18" / Minimum overhead = 0.5 (8) Values are nominal for white reflector, others may vary. (9) 41PS\* is 1000-3000 lumens Non-IC rated. 500 & 750 lumens IC rated. 41PS is not for use over 3000 lumens in Non-IC or over 750 lumens in IC.

# Reflectors

Precision formed 4-inch reflectors designed to deliver narrow, medium and wide beam distributions. A non-conductive polymer reflector may be used to meet 'dead-front' requirements.




## Beam distribution options\*



Beam Distribution*			
Code	Distribution	Spacing Criteria	Beam Angle
ND	Narrow	0.84	53°
MD	Medium	1.0	61°
WD	Wide	1.2	76°


\* Nominal values may vary depending on selected CRI/CCT and reflector finish.

## Dimensional and Mounting Details - HC4

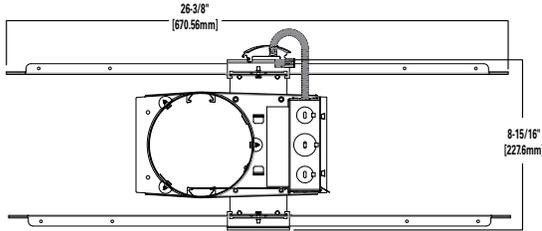

### NEW CONSTRUCTIONS - LOW LUMEN 500 – 2500 LUMENS

NEW CONSTRUCTION - LOW LUMEN  
500 - 2500 LUMENS

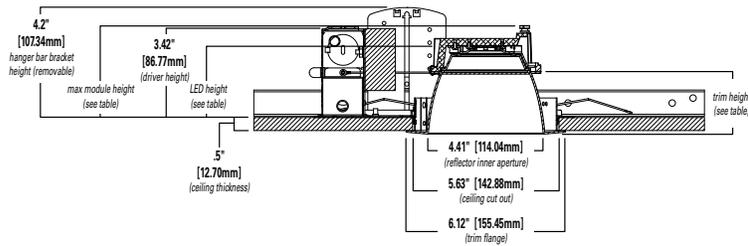


### Low Lumen (500 – 2500 Lumens)\*

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	3.6"	2.5"	2.7"
Medium	3.7"	2.6"	2.8"
Wide	3.5"	2.4"	2.6"
Baffle	3.1"	2.4"	2.6"

\*Max. height w/hanger bar bracket 4.2"

### NEW CONSTRUCTIONS - MID LUMEN 3000 – 4000 LUMENS

NEW CONSTRUCTION - MID LUMEN  
3000 - 4000 LUMEN

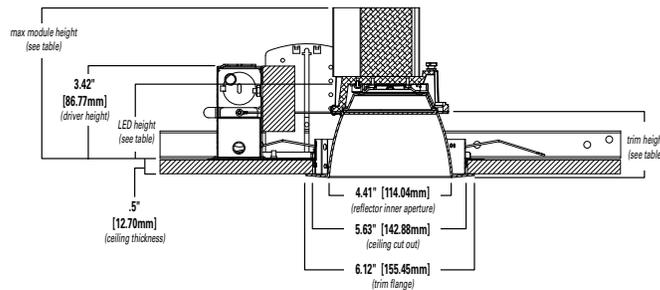


### Mid Lumen (3000 – 4000 Lumens)

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	5.6"	2.5"	2.9"
Medium	5.7"	2.6"	3.0"
Wide	5.5"	2.4"	2.8"
Baffle	5.5"	2.4"	2.8"

### NEW CONSTRUCTIONS - HIGH LUMEN 4500 – 6000 LUMENS

NEW CONSTRUCTION - HIGH LUMEN  
4500 - 6000 LUMEN

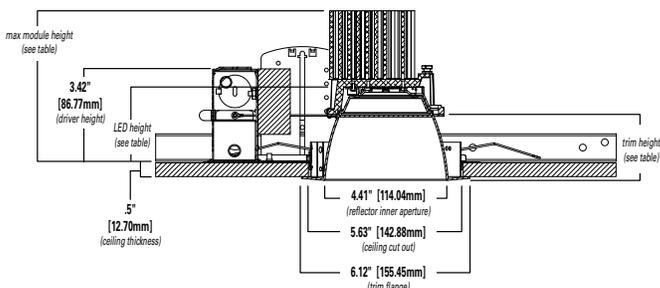

### High Lumen (4500 – 6000 Lumens)

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	5.9"	2.5"	2.9"
Medium	6.0"	2.6"	3.0"
Wide	5.8"	2.4"	2.8"
Baffle	5.8"	2.4"	2.8"

# Order Information - HC4R

**Sample Number:** HC4R20D010REM7 - HM43040930 - 42RMDC

A complete luminaire consists of a frame/collar, LED module, and reflector (ordered separately)





Frame / Collar <sup>(1)</sup>	Lumens	Driver Options	Factory Installed Emergency & Connected Lighting Options	Accessories (Order & Install Separately)
<b>HC4R</b> = 4" retrofit kit for 4.75" (4-3/4") to 4.875" (4-7/8") nominal ceiling cutout aperture	<b>05</b> = 500 lm <b>07</b> = 750 lm <b>10</b> = 1000 lm <b>15</b> = 1500 lm <b>20</b> = 2000 lm <b>25</b> = 2500 lm <b>30</b> = 3000 lm <b>35</b> = 3500 lm <b>40</b> = 4000 lm <b>45</b> = 4500 lm <sup>(6)</sup> <b>50</b> = 5000 lm <sup>(6)</sup> <b>55</b> = 5500 lm <sup>(6)</sup> <b>60</b> = 6000 lm <sup>(6)</sup>	<b>D010</b> =UNV 120-277V, 50/60Hz, 0-10V 1%-100% dimming at 120-277V on 0-10V controls  <b>Canada Option 500-5000 lumens:</b> <b>D010347</b> = 347VAC 50/60Hz 0-10V 1%-100% dimming. For 500, 750, 1000, 1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000lm models only <sup>(1)</sup>  <b>Canada Option 5500-6000 lumens:</b> <b>D010X347</b> = step down transformer factory installed (with standard "D010" 120V-277V LED driver). For 5500, 6000lm models only	<b>REM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (5)</sup> <b>REM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (5)</sup> <b>BOD7ST</b> = 7.5 watt Bodine self-test emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (5)</sup> <b>WTA</b> = Factory WaveLinX Tilemount Sensor Kit <sup>(3)</sup> <b>WTK</b> = Factory WaveLinX Lite Commercial Tilemount Sensor Kit <sup>(4)</sup>	<b>H347</b> = 347 to 120V step down transformer, 75VA <b>H347200</b> = 347 to 120V step down transformer, 200VA <b>WTA</b> = Field WaveLinX Tilemount Sensor Kit <sup>(3)</sup> <b>WTK</b> = Field WaveLinX Lite Commercial Tilemount Sensor Kit <sup>(4)</sup>

LED Module	Lumens	CRI/CCT	
<b>HM4</b> = 4" LED module	<b>0525</b> = 500 - 2500 lumen <b>3040</b> = 3000-4000 lumen <b>4560</b> = 4500-6000 lumen	<b>827</b> = 80CRI, 2700K <b>830</b> = 80CRI, 3000K <b>835</b> = 80CRI, 3500K <b>840</b> = 80CRI, 4000K <b>850</b> = 80CRI, 5000K	<b>927</b> = 90CRI, 2700K <b>930</b> = 90CRI, 3000K <b>935</b> = 90CRI, 3500K <b>940</b> = 90CRI, 4000K <b>950</b> = 90CRI, 5000K

Reflector	Distribution <sup>(7)</sup>	Finish	Flange
<b>42R</b> = 4" retrofit conical reflector for use with HC4R frame/collar only	<b>MD</b> = medium distribution 65° beam angle, 1.15 SC (nominal)	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White (white flange)	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors

**Notes:** (1) Not available with CP models. (2) Not available with D010347 (347V models). (3) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX specifications). (4) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite specifications). (5) Emergency battery backup options are Non-IC only, and rated for a minimum starting temperature of 0°C. (6) Marked Spacing: Center to Center of Adjacent Luminaires = 36" / Center of Luminaire to Building Member = 18" / Minimum overhead = 0.5 (7) Values are nominal for white reflector, others may vary.


## Dimensions - HC4R

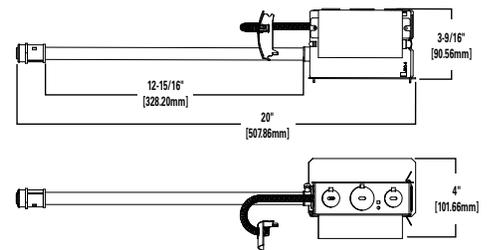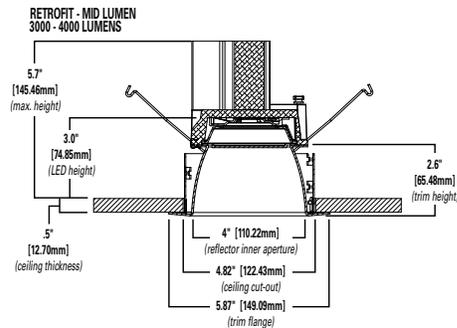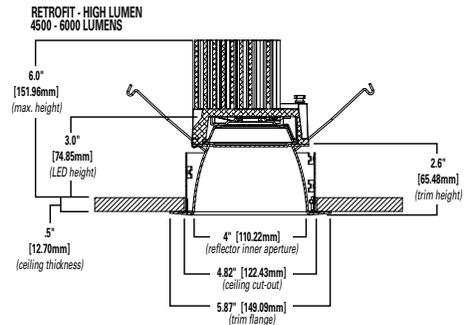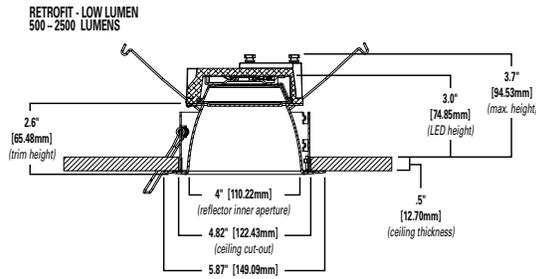

# HC6 Series

## 6-inch LED Downlight and Wall Wash

Versatile 6-inch commercial downlight optimized for lumen efficiency and optical performance. Reflectors offered in narrow, medium, wide distribution for efficiency in lumen delivery. Contractor installation friendly with emergency and connected lighting options available.

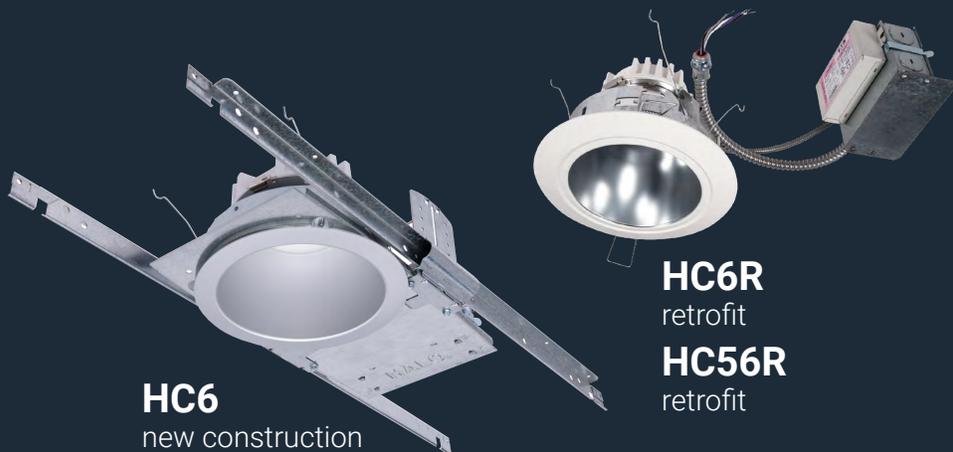

**HC6**  
new construction

**HC6R**  
retrofit  
**HC56R**  
retrofit



**HM6 Low Lumen LED Module**  
Lumens  
500 | 750 | 1000 | 1500 | 2000 | 2500




**HM6 Mid Lumen LED Module**  
Lumens  
3000 | 3500 | 4000




**HM6 High Lumen LED Module**  
Lumens  
4500 | 5000 | 5500 | 6000

### Color temperature



The HC6 LED modules are available in a discrete selection of correlated color temperatures (CCT). The user can choose color temperatures 2700K, 3000K, 3500K, 4000K and 5000K in 80 or 90 CRI.

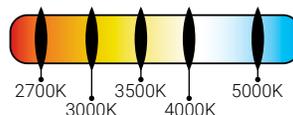


### 80 CRI Color Metric Summary - 3500K\*

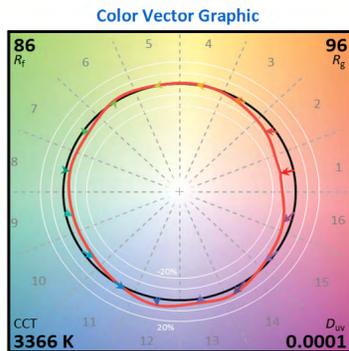



TM-30-15	R <sub>f</sub> = 86
	R <sub>g</sub> = 95.5
CRI/CIE	R <sub>a</sub> = 83.8
	R <sub>9</sub> = 10.3

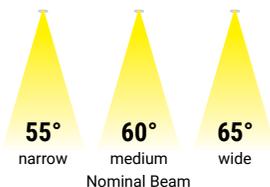

### 90 CRI Color Metric Summary - 3500K\*

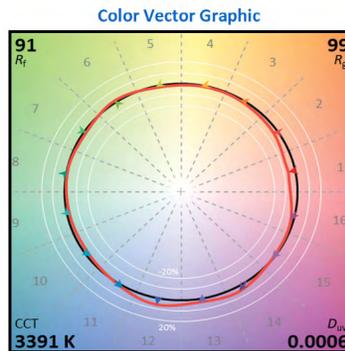

TM-30-15	R <sub>f</sub> = 91.1
	R <sub>g</sub> = 99
CRI/CIE	R <sub>a</sub> = 92.4
	R <sub>9</sub> = 55.1

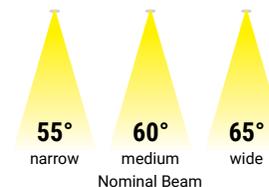

# Order Information - HC6

**Sample Number:** HC620D010REM7 – HM60525835 - 61MDC

A complete luminaire consists of a housing frame, LED module, and reflector (ordered separately)

Mounting Frame	Lumens	Driver Options	Factory Installed Emergency & Connected Lighting Options	Accessories (Order & Install Separately)
<b>HC6</b> = 6" new construction downlight housing <b>HC6CP</b> = 6" new construction housing, Chicago Plenum - CCEA compliant	<b>05</b> = 500 lm <b>07</b> = 750 lm <b>10</b> = 1000 lm <b>15</b> = 1500 lm <b>20</b> = 2000 lm <b>25</b> = 2500 lm <b>30</b> = 3000 lm <b>35</b> = 3500 lm <b>40</b> = 4000 lm <b>45</b> = 4500 lm (7) <b>50</b> = 5000 lm (7) <b>55</b> = 5500 lm (7) <b>60</b> = 6000 lm (7)	<b>D010</b> =UNV 120-277V, 50/60Hz, 0-10V 1%-100% dimming at 120-277V on 0-10V controls  <b>Canada Option 500-5000 lumens:</b> <b>D010347</b> = 347VAC 50/60Hz 0-10V 1%-100% dimming. For 500, 750, 1000, 1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000lm models only (1)	<b>REM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only (1)(2)(6) <b>REM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only (1)(2)(6) <b>IEM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only (1)(2)(6) <b>IEM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only (1)(2)(6) <b>BOD7ST</b> = 7.5 watt Bodine self-test emergency battery pack with remote test / indicator light, use with D010 only (1)(2)(6) <b>WTA</b> = Factory WaveLinX Tilemount Sensor Kit (4) <b>WTK</b> = Factory WaveLinX Lite Commercial Tilemount Sensor Kit (5)	<b>HB128APK</b> = L channel hanger bar, 26", pair (replacement) <b>RMB22</b> = Adjustable wood joist mounting bars, pair, extend to 22" long <b>HSA6</b> = Slope Adapter for 6" Aperture Housings, Specify Slope (refer to instructions for installing housing and trim) <b>H347</b> = 347 to 120V step down transformer, 75VA <b>H347200</b> = 347 to 120V step down transformer, 200VA <b>WTA</b> = Field WaveLinX Tilemount Sensor Kit (4) <b>WTK</b> = Field WaveLinX Lite Commercial Tilemount Sensor Kit (5)
		<b>Canada Option 5500-6000 lumens:</b> <b>D010X347</b> = step down transformer factory installed (with standard "D010" 120V-277V LED driver). For 5500, 6000lm models only (1)	<b>DLV</b> = Distributed Low Voltage driver 1%- 100% dimming. DLV for use with DLVP system only. Refer to DLVP low-voltage power module and DLVP specifications for details. (1)	

LED Module	Lumens	CRI/CCT	
<b>HM6</b> = 6" LED Modules For use with HC6 - HC6CP New Construction housings only	<b>0525</b> = 500 - 2500 lumen <b>3040</b> = 3000-4000 lumen <b>4560</b> = 4500-6000 lumen	<b>827</b> = 80CRI, 2700K <b>830</b> = 80CRI, 3000K <b>835</b> = 80CRI, 3500K <b>840</b> = 80CRI, 4000K <b>850</b> = 80CRI, 5000K	<b>927</b> = 90CRI, 2700K <b>930</b> = 90CRI, 3000K <b>935</b> = 90CRI, 3500K <b>940</b> = 90CRI, 4000K <b>950</b> = 90CRI, 5000K

Reflector	Distribution <sup>(8)</sup>	Finish	Flange	Accessories
<b>61</b> = 6" conical reflector	<b>ND</b> = narrow 55° beam angle 0.97 SC <b>MD</b> = medium 60° beam angle 1.10 SC <b>WD</b> = wide 65° beam angle 1.28 SC <b>RWW</b> = rotatable wall wash with linear spread lens	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors	<b>61RWWPK</b> = Replacement part kit - wall wash lens insert - for use with 61RWW* only.

Baffle	Distribution <sup>(8)</sup>	Finish	Flange	Accessories
<b>61</b> = 6" baffle reflector	<b>WD</b> = wide 65° beam angle 1.28 SC (nominal) <b>RWW</b> = rotatable wall wash with linear spread lens	<b>BB</b> = Black baffle <b>WB</b> = White baffle	<b>Blank</b> = White flange standard with BB, & WB <b>BF</b> = Black flange option available with BB	<b>61RWWPK</b> = Replacement part kit - wall wash lens insert - for use with 61RWW* only.

IEM Reflector	Distribution <sup>(8)</sup>	Finish	Flange	Integral Emergency
<b>61</b> = 6" IEM reflector for integral emergency only	<b>ND</b> = narrow 55° beam angle 0.97 SC <b>MD</b> = medium 60° beam angle 1.10 SC <b>WD</b> = wide 65° beam angle 1.28 SC	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors	<b>IEM</b> = Reflector for use with integral emergency housings only. Provides access hole for integral emergency test switch.

IEM Baffle	Distribution <sup>(8)</sup>	Finish	Flange	Integral Emergency
<b>61</b> = 6" IEM baffle reflector for integral emergency only	<b>WD</b> = wide 65° beam angle 1.28 SC (nominal)	<b>BB</b> = Black baffle <b>WB</b> = White baffle	<b>Blank</b> = White flange standard with BB, & WB <b>BF</b> = Black flange option with BB	<b>IEM</b> = Reflector for use with integral emergency housings only. Provides access hole for integral emergency test switch.

Reflector	Distribution <sup>(8)</sup>	Finish	Flange
<b>61PS</b> = 6" non-conductive polymer 'dead front' conical reflector Use with HM6PS0525* LED modules only (9)	<b>MD</b> = medium 60° beam angle 1.10 SC (nominal)	<b>W</b> = White	<b>Blank</b> = White flange standard with W reflector


**Notes:** (1) Not available with CP models. (2) Not available with D010347 (347V models). (3) ULUS for U.S. only. (4) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX specifications). (5) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite specifications). (6) Emergency battery backup options are Non-IC only, and rated for a minimum starting temperature of 0°C. (7) Marked Spacing: Center to Center of Adjacent Luminaires = 36" / Center of Luminaire to Building Member = 18" / Minimum overhead = 0.5. (8) Values are nominal, with specular clear reflector, other finishes and field results may vary. (9) 61PS is 1000-2000 lumens Non-IC rated. 500 & 750 lumens IC rated. 61PS is not for use over 2000lm in Non-IC or over 750lm in IC.

# Reflectors

Precision formed 6-inch reflectors designed to deliver narrow, medium and wide beam distributions. A non-conductive polymer reflector may be used to meet 'dead-front' requirements.




## Nominal beam distribution options\*

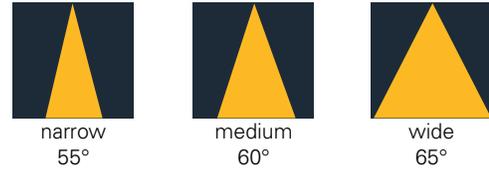


Beam Distribution*			
Code	Distribution	Spacing Criteria	Beam Angle
ND	Narrow	0.97	55°
MD	Medium	1.10	60°
WD	Wide	1.28	65°

\* Nominal values may vary depending on selected CRI/CCT and reflector finish.

## Dimensional and Mounting Details

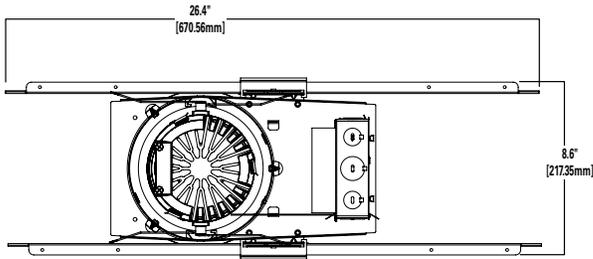

### NEW CONSTRUCTIONS - LOW LUMEN 500 – 2500 LUMENS

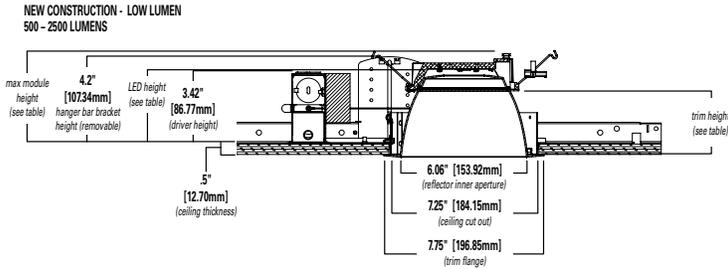


### Low Lumen (500 – 2500 Lumens)\*

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	4.5"	3.4"	3.8"
Medium	4.6"	3.5"	3.9"
Wide	4.4"	3.3"	3.7"
Baffle	4.4"	3.3"	3.7"

\*Max. height w/removable hanger bar bracket 4.2"


### NEW CONSTRUCTIONS - MID LUMEN 3000 – 4000 LUMENS

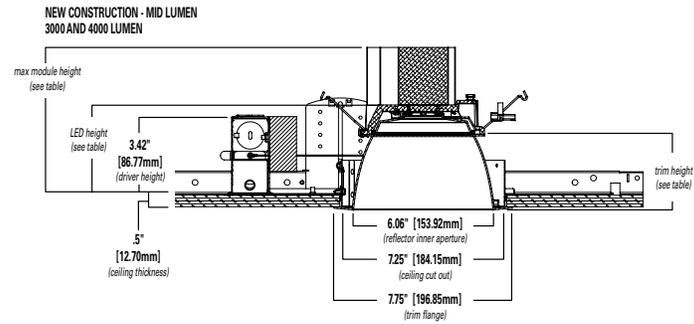

### Mid Lumen (3000 – 4000 Lumens)

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	6.6"	3.4"	3.8"
Medium	6.7"	3.5"	3.9"
Wide	6.5"	3.3"	3.7"
Baffle	6.5"	3.3"	3.7"

### NEW CONSTRUCTIONS - HIGH LUMEN 4500 – 6000 LUMENS

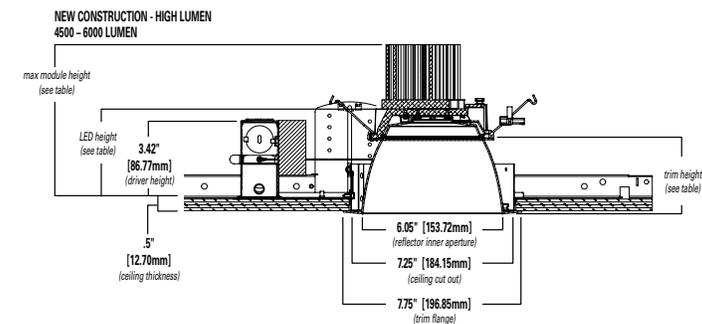

### High Lumen (4500 – 6000 Lumens)

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	6.9"	3.4"	3.8"
Medium	7.0"	3.5"	3.9"
Wide	6.8"	3.3"	3.7"
Baffle	6.8"	3.3"	3.7"



# 6" HC6R LED Retrofit Downlight

6-inch aperture LED retrofit downlight is designed for installation into **6.625" (6-5/8") to 7.0" (7")** nominal aperture commercial housings. The retrofit reflector offered in medium distribution is ideal for general area lighting. Oversize flange for greater aperture coverage when retrofitting. Lumen packages range 500 to 6000 lumens (nominal) in color temperatures of 2700K, 3000K, 3500K, 4000K and 5000K; in 80 or 90CRI. Installs from below the ceiling into existing open frame recessed housings. Applications include office spaces, healthcare, hospitality, and other institutional uses.

## Order Information

**Sample Number :** HC6R20D010 – HM6R0525835 – 62RMDC

A complete luminaire consists of a frame/collar, LED module, and reflector (ordered separately)

Frame / Collar <sup>(1)</sup>	Lumens	Driver Options	Factory Installed Emergency & Connected Lighting Options	Accessories (Order & Install Separately)
<b>HC6R</b> = 6" retrofit kit for 6.625" (6-5/8") to 7.0" (7-0") nominal ceiling cutout aperture	<b>05</b> = 500 lm <b>07</b> = 750 lm <b>10</b> = 1000 lm <b>15</b> = 1500 lm <b>20</b> = 2000 lm <b>25</b> = 2500 lm <b>30</b> = 3000 lm <b>35</b> = 3500 lm <b>40</b> = 4000 lm <b>45</b> = 4500 lm <sup>(6)</sup> <b>50</b> = 5000 lm <sup>(6)</sup> <b>55</b> = 5500 lm <sup>(6)</sup> <b>60</b> = 6000 lm <sup>(6)</sup>	<b>D010</b> -UNV 120-277V, 50/60Hz, 0-10V 1%-100% dimming at 120-277V on 0-10V controls  <b>Canada Option 500-5000 lumens:</b> <b>D010347</b> = 347VAC 50/60Hz 0-10V 1%-100% dimming. For 500, 750, 1000, 1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000lm models only <sup>(1)</sup>  <b>Canada Option 5500-6000 lumens:</b> <b>D010X347</b> = step down transformer factory installed (with standard "D010" 120V-277V LED driver). For 5500, 6000lm models only	<b>REM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (5)</sup>  <b>REM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (5)</sup>  <b>BOD7ST</b> = 7.5 watt Bodine self-test emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (5)</sup>  <b>WTA</b> = Factory WaveLinX Tilemount Sensor Kit <sup>(3)</sup>  <b>WTK</b> = Factory WaveLinX Lite Commercial Tilemount Sensor Kit <sup>(4)</sup>	<b>H347</b> = 347 to 120V step down transformer, 75VA <b>H347200</b> = 347 to 120V step down transformer, 200VA sensor kit, for use with D010 driver only <b>WTA</b> = Field installed WaveLinX sensor Kit <sup>(3)</sup> <b>WTK</b> = Field installed WaveLinX Lite Sensor Kit <sup>(4)</sup> <b>HL6RSMF</b> = 6" aperture new construction mounting frame with integral wood & T-grid bar hangers, adjust for 8" to 24" wide <sup>(9)</sup>

LED Module	Lumens	CRI/CCT
<b>HM6R</b> = 6" LED Modules For use with HC6R - HC56R Retrofit Kit housings only	<b>0525</b> = 500 - 2500 lumen <b>3040</b> = 3000-4000 lumen <b>4560</b> = 4500-6000 lumen	<b>827</b> = 80CRI, 2700K <b>830</b> = 80CRI, 3000K <b>835</b> = 80CRI, 3500K <b>840</b> = 80CRI, 4000K <b>850</b> = 80CRI, 5000K  <b>927</b> = 90CRI, 2700K <b>930</b> = 90CRI, 3000K <b>935</b> = 90CRI, 3500K <b>940</b> = 90CRI, 4000K <b>950</b> = 90CRI, 5000K

Reflector	Distribution	Finish	Flange <sup>(8)</sup>
<b>62R</b> = 6" retrofit conical reflector for use HC6R and HC56R series retrofit kits only <sup>(7)</sup>	<b>MD</b> = medium distribution 55° beam angle, 1.04 SC	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White (white flange)	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors

**Notes:** (1) Not available with CP models. (2) Not available with D010347 (347V models). (3) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX specifications). (4) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite specifications). (5) Emergency battery backup options are Non-IC only, and rated for a minimum starting temperature of 0°C. (6) Marked Spacing: Center to Center of Adjacent Luminaires = 36" / Center of Luminaire to Building Member = 18" / Minimum overhead = 0.5. (7) 62R trims feature an oversized trim ring to meet a range of nominal ceiling openings when retrofitting. See line art for dimensions. (8) Oversize flange accommodates range of retrofit apertures. (9) HL6RSMF for use with HC56R retrofit kit ONLY (aperture size not compatible with HC6R).

## Retrofit Reflectors



Specular Clear



Semi-Specular (Haze)








Matte White



Specular Clear with White Flange



Semi-Specular (Haze) with White Flange

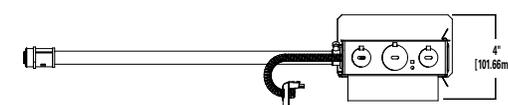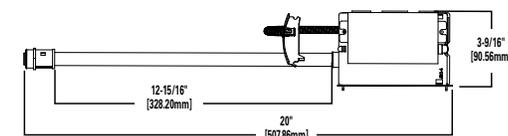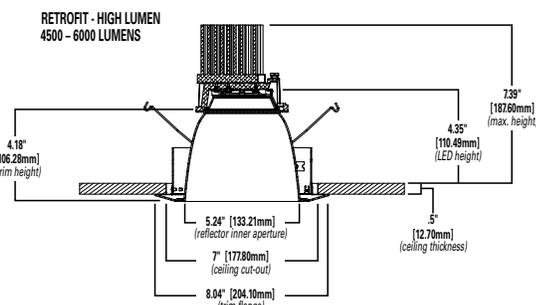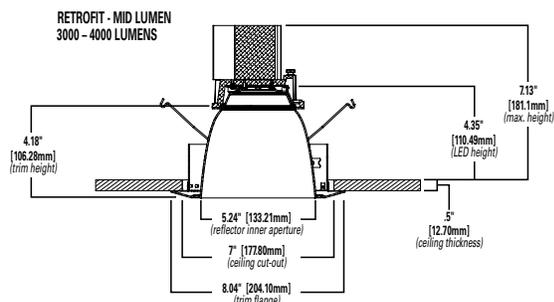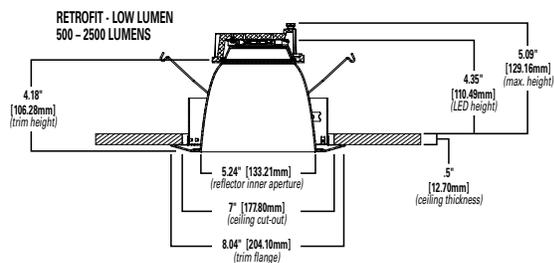

# 6" HC56R LED Retrofit Downlight

6-inch aperture LED retrofit downlight is designed for installation into other **5.875" (5-7/8") to 6.625" (6-5/8")** nominal aperture commercial housings. The retrofit reflector offered in medium distribution is ideal for general area lighting. Oversize flange for greater aperture coverage when retrofitting. Lumen packages range 500 to 6000 lumens (nominal) in color temperatures of 2700K, 3000K, 3500K, 4000K and 5000K; in 80 or 90CRI. Installs from below the ceiling into existing open frame recessed housings. Applications include office spaces, healthcare, hospitality, and other institutional uses.

## Order Information

**Sample Number:** HC56R20D010 – HM6R0525835 – 62RMDC  
A complete luminaire consists of a frame/collar, LED module, and reflector (ordered separately)





Frame / Collar <sup>(1)</sup>	Lumens	Driver Options	Factory Installed Emergency & Connected Lighting Options	Accessories (Order & Install Separately)
<b>HC56R</b> = 6" retrofit kit for 5.875" (5-7/8") to 6.625" (6-5/8") nominal ceiling cutout aperture	<b>05</b> = 500 lm <b>07</b> = 750 lm <b>10</b> = 1000 lm <b>15</b> = 1500 lm <b>20</b> = 2000 lm <b>25</b> = 2500 lm <b>30</b> = 3000 lm <b>35</b> = 3500 lm <b>40</b> = 4000 lm <b>45</b> = 4500 lm <sup>(6)</sup> <b>50</b> = 5000 lm <sup>(6)</sup> <b>55</b> = 5500 lm <sup>(6)</sup> <b>60</b> = 6000 lm <sup>(6)</sup>	<b>D010</b> =UNV 120-277V, 50/60Hz, 0-10V 1%-100% dimming at 120-277V on 0-10V controls  <b>Canada Option 500-5000 lumens:</b> <b>D010347</b> = 347VAC 50/60Hz 0-10V 1%-100% dimming. For 500, 750, 1000, 1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000lm models only <sup>(1)</sup>  <b>Canada Option 5500-6000 lumens:</b> <b>D010X347</b> = step down transformer factory installed (with standard "D010" 120V-277V LED driver). For 5500, 6000lm models only	<b>REM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (5)</sup> <b>REM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (5)</sup> <b>BOD7ST</b> = 7.5 watt Bodine self-test emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (5)</sup> <b>WTA</b> = Factory WaveLinX Tilemount Sensor Kit <sup>(3)</sup> <b>WTK</b> = Factory WaveLinX Lite Commercial Tilemount Sensor Kit <sup>(4)</sup>	<b>H347</b> = 347 to 120V step down transformer, 75VA <b>H347200</b> = 347 to 120V step down transformer, 200VA sensor kit, for use with D010 driver only <b>WTA</b> = Field installed WaveLinX sensor Kit <sup>(3)</sup> <b>WTK</b> = Field installed WaveLinX Lite Sensor Kit <sup>(4)</sup> <b>HL6RSMF</b> = 6" aperture new construction mounting frame with integral wood & T-grid bar hangers, adjust for 8" to 24" wide <sup>(8)</sup>

LED Module	Lumens	CRI/CCT
<b>HM6R</b> = 6" LED Modules For use with HC6R - HC56R Retrofit Kit housings only	<b>0525</b> = 500 - 2500 lumen <b>3040</b> = 3000-4000 lumen <b>4560</b> = 4500-6000 lumen	<b>827</b> = 80CRI, 2700K <b>830</b> = 80CRI, 3000K <b>835</b> = 80CRI, 3500K <b>840</b> = 80CRI, 4000K <b>850</b> = 80CRI, 5000K  <b>927</b> = 90CRI, 2700K <b>930</b> = 90CRI, 3000K <b>935</b> = 90CRI, 3500K <b>940</b> = 90CRI, 4000K <b>950</b> = 90CRI, 5000K

Reflector	Distribution	Finish	Flange <sup>(8)</sup>
<b>62R</b> = 6" retrofit conical reflector for use HC6R and HC56R series retrofit kits only <sup>(7)</sup>	<b>MD</b> = medium distribution 55° beam angle, 1.04 SC	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White (white flange)	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors

**Notes:** (1) Not available with CP models. (2) Not available with D010347 (347V models). (3) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX specifications). (4) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite specifications). (5) Emergency battery backup options are Non-IC only, and rated for a minimum starting temperature of 0°C. (6) Marked Spacing: Center to Center of Adjacent Luminaires = 36" / Center of Luminaire to Building Member = 18" / Minimum overhead = 0.5. (7) 62R trims feature an oversized trim ring to meet a range of nominal ceiling openings when retrofitting. See line art for dimensions. (8) Oversize flange accommodates range of retrofit apertures. (9) HL6RSMF for use with HC56R retrofit kit ONLY (aperture size not compatible with HC6R).

## Retrofit Reflectors

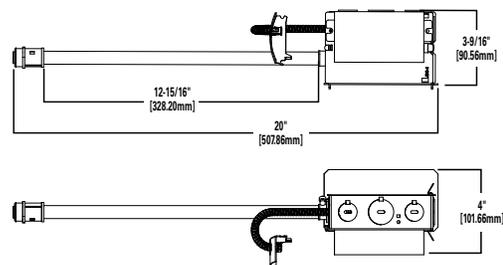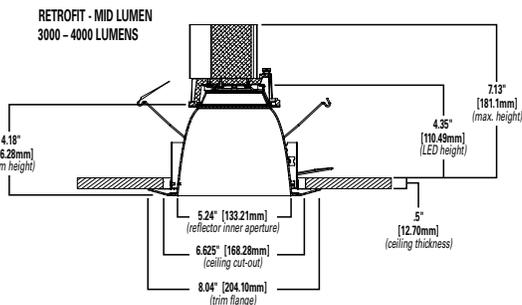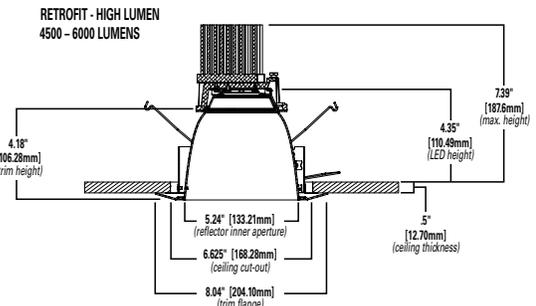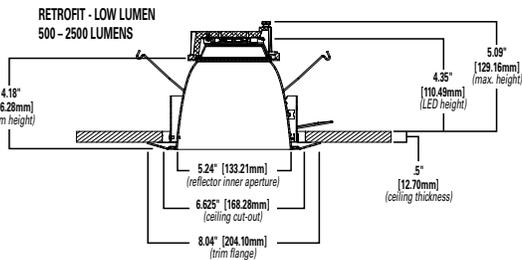



## Efficiency + Value

Halo Commercial achieves the perfect balance of optical control and efficiency to deliver lower watts per square foot in meeting commercial lighting energy codes and provide uniform beam distributions. Design/build, tenant improvement, hospitality and institutional projects will appreciate the Halo Commercial balance of performance and budget-minded design.

### Contractor and Distributor Friendly

- Housings ship complete with No-Fuss bar hangers (no additional bars or C-channel to assemble).
- No-Fuss bars lock to T-grid by quick bend of a screwdriver or pliers (no screws to secure to grid).
- Boat-shaped plaster frame offers versatility in new construction and "old-work" remodeling.
- Oversized junction box with 1/2" and 3/4" trade size pry-outs ships with quick wiring connectors.
- Junction box low voltage section provides code-required barrier for 0-10V dimmer wiring.
- Plaster lip collar is preset for 1/2" ceiling material, and adjusts up to 1-1/2".

### Performance and Efficiency

- Reflector designs optimized for greater optical efficiency (lumen delivery) and beam distribution.
- Greater efficiency allows maximized fixture spacing with good uniformity.
- Maximized spacing achieves desired watts per square foot (fewer fixtures = less power).
- Control from industry standard 120V-277V, 0-10V 1% dimmable LED driver.
- Optional connected lighting control with Distributed Low Voltage Power system (DLVP), WaveLinx and WaveLinx Lite.

### Product Mix

- Mainstream offering meets market demand in 4-inch, 6-inch, and 8-inch downlights.
- PR series offers contractors and distributors versatility of selectable lumen and selectable color for remodeling, design/build and fast-track projects.
- HC series offers discrete selection of lumen and LED color for specified, renovation, and value-engineered projects.

# HC8 Series

## 8-inch LED Downlight and Wall Wash

Versatile 8-inch commercial downlight optimized for lumen efficiency and optical performance. Reflectors offered in narrow, medium, wide distribution for efficiency in lumen delivery. Contractor installation friendly with connected lighting options available.



**HC8**  
new construction



**HC8R**  
retrofit

**HC812R**  
retrofit




**HM8 Low Lumen LED Module**  
500 to 2000 lumens

**HM8 Mid Lumen LED Module**  
2500 to 5500 lumens


**HM8 High Lumen LED Module**  
6000 and 8000 lumens

### Color temperature


The HC8 LED modules are available in a discrete selection of correlated color temperatures (CCT). The user can choose color temperatures 2700K, 3000K, 3500K, 4000K and 5000K in 80 or 90 CRI.

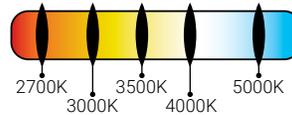

### 80 CRI Color Metric Summary - 3500K\*

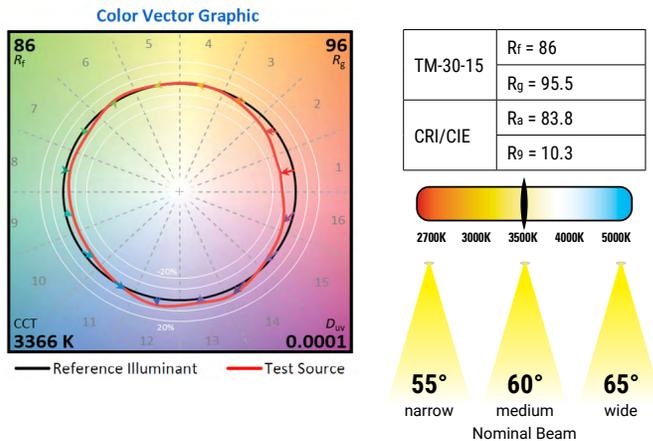

### 90 CRI Color Metric Summary - 3500K\*

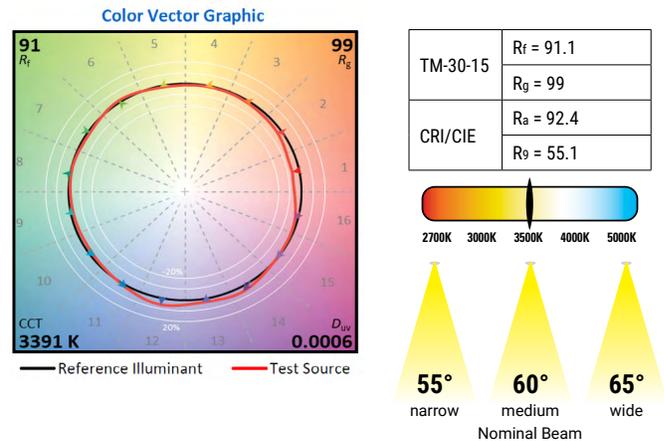

# Order Information - HC8

SAMPLE ORDER NUMBER: HC820D010REM7 – HM80520835 - 81MDC  
 A complete luminaire consists of a mounting frame, LED module, and reflector, ordered separately

Mounting Frame	Lumens	Driver Options	Factory Installed Emergency & Connected Lighting Options	Accessories (Order & Install Separately)
<b>HC8</b> = 8" new construction downlight housing <b>HC8CP</b> = 8" new construction housing, Chicago Plenum - CCEA compliant	<b>05</b> = 500 lm <b>07</b> = 750 lm <b>10</b> = 1000 lm <b>15</b> = 1500 lm <b>20</b> = 2000 lm <b>25</b> = 2500 lm <b>30</b> = 3000 lm <b>35</b> = 3500 lm <b>40</b> = 4000 lm <b>45</b> = 4500 lm <b>50</b> = 5000 lm <b>55</b> = 5500 lm <b>60</b> = 6000 lm <sup>(7)</sup> <b>80</b> = 8000 lm <sup>(7)</sup>	<b>D010</b> =UNV 120-277V, 50/60Hz, 0-10V 1%-100% dimming at 120-277V on 0-10V controls  <b>Canada Option 500-5000 lumens:</b> <b>D010347</b> = 347VAC 50/60Hz 0-10V 1%-100% dimming. For 500, 750, 1000, 1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000lm models only <sup>(1)</sup>  <b>Canada Option 5500-8000 lumens:</b> <b>D010X347</b> = step down transformer factory installed (with standard "D010" 120V-277V LED driver). For 5500, 6000, 8000lm models only <sup>(1)(6)</sup>	<b>REM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)(8)</sup> <b>REM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)(8)</sup> <b>IEM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)(8)</sup> <b>IEM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)(8)</sup> <b>B0D7ST</b> = 7.5 watt Bodine self-test emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)(8)</sup> <b>WTA</b> = Factory WaveLinX Tilemount Sensor Kit <sup>(4)</sup> <b>WTK</b> = Factory WaveLinX Lite Commercial Tilemount Sensor Kit <sup>(5)</sup>	<b>HB128APK</b> = L channel hanger bar, 26", pair (replacement) <b>RMB22</b> = Adjustable wood joist mounting bars, pair, extend to 22" long <b>H347</b> = 347 to 120V step down transformer, 75VA <b>H347200</b> = 347 to 120V step down transformer, 200VA <b>WTA</b> = Field WaveLinX Tilemount Sensor Kit <sup>(4)</sup> <b>WTK</b> = Field WaveLinX Lite Commercial Tilemount Sensor Kit <sup>(5)</sup>
		<b>DLV</b> = Distributed Low Voltage driver 1%-100% dimming. DLV for use with DLVP system only. Refer to DLVP low-voltage power module and DLVP specifications for details. <sup>(1)(6)</sup>  <b>REM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with DLV only <sup>(1)(2)(3)(8)</sup> <b>REM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with DLV only <sup>(1)(2)(3)(8)</sup> <b>IEMV7</b> = 7 watt emergency battery pack with remote test / indicator light, use with DLV only <sup>(1)(2)(3)(8)</sup> <b>IEMV14</b> = 14 watt emergency battery pack with remote test / indicator light, use with DLV only <sup>(1)(2)(3)(8)</sup>		

Module	Lumens	CRI / CCT
<b>HM8</b> = 8" LED Modules	<b>0520</b> = 500 - 2000 lumen	<b>827</b> = 80CRI, 2700K
	<b>2555</b> = 2500-5500 lumen	<b>830</b> = 80CRI, 3000K
	<b>6080</b> = 6000-8000 lumen	<b>835</b> = 80CRI, 3500K
		<b>840</b> = 80CRI, 4000K
		<b>850</b> = 80CRI, 5000K
		<b>927</b> = 90CRI, 2700K
		<b>930</b> = 90CRI, 3000K
		<b>935</b> = 90CRI, 3500K
		<b>940</b> = 90CRI, 4000K
		<b>950</b> = 90CRI, 5000K

Reflector	Distribution <sup>(10)</sup>	Finish	Flange	Accessories
<b>81</b> = 8" conical reflector	<b>ND</b> = narrow reflector 13° beam angle, 0.24 SC <b>MD</b> = medium reflector 37° beam angle, 0.60 SC <b>WD</b> = wide reflector 71° beam angle, 1.08 SC <b>RWW</b> = rotatable wall wash with linear spread lens	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors	<b>81RWWPK</b> = Replacement part kit - wall wash lens insert - for use with 81RWW* only.
<b>81</b> = 8" baffle reflector	<b>WD</b> = wide baffle 71° beam angle, 1.08 SC <b>RWW</b> = rotatable wall wash with linear spread lens (wide beam baffle with lens wall wash)	<b>BB</b> = Black baffle <b>WB</b> = White baffle	<b>Blank</b> = White flange standard with BB & WB <b>BF</b> = Black flange option available with BB	
<b>81PS</b> = 8" non-conductive polymer conical reflector <sup>(9)</sup>	<b>MD</b> = medium reflector 37° beam angle, 0.60 SC	<b>W</b> = White	<b>Blank</b> = White flange standard with W reflector	
<b>Integral Emergency</b>				
<b>81IEM</b> = 8" conical reflector for integral emergency only	<b>ND</b> = narrow reflector 13° beam angle, 0.24 SC <b>MD</b> = medium reflector 37° beam angle, 0.60 SC <b>WD</b> = wide reflector 71° beam angle, 1.08 SC	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors	<b>IEM</b> = Reflector for IEM only
<b>81IEM</b> = 8" baffle reflector for integral emergency only	<b>WD</b> = wide baffle 71° beam angle, 1.08 SC	<b>BB</b> = Black baffle <b>WB</b> = White baffle	<b>Blank</b> = White flange standard with BB & WB <b>BF</b> = Black flange option with BB	<b>IEM</b> = Reflector for IEM only

**Notes:** (1) Not available with CP models. (2) Not available with D010347 (347V driver). (3) ULus for U.S. only. (4) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX specifications). (5) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite specifications). (6) New Construction ONLY - Not available with retrofit kit models. (7) Marked Spacing: Center to Center of Adjacent Luminaires = 36" / Center of Luminaire to Building Member = 18" / Minimum overhead = 0.5" (8) Emergency battery backup options are Non-IC only, and rated for a minimum starting temperature of 0°C. (9) 81PS reflector is for Non-IC environment only, and up to 4000 lumens only. (10) Values are nominal, based on specular clear reflector, other may vary.

## Reflectors

Precision formed 8-inch reflectors designed to deliver narrow, medium and wide beam distributions. A non-conductive polymer reflector may be used to meet 'dead-front' requirements.




### Nominal beam distribution options\*




Beam Distribution*			
Code	Distribution	Spacing Criteria	Beam Angle
ND	Narrow	0.24	13°
MD	Medium	0.59	37°
WD	Wide	1.08	71°

\* Nominal values may vary depending on selected CRI/CCT and reflector finish.

**NEW CONSTRUCTION**

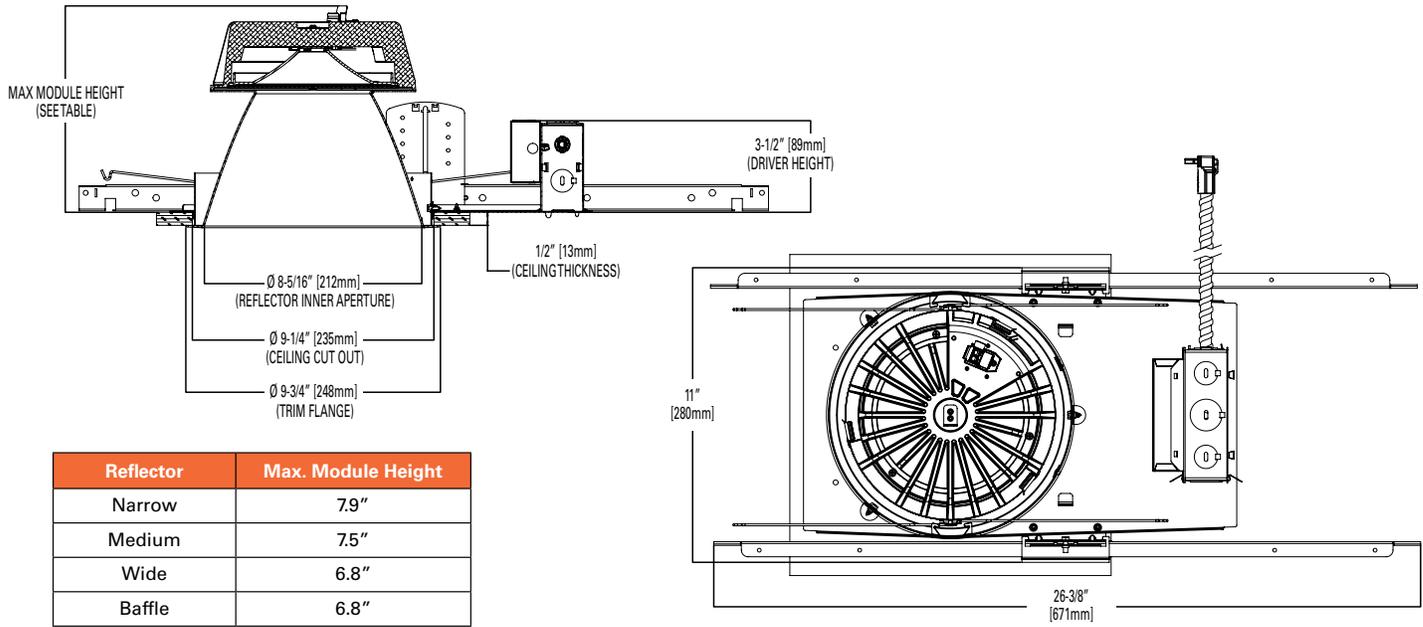

**REMODEL**

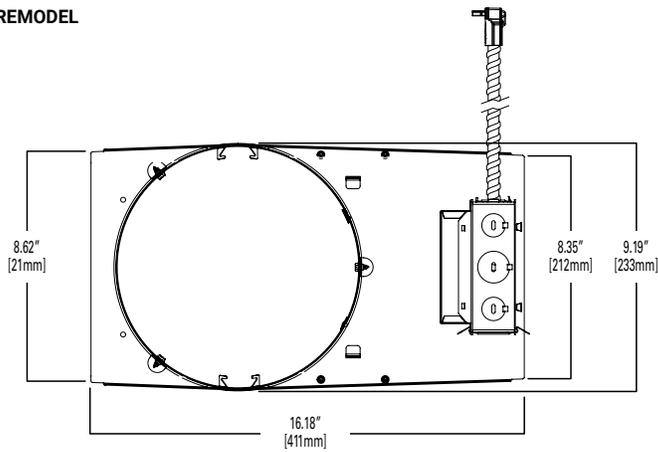

# Order Information - HC8R

**SAMPLE ORDER NUMBER:** HC8R20D010 – HM80520835 - 81MDC

A complete luminaire consists of a retrofit kit, LED module, and reflector; ordered separately

Retrofit Kit <sup>(1)</sup>	Lumens	Driver Options	Factory Installed Emergency & Connected Lighting Options	Accessories (Order & Install Separately)
<b>HC8R</b> = 8.7" retrofit kit for 8.73" to 10.3" nominal ceiling cutout aperture with preinstalled 11.3" O.D. oversized matte white trim ring <b>HC812R</b> = 12" retrofit kit for 12" nominal ceiling cutout aperture with preinstalled 15.375" O.D. oversized matte white trim ring	<b>05</b> = 500 lm <b>07</b> = 750 lm <b>10</b> = 1000 lm <b>15</b> = 1500 lm <b>20</b> = 2000 lm <b>25</b> = 2500 lm <b>30</b> = 3000 lm <b>35</b> = 3500 lm <b>40</b> = 4000 lm <b>45</b> = 4500 lm <sup>(5)</sup> <b>50</b> = 5000 lm <sup>(5)</sup> <b>55</b> = 5500 lm <sup>(5)</sup> <b>60</b> = 6000 lm <sup>(5)</sup> <b>80</b> = 8000 lm <sup>(5)</sup>	<b>D010</b> =UNV 120-277V, 50/60Hz, 0-10V 1%-100% dimming at 120-277V on 0-10V controls  <b>Canada Option 500-5000 lumens:</b> <b>D010347</b> = 347VAC 50/60Hz 0-10V 1%-100% dimming. For 500, 750, 1000, 1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000lm models only <sup>(1)</sup>  <b>Canada Option 5500-8000 lumens:</b> <b>D010X347</b> = step down transformer factory installed (with standard "D010" 120V-277V LED driver). For 5500, 6000, 8000lm models only	<b>REM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)</sup> <b>REM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)</sup> <b>B0D7ST</b> = 7.5 watt Bodine self-test emergency battery pack with remote test / indicator light, use with D010 only <sup>(1)(2)</sup> <b>WTA</b> = Factory WaveLinX Tilemount Sensor Kit <sup>(3)</sup> <b>WTK</b> = Factory WaveLinX Lite Commercial Tilemount Sensor Kit <sup>(4)</sup>	<b>H347</b> = 347 to 120V step down transformer, 75VA <b>H347200</b> = 347 to 120V step down transformer, 200VA <b>WTA</b> = Field WaveLinX Tilemount Sensor Kit <sup>(3)</sup> <b>WTK</b> = Field WaveLinX Lite Commercial Tilemount Sensor Kit <sup>(4)</sup>

Module	Lumens	CRI / CCT
<b>HM8</b> = 8" LED Modules	<b>0520</b> = 500 - 2000 lumen <b>2555</b> = 2500-5500 lumen <b>6080</b> = 6000-8000 lumen	<b>827</b> = 80CRI, 2700K <b>830</b> = 80CRI, 3000K <b>835</b> = 80CRI, 3500K <b>840</b> = 80CRI, 4000K <b>850</b> = 80CRI, 5000K  <b>927</b> = 90CRI, 2700K <b>930</b> = 90CRI, 3000K <b>935</b> = 90CRI, 3500K <b>940</b> = 90CRI, 4000K <b>950</b> = 90CRI, 5000K

Reflector	Distribution <sup>(9)</sup>	Finish	Flange	Accessories
<b>81</b> = 8" conical reflector	<b>ND</b> = narrow reflector 13° beam angle, 0.24 SC <b>MD</b> = medium reflector 37° beam angle, 0.60 SC <b>WD</b> = wide reflector 71° beam angle, 1.08 SC <b>RWW</b> = rotatable wall wash with linear spread lens	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors	<b>81RWWPK</b> = Replacement part kit - wall wash lens insert - for use with 81RWW* only.
<b>81</b> = 8" baffle reflector	<b>WD</b> = wide baffle 71° beam angle, 1.08 SC <b>RWW</b> = rotatable wall wash with linear spread lens (wide beam baffle with lens wall wash)	<b>BB</b> = Black baffle <b>WB</b> = White baffle	<b>Blank</b> = White flange standard with BB & WB <b>BF</b> = Black flange option available with BB	
<b>81PS</b> = 8" non-conductive polymer conical reflector <sup>(8)</sup>	<b>MD</b> = medium reflector 37° beam angle, 0.60 SC	<b>W</b> = White	<b>Blank</b> = White flange standard with W reflector	

**Notes:** (1) Not available with CP models. (2) Not available with D010347 (347V driver). (3) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX specifications). (4) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite specifications). (5) Marked Spacing: Center to Center of Adjacent Luminaires = 36" / Center of Luminaire to Building Member = 18" / Minimum overhead = 0.5" (6) Emergency battery backup options are Non-IC only, and rated for a minimum starting temperature of 0°C. (7) Not available with DLV driver. (8) 81PS reflector is for Non-IC environment only, and up to 4000 lumens only. (9) Values are nominal, based on specular clear reflector, other may vary.


## HC8R



## HC812R




**HC8R and HC812R**

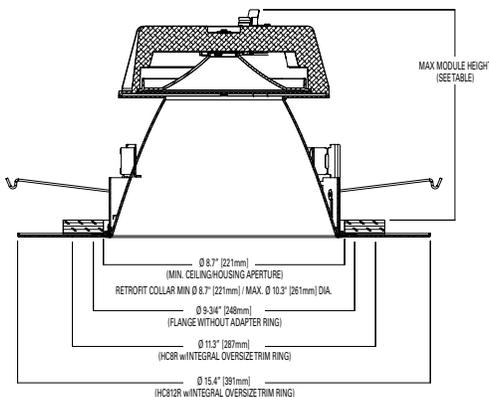

Reflector	Max. Module Height
Narrow	7.9"
Medium	7.5"
Wide	6.8"
Baffle	6.8"

**HC812R**

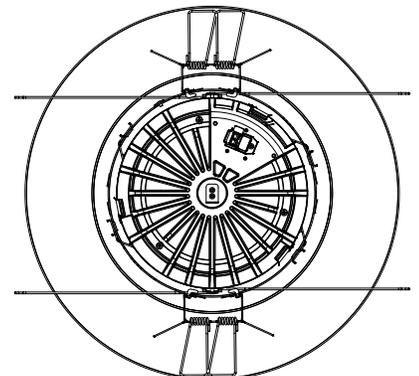

## ENERGY DATA

Series	500 lumen		750 lumen		1000 lumen		1500 lumen		2000 lumen	
Input Voltage 120-277VAC	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V
Input Current (A)	0.051	0.026	0.067	0.036	0.083	0.039	0.119	0.053	0.171	0.077
Input Power (W)	6.1	6.5	7.9	8.3	10	10.4	14.5	14.5	20.9	20.6
In-rush (A)	1.9	8.4	2	8.4	2.2	8.5	2.7	8.5	2.1	9.7
Inrush duration (µs)	251	135	237	133	250	134	250	139	245	131
THD (%)	6.2	13.5	7.4	8.8	5.4	10.3	10	6.7	6.5	7.9
PF	≥ 0.99	≥ 0.9	≥ 0.98	≥ 0.92	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.97	≥ 0.99	≥ 0.96

Series	2500 lumen		3000 lumen		3500 lumen		4000 lumen		4500 lumen	
Input Voltage 120-277VAC	120V	277V								
Input Current (A)	0.2	0.088	0.24	0.107	0.292	0.152	0.351	0.159	0.384	0.172
Input Power (W)	23.9	23.8	28.6	28.5	34.6	35.1	42.1	42.1	45.9	45.6
In-rush (A)	2.1	9.9	2.5	11.6	3.4	13.9	3.1	14.7	3.1	14.8
Inrush duration (µs)	244	137	216	111	183	95	200	98	202	100
THD (%)	8.7	6.7	7.8	8.3	5.6	10	4.1	9.5	4.5	8.5
PF	≥ 0.99	≥ 0.96	≥ 0.99	≥ 0.96	≥ 0.99	≥ 0.93	≥ 0.99	≥ 0.94	≥ 0.99	≥ 0.95

Series	5000 lumen		5500 lumen		6000 lumen		8000 lumen <sup>(1)</sup>	
Input Voltage 120-277VAC	120V	277V	120V	277V	120V	277V	120V	277V
Input Current (A)	0.419	0.186	0.457	0.201	0.489	0.214	0.61	0.29
Input Power (W)	50.1	49.5	54.6	53.7	58.4	57.4	72.5	72.9
In-rush (A)	3.1	15	3.2	14.8	3.4	14.8	6.8	12.9
Inrush duration (µs)	202	117	196	131	192	121	119	109
THD (%)	5.5	7.6	7	7.2	8.1	7.2	10.1	18.6
PF	≥ 0.99	≥ 0.96	≥ 0.99	≥ 0.96	≥ 0.99	≥ 0.97	≥ 0.98	≥ 0.91

Minimum starting temperature -30°C (-22°F) <sup>(2)</sup>  
 (Nominal input 120-277VAC & 100% of rated output power)

Sound Rating: Class A standards

### Notes:

(1) HC8 / HC8R / HC812R only.

(2) Emergency Battery packs are rated for a minimum starting temperature of 0°C.



# Connected Systems


## WaveLinx Lite - WTK Tilemount Sensor




- Intuitive Android™ or Apple® iOS® app for basic system code compliant set up and configuration via Bluetooth
- Up to 28 unique areas per project site (WaveLinx Lite Bluetooth network)
- Up to 50 devices for an area, any one of 16 control zones, up to 6 occupancy sets, and custom lighting scenes
- Automatic occupancy or vacancy, sensor sensitivity, daylight dimming, etc. configurable through the app
- Refer to the WaveLinx system specifications for details



### WaveLinx Lite WTK Tilemount Wiring Diagram

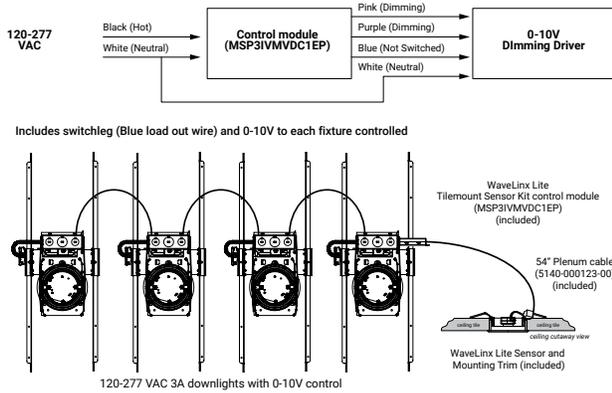

### WaveLinx Lite Bluetooth Enabled System

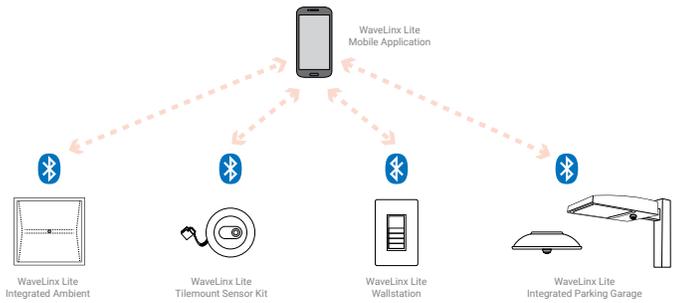


## WaveLinx – WTA Tilemount Sensor




- WaveLinx functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with Wireless Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations




### WaveLinx mobile app settings

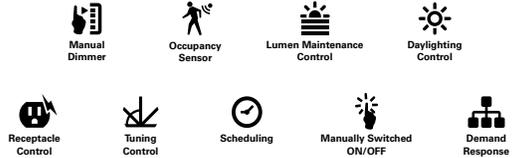

### WaveLinx Lite WTA Tilemount Wiring Diagram

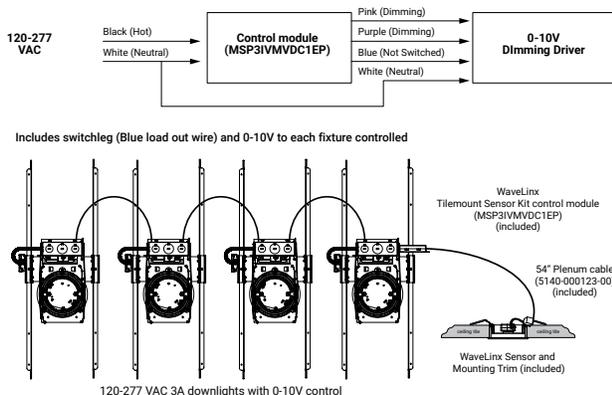

### WaveLinx Trellix Building Management Integration

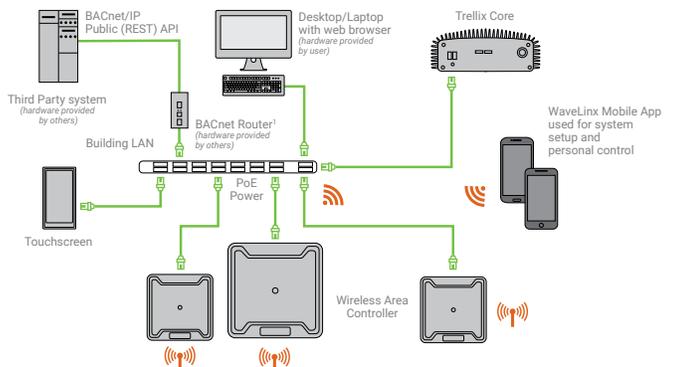

### Lighting Product Lines

Ametrix  
AtLite  
Corelite  
Ephesus  
Fail-Safe  
HALO  
HALO Commercial  
Invue  
io  
IRiS  
Lumark  
Lumière  
McGraw-Edison  
Metalux  
MWS  
Neo-Ray  
Portfolio  
RSA  
Shaper  
Streetworks  
Sure-Lites

### Controls Product Lines

Greengate

### Connected Lighting Systems

Fifth Light (Canada Only)  
HALO Home  
WaveLinx

### IoT Platform

Trellix



**Cooper Lighting Solutions**  
1121 Highway 74 South  
Peachtree City, GA 30269  
P: 770-486-4800  
[www.cooperlighting.com](http://www.cooperlighting.com)

**Canada Sales**  
5925 McLaughlin Road  
Mississauga, Ontario L5R 1B8  
P: 905-501-3000  
F: 905-501-3172

© 2022 Cooper Lighting Solutions  
All Rights Reserved  
Printed in USA  
Publication No. BR51711422  
April 21, 2022 10:45 AM



All other trademarks are property  
of their respective owners.

Product availability, specifications,  
and compliances are subject to  
change without notice.