

## D400SN 400 A General Duty Switch Neutral Kit Series E01

Retain for future use.

### **⚠ DANGER**

#### **HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH**


- Apply appropriate personal protective equipment (PPE) and follow safe electrical work practices. See NFPA 70E.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Never operate energized switch with door open.
- Turn off switch before removing or installing fuses or making load side connections.
- Always use a properly rated voltage sensing device at all line and load fuse clips to confirm switch is off.
- Turn off power supplying switch before doing any other work on or inside switch.
- Do not use renewable link fuses in fused switches.

**Failure to follow these instructions will result in death or serious injury.**


### **INSTALLATION**

1. Turn off all power ahead of switch before working on or inside switch.
2. Remove fuse base assembly by removing the seven 1/4-20 x 3/4 in. base mounting screws. See Figure 1.
3. Install neutral assembly by locating neutral connector threaded mounting holes with clearance holes on top of base.
4. Drive 1/4-20 x 5/8 in. screws, supplied in cloth bag, through bottom of base into connector. Torque to 45–55 lbs-in. (5–6 N•m). See Figure 2.
5. Reinstall fuse base assembly switch, reusing 1/4-20 x 3/4 in. base mounting screws. Torque to 45–55 lbs-in. (5–6 N•m).

**Figure 1**

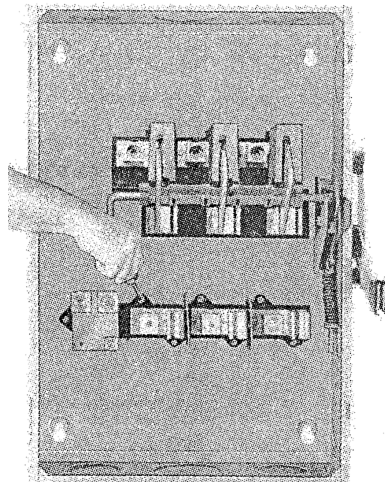

**Figure 2**

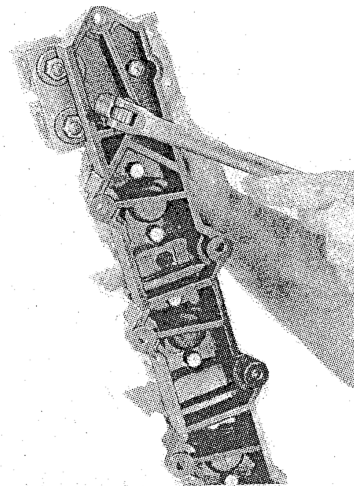

Schneider Electric USA  
1601 Mercer Road  
Lexington, KY 40511 USA  
1-888-SquareD (1-888-778-2733)  
www.us.SquareD.com

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

© 2005 Schneider Electric All Rights Reserved