




GUY-GRIP® Dead-end

**For use on:
Aluminum Clad Steel Strand³**

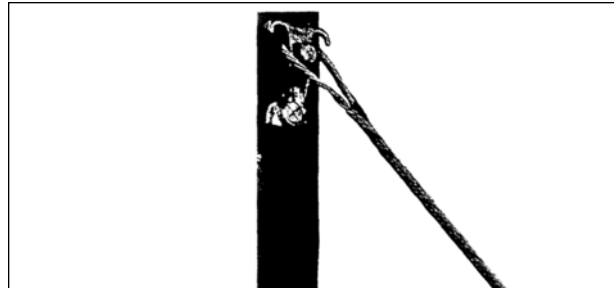

Catalog Number	Mean Diameter (Inches)	Nominal Strand Size	Units per carton	Wt./lbs. per carton	Length (Inches)	Color Code
AWDE-4102	.174	3 # 12	100	21	18	Orange
AWDE-4108	.220 .220	4M 3 # 10	50	20	21	Green
AWDE-4110	.247 .242	3 # 9 6M	50	20	24	Yellow
AWDE-4113	.277 .272	3 # 8 8M	50	22	24	Blue
AWDE-4116	.311 .306 .306	3 # 7 10M 5/16" - 7 # 10	50	29	26	Black
AWDE-4118	.330	11.5M	50	30	26	Green
AWDE-4119	.349 .343 .343	3 # 6 12.5M 11/32" - 7 # 9	50	41	29	Yellow
AWDE-4120	.363	14M	50	53	31	Blue
AWDE-4122	.392 .385 .386	3 # 5 3/8" - 7 # 8 16M	50	55	32	Orange
AWDE-4124	.417	18M	25	37	34	Black
AWDE-4125	.433	7/16" - 7 # 7	25	40	36	Green
AWDE-4126	.444	20M	10	22	37	Yellow
AWDE-4128	.486	1/2" - 7 # 6	10	23	39	Blue
AWDE-4130	.519	25M	10	31	43	Red
AWDE-4131	.546	7 # 5	10	32	44	Yellow

Left-Hand Lay standard

EXPLANATORY NOTES:

- (1) Big-Grip Dead-end is recommended as an alternative product for guying multiple pole structures or metal towers associated with transmission construction.
- (2) Refer to Hardware Considerations for acceptable fittings. Cabled Loop design furnished as standard, all sizes.
- (3) Rated holding strength is 100% of all grades of aluminum clad steel strand.
- (4) Rated holding strength is 100% of the published rating for the strand.
- (5) Consult PLP for sizes and stranding not shown.