

Straight Blade Receptacles TradeMaster® Tamper-Resistant Receptacles

15A, 125V

Pass & Seymour






Straight Blade Receptacles

TradeMaster® Tamper-Resistant Receptacles

Features

- Meets 2008 National Electrical Code® Tamper-Resistant requirements.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- High-impact resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid wire.
- Push wire accepts #14 AWG solid only.
- Superior protection than traditional outlet “caps” or “protection plates.”
- Low profile face.
- Traditional contoured face (3232 models).
- Self-grounding models provide automatic ground clip.

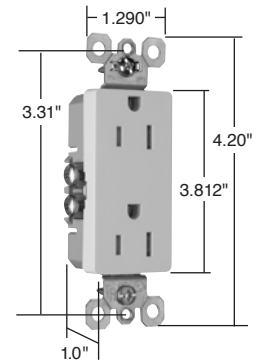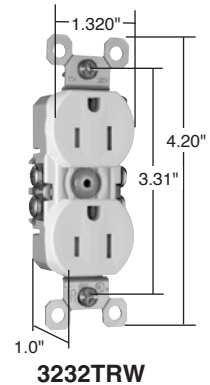

2 Pole, 3 Wire



NEMA
5-15R

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				 UL498	 C22.2 No. 42	 cULus
Tamper-Resistant Duplex Receptacles – Grounding						
3232TRI	15 125	Ivory	5-15R	•	•	•
3232TRW	15 125	White	5-15R	•	•	•
3232TR	15 125	Brown	5-15R	•	•	•
3232TRBK	15 125	Black	5-15R	•	•	•
3232TRLA	15 125	Light Almond	5-15R	•	•	•
Self-Grounding Tamper-Resistant Duplex Receptacles						
3232TRSI	15 125	Ivory	5-15R	•	•	•
3232TRSW	15 125	White	5-15R	•	•	•
3232TRS	15 125	Brown	5-15R	•	•	•
3232TRSLA	15 125	Light Almond	5-15R	•	•	•
Decorator Tamper-Resistant Receptacles						
885TRI	15 125	Ivory	5-15R	•	•	•
885TRW	15 125	White	5-15R	•	•	•
885TR	15 125	Brown	5-15R	•	•	•
885TRGRY	15 125	Gray	5-15R	•	•	•
885TRBK	15 125	Black	5-15R	•	•	•
885TRLA	15 125	Light Almond	5-15R	•	•	•
Self-Grounding Decorator Tamper-Resistant Receptacles						
885TRSI	15 125	Ivory	5-15R	•	•	•
885TRSW	15 125	White	5-15R	•	•	•
885TRSLA	15 125	Light Almond	5-15R	•	•	•

Features

- Impact-resistant face and body.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- GE Lexan™ high impact-resistant lens.
- Tri-drive screws.
- Energy-efficient LED has average 20-year life expectancy: eliminates bulb replacement.
- Sensor automatically turns light ON in the dark.
- Increased light output for better illumination.
- Light sensor for enhanced sensitivity.
- UL tested shutter mechanism for protection against improper object insertion per UL498.
- Specially designed for increased protection of children in their homes.
- Superior protection than traditional outlet “caps” or “protection plates.”

Catalog Number	Rating A. VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance
					 UL498
Decorator Hallway Light with High Output Light & Tamper-Resistant Single Receptacle					
TM8HWLTRICC	15 125	0.2561	Ivory	5-15R	•
TM8HWLTRWCC	15 125	0.2561	White	5-15R	•
TM8HWLTRBKCC	15 125	0.2561	Black	5-15R	•
TM8HWLTRCC	15 125	0.2561	Brown	5-15R	•
TM8HWLTRLACC	15 125	0.2561	Light Almond	5-15R	•

* FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page U-55 for more information.

All devices listed on this page conform to NEMA WD-1 and WD-6.