
Page 1 of 2

6 3/4" Aperture Shallow Slope Ceiling Reflector Trim 14°-30° Angle, 3/12-7/12" Pitch

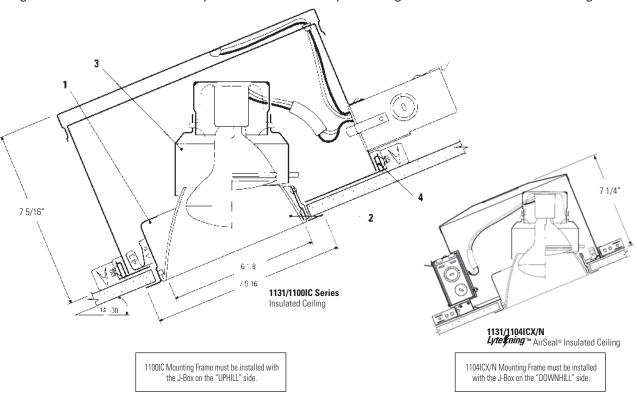

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim		Frame-In K	Frame-In Kit — See Individual Frame-In Kit Specification Sheets			
			Incandescent			
		Frame-In Kit	Installation Type	Lamping	Height	
1131	Black Step Baffle	1100IC	IC	75W PAR30 (Short Neck)	7 5/16"	
1131WH	White Step Baffle	1100AICM	AirSeal® IC	65W BR30	7 5/16"	
1131GD 1131CL 1131BK	Specular Gold Specular Clear Specular Black	1104ICX/N	AirSeal® IC	75W PAR30 (Short Neck) 85W BR30	7 1/4"	

Features

- 1. Housing: Hydroformed aluminum, .040" thick; white trim flange.
- 2. Aperture: Conical aluminum step baffle, matte black or gloss white finish; or hydroformed aluminum cone, specular finish. For ceiling slopes 14° - 30° angle, 3/12 - 7/12 pitch.
- 3. Lamp Housing: Hydroformed aluminum, .040" thick; permits \pm 7° vertical adjustment for straight downlighting.
- 4. Frame-In Kit: See Frame-In Kit specification sheets for more details.

Options & Accessories

Extra Wide Flange Trim Ring: 1954 - 8 5/8" O.D.

Labels

UL (Suitable for Damp Locations), I.B.E.W.

Job Information	Туре:					
Job Name:						
Cat. No.:						
Lamp(s):						
Notes:						

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2011 Philips Group • D0711



Page 2 of 2

6 3/4" Aperture Shallow Slope Ceiling Reflector Trim 14°-30° Angle, 3/12-7/12" Pitch


Footcandles 2 1/2' Above the Floor


Fixture mounted on 5' x 5' centers (horizontally) in 15' x 30' room with sloped ceiling.


Room reflectances: 80% ceiling, 50% walls, 20% floor.


A = 75W PAR30 FL (Flood)

B = 75W PAR30 NFL (Narrow Flood)

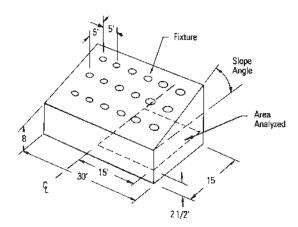

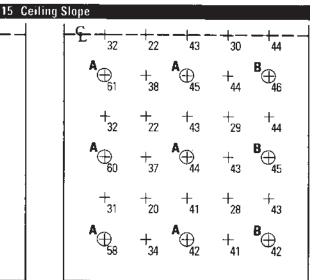

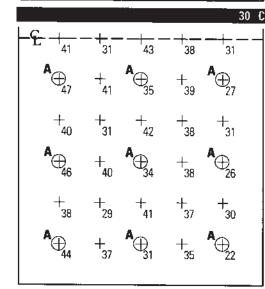

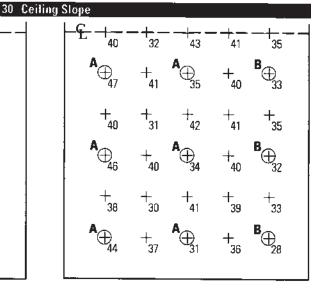

Data calculated with GENESYS using bare lamp photometrics. Fixture spacing exceeding 5' may cause uneven lighting under lowest ceiling areas.

To convert lighting data for a lower wattage incandescent lamp of the **same type**, multiply the footcandle (or candlepower) values by the ratio of the lumens of the two lamps.

The coefficients of utilization remain the same.

Job Information

Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2011 Philips Group • D0711

