



Harmony Electromechanical Relays

Interface, miniature, and power
electromechanical relays



Harmony

Discover **Harmony**

Advanced operator interface and industrial relays

Harmony operator interface and industrial relays enhance operational efficiency and equipment availability across industrial and building applications. **Harmony** includes intelligent connected products and edge terminals that visualize, gather and process data, enabling informed operator decisions

Explore our offer

- **Harmony** Push Buttons and Switches
- **Harmony** HMI Operator Terminals, iPC and EdgeBox
- **Harmony** Signaling Devices
- **Harmony** Electrical Relays
- **Harmony** Safety

Life Is On

Schneider
Electric


Quick access to product information

Get technical information about your product

References

Modicon TM3
I/O expansion modules for Modicon controllers
Analog I/O modules


References	Modicon TM3 analog input modules	Input range	Resolution	Input terminal block (T)	Reference	Weight (kg)
2 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	16 bits of	16 bits of	0 581.2	TM3AI20	0.150
		16 bits of	16 bits of	0 581.2	TM3AI20	0.254
4 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	12 bits of	12 bits of	3 110.15	TM3AI40	0.200
		11 bits of	11 bits of	3 110.15	TM3AI40	0.200
4 voltage/current or temperature inputs (I, K, R, S, E, T, N, E, C)	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	16 bits of	16 bits of	3 110.15	TM3AI40	0.200
		11 bits of	11 bits of	3 110.15	TM3AI40	0.200
4 differential temperature inputs (I, K, R, S, E, T, N, E, C)	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	16 bits of	16 bits of	3 110.15	TM3AI40	0.200
		11 bits of	11 bits of	3 110.15	TM3AI40	0.200
4 voltage/current	-10...+10 VDC	16 bits of	16 bits of	0 581.2	TM3AI40	0.150
		11 bits of	11 bits of	0 581.2	TM3AI40	0.150

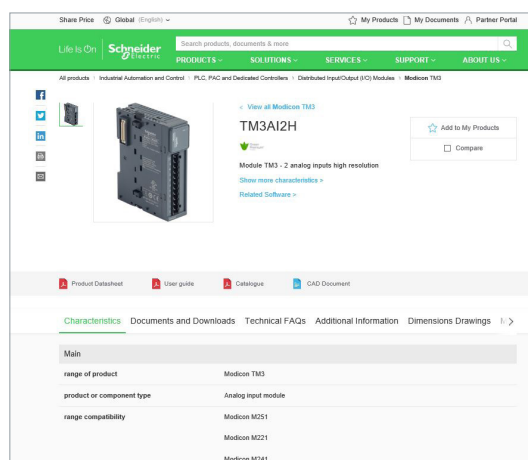


Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

Find your catalog

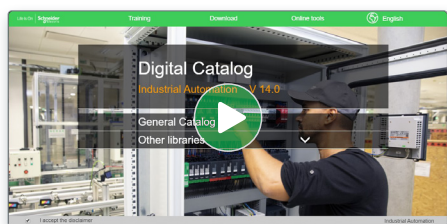

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

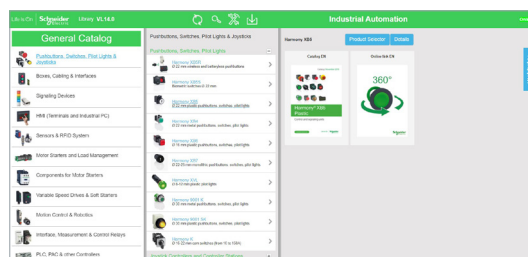


- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

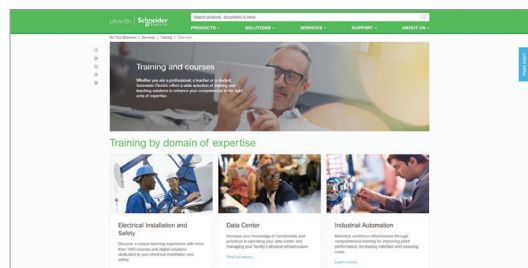

Life Is On

Schneider Electric

Harmony Electromechanical Relays

Interface, miniature, and power electromechanical relays

General presentation

- RSL relays for compactness page 3
- RXG relays for reliability page 3
- RXM relays for automation control page 4
- Selection guide of Plug-in relays and relays with clamp fixing* page 5

RSL slim interface relays

- **Presentation**
 - Presentation of the range page 11
 - Relay description page 11
 - Socket description page 11
- **References**
 - Pre-assembled slim interface relays page 12
 - Slim interface relays for customer assembly page 12
 - Accessories for sockets page 12

RSB interface relays

- **Presentation**
 - Presentation of the range page 13
 - Socket description page 13
- **References**
 - Pre-assembled interface relays page 14
 - Interface relays for customer assembly page 15
 - Sockets with separate contact terminal arrangement and connector connection page 15
 - Protection modules page 15
 - Accessories page 16

RXG interface relays

- **Presentation**
 - Presentation of the range page 17
 - Relay description page 17
 - Socket description page 17
- **References**
 - Pre-assembled interface relays page 18
 - Interface relays for customer assembly page 18
 - Sockets with separate contact terminals, mixed contact terminals, and built-in clamp page 20
 - Protection modules page 20
 - Accessories page 20

RXM miniature relays

- **Presentation**
 - Presentation of the range page 21
 - Relay description page 21
 - Socket description page 22
- **References**
 - Pre-assembled interface relays page 23
 - Miniature relays for customer assembly page 24
 - Sockets page 25
 - Protection modules page 25
 - Timing relays page 25
 - Accessories page 26

Harmony Electromechanical Relays

Interface, miniature, and power electromechanical relays

782H hermetically sealed relays

- **Presentation**
- Presentation of the range..... [page 27](#)
- Relay description [page 27](#)
- Socket description [page 27](#)
- **References** [page 28](#)
- 782H Hermetically sealed relays [page 28](#)
- Sockets..... [page 28](#)
- Socket modules [page 28](#)
- Socket accessories..... [page 28](#)

725 power relays

- **Presentation**
- Presentation of the range..... [page 29](#)
- Relay description [page 29](#)
- Socket description [page 29](#)
- **References** [page 30](#)
- 725 power relays [page 30](#)
- Sockets..... [page 30](#)
- Socket modules [page 30](#)
- Socket accessories..... [page 30](#)

RPM power relays

- **Presentation**
- Presentation of the range..... [page 31](#)
- Relay description [page 31](#)
- Socket description [page 31](#)
- **References** [page 32](#)
- Power relays for customer assembly [page 32](#)
- Sockets..... [page 33](#)
- Protection modules..... [page 33](#)
- Timer module..... [page 33](#)
- Accessories [page 34](#)

RUM universal relays

- **Presentation**
- Presentation of the range..... [page 35](#)
- Relay description [page 35](#)
- Socket description [page 36](#)
- **References** [page 37](#)
- Universal relays for customer assembly [page 37](#)
- Sockets..... [page 38](#)
- Protection modules..... [page 38](#)
- Timer module..... [page 38](#)
- Timing relays [page 38](#)
- Accessories [page 38](#)

RPF power relays

- **Presentation**..... [page 39](#)
- **References** [page 40](#)

Technical presentation

- **Relays**..... [page 41](#)
- **Protection modules**..... [page 42](#)

Index

- **Product reference index**..... [page 43](#)

Harmony Electromechanical Relays

Interface, miniature, and power electromechanical relays

Harmony Electromechanical Relays

Used to multiply the number of input and output contacts, or for logic processing control

RSL relays are compact modular relays conforming to IEC/EN 61810-1, UL508, CSA C22.2 No. 14, and EAC international standards.

Harmony relays offer interface, miniature, universal, and power electromechanical relays, from 1 CO to 4 CO contacts, up to 30 A. The electromechanical relays help to reduce the size of enclosures and at the same time increase machine reliability.


RSL relays for compactness

Flexible offer

- > Available as a single-referenced complete product (relay and socket) or customer-assembled product
- > Wide choice of sockets ranging from 12 to 230 V ~
- > Standard and low level contact types

Enhanced performance


- > Sockets with integrated reverse polarity protection circuit
- > Relays for high breaking capacity or low-level current application requirements
- > Power-on and Relay status LED indicator

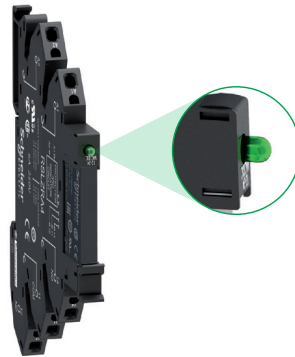

LED indicator for RSL relay status

Simple installation and cabling

- > Locking/unlocking lever for removing and replacing the relay in the socket
- > Simple DIN rail mounting and commoning link accessory
- > Choice of screw connector or spring terminal connection for sockets



Screw connector



Spring terminal

RXG relays for reliability

Complete offer

RXG relays offer a broad range of coil voltages, from 6 V to 110 V --- and 24 V to 230 V ~. The relays are available with/without lockable test button, LED, and basic cover.



Easy to mount and use

These are the latest relays with a single-step lockable test button. The Faston pin terminal mounts quickly and securely. The slim 16 mm/0.629 in. socket for 2 CO saves panel space.



Single-step lockable test button

Harmony RXG → Latest interface relay with easy testing function

RXG relays for reliability (continued)

Expandable relays

RXG relays can be expanded with protection modules such as diode, diode with LED, varistor with LED, and RC circuit.



RXM industrial relays bring features for easy and improved control of simple and complex automation systems.

RXM relays for automation control


Easy to select

- > Wider choice of contacts (2, 3, and 4 CO)
- > Broad range of control circuit voltages and different socket types



Convenient to use

- > One-step lockable test button
- > Mechanical indicator for contact status
- > "Power On" LED for readiness

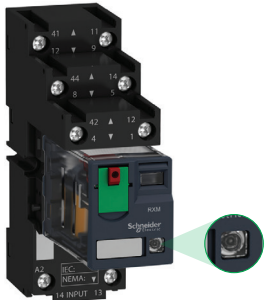


LED indicator for relay status

Simple to install

- > 64% less wiring time with Push-in Sockets (no screwdriver required)
- > Sockets for both DIN rail and panel mounting, time-saving bus jumper
- > Direct mounting with DIN rail or flange adapter

Designed to perform

- > Eco-design with RoHS and REACH
- > Flexible add-on protection modules
- > Push-in Socket with 223.75 Newton max pull out force, reliable in vibration environment

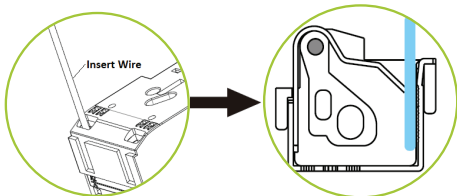

Push-in terminal: insert without tool

Note: The Zelio Relays range name has been changed in 2020 to Harmony Relays. As the timeline for each range is different, during the transition period there will be both Zelio and Harmony ranges shown on different product datasheets and packaging.

Harmony RXM → Miniature in size and powerful in performance

Harmony Electromechanical Relays

Interface, miniature, and power electromechanical relays

Type of product	Plug-in relays Interface relays
	
Number and type of contacts/conventional thermal current (Ith on NO contact)	1 CO/10 A 2 CO/5 A
Control circuit voltage	24...230 V ~ 6...110 V =
Pin type	Flat (Faston type)
Operational voltage	Up to 250 V ~/30 V =
Durability (operating cycles per hour)	Electrical, resistive load: 100,000 Mechanical, no-load: 10,000,000 for AC coil 10,000,000 for DC coil
Functions	LED: Yes (depending on version) Mechanical indicator: Yes (depending on version) Test button: Yes, lockable (depending on version) Contact type: Standard
Accessories	Mounting adapters for DIN rail: No Mounting adapters with fixing lugs: No
Type references	RXG●●●● (1)
Pages	18

Type of associated sockets	Sockets
	
Contact terminal arrangements	Separate Mixed
Connection	Screw connector Push-in terminals Screw clamp terminals
Accessories	Protection modules: Yes No Timer module: No Maintaining clamps: Yes (plastic, integrated) Socket identification legend: Yes Bus jumper: Yes, 8-pole
Conventional thermal current (Ith)	10 A 5 A 10 A 5 A 10 A 5 A
Type references	RGZE1S35M RGZE1S48M RGZE05P RGZE08P RGZE05E RGZE08E
Pages	20

(1) Pre-assembled interface relays RSL1PV●● and RSL1PR●● (standard type relay + socket), RSB (relay + socket + clamp + protection module + label), and RXG (relay + socket + protection module) are also available.
(2) When using relay RSB1A160●● with socket RSZE1S48M, or RSZE08P terminals must be linked.


Plug-in relays	Interface relays
Slim interface relays	
	
	
1 CO/6 A	1 CO/16 A 1 CO/12 A 2 CO/8 A
-	24...240 V
12...60 V	6...110 V
Flat (PCB type, reinforced)	Flat (PCB type)
Up to 250 V ~/30 V =	
60,000	100,000
10,000,000	30,000,000
No	Yes (with protection modules)
No	
No	
Standard and low level	Standard
No	
No	
RSL1●B4●D (1)	RSB●●●●●● (1)
12	14

Sockets with LED and protection circuit	Sockets without LED
	
	
Separate	Separate
Screw connector	Spring terminals
No	No
No	No
No	No
Yes	Yes
Yes, 20-pole	Yes, 20-pole
6 A	6 A
RSLZV●●	RSLZR●●
12	14
Separate	Separate
Screw connector	Push-in terminals
Yes	Yes
No	No
Yes	Yes (plastic, integrated)
Yes	Yes
Yes, 8-pole	Yes, 2-pole
12 A	12 A
(2 terminals) × 10 A (2)	(2 terminals) × 10 A (2)
RSZE1S35M	RSZE1S48M
RSZE05P	RSZE08P


Harmony Electromechanical Relays


Interface, miniature, and power electromechanical relays

Type of product		Plug-in relays	
		Miniature relays	
			
Number and type of contacts/conventional thermal current (Ith on NO contact)		2 CO/12 A 3 CO/10 A 4 CO/6 A 4 CO/3 A (low level)	
Control circuit voltage	~ =	24...240 V 12...220 V	
Pin type		Flat (Faston type)	
Operational voltage		Up to 250 V ~/30 V =	
Durability (operating cycles per hour)	Electrical, resistive load Mechanical, no-load	100,000 10,000,000	
Functions	LED Mechanical indicator Test button Contact type	Yes (depending on version) Yes Yes, lockable Standard and low level	
Accessories	Mounting adapters for DIN rail Mounting adapters with fixing lugs	Yes Yes	
Type references		RXM●●●●● (1)	
Pages		23	

Type of associated sockets		Sockets without LED			
					
Contact terminal arrangements		Mixed		Separate	
Connection		Screw connector	Screw clamp terminals	Screw connector	Push-in terminals
Accessories	Protection modules Timer module Maintaining clamps Socket identification legend Bus jumper	Yes No Yes Yes No	No No No No	Yes No Yes Yes, 2-pole	Yes No Yes (plastic, integrated) Yes Yes, 2-pole
Conventional thermal current (Ith)		10 A	10 A	12 A for 2 CO (2) 6 A for 4 CO	12 A for 2 CO 6 A for 4 CO
Type references		RXZE2M114M	RXZE2M114	RXZE2S●●●M	RXZE14P
Pages		25			


(1) Pre-assembled miniature relays RXM (relay + socket + clamp + label) are also available.
 (2) Except for sockets RXZE2S11●M: 10 A.
 (3) To be used with specified sockets only.


Type of product		Plug-in relays	
		Hermetically sealed relays	
			
Number and type of contacts/conventional thermal current (Ith on NO contact)		4 CO/5 A 4 CO/3 A (low level) 2 CO/5 A	
Control circuit voltage		6...240 V 6...110 V	
Pin type		Flat (Plug-in type) (3)	
Operational voltage		Up to 240 V ~/30 V =	
Durability (operating cycles per hour)		100,000 10,000,000	
Functions		No No No Standard and low level	
Accessories		No No	
Type references		782X●XH●●● (3)	
Pages		28	

Type of associated sockets		Sockets				
						
Contact terminal arrangements		Mixed		Separate	-	-
Connection		Screw connector	Screw clamp terminals	Screw connector	Solder lug	PCB pins
Accessories		Yes No No Yes Yes	No No Yes No	Yes No Yes Yes, 2-pole	No No Yes -	No No Yes -
Conventional thermal current (Ith)		10 A	10 A	10 A	5 A	10 A
Type references		70-782E14-1	70-461-1	70-782EL14-1	70-378-1	70-379-1
Pages		28				

Harmony Electromechanical Relays

Interface, miniature, and power electromechanical relays

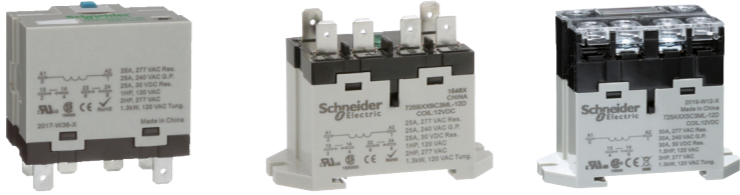Type of product	Plug-in socket mount	Panel/DIN rail mount with flat (Faston type) terminals	Panel/DIN rail mount with screw terminals
	Power relays		
			
Number and type of contacts/conventional thermal current (Ith on NO contact)	1 NO/30 A 2 NO/25 A		
Control circuit voltage	24...240 V 12...24 V		
Pin type	Flat (Faston type)	Flat (Faston type)	Screw type
Operational voltage	Up to 277 V ~/30 V ---		
Durability (operating cycles per hour)	100,000 5,000,000		
Functions	LED Mechanical indicator Test button Contact type	Yes No Yes, non-lockable	Yes No Yes, non-lockable
Accessories	Mounting adapters for DIN rail Mounting adapters with fixing lugs	No -	No -
Type references	725•XX•BM4L-•	725•XX•BC3ML-•	725•XX•SC3ML-•
Pages	30		

Type of associated sockets	Socket		
			
Contact terminal arrangements	Separate	-	-
Connection	Screw connector	-	-
Accessories	Protection modules Timer module Maintaining clamps Socket identification legend Bus jumper	Yes No Yes - No	- - - - -
Conventional thermal current (Ith)	30 A	-	-
Type references	70-725-1	-	-
Pages	30		

(1) 100,000 for RPM1 and RPM2; 60,000 for RPM3 and RPM4.
 (2) 30 A when mounted with 13 mm (0.51 in.) gap between two relays and 25 A when mounted side-by-side without a gap.
 Note: The Zelio Relays range name has been changed in 2020 to Harmony Relays. As the timeline for each range is different, during the transition period there will be both Zelio and Harmony ranges shown on different product datasheets and packaging.

Plug-in relays	Relays with clamp fixing	
Power relays	Universal relays	Power relays
		
1 CO/15 A 2 CO/15 A 3 CO/15 A 4 CO/15 A	2 CO/10 A 3 CO/10 A	2 CO/10 A 3 CO/10 A
12...110 V	24...230 V 12...220 V	12...110 V
Flat (Faston type)	Cylindrical	Flat (Faston type)
Up to 270 V ~/28 V ---	Up to 277 V ~/30 V ---	Up to 277 V ~/28 V ---
100,000 (1) 10,000,000	100,000 5,000,000	100,000 5,000,000
Yes (depending on version)	Yes (depending on version)	-
Yes	Yes	-
Yes, lockable	Yes, lockable	-
Standard	Low level (depending on version)	Standard
Yes	No	-
Yes	No	-
RPM••••	RUM•••••	RPF••••
32	37	40

Sockets without LED	Sockets without LED		
			
Mixed	Mixed	Separate	-
Screw clamp terminals	Screw connector	-	-
Yes	Yes	-	-
Yes (for 3-pole and 4-pole)	Yes	-	-
Yes (on socket RPZF1)	Yes	-	-
Yes	Yes	-	-
No	No	Yes, 2-pole	-
16 A	12 A	-	-
RPZF•	RUZC•M	RUZSC•M	RUZSF3M
33	38	-	-

Harmony Electromechanical Relays

Plug-in relays


RSL slim interface relays

Presentation of the range

RSL slim interface relays offer the advantages of compact size and modular design. Their slim width (6 mm/0.236 in.) saves space when mounting on a DIN rail at the back of an enclosure.

RSL relays are available as:


- **Pre-assembled offer:** a single reference comprising a standard relay mounted on its socket.
 - The socket includes a protection circuit (against reverse polarity and surge) and an LED indicator as standard.
 - Two types of connector are available for wire connection: screw connectors or spring terminals.
 - This pre-assembled solution covers a wide range of operating voltages from 12 to 230 V.
- **Customer assembly offer:**
 - The relay (standard or low level) and the socket are selected, as required, according to the operating voltage of the application.
 - For maintenance, an RSL slim relay can be replaced without disconnecting the socket wiring.

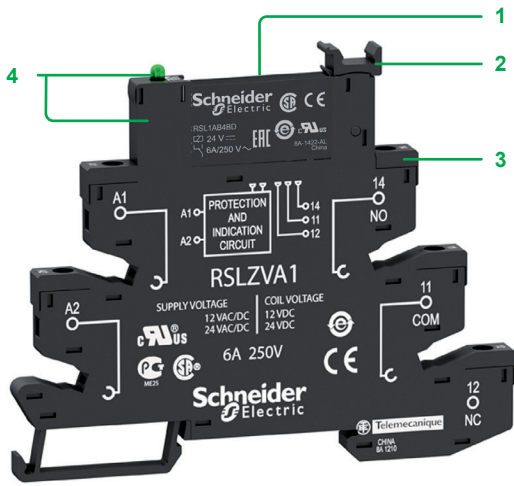

Relay description

RSL slim interface relays, pre-assembled

- 1 6 A standard relay with 1 CO contact
- 2 Lever for retaining or easy withdrawal of the relay from its socket
- 3 Sockets: wire connection by screw connectors or spring terminals
- 4 Built-in protection circuit and LED indicator on all sockets




RSL slim interface relay

- 1 5 flat (PCB type) standard pins

Socket description

Sockets for RSL slim interface relays

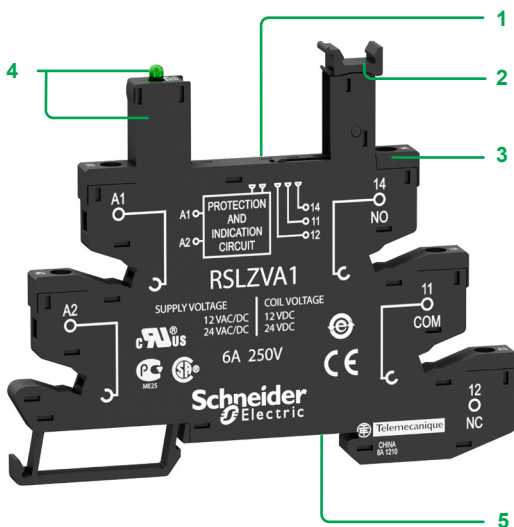

- 1 5 female contacts for the relay pins
- 2 Retaining lever with marker label
- 3 Wire connection by screw connectors or spring terminals
- 4 Built-in protection circuit and LED indicator
- 5 Locating slot for mounting on DIN rail



Pre-assembled slim interface relays

Relays mounted on socket equipped with LED and protection circuit (sold in lots of 10)

1 CO contact - 6A thermal current (lth)

Control circuit voltage V	Pre-assembled unit reference	Components in pre-assembled unit reference		Weight kg/lb
		Relay	Socket (with LED)	
Screw connector socket type				
12 ~/~	RSL1PVJU	RSL1AB4JD	RSLZVA1	0.031/0.068
24 ~/~	RSL1PVBU	RSL1AB4BD	RSLZVA1	0.031/0.068
48 ~/~	RSL1PVEU	RSL1AB4ED	RSLZVA2	0.031/0.068
110 ~/~	RSL1PVFU	RSL1AB4ND	RSLZVA3	0.031/0.068
230 ~/~	RSL1PVPJU	RSL1AB4ND	RSLZVA4	0.031/0.068
Spring terminal socket type				
12 ~/~	RSL1PRJU	RSL1AB4JD	RSLZRA1	0.029/0.064
24 ~/~	RSL1PRBU	RSL1AB4BD	RSLZRA1	0.029/0.064
48 ~/~	RSL1PREU	RSL1AB4ED	RSLZRA2	0.029/0.064
110 ~/~	RSL1PRFU	RSL1AB4ND	RSLZRA3	0.029/0.064
230 ~/~	RSL1PRPU	RSL1AB4ND	RSLZRA4	0.029/0.064

Slim interface relays for customer assembly

Relays with flat (PCB type) standard pins

1 CO contact - 6A Thermal current (lth)


Control circuit voltage V	Standard		Low level	
	Unit reference	Weight kg/lb	Unit reference	Weight kg/lb
12 ~	RSL1AB4JD	0.006/0.013	RSL1GB4JD	0.006/0.013
24 ~	RSL1AB4BD	0.006/0.013	RSL1GB4BD	0.006/0.013
48 ~	RSL1AB4ED	0.006/0.013	RSL1GB4ED	0.006/0.013
60 ~	RSL1AB4ND	0.006/0.013	RSL1GB4ND	0.006/0.013

Sockets equipped with LED and protection circuit (Sold in lots of 10)

Control circuit voltage V	For use with relays	Socket type			
		Screw connector		Spring terminal	
		Unit reference	Weight kg/lb	Unit reference	Weight kg/lb
12 ~/~	RSL1●B4JD	RSLZVA1	0.025/0.055	RSLZRA1	0.023/0.051
	RSL1●B4BD				
24 ~/~					
48 ~/~	RSL1●B4ED	RSLZVA2	0.025/0.055	RSLZRA2	0.023/0.051
	RSL1●B4ND				
60 ~/~					
110 ~/~	RSL1●B4ND	RSLZVA3	0.025/0.055	RSLZRA3	0.023/0.051
230 ~/~		RSLZVA4	0.025/0.055	RSLZRA4	0.023/0.051

Socket accessories

Description	For use with	Sold in lots of	Reference	Weight kg/lb
Clip-in legends (sheet of 64 legends)	All sockets	2	RSLZ5	0.001/0.002
Bus jumper (20-pole jumper)	All sockets	10	RSLZ2	0.003/0.007
Partition plate	All sockets	10	RSLZ3	0.001/0.002

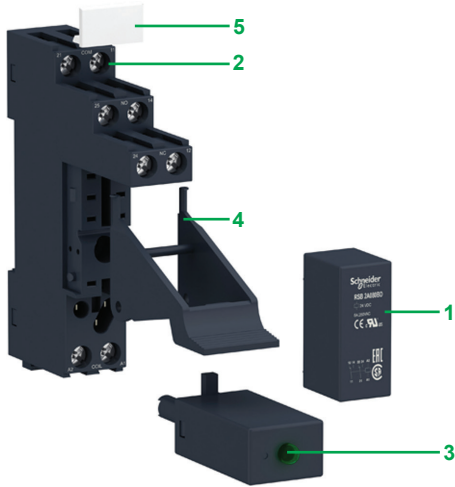


Presentation of the range

The RSB interface relay range comprises:

- 1 12 A relays with 1 CO contact , 16 A relays with 1 CO contact, and 8 A relays with 2 CO contacts
- 2 Sockets with separate contact terminals
- 3 Protection modules (diode, diode + LED, RC circuit, or varistor + LED) common to all sockets
- 4 A plastic maintaining clamp for all sockets
- 5 Clip-in legend for all sockets


These relays are available in both pre-assembled (single reference) and customer assembled offers.

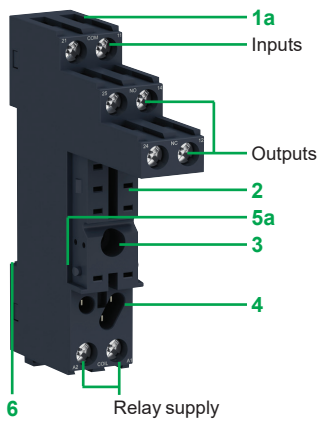

Socket description

Sockets with separate contact terminals (1)

- 1a Connection by screw connector
- 1b Connection by push-in terminal
- 2 5 or 8 female contacts for the relay pins
- 3 Hole for panel mounting
- 4 Location for protection modules
- 5a Locking components for plastic maintaining clamp
- 5b Built-in plastic maintaining clamp for locking components
- 6 Locating slot for mounting on DIN rail
- 7 Test point
- 8 Push button to release wire
- 9 Location for bus jumpers

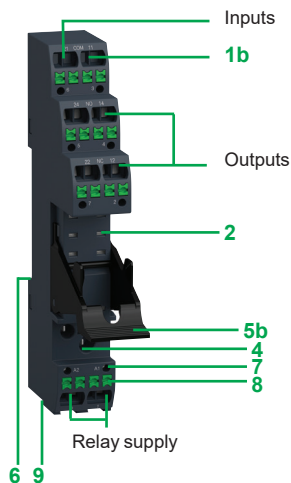

(1) The inputs and outputs are separate from the relay supply.



RSB2A080F7PV

Pre-assembled interface relays							
Relays mounted on screw connector separate terminal sockets with protection module, clamp and label (sold in lots of 30)							
Control circuit voltage V	Pre-assembled unit reference	Components in pre-assembled unit reference					Weight kg/lb
		Relay	Socket	Clamp	Protection module (with LED)	Socket label	
1 CO contact - 12A thermal current (lth)							
12 ---	RSB1A120JDPV	RSB1A120JD	RSZE1S35M	RSZR215	RZM031RB	RSZL300	0.050/0.110
24 ---	RSB1A120BDPV	RSB1A120BD	RSZE1S35M	RSZR215	RZM031RB	RSZL300	0.050/0.110
24 ~	RSB1A120B7PV	RSB1A120B7	RSZE1S35M	RSZR215	RZM021RB	RSZL300	0.050/0.110
120 ~	RSB1A120F7PV	RSB1A120F7	RSZE1S35M	RSZR215	RZM021FP	RSZL300	0.050/0.110
230 ~	RSB1A120P7PV	RSB1A120P7	RSZE1S35M	RSZR215	RZM021FP	RSZL300	0.050/0.110
1 CO contact - 16A thermal current (lth)							
24 ---	RSB1A160BDPV	RSB1A160BD	RSZE1S48M	RSZR215	RZM031RB	RSZL300	0.057/0.126
230 ~	RSB1A160P7PV	RSB1A160P7	RSZE1S48M	RSZR215	RZM021FP	RSZL300	0.057/0.126
2 CO contact - 8A thermal current (lth)							
12 ---	RSB2A080JDPV	RSB2A080JD	RSZE1S48M	RSZR215	RZM031RB	RSZL300	0.057/0.126
24 ---	RSB2A080BDPV	RSB2A080BD	RSZE1S48M	RSZR215	RZM031RB	RSZL300	0.057/0.126
24 ~	RSB2A080B7PV	RSB2A080B7	RSZE1S48M	RSZR215	RZM021RB	RSZL300	0.057/0.126
120 ~	RSB2A080F7PV	RSB2A080F7	RSZE1S48M	RSZR215	RZM021FP	RSZL300	0.057/0.126
220 ~	RSB2A080M7PV	RSB2A080M7	RSZE1S48M	RSZR215	RZM021FP	RSZL300	0.057/0.126
230 ~	RSB2A080P7PV	RSB2A080P7	RSZE1S48M	RSZR215	RZM021FP	RSZL300	0.057/0.126



RSB1A120JD + RZM031RB + RSZE1S35M



RSB1A160JD + RSZE1S48M



RSZE05P

Interface relays for customer assembly

RSB interface relays for standard applications (sold in lots of 10)

Control circuit voltage V	Number and type of contacts - Thermal current (Ith)			Weight kg/lb
	1 CO - 12 A Unit reference	1 CO - 16 A Unit reference	2 CO - 8 A Unit reference	
6 ---	–	RSB1A160RD	–	0.014/0.031
12 ---	RSB1A120JD	RSB1A160JD	RSB2A080JD	0.014/0.031
24 ---	RSB1A120BD	RSB1A160BD	RSB2A080BD	0.014/0.031
48 ---	RSB1A120ED	RSB1A160ED	RSB2A080ED	0.014/0.031
60 ---	–	RSB1A160ND	–	0.014/0.031
110 ---	RSB1A120FD	RSB1A160FD	RSB2A080FD	0.014/0.031
24 ~	RSB1A120B7	RSB1A160B7	RSB2A080B7	0.014/0.031
48 ~	RSB1A120E7	RSB1A160E7	RSB2A080E7	0.014/0.031
120 ~	RSB1A120F7	RSB1A160F7	RSB2A080F7	0.014/0.031
220 ~	RSB1A120M7	RSB1A160M7	RSB2A080M7	0.014/0.031
230 ~	RSB1A120P7	RSB1A160P7	RSB2A080P7	0.014/0.031
240 ~	RSB1A120U7	RSB1A160U7	RSB2A080U7	0.014/0.031

Sockets for interface relays

Sockets with separate contact terminal arrangement and screw connector connection

Rated insulation voltage	Thermal current (Ith)	Relay type	Sold in lots of	Unit reference	Weight kg/lb
250 V ~	12 A	RSB1A120●●	10	RSZE1S35M	0.060/0.132
	10 A (1)	RSB1A160●● (2) RSB2A080●●	10	RSZE1S48M	0.050/0.110

Sockets with separate contact terminal arrangement, push-in terminals, with built-in clamp

Rated insulation voltage	Thermal current (Ith)	Relay type	Sold in lots of	Unit reference	Weight kg/lb
250 V ~	12 A	RSB1A●●●●●	10	RSZE05P	0.037/0.082
	10 A	RSB1A160●● (2) RSB2A080●●	10	RSZE08P	0.042/0.093

Protection modules

Description	For use with	Voltage V	Sold in lots of	Unit reference	Weight kg/lb
Diode	All sockets	6...230 ---	10	RZM040W	0.003/0.007
RC circuit	All sockets	24...60 ~	10	RZM041BN7	0.010/0.022
		110...240 ~	10	RZM041FU7	0.010/0.022
Diode + green LED	All sockets	6...24 ---	10	RZM031RB	0.004/0.009
		24...60 ---	10	RZM031BN	0.004/0.009
		110...230 ---	10	RZM031FPD	0.004/0.009
Varistor + green LED	All sockets	6...24 ---/~	10	RZM021RB	0.005/0.011
		24...60 ---/~	10	RZM021BN	0.005/0.011
		110...230 ---/~	10	RZM021FP	0.005/0.011

(1) RSZE1S48M is a two terminal socket each carrying 10 A.

(2) If RSZE1S48M/RSZE08P socket terminals are linked, relay RSB1A160●● can be used up to 16 A. See "Wiring diagrams" on www.se.com/harmonyelectromechanicalrelays.

Accessories

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Plastic maintaining clamp	All sockets	10	RSZR215	0.002/0.004
Legend	All sockets	10	RSZL300	0.001/0.002
Bus jumper (8-pole jumper)	For inputs (A1, A2) of RSZE screw sockets (RSZE1S35M, RSZE1S48M)	10	RGZS08	0.006/0.013
Bus jumper (2-pole jumper)	For input (A2) of RSZE push-in sockets (RSZE05P, RSZE08P)	10	RSZS02	0.002/0.004



RSZR215



RGZS08




RSZS02

Harmony Electromechanical Relays

Plug-in relays

RXG interface relays

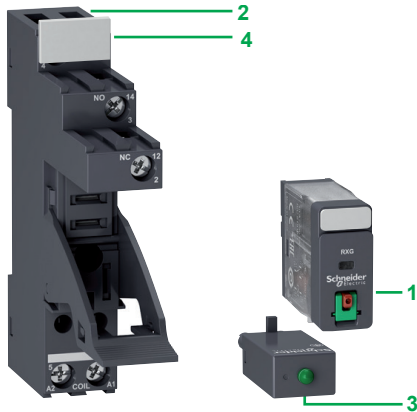


Presentation of the range

RXG relays are interface plug-in relays with Faston pins for better reliability and robust installation. They are used in PLC applications.

The RXG interface relay range comprises:


- 1 10 A relays with 1 CO contact and 5 A relays with 2 CO contacts
- 2 Sockets with separate or mixed contact terminals, built-in plastic maintaining clamp
- 3 Protection modules (diode, diode + LED, RC circuit, or varistor + LED) for RXG separate sockets
- 4 Clip-in legends for RXG separate sockets

These relays are available in both pre-assembled (single reference) and customer assembled offers.

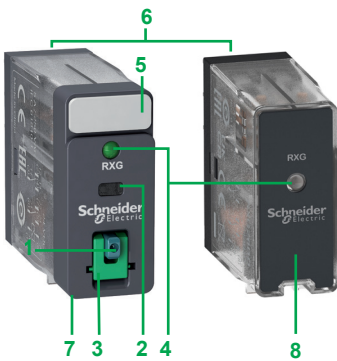

Relay description

- 1 Push button for testing the contacts (blue: $\overline{\text{---}}$, red: \sim)
- 2 Mechanical "relay status" indicator
- 3 Removable lock-down door enabling forced maintaining of the contacts for test sequences or maintenance purposes
- 4 LED (depending on version) indicating the relay status
- 5 Removable legend for relay identification
- 6 5 or 8 Faston type pins
- 7 Standard cover-type relay with pushbutton, mechanical indicator, and LED options
- 8 Basic cover-type relay with LED option

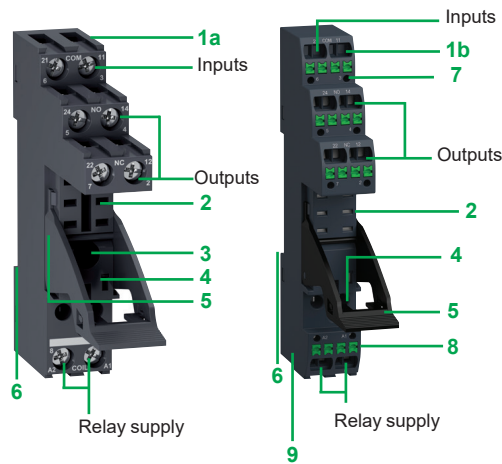


Socket description

Sockets with separate contact terminals (1)

- 1a Connection by screw connector
- 1b Connection by push-in terminal
- 2 5 or 8 female contacts for the relay pins
- 3 Hole for panel mounting
- 4 Location for protection modules
- 5 Built-in plastic maintaining clamp for locking components
- 6 Locating slot for mounting on DIN rail
- 7 Test point
- 8 Push button to release wire
- 9 Location for bus jumpers

Sockets with mixed contact terminals (2)

- 1 Connection by screw clamp
- 2 5 or 8 female contacts for the relay pins
- 3 Hole for panel mounting
- 4 Built-in plastic maintaining clamp for locking components
- 5 Locating slot for mounting on DIN rail

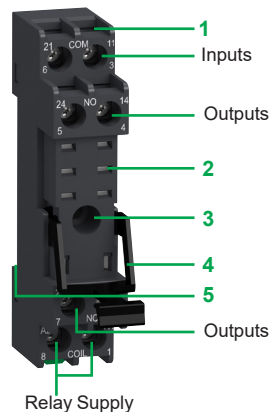

(1) The inputs and outputs are separate from the relay supply.

(2) The outputs NC are mixed with the relay supply, with the outputs NO and inputs being located on the opposite side of the socket.



Pre-assembled interface relays

Relays mounted on screw connector separate terminal sockets with integrated clamp and protection module (sold in lots of 30)

Control circuit voltage V	Pre-assembled unit reference		Components in pre-assembled unit reference			Weight kg/lb
	1 CO - 10A	2 CO - 5A	Relay	Socket (with RGZR215 clamp)	Protection module (with LED)	
Relays with lockable test button and LED						
24 ---	RXG12BDPV		RXG12BD	RGZE1S35M	RZM031RB	0.059/0.130
24 ~	RXG12B7PV		RXG12B7	RGZE1S35M	RZM021RB	0.059/0.130
230 ~	RXG12P7PV		RXG12P7	RGZE1S35M	RZM021FP	0.059/0.130
24 ---		RXG22BDPV	RXG22BD	RGZE1S48M	RZM031RB	0.066/0.145
24 ~		RXG22B7PV	RXG22B7	RGZE1S48M	RZM021RB	0.067/0.148
230 ~		RXG22P7PV	RXG22P7	RGZE1S48M	RZM021FP	0.067/0.148
Relays with LED						
24 ---	RXG13BDPV		RXG13BD	RGZE1S35M	RZM031RB	0.058/0.129
230 ~	RXG13P7PV		RXG13P7	RGZE1S35M	RZM021FP	0.059/0.130
24 ---		RXG23BDPV	RXG23BD	RGZE1S48M	RZM031RB	0.066/0.145
230 ~		RXG23P7PV	RXG23P7	RGZE1S48M	RZM021FP	0.067/0.148
Relays with lockable test button and without LED						
24 ---		RXG21BDPV	RXG21BD	RGZE1S48M	RZM031RB	0.067/0.148
24 ~		RXG21B7PV	RXG21B7	RGZE1S48M	RZM021RB	0.067/0.148
230 ~		RXG21P7PV	RXG21P7	RGZE1S48M	RZM021FP	0.067/0.148

Relays mounted on push-in separate terminal sockets with integrated clamp (sold in lots of 10)

Control circuit voltage V	Pre-assembled unit reference		Components in pre-assembled unit reference		Weight g/lb
	1 CO - 10A	2 CO - 5A	Relay	Socket (with RGZR215 clamp)	
Relays with lockable test button and LED					
24 ---	RXG12BDPVP		RXG12BD	RGZE05P	59/0.130
24 ~	RXG12B7PVP		RXG12B7	RGZE05P	59/0.130
230 ~	RXG12P7PVP		RXG12P7	RGZE05P	59/0.130
24 ---		RXG22BDPVP	RXG22BD	RGZE08P	62/0.137
24 ~		RXG22B7PVP	RXG22B7	RGZE08P	62/0.137
230 ~		RXG22P7PVP	RXG22P7	RGZE08P	62/0.137
Relays with LED					
24 ---	RXG13BDPVP		RXG13BD	RGZE05P	59/0.130
230 ~	RXG13P7PVP		RXG13P7	RGZE05P	59/0.130
24 ---		RXG23BDPVP	RXG23BD	RGZE08P	62/0.137
230 ~		RXG23P7PVP	RXG23P7	RGZE08P	62/0.137
Relays with lockable test button and without LED					
24 ---		RXG21BDPVP	RXG21BD	RGZE08P	62/0.137
24 ~		RXG21B7PVP	RXG21B7	RGZE08P	62/0.137
230 ~		RXG21P7PVP	RXG21P7	RGZE08P	62/0.137





RXG11BD



RXG22B7



RXG13BD



RXG26BD



RXG18P7

Interface relays for customer assembly


Control circuit voltage V	Sold in lots of	Number and type of contacts - Thermal current (Ith)		
		1 CO - 10 A	2 CO - 5 A	Weight kg/lb
		Unit reference	Unit reference	
Standard cover relays with lockable test button				
6 ---	10	–	RXG21RD	0.020/0.044
12 ---	10	–	RXG21JD	0.020/0.044
24 ---	10	RXG11BD	RXG21BD	0.020/0.044
24 ~	10	RXG11B7	RXG21B7	0.020/0.044
48 ~	10	–	RXG21E7	0.020/0.044
120 ~	10	RXG11F7	RXG21F7	0.020/0.044
230 ~	10	RXG11P7	RXG21P7	0.020/0.044

Standard cover relays with lockable test button and LED				
6 ---	10	RXG12RD	–	0.020/0.044
12 ---	10	RXG12JD	RXG22JD	0.020/0.044
24 ---	10	RXG12BD	RXG22BD	0.020/0.044
48 ---	10	RXG12ED	RXG22ED	0.020/0.044
110 ---	10	RXG12FD	RXG22FD	0.020/0.044
24 ~	10	RXG12B7	RXG22B7	0.020/0.044
48 ~	10	RXG12E7	RXG22E7	0.020/0.044
120 ~	10	RXG12F7	RXG22F7	0.020/0.044
220 ~	10	–	RXG22M7	0.020/0.044
230 ~	10	RXG12P7	RXG22P7	0.020/0.044

Standard cover relays with LED				
12 ---	10	RXG13JD	–	0.020/0.044
24 ---	10	RXG13BD	RXG23BD	0.020/0.044
24 ~	10	RXG13B7	RXG23B7	0.020/0.044
48 ~	10	–	RXG23E7	0.020/0.044
120 ~	10	RXG13F7	RXG23F7	0.020/0.044
220 ~	10	–	RXG23M7	0.020/0.044
230 ~	10	RXG13P7	RXG23P7	0.020/0.044

Basic cover relays with LED				
24 ---	10	RXG16BD	RXG26BD	0.019/0.042
230 ~	10	RXG16P7	RXG26P7	0.019/0.042

Basic cover relays without LED				
24 ---	10	RXG18BD	RXG28BD	0.019/0.042
230 ~	10	RXG18P7	RXG28P7	0.019/0.042



RGZE1S48M



RGZE05P



RGZE05E



RZM031RB



RSZL300



RGZS08



RGZR215

RSZS02

Sockets for interface relays

Sockets with separate contact terminals arrangement, screw connector connection, and built-in clamp

Description	Thermal current (Ith)	Relay type	Sold in lots of	Unit reference	Weight kg/lb
1 CO socket with 1 pole	10 A	RXG1●●●	10	RGZE1S35M	0.034/0.075
2 CO socket with 2 poles	5 A	RXG2●●●	10	RGZE1S48M	0.042/0.093

Sockets with separate contact terminals arrangement, push-in terminals, and built-in clamp

1 CO socket with 1 pole	10 A	RXG1●●●	10	RGZE05P	0.039/0.086
2 CO socket with 2 poles	5 A	RXG2●●●	10	RGZE08P	0.042/0.093

Sockets with mixed contact terminals arrangement, screw clamp connection, and built-in clamp


1 CO socket with 1 pole	10 A	RXG1●●●	10	RGZE05E	0.024/0.053
2 CO socket with 2 poles	5 A	RXG2●●●	10	RGZE08E	0.026/0.057

Protection modules

Description	For use with	Voltage V	Sold in lots of	Unit reference	Weight kg/lb
Diode	All separate sockets	6...230 ~	10	RZM040W	0.003/0.007
RC circuit	All separate sockets	24...60 ~	10	RZM041BN7	0.010/0.022
		110...240 ~	10	RZM041FU7	0.010/0.022
Diode + green LED	All separate sockets	6...24 ~	10	RZM031RB	0.004/0.009
		24...60 ~	10	RZM031BN	0.004/0.009
		110...230 ~	10	RZM031FPD	0.004/0.009
Varistor + green LED	All separate sockets	6...24 ~/~	10	RZM021RB	0.005/0.011
		24...60 ~/~	10	RZM021BN	0.005/0.011
		110...230 ~/~	10	RZM021FP	0.005/0.011

Accessories

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Plastic maintaining clamp	All separate sockets (RGZE1S●●M, RGZE●●P)	10	RGZR215	0.002/0.004
Legend	All separate sockets (RGZE1S●●M, RGZE●●P)	10	RSZL300	0.001/0.002
Clip-in legends (sheet of 16 legends)	RXG●1●●, RXG●2●●, RXG●3●● relays	10	RGZL520	0.001/0.002
Bus jumper (8-pole jumper)	For inputs (A1, A2) of RGZE screw sockets (RGZE1S35M, RGZE1S48M)	10	RGZS08	0.006/0.013
Bus jumper (2-pole jumper)	For input (A2) of RGZE push-in sockets (RGZE05P, RGZE08P)	10	RSZS02	0.002/0.004

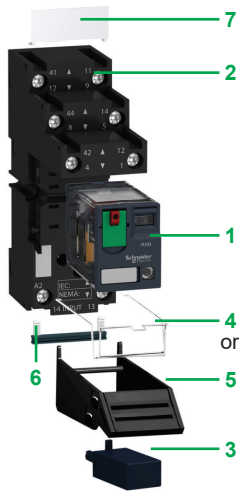


Presentation of the range

The RXM miniature relay range comprises:


- 1 12 A relays with 2 CO contacts, 10 A relays with 3 CO contacts, 6 A relays with 4 CO contacts, and 3 A "low level" relays with 4 CO contacts (all these relays have the same dimensions)
- 2 Sockets with mixed or separate contact terminals
- 3 Protection modules (diode, RC circuit, or varistor) common to all sockets
- 4 Metal maintaining clamp for all sockets
- 5 Plastic maintaining clamp for all sockets
- 6 2-pole bus jumper that can be used on sockets with separate contact terminals in order to simplify cabling when creating an equipotential link between the coil terminals
- 7 Clip-in legends for all sockets except RXZE2M114


These relays are available in both pre-assembled (single reference) and customer assembled offers.



Relay description

- 1 Push button for testing the contacts (blue: --- , red: \sim)
- 2 Mechanical "relay status" indicator
- 3 Removable lock-down door enabling forced maintaining of the contacts for test sequences or maintenance purposes
- 4 LED (depending on version) indicating the relay status
- 5 Removable legend for relay identification
- 6 4 notches for rail mounting adapter or panel mounting adapter with mounting lugs
- 7 8, 11, or 14 Faston type pins
- 8 Area by which the product can be easily gripped
- 9 Mounting adapter enabling direct mounting of the relay on a panel
- 10 Mounting adapter enabling direct mounting of the relay on a DIN rail




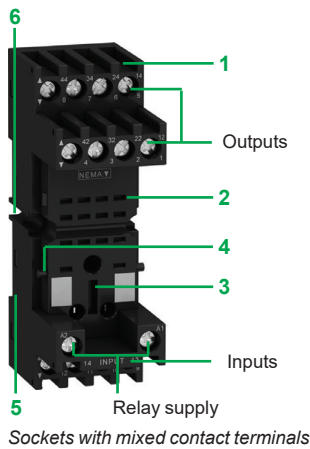

Socket description


Sockets with mixed contact terminals (1)

- 1 Connection by screw clamp terminals or screw connector
- 2 14 female contacts for the relay pins
- 3 Location for protection modules
- 4 Locking components for plastic and metal maintaining clamps
- 5 Locating slot for mounting on DIN rail with compression spring or mounting clip
- 6 2 or 4 holes for panel mounting

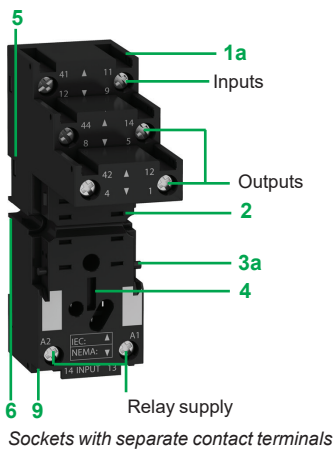

Sockets with separate contact terminals (2)

- 1a Connection by screw connector
- 1b Connection by push in terminal
- 2 8, 11, or 14 female contacts for the relay pins
- 3a Locking components for plastic and metal maintaining clamps
- 3b Built-in plastic maintaining clamp for locking components
- 4 Location for protection modules
- 5 Locating slot for mounting on DIN rail with compression spring or mounting clip
- 6 2 holes for panel mounting
- 7 Test point
- 8 Push button to release wire
- 9 Location for bus jumpers

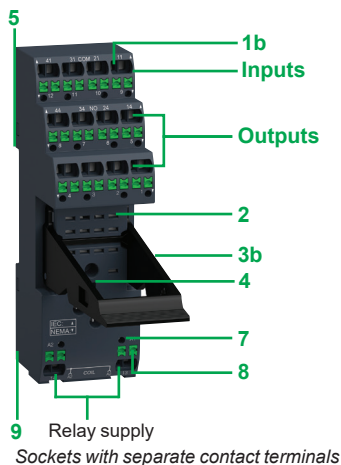

- (1) The inputs are mixed with the relay supply, with the outputs being located on the opposite side of the socket.
- (2) The inputs and outputs are separate from the relay supply.



RXM4AB1BDPVS



RXM4AB2B7PVM



RXM4AB1BDPVP

Pre-assembled interface relays

Relays mounted on screw connector separate terminal sockets with clamp and label (sold in lots of 30)

Control circuit voltage V	Pre-assembled unit reference		Components in pre-assembled unit reference				Weight kg/lb
	2 CO - 12A	4 CO - 6A	Relay	Socket	Clamp	Socket label	

Relays with lockable test button and LED

24 ---	RXM2AB2BDPVS		RXM2AB2BD	RXZE2S108M	RXZR335	RXZL520	0.101/0.223
24 ~	RXM2AB2B7PVS		RXM2AB2B7	RXZE2S108M	RXZR335	RXZL520	0.101/0.223
230 ~	RXM2AB2P7PVS		RXM2AB2P7	RXZE2S108M	RXZR335	RXZL520	0.101/0.223
24 ---	RXM4AB2BDPVS		RXM4AB2BD	RXZE2S114M	RXZR335	RXZL520	0.113/0.249
24 ~	RXM4AB2B7PVS		RXM4AB2B7	RXZE2S114M	RXZR335	RXZL520	0.113/0.249
230 ~	RXM4AB2P7PVS		RXM4AB2P7	RXZE2S114M	RXZR335	RXZL520	0.113/0.249

Relays with lockable test button and without LED

24 ---	RXM4AB1BDPVS	RXM4AB1BD	RXZE2S114M	RXZR335	RXZL520	0.113/0.249
24 ~	RXM4AB1B7PVS	RXM4AB1B7	RXZE2S114M	RXZR335	RXZL520	0.113/0.249
230 ~	RXM4AB1P7PVS	RXM4AB1P7	RXZE2S114M	RXZR335	RXZL520	0.113/0.249

Relays mounted on screw connector mixed terminal sockets with clamp and label (sold in lots of 30)

Control circuit voltage V	Pre-assembled unit reference		Components in pre-assembled unit reference				Weight kg/lb
	2 CO - 12A	4 CO - 6A	Relay	Socket	Clamp	Socket label	

Relays with lockable test button and LED

24 ---	RXM2AB2BDPVM		RXM2AB2BD	RXZE2M114M	RXZR335	RXZL520	0.099/0.218
24 ~	RXM2AB2B7PVM		RXM2AB2B7	RXZE2M114M	RXZR335	RXZL520	0.099/0.218
230 ~	RXM2AB2P7PVM		RXM2AB2P7	RXZE2M114M	RXZR335	RXZL520	0.099/0.218
24 ---	RXM4AB2BDPVM		RXM4AB2BD	RXZE2M114M	RXZR335	RXZL520	0.099/0.218
24 ~	RXM4AB2B7PVM		RXM4AB2B7	RXZE2M114M	RXZR335	RXZL520	0.099/0.218
230 ~	RXM4AB2P7PVM		RXM4AB2P7	RXZE2M114M	RXZR335	RXZL520	0.099/0.218

Relays with lockable test button and without LED

24 ---	RXM4AB1BDPVM	RXM4AB1BD	RXZE2M114M	RXZR335	RXZL520	0.113/0.249
24 ~	RXM4AB1B7PVM	RXM4AB1B7	RXZE2M114M	RXZR335	RXZL520	0.113/0.249
230 ~	RXM4AB1P7PVM	RXM4AB1P7	RXZE2M114M	RXZR335	RXZL520	0.113/0.249

Relays mounted on push-in separate terminal sockets with integrated clamp (sold in lots of 10)

Control circuit voltage V	Pre-assembled unit reference		Components in pre-assembled unit reference		Weight g/lb
	2 CO - 12A	4 CO - 6A	Relay	Socket (with RXZR315 clamp)	

Relays with lockable test button and LED

24 ---	RXM2AB2BDPVP		RXM2AB2BD	RXZE14P	117/0.258
24 ~	RXM2AB2B7PVP		RXM2AB2B7	RXZE14P	117/0.258
230 ~	RXM2AB2P7PVP		RXM2AB2P7	RXZE14P	117/0.258
24 ---	RXM4AB2BDPVP		RXM4AB2BD	RXZE14P	117/0.258
24 ~	RXM4AB2B7PVP		RXM4AB2B7	RXZE14P	117/0.258
230 ~	RXM4AB2P7PVP		RXM4AB2P7	RXZE14P	117/0.258

Relays with lockable test button and without LED

24 ---	RXM4AB1BDPVP	RXM4AB1BD	RXZE14P	117/0.258
24 ~	RXM4AB1B7PVP	RXM4AB1B7	RXZE14P	117/0.258
230 ~	RXM4AB1P7PVP	RXM4AB1P7	RXZE14P	117/0.258



RXM2AB1BD



RXM2AB1F7



RXM2AB2ED



RXM2AB2F7



RXM4GB1BD



RXM4GB1P7



RXM4GB2BD



RXM4GB2F7

Miniature relays for customer assembly

RXM miniature relays without LED (sold in lots of 10)

Control circuit voltage V	Number and type of contacts - Thermal current (Ith)					
	2 CO - 12 A		3 CO - 10 A		4 CO - 6 A	
	Unit reference	Weight kg/lb	Unit reference	Weight kg/lb	Unit reference	Weight kg/lb
12 ---	RXM2AB1JD	0.037/0.082	RXM3AB1JD	0.037/0.082	RXM4AB1JD	0.037/0.082
24 ---	RXM2AB1BD	0.037/0.082	RXM3AB1BD	0.037/0.082	RXM4AB1BD	0.037/0.082
48 ---	RXM2AB1ED	0.037/0.082	RXM3AB1ED	0.037/0.082	RXM4AB1ED	0.037/0.082
110 ---	RXM2AB1FD	0.037/0.082	RXM3AB1FD	0.037/0.082	RXM4AB1FD	0.037/0.082
220 ---	—	—	—	—	RXM4AB1MD	0.037/0.082
24 ~	RXM2AB1B7	0.037/0.082	RXM3AB1B7	0.037/0.082	RXM4AB1B7	0.037/0.082
48 ~	RXM2AB1E7	0.037/0.082	RXM3AB1E7	0.037/0.082	RXM4AB1E7	0.037/0.082
120 ~	RXM2AB1F7	0.037/0.082	RXM3AB1F7	0.037/0.082	RXM4AB1F7	0.037/0.082
230 ~	RXM2AB1P7	0.037/0.082	RXM3AB1P7	0.037/0.082	RXM4AB1P7	0.037/0.082
240 ~	—	—	—	—	RXM4AB1U7	0.037/0.082

RXM miniature relays with LED (sold in lots of 10)

12 ---	RXM2AB2JD	0.037/0.082	RXM3AB2JD	0.037/0.082	RXM4AB2JD	0.037/0.082
24 ---	RXM2AB2BD	0.037/0.082	RXM3AB2BD	0.037/0.082	RXM4AB2BD	0.037/0.082
48 ---	RXM2AB2ED	0.037/0.082	—	—	RXM4AB2ED	0.037/0.082
110 ---	RXM2AB2FD	0.037/0.082	RXM3AB2FD	0.037/0.082	RXM4AB2FD	0.037/0.082
125 ---	—	—	—	—	RXM4AB2GD	0.037/0.082
24 ~	RXM2AB2B7	0.037/0.082	RXM3AB2B7	0.037/0.082	RXM4AB2B7	0.037/0.082
48 ~	RXM2AB2E7	0.037/0.082	RXM3AB2E7	0.037/0.082	RXM4AB2E7	0.037/0.082
120 ~	RXM2AB2F7	0.037/0.082	RXM3AB2F7	0.037/0.082	RXM4AB2F7	0.037/0.082
230 ~	RXM2AB2P7	0.037/0.082	RXM3AB2P7	0.037/0.082	RXM4AB2P7	0.037/0.082

RXM miniature relays with low level contacts, without LED (sold in lots of 10)

Control circuit voltage V	Number and type of contacts Thermal current (Ith)	
	4 CO - 3 A	
	Unit reference	Weight kg/lb
12 ---	RXM4GB1JD	0.037/0.082
24 ---	RXM4GB1BD	0.037/0.082
24 ~	RXM4GB1B7	0.037/0.082
48 ~	RXM4GB1E7	0.037/0.082
120 ~	RXM4GB1F7	0.037/0.082
230 ~	RXM4GB1P7	0.037/0.082

RXM miniature relays with low level contacts, with LED (sold in lots of 10)


12 ---	RXM4GB2JD	0.037/0.082
24 ---	RXM4GB2BD	0.037/0.082
48 ---	RXM4GB2ED	0.037/0.082
125 ---	RXM4GB2GD	0.037/0.082
220 ---	RXM4GB2MD	0.037/0.082
24 ~	RXM4GB2B7	0.037/0.082
48 ~	RXM4GB2E7	0.037/0.082
120 ~	RXM4GB2F7	0.037/0.082
230 ~	RXM4GB2P7	0.037/0.082
240 ~	RXM4GB2U7	0.037/0.082



RXZE2M114M



RXZE14P



RXM041007

Sockets

Contact terminal arrangement	Connection	Thermal current (Ith)	Relay type	Sold in lots of	Unit reference	Weight kg/lb
Mixed	Screw clamp	10	RXM2●●●●● (1) RXM4●●●●●	10	RXZE2M114	0.048/0.106
	Screw connector	10	RXM2●●●●● (1) RXM4●●●●●	10	RXZE2M114M	0.056/0.124
Separate	Push-in terminal	12	RXM2●●●●● RXM4●●●●●	10	RXZE14P	0.080/0.176
		12	RXM2●●●●●	10	RXZE2S108M	0.058/0.128
	Screw connector	10	RXM3●●●●●	10	RXZE2S111M	0.066/0.146
		10	RXM4●●●●●	10	RXZE2S114M	0.070/0.154

Protection modules

Description	Voltage V	For use with	Sold in lots of	Unit reference	Weight kg/lb
Diode	6...250 ---	All sockets	10	RXM040W	0.003/0.007
RC circuit	24...60 ~	All sockets	10	RXM041BN7	0.010/0.022
	110...240 ~	All sockets	10	RXM041FU7	0.010/0.022
Varistor	6...24 ~/---	All sockets	10	RXM021RB	0.030/0.066
	24...60 ~/---	All sockets	10	RXM021BN	0.030/0.066
	110...240 ~/---	All sockets	10	RXM021FP	0.030/0.066

Timing relays

Description	For use with	Unit reference	Weight kg/lb
2 or 4 timed CO contacts (function A)	RXZE●●●●● sockets	REXL2●● (2)	—
		REXL4●● (2)	—


(1) When mounting relay RXM2●●●●● on socket RXZE2M●●●●●, the thermal current should not exceed 10 A.
 (2) Please refer to the "Harmony Timer Relays" catalog.



REXL4●●



RXZR315



RXZS2



RXZE2FA



RXZL520



RXZ400



RXZL520


Accessories

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Metal maintaining clamp	All sockets	10	RXZ400	0.001/0.002
Plastic maintaining clamp	All sockets except push-in socket RXZE14P	10	RXZR335	0.005/0.011
	RXZE14P	10	RXZR315	0.004/0.009
2-pole bus jumper (Ith: 5 A)	All screw sockets with separate contacts (RXZE2S●●●●)	10	RXZS2	0.005/0.011
Bus jumper (2-pole jumper)	For input (A2) of RXZE push in sockets (RXZE14P)	10	RSZS02	0.002/0.004
Mounting adapter with panel mounting lugs	RXM2●●●● RXM3●●●●	10	RXZE2FA	0.002/0.004
Clip-in legends	All relays (sheet of 108 legends)	10	RXZL520	0.080/0.176
	RXZE14P	10	RXZL300	0.004/0.009
	All sockets except RXZE2M114	10	RXZL420	0.001/0.002

Harmony Electromechanical Relays

Plug-in relays

782H hermetically sealed relays



Presentation of the range

The hermetically sealed 782H series relays comply with UL Class I Division 2 requirements for use in hazardous locations. They are suitable for installation in harsh, hazardous, and corrosive environments like offshore mining and refineries in the oil and gas, petrochemical, chemical, and mines and minerals sectors.

782H hermetically sealed relays comprise:

- Relays with 3 A/5 A, 2 CO/4 CO contacts
- Sockets with multiple configuration, finger-safe according to IP20, and compatible with DIN rail or panel mounting
- Accessories (protection modules and/or LED indicator)

These relays are available in panel, DIN rail, PCB, and chassis mount versions.


Description

Relay

- 1 Hermetically sealed enclosure
- 2 Flat (Plug-in type) terminal
- 3 Stub to mount in panel


Socket

- 4 There are different types of sockets:
 - DIN rail or panel mount sockets
 - a with screw connector
 - b with screw connector
 - c with screw clamp terminals
 - Other types of terminals
 - d Solder terminals for chassis mount
 - e Printed circuit terminals for PCB mount
- 5 Connection by screw connector
- 6 Location for protection modules
- 7 Solder lug
- 8 PCB pins

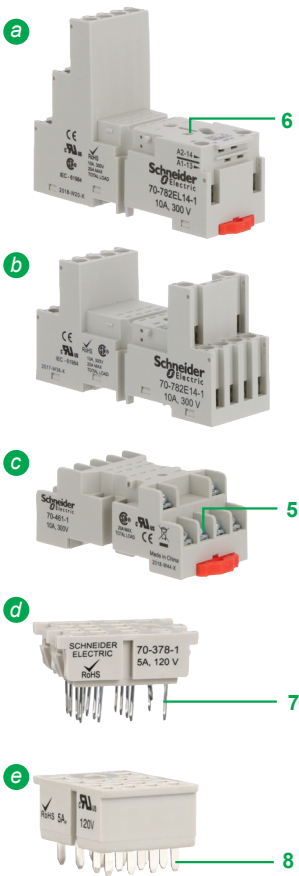



782DXH21-12D




70-782EL14-1



70-782E14-1




70-461-1



70-379-1

70-378-1



70-BSMM-24



70-BSMD-250



70-BSMLG-24



16-1342



RXZS2

Plug-in relays

782H hermetically sealed relays (sold in lots of 10)

Coil voltage V	Contact type - Thermal current (Ith)		4 CO - 5 A		2 CO - 5 A	
	4 CO - 3 A	Weight kg/lb	Unit reference	Weight kg/lb	Unit reference	Weight kg/lb
6 ~	782DXH10-6A	0.045/0.099	-	-	-	-
24 ~	782DXH10-24A	0.045/0.099	-	-	-	-
120 ~	782DXH10-120A	0.045/0.099	782DXH21-120A	0.045/0.099	-	-
240 ~	782DXH10-240A	0.045/0.099	782DXH21-240A	0.045/0.099	-	-
6 ∴	782DXH10-6D	0.045/0.099	-	-	-	-
12 ∴	782DXH10-12D	0.045/0.099	782DXH21-12D	0.045/0.099	-	-
24 ∴	782DXH10-24D	0.045/0.099	782DXH21-24D	0.045/0.099	782XBH21-24D	0.045/0.099
48 ∴	-	-	782DXH21-48D	0.045/0.099	-	-
110 ∴	782DXH10-110D	0.045/0.099	-	-	-	-

Sockets for all 782H relays

Contact terminal arrangement	Connection	Mounting	Unit reference	Sold in lots of	Weight Kg/lb
Mixed	Screw clamp terminals	DIN rail/ Panel	RXZE2M114 (1)	10	0.07/0.154
			70-461-1		0.044/0.097
	Screw connector	RXZE2M114M (1)	0.06/0.132		
Separate	Screw connector	DIN rail/ Panel	RXZE2S114M (1)	10	0.06/0.132
	Solder terminals	Chassis	70-378-1		0.007/0.015
	Printed circuit terminals	PCB	70-379-1		0.007/0.015

Protection modules

Description	For use with sockets	Coil voltage	Unit reference	Sold in lots of	Weight Kg/lb
Diode	70-782EL14-1 , 70-782E14-1	6 to 250 ∴	70-BSMD-250	10	-
MOV suppressor		24 ~	70-BSMM-24	10	-
		120 ~	70-BSMM-120		-
		240 ~	70-BSMM-240		-
LED indicator		24 ~	70-BSMLG-24	10	-

Accessories

Description	For use with sockets	Unit reference	Sold in lots of	Weight Kg/lb
Metal spring clip	All sockets	16-1342	10	-
Plastic ID tag	70-782E14-1 , 70-782EL14-1	RXZL420	10	-
Insulated coil bus jumper system	70-782EL14-1	RXZS2	10	-





(1) 782H relays are:

- UL Recognized when used with **RXZE** sockets
- UL Listed when used with **70-782** sockets

Harmony Electromechanical Relays

Plug-in and DIN rail/Panel mount relays

725 power relays

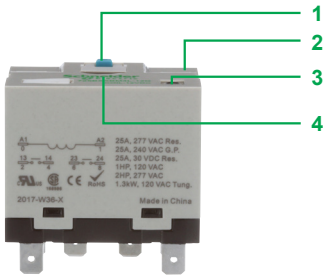

Presentation of the range

The 725 series are power relays offering multiple mounting options for ease of use, enhanced reliability, and robust installation. They are used in high-capacity switching applications such as EV charging, CNC machines, and HVAC compressors.

725 power relays comprise:

- 30 A relays with 1 NO contact and 25 A relays with 2 NO contacts
- Socket for plug-in type version with flat (Faston type) terminals
- Protection modules as accessories (diode, separate LED indicator, RC circuit)

Apart from Plug-in relays with flat (Faston type) terminals, these relays are also available in Panel/DIN rail mount versions with screw type and flat (Faston type) terminals.

Description

Plug-in socket mount power relay


- 1 Spring-return pushbutton for testing the contacts (blue: \square ; red: \sim)
- 2 Mechanical "relay status" indicator
- 3 LED indicating the relay status
- 4 Lock-down door enabling forced maintaining of the contacts for testing purposes

DIN rail/Panel mount power relay

- 5 LED indicating the relay status
- 6 Side-mounted spring-return pushbutton for testing the contacts
- 7 Touch-proof cover (for screw type terminal)

Socket

- 1 Connection by screw connector
- 2 6 female contacts for the relay pins
- 3 Location for protection modules
- 4 Holes for panel mounting
- 5 Spring clip location
- 6 Locating slot for mounting on DIN rail



725AXXBC3ML-12D



725AXXSC3ML-12D



725BXXBM4L-12D



70-725-1



70-ASMD-250



70-ASMM-120



16-725SC-1

Power relays

725 power relays with DIN rail/Panel mounting (sold in lots of 10)

Coil voltage V	Terminal style	Contact type - Thermal current (Ith)		1 NO - 30 A	
		2 NO - 25 A	Weight kg/lb	Unit reference	Weight kg/lb
24 ~	Flat (Faston type)	725BXXBC3ML-24A	0.120/0.265	725AXXBC3ML-24A	0.120/0.265
	Screw terminals	725BXXSC3ML-24A	0.120/0.265	725AXXSC3ML-24A	0.120/0.265
120 ~	Flat (Faston type)	725BXXBC3ML-120A	0.120/0.265	725AXXBC3ML-120A	0.120/0.265
	Screw terminals	725BXXSC3ML-120A	0.120/0.265	725AXXSC3ML-120A	0.120/0.265
240 ~	Flat (Faston type)	725BXXBC3ML-240A	0.120/0.265	725AXXBC3ML-240A	0.120/0.265
	Screw terminals	725BXXSC3ML-240A	0.120/0.265	725AXXSC3ML-240A	0.120/0.265
12 ☐	Flat (Faston type)	725BXXBC3ML-12D	0.120/0.265	725AXXBC3ML-12D	0.120/0.265
	Screw terminals	725BXXSC3ML-12D	0.120/0.265	725AXXSC3ML-12D	0.120/0.265
24 ☐	Flat (Faston type)	725BXXBC3ML-24D	0.120/0.265	725AXXBC3ML-24D	0.120/0.265
	Screw terminals	725BXXSC3ML-24D	0.120/0.265	725AXXSC3ML-24D	0.120/0.265

725 power relays with Plug-in socket mounting (sold in lots of 10)

24 ~	Flat (Faston type)	725BXXBM4L-24A	0.120/0.265	725AXXBM4L-24A	0.120/0.265
120 ~	Flat (Faston type)	725BXXBM4L-120A	0.120/0.265	725AXXBM4L-120A	0.120/0.265
240 ~	Flat (Faston type)	725BXXBM4L-240A	0.120/0.265	725AXXBM4L-240A	0.120/0.265
12 ☐	Flat (Faston type)	725BXXBM4L-12D	0.120/0.265	725AXXBM4L-12D	0.120/0.265
24 ☐	Flat (Faston type)	725BXXBM4L-24D	0.120/0.265	725AXXBM4L-24D	0.120/0.265

Socket


Contact terminal arrangement	Connection	Sold in lots of	Relay type	Unit reference	Weight Kg/lb
Separate	Screw connector	10	725 relays with Plug-in socket mount cover	70-725-1	0.055/0.121

Socket modules

Description	For use with sockets	Sold in lots of	Coil voltage V	Unit reference	Weight Kg/lb
Diode	70-725-1	10	6 to 250 ☐	70-ASMD-250	-
MOV suppressor			24 ~ 120 ~ 240 ~	70-ASMM-24 70-ASMM-120 70-ASMM-240	-

Socket accessories


Description	For use with sockets	Sold in lots of	Unit reference	Weight Kg/lb
Spring clip	70-725-1	10	16-725SC-1	-

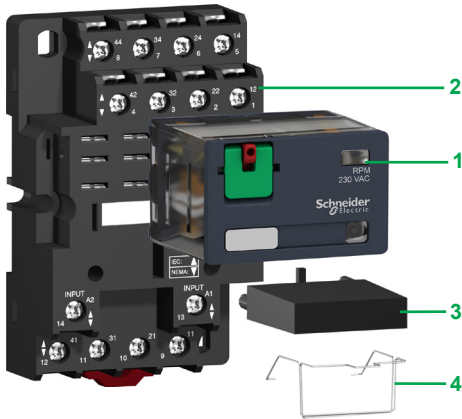

Presentation of the range



The RPM power relay range comprises:

- 1 15 A relay with 1, 2, 3, and 4 CO contacts
- 2 Sockets with mixed contact terminals
- 3 Protection modules (diode, RC circuit, or varistor) or 1 timer module (these protection modules are common to all sockets except for the timer module, which can be used on 3-pole or 4-pole sockets only)
- 4 Metal maintaining clamp for 1 and 2 CO contact relays



Relay description

- 1 Spring-return pushbutton for testing the contacts (blue: \equiv , red: \sim)
- 2 Mechanical "relay status" indicator
- 3 Removable lock-down door enabling forced maintaining of the contacts for test sequences or maintenance purposes
- 4 LED (depending on version) indicating the relay status
- 5 Removable legend for relay identification
- 6 4 notches for rail mounting adapter or panel mounting adapter with mounting lugs
- 7 5, 8, 11, or 14 Faston type pins
- 8 Area by which the product can be easily gripped
- 9 Mounting adapter enabling direct mounting of the relay on a panel
- 10 Mounting adapter enabling direct mounting of the relay on a 5 rail

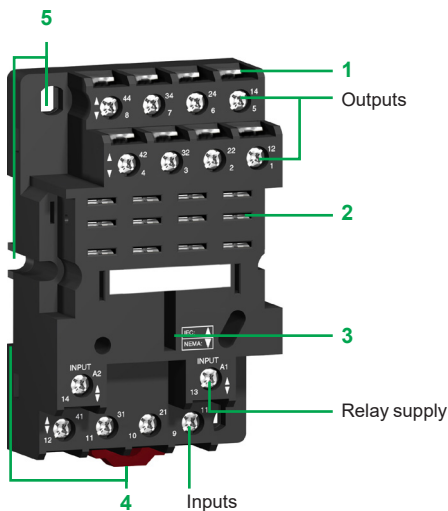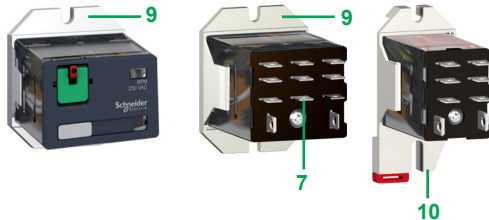

Socket description

Sockets with mixed contact terminals (1)

- 1 Connection by screw clamp terminals
- 2 5, 8, 11, or 14 female contacts for the relay pins
- 3 Location for protection modules or the timer module
- 4 Locating slot for mounting on rail with mounting clip
- 5 2 or 4 holes for panel mounting

(1) The inputs are mixed with the relay supply, with the outputs being located on the opposite side of the socket.

Power relays for customer assembly

Power relays without LED (sold in lots of 10)

Control circuit voltage V	1 CO - 15 A		2 CO - 15 A		3 CO - 15 A		4 CO - 15 A	
	Unit reference	Weight kg/lb	Unit reference	Weight kg/lb	Unit reference	Weight kg/lb	Unit reference	Weight kg/lb
12 ---	RPM11JD	0.026/0.057	RPM21JD	0.036/0.079	RPM31JD	0.054/0.119	RPM41JD	0.071/0.157
24 ---	RPM11BD	0.026/0.057	RPM21BD	0.036/0.079	RPM31BD	0.054/0.119	RPM41BD	0.071/0.157
48 ---	RPM11ED	0.026/0.057	RPM21ED	0.036/0.079	RPM31ED	0.054/0.119	RPM41ED	0.071/0.157
110 ---	RPM11FD	0.026/0.057	RPM21FD	0.036/0.079	RPM31FD	0.054/0.119	RPM41FD	0.071/0.157
24 ~	RPM11B7	0.026/0.057	RPM21B7	0.036/0.079	RPM31B7	0.054/0.119	RPM41B7	0.071/0.157
48 ~	RPM11E7	0.026/0.057	RPM21E7	0.036/0.079	RPM31E7	0.054/0.119	RPM41E7	0.071/0.157
120 ~	RPM11F7	0.026/0.057	RPM21F7	0.036/0.079	RPM31F7	0.054/0.119	RPM41F7	0.071/0.157
230 ~	RPM11P7	0.026/0.057	RPM21P7	0.036/0.079	RPM31P7	0.054/0.119	RPM41P7	0.071/0.157

Power relays with LED (sold in lots of 10)


12 ---	RPM12JD	0.026/0.057	RPM22JD	0.036/0.079	RPM32JD	0.054/0.119	RPM42JD	0.071/0.157
24 ---	RPM12BD	0.026/0.057	RPM22BD	0.036/0.079	RPM32BD	0.054/0.119	RPM42BD	0.071/0.157
48 ---	RPM12ED	0.026/0.057	RPM22ED	0.036/0.079	RPM32ED	0.054/0.119	RPM42ED	0.071/0.157
110 ---	—	—	RPM22FD	0.036/0.079	—	—	RPM42FD	0.071/0.157
24 ~	RPM12B7	0.026/0.057	RPM22B7	0.036/0.079	RPM32B7	0.054/0.119	RPM42B7	0.071/0.157
48 ~	RPM12E7	0.026/0.057	RPM22E7	0.036/0.079	RPM32E7	0.054/0.119	RPM42E7	0.071/0.157
120 ~	RPM12F7	0.026/0.057	RPM22F7	0.036/0.079	RPM32F7	0.054/0.119	RPM42F7	0.071/0.157
230 ~	RPM12P7	0.026/0.057	RPM22P7	0.036/0.079	RPM32P7	0.054/0.119	RPM42P7	0.071/0.157



RPM41BD




RPM41P7




RPM42BD



RPM42P7



RPZF4 + Relay RPM42P7



RUW24

Sockets

Contact terminal arrangement	Connection	Relay type	Sold in lots of	Unit reference	Weight kg/lb
Mixed	Screw clamp terminals	RPM1●●●	10	RPZF1	0.042/0.093
		RPM2●●●	10	RPZF2	0.054/0.119
		RPM3●●●	10	RPZF3	0.072/0.159
		RPM4●●●	10	RPZF4	0.094/0.207

Protection modules

Description	Voltage V	Socket type	Sold in lots of	Unit reference	Weight kg/lb	
Diode	6...250 ---	RPZF1	10	RXM040W	0.003/0.007	
		RPZF2		RUX240BD		
		RPZF3	10	RUW240BD	0.004/0.009	
		RPZF4				
RC circuit	24...60 ~	RPZF1	10	RXM041BN7	0.010/0.022	
		RPZF2				
	110...240 ~	RPZF1	10	RXM041FU7	0.010/0.022	
		RPZF2				
	Varistor	6...24 ~/-	RPZF1	10	RXM021RB	0.030/0.066
			RPZF2			
24...60 ~/-		RPZF1	10	RXM021BN	0.030/0.066	
		RPZF2				
110...240 ~/-	RPZF1	10	RXM021FP	0.030/0.066		
	RPZF2					
24 ~/-	24 ~/-	RPZF3	10	RUW242B7	0.004/0.009	
		RPZF4				
240 ~/-	240 ~/-	RPZF3	10	RUW242P7	0.004/0.009	
		RPZF4				

Timer module (1)

Description	Voltage V	Socket type	Reference	Weight kg/lb
Multifunction	24... 240 ~/-	RPZF3 RPZF4	RUW101MW	0.020/0.044

(1) See timer module description (selection of functions and time delays) on www.se.com/harmonyelectromechanicalrelays.

Accessories

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Metal maintaining clamp	RPZF1	10	RPZR235	0.001/0.002
	RPZF2	10	16-1342	0.001/0.002
Mounting adapters for \perp rail (1)	RPM4●●●	10	RPZ4DA	0.006/0.013
Mounting adapters with panel mounting lugs	RPM1●●●	10	RPZ1FA	0.002/0.004
	RPM2●●●	10	RXZE2FA	0.002/0.004
	RPM3●●●	10	RPZ3FA	0.003/0.007
Clip-in legends (sheet of 108 legends)	All relays	10	RXZL520	0.080/0.176
Clip-in legends (sheet of 16 legends)	All relays	10	RGZL520	0.080/0.176

(1) Test button becomes inaccessible.

PF 120922



RPZ4DA

PF 120923




RPZ1FA



Presentation of the range


The RUM universal relay range comprises:

- 1 10 A relays with 2 and 3 CO contacts, and cylindrical or flat (Faston type) pins (all these relays have the same dimensions)
- 2 Sockets with mixed or separate contact terminals
- 3 Protection modules (diode, RC circuit, or varistor) or 1 timer module, common to all RUM sockets
- 4 Metal maintaining clamp for all RUM sockets
- 5 2-pole bus jumper that can be used on sockets with separate contact terminals in order to simplify cabling when creating an equipotential link between the coil terminals
- 6 Clip-in legends for the sockets

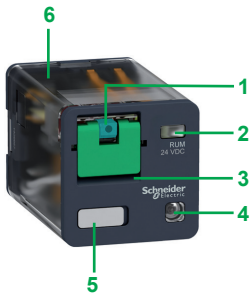


Relay description

- 1 Spring-return pushbutton for testing the contacts (blue: --- , red: \sim)
- 2 Mechanical "relay status" indicator
- 3 Removable lock-down door enabling forced maintaining of the contacts for test sequences or maintenance purposes (1)
- 4 LED (depending on version) indicating the relay status
- 5 Removable legend for relay identification
- 6 Area by which the product can be easily gripped
- 7 8 or 11 cylindrical pins
- 8 8 or 11 flat (Faston type) pins




(1) During operation, this lock-down door must always be in the closed position.

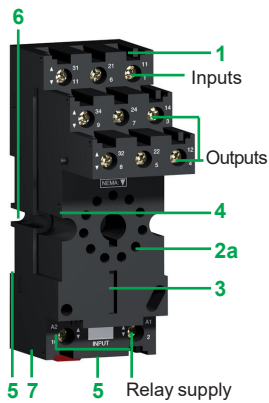

Socket description


Sockets with separate contact terminals (1)

- 1 Connection by screw connector
- 2a 8 or 11 female contacts for the relay cylindrical pins
- 2b 11 female contacts for the relay flat pins
- 3 Location for protection modules or the timer module
- 4 Locking component for metal maintaining clamp
- 5 Locating slot for mounting on DIN rail with mounting clip
- 6 2 holes for panel mounting
- 7 Location for bus jumpers (see dimensions for mounting on sockets on www.se.com/harmonyelectromechanicalrelays)

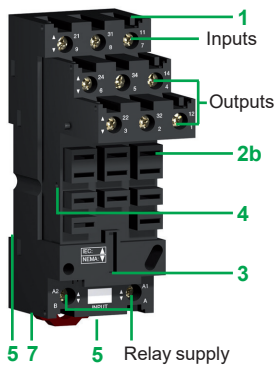

Sockets with mixed contact terminals

- 1 Connection by screw connector
- 2 8 or 11 female contacts for the relay cylindrical pins
- 3 Location for protection modules or the timer module
- 4 Locking component for metal maintaining clamp
- 5 A locating slot for mounting on DIN rail
- 6 2 holes for panel mounting

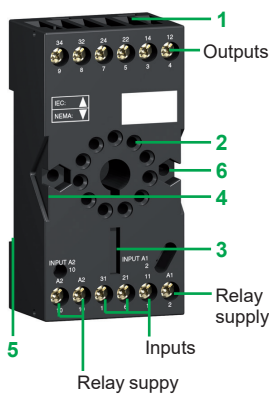

(1) The inputs and outputs are separate from the relay supply.

PF-140700C



RUMC21BD

PF-140728B



RUMC21F7

PF-140700C



RUMC32BD

PF-140735



RUMF32F7

Universal relays for customer assembly

Relays for standard applications, with lockable test button and without LED (sold in lots of 10)

Pins	Control circuit voltage V	Number and type of contacts - Thermal current (Ith)			
		2 CO - 10 A		3 CO - 10 A	
		Unit reference	Weight kg/lb	Unit reference	Weight kg/lb
Cylindrical	12 ---	RUMC21JD	0.086/0.190	RUMC31JD	0.086/0.190
	24 ---	RUMC21BD	0.086/0.190	RUMC31BD	0.086/0.190
	48 ---	-	-	RUMC31ED	0.086/0.190
	60 ---	-	-	RUMC31ND	0.086/0.190
	110 ---	RUMC21FD	0.086/0.190	RUMC31FD	0.086/0.190
	125 ---	-	-	RUMC31GD	0.086/0.190
	220 ---	-	-	RUMC31MD	0.086/0.190
	24 ~	RUMC21B7	0.086/0.190	RUMC31B7	0.086/0.190
	48 ~	-	-	RUMC31E7	0.086/0.190
	120 ~	RUMC21F7	0.086/0.190	RUMC31F7	0.086/0.190
	230 ~	RUMC21P7	0.086/0.190	RUMC31P7	0.086/0.190
	Flat (Faston type)	12 ---	RUMF21JD	0.086/0.190	RUMF31JD
24 ---		RUMF21BD	0.086/0.190	RUMF31BD	0.086/0.190
48 ---		RUMF21ED	0.086/0.190	RUMF31ED	0.086/0.190
110 ---		RUMF21FD	0.086/0.190	RUMF31FD	0.086/0.190
24 ~		RUMF21B7	0.086/0.190	RUMF31B7	0.086/0.190
48 ~		RUMF21E7	0.086/0.190	RUMF31E7	0.086/0.190
120 ~		RUMF21F7	0.086/0.190	RUMF31F7	0.086/0.190

Relays for standard applications, with lockable test button and LED (sold in lots of 10)

Cylindrical	12 ---	RUMC22JD	0.086/0.190	RUMC32JD	0.086/0.190	
	24 ---	RUMC22BD	0.086/0.190	RUMC32BD	0.086/0.190	
	48 ---	RUMC22ED	0.086/0.190	RUMC32ED	0.086/0.190	
	110 ---	RUMC22FD	0.086/0.190	RUMC32FD	0.086/0.190	
	125 ---	-	-	RUMC32GD	0.086/0.190	
	24 ~	RUMC22B7	0.086/0.190	RUMC32B7	0.086/0.190	
	48 ~	RUMC22E7	0.086/0.190	RUMC32E7	0.086/0.190	
	120 ~	RUMC22F7	0.086/0.190	RUMC32F7	0.086/0.190	
	230 ~	RUMC22P7	0.086/0.190	RUMC32P7	0.086/0.190	
	Flat (Faston type)	12 ---	RUMF22JD	0.086/0.190	RUMF32JD	0.086/0.190
		24 ---	RUMF22BD	0.086/0.190	RUMF32BD	0.086/0.190
		110 ---	-	0.086/0.190	RUMF32FD	0.086/0.190
24 ~		RUMF22B7	0.086/0.190	RUMF32B7	0.086/0.190	
120 ~		RUMF22F7	0.086/0.190	RUMF32F7	0.086/0.190	
230 ~		RUMF22P7	0.086/0.190	RUMF32P7	0.086/0.190	

(1) The inputs are mixed with the relay supply, with the outputs being located on the opposite side of the socket.

PF1407338



RUZSC3M +
Relay RUMC3●●●

PF108027



RUW241P7

PF516229



RUW101MW

DF538485



RUZC200

DF535203



RUZS2

Sockets

Contact terminal arrangement	Connection	Relay type	Sold in lots of	Unit reference	Weight kg/lb
Mixed	Screw connector	RUMC2●●●	10	RUZC2M	0.054/0.119
		RUMC3●●●		RUZC3M	0.054/0.119
Separate	Screw connector	RUMC2●●●	10	RUZSC2M	0.095/0.209
		RUMC3●●●		RUZSC3M	0.100/0.220
		RUMF2●●●		RUZSF3M	0.095/0.209
		RUMF3●●●			

Protection modules

Description	For use with	Voltage V	Sold in lots of	Unit reference	Weight kg/lb
Diode	All RUM sockets	6...250 $\overline{\text{---}}$	10	RUW240BD	0.004/0.009
RC circuit	All RUM sockets	110...240 \sim		RUW241P7	0.004/0.009
Varistor	All RUM sockets	24 $\sim/\overline{\text{---}}$		RUW242B7	0.004/0.009
		240 $\sim/\overline{\text{---}}$		RUW242P7	0.004/0.009

Timer module

Description	For use with	Voltage V	Sold in lots of	Reference	Weight kg/lb
Multifunction	All RUM sockets	24... 240 $\sim/\overline{\text{---}}$	1	RUW101MW	0.020/0.044


Timing relays

Description	For use with	Reference	Weight kg/lb
2 timed CO contacts (single-function or multifunction)	RUZC●M sockets	RE48A●● (1)	–

Accessories

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Metal maintaining clamp	All RUM sockets	10	RUZC200	0.001/0.002
2-pole bus jumper (Ith: 5 A)	All RUM sockets with separate contacts	10	RUZS2	0.005/0.011
Clip-in legends	All relays (sheet of 108 legends)	10	RXZL520	0.086/0.190
	All RUM sockets with separate contacts	10	RUZL420	0.001/0.002

(1) Please refer to "Harmony Timer Relays" catalog.

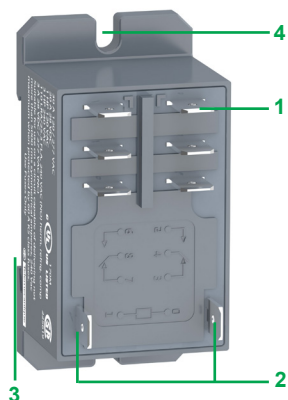

Presentation of the range

RPF power relays with 2 CO or 2 NO contacts comprise:

- 1 4 or 6 Faston type pins
- 2 2 relay supply pins
- 3 Locating slot for mounting on DIN rail
- 4 2 holes for panel mounting

Harmony Electromechanical Relays

Relays with clamp mounting

RPF power relays

RPF20361C



RPF2A●●

Power relays				
Control circuit voltage V	Sold in lots of	Number and type of contacts - Thermal current (Ith)		Weight kg/lb
		2 NO - 30 A (1) Unit reference	2 CO - 30 A (1) Unit reference	
12 \equiv	10	RPF2AJD	RPF2BJD	0.082/0.181
24 \equiv	10	RPF2ABD	RPF2BBD	0.082/0.181
24 \sim	10	RPF2AB7	RPF2BB7	0.082/0.181
120 \sim	10	RPF2AF7	RPF2BF7	0.082/0.181
230 \sim	10	RPF2AP7	RPF2BP7	0.082/0.181

(1) 30 A when mounted with 13 mm (0.51 in.) gap between two relays and 25 A when mounted side by side without a gap.

Harmony Electromechanical Relays

Interface, miniature and power electromechanical relays

Relays			
Contact types			
Symbol	Configuration	EU	USA
	Make contact (Normally Open)	NO	SPST-NO DPST-NO nPST-NO (1)
	Break contact (Normally Closed)	NC	SPST-NC DPST-NC nPST-NC (1)
	Changeover Contact	CO	SPDT DPDT nPDT (1)

Utilization categories		
Category	Type of current	Applications
AC-1	~ 1-phase ~ 3-phase	Resistive or slightly inductive loads
AC-3	~ 3-phase	Starting and braking of squirrel cage motors; reversing direction of rotation only after stopping of motor
AC-4	~ 3-phase	Starting of squirrel cage motors, inching; plugging, reversing direction of rotation
DC-1	---	Resistive or slightly inductive loads (2)
AC-14	~ 1-phase	Control of electromagnetic loads (< 72 VA), auxiliary control relays, power contactors, electromagnetic solenoid valves, and electromagnets
AC-15	~ 1-phase	Control of electromagnetic loads (> 72 VA), auxiliary control relays, power contactors, electromagnetic solenoid valves, and electromagnets
DC-13	---	Control of electromagnetic loads, auxiliary control relays, power contactors, magnetic solenoid valves, and electromagnets

Protection categories		
Category	Explanation	Condition
RT 0	Unenclosed relay	Relay not provided with a protective case
RT I	Dust protected relay	Relay provided with a case that helps to protect its mechanism from dust
RT II	Flux-proof relay	Relay capable of being automatically soldered without allowing the migration of solder fluxes beyond the intended areas
RT III	Wash-tight relay	Relay capable of being automatically soldered and then washed to remove flux residues and minimize the possibility of ingress of flux or washing solvents
RT IV	Sealed relay	Relay provided with a case that has no venting to the outside atmosphere
RT V	Hermetically sealed relay	Sealed relay with an enhanced level of sealing

(1) n = number of contacts.

(2) The switchable voltage can be doubled, for an equal current, by connecting 2 contacts in series.

Protection modules

Whenever an inductive load is de-energized (coil of a relay or of a contactor), an overvoltage appears at its terminals. This voltage peak can reach several thousand volts and a frequency of several MHz.

It is likely to disturb the operation of automation systems that contain electronic devices.

Protection modules are used to reduce the voltage peak on de-energization and therefore limit the energy of interference signals to a level that will not disturb surrounding coils and electronic devices.

These modules are used to help reduce the risk of:

- electromagnetic compatibility problems
- deterioration of contact materials
- damage to insulation due to overvoltage
- damage to electronic components

Diode protection module (with or without LED)

Advantages

- accumulation of energy allowing current to flow in the same direction
- absence of any voltage peaks at the coil terminals
- low cost

Disadvantages

- increase in relay drop-out time (3 to 4 times the usual time)
- no polarity protection
- de-energization of the relay

Protection module with varistor

Advantages

- can be used with \sim and --- supply
- voltage peak limited to about $2 U_n$
- little effect on relay drop-out time

Disadvantages

- no modification of coil's own oscillating frequency
- limitation of switching frequency


Protection module with RC circuit

Advantages


- coil oscillating frequency reduced to about 150 Hz
- voltage peak limited to $3 U_n$
- little effect on relay drop-out time

Disadvantages


- no protection for low voltages

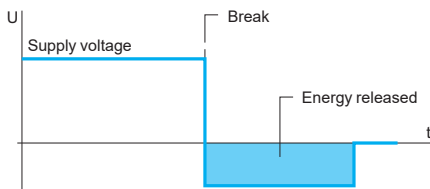

Coil voltage with diode protection module (--- only)

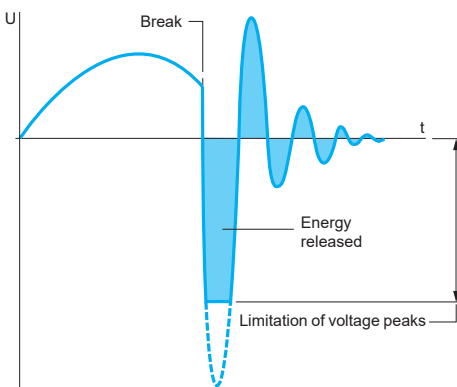

Coil voltage with varistor protection module (\sim and ---)

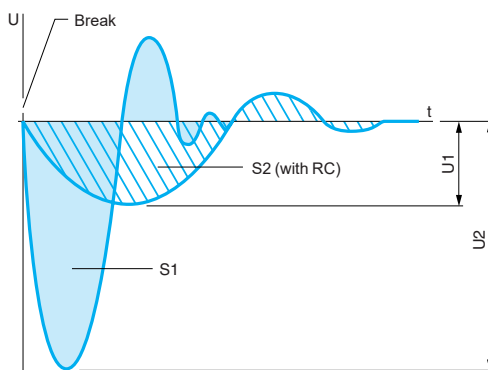

S1 = S2 = Energy released

Coil voltage with RC circuit protection module (\sim only)

RUZS2	37	RXG22P7PV	17	RXM3AB2BD	23	RXZE2FA	33
RUZSC2M	37	RXG22P7PVP	17	RXM3AB2E7	23	RXZE2M114	24
RUZSC3M	37	RXG23B7	18	RXM3AB2F7	23		27
RUZSF3M	37	RXG23BD	18	RXM3AB2FD	23	RXZE2M114M	24
RXG11B7	18	RXG23BDPV	17	RXM3AB2JD	23		27
RXG11BD	18	RXG23BDPVP	17	RXM3AB2P7	23	RXZE2S108M	24
RXG11F7	18	RXG23E7	18	RXM4AB1B7	23	RXZE2S111M	24
RXG11P7	18	RXG23F7	18	RXM4AB1B7PVM	22	RXZE2S114M	24
RXG12B7	18	RXG23M7	18	RXM4AB1B7PVP	22		27
RXG12B7PV	17	RXG23P7	18	RXM4AB1B7PVS	22	RXZL300	25
RXG12B7PVP	17	RXG23P7PV	17	RXM4AB1BD	23	RXZL420	25
RXG12BD	18	RXG23P7PVP	17	RXM4AB1BDPVM	22		27
RXG12BDPV	17	RXG26BD	18	RXM4AB1BDPVP	22	RXZL520	25
RXG12BDPVP	17	RXG26P7	18	RXM4AB1BDPVS	22		33
RXG12E7	18	RXG28BD	18	RXM4AB1E7	23		37
RXG12ED	18	RXG28P7	18	RXM4AB1ED	23	RXZR315	25
RXG12F7	18	RXM021BN	24	RXM4AB1F7	23	RXZR335	25
RXG12FD	18		32	RXM4AB1FD	23	RXZS2	27
RXG12JD	18	RXM021FP	24	RXM4AB1JD	23	RXZS2	25
RXG12P7	18		32	RXM4AB1MD	23	RZM021BN	14
RXG12P7PV	17	RXM021RB	24	RXM4AB1P7	23		19
RXG12P7PVP	17		32	RXM4AB1P7PVM	22	RZM021FP	14
RXG12RD	18	RXM040W	24	RXM4AB1P7PVP	22		19
RXG13B7	18		32	RXM4AB1P7PVS	22	RZM021RB	14
RXG13BD	18	RXM041BN7	24	RXM4AB1U7	23		19
RXG13BDPV	17	RXM041BN7	32	RXM4AB2B7	23	RZM031BN	14
RXG13BDPVP	17	RXM041FU7	24	RXM4AB2B7PVM	22		19
RXG13F7	18		32	RXM4AB2B7PVP	22	RZM031FPD	14
RXG13JD	18	RXM2AB1B7	23	RXM4AB2B7PVS	22		19
RXG13P7	18	RXM2AB1BD	23	RXM4AB2BD	23	RZM031RB	14
RXG13P7PV	17	RXM2AB1E7	23	RXM4AB2BDPVM	22		19
RXG13P7PVP	17	RXM2AB1ED	23	RXM4AB2BDPVP	22	RZM040W	14
RXG16BD	18	RXM2AB1F7	23	RXM4AB2BDPVS	22		19
RXG16P7	18	RXM2AB1FD	23	RXM4AB2E7	23	RZM041BN7	14
RXG18BD	18	RXM2AB1JD	23	RXM4AB2ED	23		19
RXG18P7	18	RXM2AB1P7	23	RXM4AB2F7	23	RZM041FU7	14
RXG21B7	18	RXM2AB2B7	23	RXM4AB2FD	23		19
RXG21B7PV	17	RXM2AB2B7PVM	22	RXM4AB2GD	23		
RXG21B7PVP	17	RXM2AB2B7PVP	22	RXM4AB2JD	23		
RXG21BD	18	RXM2AB2B7PVS	22	RXM4AB2P7	23		
RXG21BDPV	17	RXM2AB2BD	23	RXM4AB2P7PVM	22		
RXG21BDPVP	17	RXM2AB2BDPVM	22	RXM4AB2P7PVP	22		
RXG21E7	18	RXM2AB2BDPVP	22	RXM4AB2P7PVS	22		
RXG21F7	18	RXM2AB2BDPVS	22	RXM4GB1B7	23		
RXG21JD	18	RXM2AB2E7	23	RXM4GB1BD	23		
RXG21P7	18	RXM2AB2ED	23	RXM4GB1E7	23		
RXG21P7PV	17	RXM2AB2F7	23	RXM4GB1F7	23		
RXG21P7PVP	17	RXM2AB2FD	23	RXM4GB1JD	23		
RXG21RD	18	RXM2AB2JD	23	RXM4GB1P7	23		
RXG22B7	18	RXM2AB2P7	23	RXM4GB2B7	23		
RXG22B7PV	17	RXM2AB2P7PVM	22	RXM4GB2BD	23		
RXG22B7PVP	17	RXM2AB2P7PVP	22	RXM4GB2E7	23		
RXG22BD	18	RXM2AB2P7PVS	22	RXM4GB2ED	23		
RXG22BDPV	17	RXM3AB1B7	23	RXM4GB2F7	23		
RXG22BDPVP	17	RXM3AB1BD	23	RXM4GB2GD	23		
RXG22E7	18	RXM3AB1E7	23	RXM4GB2JD	23		
RXG22ED	18	RXM3AB1ED	23	RXM4GB2MD	23		
RXG22F7	18	RXM3AB1F7	23	RXM4GB2P7	23		
RXG22FD	18	RXM3AB1FD	23	RXM4GB2U7	23		
RXG22JD	18	RXM3AB1JD	23	RXZ400	25		
RXG22M7	18	RXM3AB1P7	23	RXZE14P	24		
RXG22P7	18	RXM3AB2B7	23	RXZE2FA	25		

mySchneider, your personalized digital experience

Access an all-in-one customized online experience and benefit from tailored business services, resources, and tools to efficiently support your business operations.

- **Efficiency:** In just a few clicks, find all the information and support you need to get the job done.
- **Simplicity:** Use a single login to access all business services, in one place, available 24/7. You no longer need to log in to multiple platforms.
- **Personalization:** Benefit from content, tools, and business services tailored to your activity, and customize your landing page based on your preferences.

Watch the How-to Videos



Order management

- > [Select Products and Add to Cart](#)
- > [Check for Products' Price and Availability](#)
- > [Order Products with Generic Commercial References](#)




Product information

- > [Find a Product Data Sheet and Related Documents](#)
- > [Select Products and Add to Cart](#)
- > [Stay Up to Date on the Status of My Products](#)



Support

- > [Get Quicker Answers Thanks to Online Support](#)

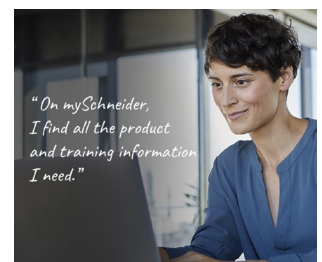

Training

- > [Access Trainings Dedicated to My Activity](#)

[Create your account](#)

Life Is 

Schneider
Electric

Legal information

The information provided in this Catalog contains description of Schneider Electric products, solutions and services ("Offer") with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any type of damages arising out of or in connection with (i) informational content of this Catalog not conforming with or exceeding the technical specifications, or (ii) any error contained in this Catalog, or (iii) any use, decision, act or omission made or taken on basis of or in reliance on any information contained or referred to in this Catalog.


SCHNEIDER ELECTRIC MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOG OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS AND SERVICES WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.

Schneider Electric brand and any trademarks of Schneider Electric and its subsidiaries referred to in this Catalog are property of Schneider Electric or its subsidiaries. All other brands are trademarks of their respective owners.

This Catalog and its content are protected under applicable copyright laws and provided for informative use only. No part of this Catalog may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Copyright, intellectual, and all other proprietary rights in the content of this Catalog (including but not limited to software, audio, video, text, and photographs) rests with Schneider Electric or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.

Life Is On



Learn more about our products at
www.se.com/automationrelays

Design: Schneider Electric
Photos: Schneider Electric

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier - CS 30323
F-92500 Rueil-Malmaison Cedex
France

DIA5ED2130303EN
May 2025 - V8.0