For more information on Arc Flash Protection, see page 2656.

SALISBURY by Honeywell

Electrical Protection Equipment

 Meet ASTM standard Class 3 Type II ozone-resistant rubber remains flexible in cold weather. Safety orange color.

INSULATING BLANKETS AND ACCESSORIES

Fabric-reinforced Type II ozone-resistant Salcor® rubber is flexible and customizable.

-Clear PVC Roll Blanket No. 5EU29 allows visibility of insulated surfaces.

- Nos. 3KWU9 and 3GY62 meet ASTM F2320-03 standard Class 0
- No. 5EU29 meets ASTM F1742 standard Class 1

Low-Voltage—Feature hook-and-loop fasteners for fast installation and safe removal. Yellow color.

■ Meet ASTM D1048 standard Class 0

Eyelet Style-Reinforced beaded edges for added strength and tear resistance. Designed to be easily secured using Clamp Pin No. 5ZV99 (sold separately). Safety orange color.

■ Meets ASTM D1048 standard Class 4

Slotted Style—Designed for flexibility in special cover-up situations. Use where protruded objects interfere with proper placement of other cover-up devices.

Meet ASTM D1048 standard Class 4

Magnetic Blanket Button—Apply with shotgun stick or rubber gloves to eyelets of insulating blankets

Blanket Clamp Pin—Holds insulating blankets in place.

Blanket Canisters—Molded, high-impact orange polyethylene canisters protect insulating blankets in storage.

ARC PROTECTION BLANKETS

■ Meet ASTM F2676 standard

Provide barrier protection from exposure to explosive electrical arcs and flashes. Nos. 5YGL0 and 5YGL2 include loops for keeping blanket in place; Nos. 5YGL1 and 5YGL3 include grommets. Not electrically insulating.

GROUNDING SETS AND ACCESSORIES

Easy to apply multiple grounding jumpers. Recommended for 3-phase Wye systems. Storage Bag No. 5ZV85 available separately.

VOLTAGE DETECTOR KITS

Audio/visual indicator verifies live or de-energized conductors and equipment. Operate on 3 C cell batteries. Case and shotgun adapter included.

HOT SWITCH STICKS AND ACCESSORIES

■ Meet ASTM F711 standard

Closed cell foam-filled tubular fiberglass.

Storage Container—Tubular weathertight PVC container includes 2 mounting brackets and 4 bolts.

SWITCHBOARD MATTING

■ Meets ASTM D178 standard Class 2 Type II. 1/4"-thick corrugated rubber for protection in front of switchgears, motor control centers, and other high-voltage apparatus.



Eyelet Style Insulating Blanket



Magnetic **Blanket Button**

SALISBURY



Arc Protection Blanket



Rianket


Clamp Pin

Blanket Caniste







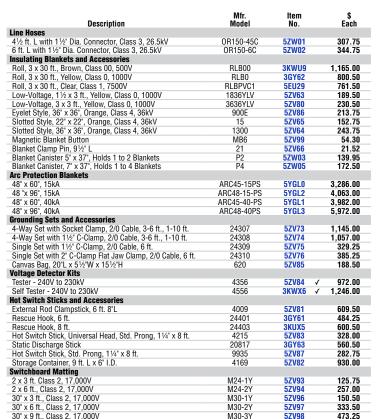

Static Discharge

Stick