

# PIR WALL SWITCH VACANCY SENSOR

CS-50

Manual-on/automatic-off control

LED status indicator



Adjustable time delay

Two-wire sensor; no neutral connection

## DESCRIPTION

The CS-50 Passive Infrared (PIR) Vacancy Sensor provides automatic shutoff for single-pole lighting control applications. It is engineered to comply with specific provisions of California's Title 24-2013 energy code.

## OPERATION

The CS-50 operates as a manual-on sensor. Users must press the pushbutton to turn on lighting. The CS-50 employs PIR technology to sense the difference between the infrared energy from a person in motion and the background space. It keeps lighting on as long as motion is detected and provides automatic shutoff, following a user-selected time delay, when motion is no longer detected. Users may turn the lighting off manually.

## ADJUSTABLE TIME DELAY

The CS-50 is shipped preset for a 30 minute time delay, and does not require any adjustment after installation. If desired, the time delay may be easily reduced to 25, 20, 15, 10 or 5 minutes or to 30 seconds. The time delay should be set relative to the anticipated duration of stay and level of activity in the room; 30 minutes for guest room and executive restroom, and 5 to 10 minutes for pantries and laundry rooms.

## APPLICATIONS

The CS-50 is ideal for many residential and light commercial applications where the switch location has an unobstructed line of sight of the room. It does not require a neutral wire in the switch box and may be used to switch lighting or fan motors.

## FEATURES

- Replaces single-pole switches
- Adjustable time delay, 30 seconds to 30 minutes
- If enabled, status indicator blinks when motion is detected
- Low-profile styling
- Operates most common types of lighting or fan motors
- Relay-based switching
- No current leakage to load in off mode for safety
- Compatible with decorator wall plates
- CA Title 24 compliant


PROJECT

LOCATION/  
TYPE

## SPECIFICATIONS


- 120 VAC, 60 Hz
- Load ratings: 0-600W incandescent, LED, fluorescent, compact fluorescent (CFL), magnetic low voltage (MLV) or electronic low voltage (ELV) or 1/6 hp motor
- Time delay settings: 30 seconds, 5, 10, 15, 20, 25, 30 minutes
- PIR coverage: 180°, 600 ft<sup>2</sup> (56 m<sup>2</sup>)
- LED to indicate motion detection
- 2.67" x 1.73" x 1.77" (68mm x 44mm x 45mm) L x W x D
- Operating conditions: 32-131°F (0-55°C), 95% RH, non-condensing; for indoor use only
- UL and cUL listed
- Five year warranty

## INSTALLATION & WIRING

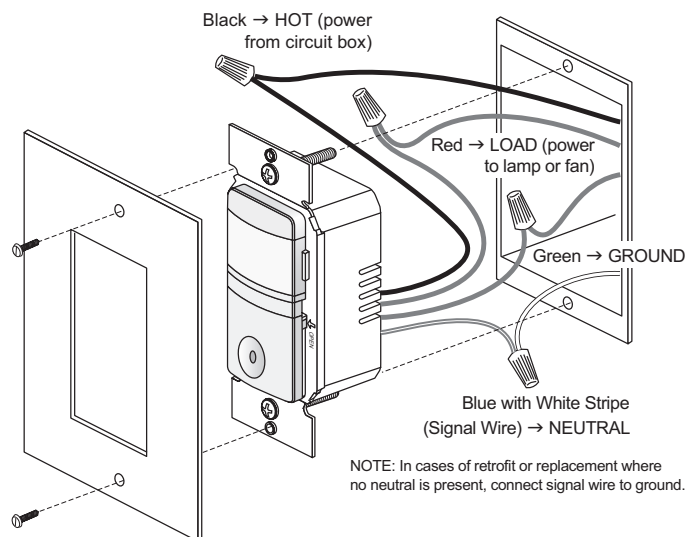


## ADJUSTMENTS & COVERAGE

### Accessing Adjustments

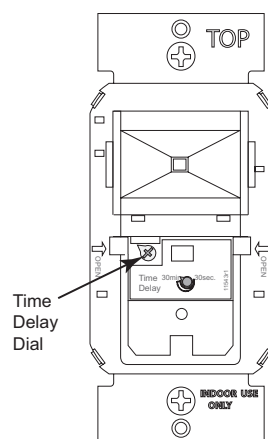

Adjustment controls are located behind the front cover of the unit and are clearly labeled.

### Coverage Pattern

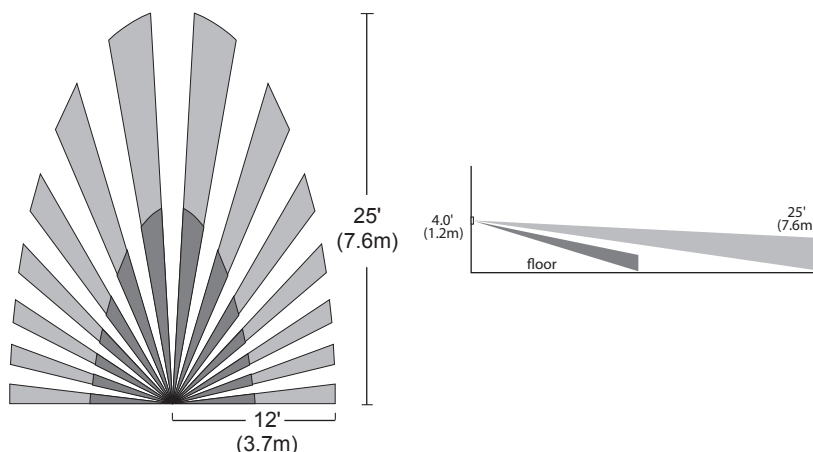

## ORDERING INFORMATION

Catalog #	Color	Description	Voltage	Load Rating	Coverage
<input type="checkbox"/> CS-50-W	White	PIR Wall Switch Vacancy Sensor	120 VAC, 60 Hz	0-600W incandescent, LED, fluorescent, CFL, MLV, ELV or 1/6 hp motor	180°, max. 600 ft <sup>2</sup> (56m <sup>2</sup> )

Order wall plate separately.

30691r3 Rev 05/2024