

Premier and value series

Ark-Gard premier series:

- The premier line of ENR receptacles (M4) come equipped with exclusive features that increase the life of the product, reduce maintenance costs and eliminate the need to purchase costly replacement parts. There is no other product offering on the market today that comes equipped with time saving saddle clamp terminals or the added safety of a lockout/tagout hole. The premier ENR receptacle series is the ideal solution for applications where increased safety and reliability are critical.

Ark-Gard value series:

- The value line of ENR receptacles is the ideal solution for rugged and industrial NEMA configured applications up to 20 amperes. Like the premier line, this product comes equipped with built-in safety features that reject standard NEMA configuration plugs that could cause an arc in hazardous areas.


FEATURES AND BENEFITS - premier solution (M4)

Gasketed screw cap cover design:

- Offers superior protection from harsh environments for increased product life
- Eliminates the need to purchase a separate environmental cover for added protection

Complies with OSHA lockout/tagout requirements:

- Lockout/tagout hole in cover gives users the ability to lock the cover closed while not in use



Spring-loaded sliding key offers increased safety:


- Rejects standard NEMA/EEMAC configuration plugs that could cause an arc in a hazardous area
- Also prevents the receptacle face plate from being rotated until the ENP plug is fully inserted

Protected hinge:

- Cap design provides 360° of protection around cover hinge to reduce damage from dirt and corrosion


Saddle clamp terminals:

- Reduce installation and maintenance costs – easy to wire, time saving terminals



Integral bushings:

- Taper tapped hubs protect wire installation during wire pulling

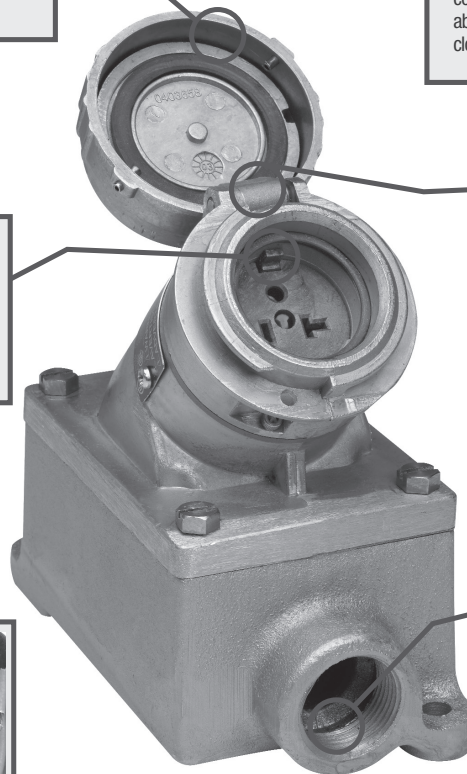


FEATURES AND BENEFITS - traditional value solution

- To make connection, simply insert the ENP plug and rotate to close the circuit
- Built-in features cause the ENP plug to become locked in the receptacle and cannot be accidentally disengaged while in use

- Top hinged cover design with 45° downward angle provides protection in damp, wet and dirty locations

- Molded-in contact design provides for superior interior contact reliability
- Incorporates three spring-loaded slide keys that prevent the receptacle face plate from being rotated until the ENP plug is fully inserted into the receptacle

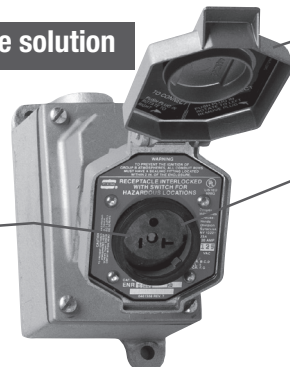

Ark-Gard ENR value series dead front interlocked circuit breaking receptacles

Cl. I, Div. 1 & 2, Groups B^A, C, D
Cl. II, Div. 1 & 2, Groups F, G
Cl. III
NEMA 3, 7BCD, 9FG, 12

Explosionproof
Dust-ignitionproof
Raintight
Wet Locations

2P

Applications:

Ark-Gard ENR receptacles and ENP plugs are used:

- With portable electrical equipment, such as compressors, tools, lighting systems and similar devices
- In areas made hazardous by the presence of flammable vapors and gases or combustible dusts
- Wherever portable electrical equipment is likely to be transferred from hazardous to non-hazardous areas
- In damp and corrosive areas
- When power requirements do not exceed 20 amperes
- Where general purpose application is required

Features:

- Ark-Gard 2 receptacle incorporates three spring-loaded slide keys that prevent the receptacle face plate from being rotated until the ENP plug is fully inserted into the receptacle. To make the connection, the ENP plug is fully inserted, and the receptacle face moved inward by pushing the plug forward. The plug is then rotated, closing the circuit. As rotation begins, the plug becomes locked in the receptacle and cannot be accidentally disengaged. In making or breaking the circuit, any resulting electrical arc is confined in the factory sealed chamber.
- Factory sealed chamber encloses the potential arcing components between two explosionproof threaded joints; these threads are specially coated to guarantee freedom of movement, which ensures on-off action; no additional seals are required
- One-piece molded gasket seals cover plate and ENP plug when plug is inserted, providing full environmental protection at the receptacle face
- Top hinged cover design with 45° downward angle provides superior protection in damp, wet and dirty locations
- Field assembly is accomplished with standard tools
- Use standard EDS back boxes

Certifications and compliances:

NEC:

- Class I, Divisions 1 & 2, Groups B^A, C, D
- Class II, Divisions 1 & 2, Groups F, G
- Class III

ANSI/UL standard:

- UL1010

NEMA/EEMAC:

- NEMA/EEMAC 3, 7BCD, 9FG

CEC:

- Class I, Divisions 1 & 2, Groups B, C, D
- Class II, Divisions 1 & 2, Group G
- Class III

Standard materials:

- Receptacle housing and spring door – die cast copper-free aluminum
- Interior – Krydon fiberglass-reinforced polyester
- Contacts – receptacle blade: brass; receptacle switch: silver
- Receptacle cover hinge pin and spring – stainless steel
- Receptacle gasket – neoprene

Standard finishes:

- Copper-free aluminum – aluminum acrylic paint
- Brass – natural

Electrical ratings:


- 15 and 20 amperes; 125 VAC and 250 VAC, 50-400 Hz

Grounding:

- NEC Article 501 and CEC Section 18 require that metal frames or exposed non-current-carrying metal parts of portable devices used in hazardous locations be grounded through an extra conductor in the portable cord
- ENR receptacles and ENP plugs are provided with an extra grounding pole

CAUTION: To reduce the risk of ignition of hazardous atmospheres, do not use plugs or receptacles in Class II, Group F locations that contain electrically conductive dusts.

Dimensions (in inches):

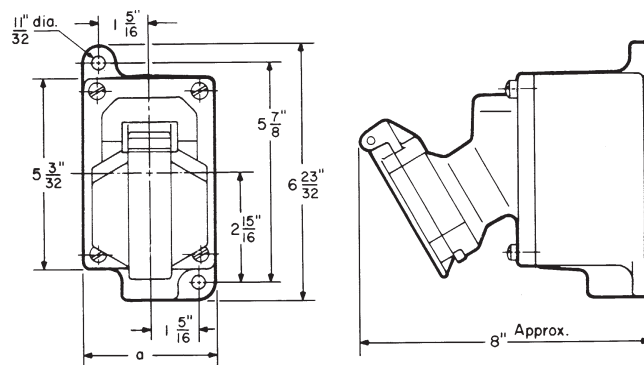

a = 3 1/2 for single-gang
7 9/16 for two-gang

^A Receptacle units alone (i.e. ENR5201) are not suitable for Class I, Group B.


Ark-Gard ENR value series dead front interlocked circuit breaking receptacles

Cl. I, Div. 1 & 2, Groups B, C, D
Cl. II, Div. 1 & 2, Groups F, G
Cl. III
NEMA 3, 7BCD, 9FG, 12

Explosionproof
Dust-ignitionproof
Raintight
Wet Locations

2P

Ordering information:

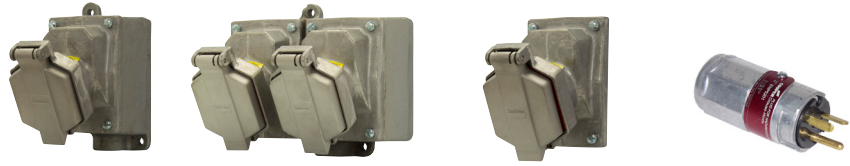

| Rating | Description | Hub size | Cat. # Single-gang receptacle assembly [Ⓒ] | Cat. # Two-gang receptacle assembly [Ⓓ] | Cat. # Receptacle unit only [Ⓔ] | NEMA config. | Cat. # 15A plug [Ⓔ] | NEMA config. |
|-----------|--------------|----------|---|--|--|--------------|------------------------------|--------------|
| 15A, 125V | Dead end | 1/2" | ENR11151 | ENR12151 | ENR5151 | | ENP5151 | |
| | | 3/4" | ENR21151 | ENR22151 | | | | |
| | | 1" | ENR31151 | ENR32151 | | | | |
| | Through feed | 1/2" | ENRC11151 | ENRC12151 | | | | |
| | | 3/4" | ENRC21151 | ENRC22151 | | | | |
| | | 1" | ENRC31151 | ENRC32151 | | | | |
| 15A, 250V | Dead end | 1/2" | ENR11152 | ENR12152 | ENR6152 | | ENP6152 | |
| | | 3/4" | ENR21152 | ENR22152 | | | | |
| | | 1" | ENR31152 | ENR32152 | | | | |
| | Through feed | 1/2" | ENRC11152 | ENRC12152 | | | | |
| | | 3/4" | ENRC21152 | ENRC22152 | | | | |
| | | 1" | ENRC31152 | ENRC32152 | | | | |

| Rating | Description | Hub size | Cat. # Single-gang receptacle assembly [Ⓒ] | Cat. # Two-gang receptacle assembly [Ⓓ] | Cat. # Receptacle unit only [Ⓔ] | NEMA config. | Cat. # 20A plug [Ⓔ] | NEMA config. |
|-----------|--------------|----------|---|--|--|--------------|------------------------------|--------------|
| 20A, 125V | Dead end | 1/2" | ENR11201 | ENR12201 | ENR5201 | | ENP5201 | |
| | | 3/4" | ENR21201 | ENR22201 | | | | |
| | | 1" | ENR31201 | ENR32201 | | | | |
| | Through feed | 1/2" | ENRC11201 | ENRC12201 | | | | |
| | | 3/4" | ENRC21201 | ENRC22201 | | | | |
| | | 1" | ENRC31201 | ENRC32201 | | | | |
| 20A, 250V | Dead end | 1/2" | ENR11202 | ENR12202 | ENR6202 | | ENP6202 | |
| | | 3/4" | ENR21202 | ENR22202 | | | | |
| | | 1" | ENR31202 | ENR32202 | | | | |
| | Through feed | 1/2" | ENRC11202 | ENRC12202 | | | | |
| | | 3/4" | ENRC21202 | ENRC22202 | | | | |
| | | 1" | ENRC31202 | ENRC32202 | | | | |

Note: 15A with copper-free aluminum EDS, EDSC back boxes. 20A with Feraloy® iron alloy EDS, EDSC back boxes.

[Ⓔ] Receptacle units alone (i.e. ENR5201) are not suitable for Class I, Group B.

[Ⓒ] Single-gang assemblies purchased with an EDS back box are suitable for Class I, Group B.

[Ⓓ] Two-gang assemblies purchased with an EDS back box are suitable for Class I, Groups C, D only. For Class I, Group B rating, add 'B' to catalog number. For example: ENRB22201. Seals must be installed within 1/2" of each conduit opening.

[Ⓔ] ENP plugs use #12 or #14 AWG type S, SO, ST or STO cord with range of 0.540 - 0.635" diameter.