

Catalog Number
Notes
Type

Outdoor

## FEATURES & SPECIFICATIONS

**INTENDED USE** — PAR holder with 180° motion sensor. Up to 70' detection range.

**CONSTRUCTION** — Precision-molded polycarbonate housing and back plate.

Accepts PAR38 lamps up to 150 watts each. Lamps not provided.

**OPTICS** — Overlapping, multi-segment optical lens designed for outdoor use.

**ELECTRICAL** — Incandescent switching capacity: 8 amps, 500 watts.

Operates at 120V.

Off-state power is less than 1 watt.

Surge protection up to 6Kv.

**INSTALLATION** — Mounts to standard recessed junction box or surface-mounted wet-location junction box. Tool-free adjustable knuckles for easy aiming of lamps and motion sensor.

Recommended mounting height: 6' to 12'. (Increased mounting height reduces detection range.)

Time settings: TEST / 1 / 5 / 10 minutes.

**SYSTEM FEATURES** — Detection zone: 180° forward detection.

Detection range: Up to 70' at 70°F ambient temperature and 6' to 12' mounting height. (Increased mounting height reduces detection range.)

Photo control: Deactivates lights during daylight.

Temperature compensation: Automatically calibrates sensitivity for varying ambient temperatures.

Manual override: Temporarily disables sensor at wall switch. Turns light on. Automatically deactivates at dawn.

**LISTINGS** — UL certified to US and Canadian safety standards for wet-location mounting higher than 4 feet off the ground.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Actual performance may differ as a result of end-user environment and application.


Note: Specifications subject to change without notice.

# OMS 1000 PR2

Twin PAR Holder with Outdoor Motion Sensor



Lamps not provided.

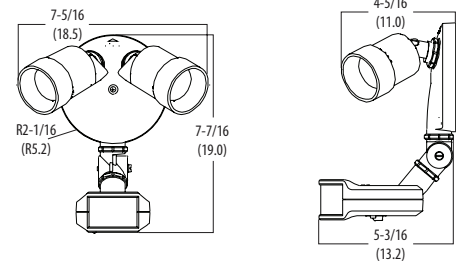

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION For shortest lead times, configure product using **bolded options**.

**Example:** OMS 1000 PR2 120 DDB

OMS	1000	PR2	120	
Series	Sensor model	Light source/# of heads	Voltage	Finish
OMS	1000	PR2 2 PAR holders	120 120V	DDB Dark bronze WH White