

**CFP**

EDGE-LIT FLAT PANEL

NOTE: Components shown in images are representative only and may vary based on the configuration ordered.

**CAUTION**

Read instructions carefully and turn electricity off at main circuit breaker panel before beginning installation.

**WARNING**

If any special control devices are used with this luminaire, follow the instructions carefully to assure full compliance with NEC requirements. If there are any questions, contact a qualified electrical contractor.

**WARNING**

This product contains chemicals known to the State of California to cause cancer, birth defects and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

**WARNING**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**NOTE:** Finished installation depth is 1.69" from the ceiling surface.

**NOTE:** The maximum load for CFPSMK14 is 6.00 lbs.  
The maximum load for CFPSMK22 is 6.22 lbs.  
The maximum load for CFPSMK24 is 11.11 lbs.

**LUMINAIRE FITTING**


**STEP 1**

Snap corner bracket to extruded rails, making sure that mounting flanges are on opposite sides.

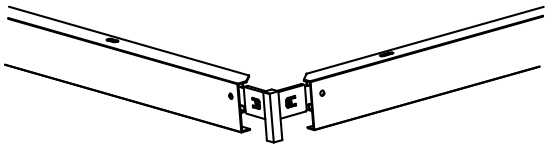


**STEP 2**

Attach frame to ceiling structure.

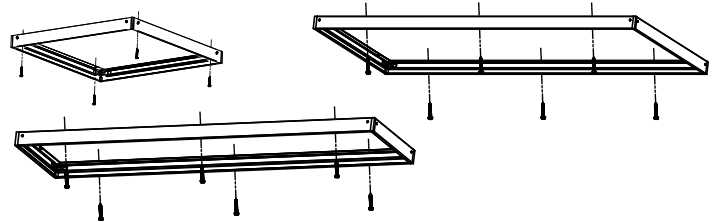

**STEP 3**

Remove one non-mounting frame side and slide in flat-panel. Make all electrical connections using appropriate fittings.

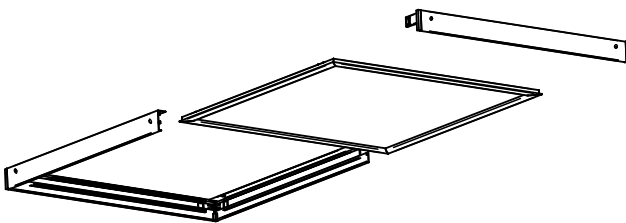

**STEP 4**

Reinstall frame side to complete.

