







Motor Protection Circuit Breaker and Motor Circuit Protector Specifications

Bulletins 140MP, 140MT, 140M

Topic	Page
Product Line Overview	2
Bulletin 140MP Motor Protection Circuit Breakers	3
Product Overview	3
Catalog Number Explanation	4
Product Selection	5
Accessories	6
Specifications	10
MPCB Specifications	10
Application Ratings	11
Accessory Specifications	15
Wiring Diagrams	17
Approximate Dimensions	18
Bulletin 140MT Motor Protective Switching Devices and Motor Circuit Protectors	20
Product Overview	20
Catalog Number Explanation	23
Product Selection	24
Selection Using Current and Hp/kW Ratings	24
Selection Using Application Ratings	27
Accessories	32
Specifications	39
Approximate Dimensions	51
140MT-C, 140MT-D Devices and Accessories	51
140M-F Devices and Accessories	54
Additional Resources	57

				
Bulletin No.	140MP-A	140MT-C	140MT-D	140M-F
Frame Size	–	C-Frame	D-Frame	F-Frame
Max. Current I_e	32 A	32 A	40 A	45 A
Current Rating	0.1...32 A	0.1...32 A	0.4...40 A	6.3...45 A
Short-circuit protection	✓	✓	✓	✓
Standard magnetic trip	✓	✓	140MT-D9E*	140M-F8E*
High magnetic trip	–	–	140MT-D9T*	140M-F8T*
Magnetic-only trip (Motor Circuit Protector [MCP])	–	–	140MT-D9N*	140M-F8N*
Overload protection	✓	✓	✓	✓
Trip Class	10A	10	10	10
Phase loss sensitivity	✓	✓	✓	✓
Variable-frequency Drive (VFD) downstream compatible	–	–	140MT-D9V...	✓
UL 60947-4-1 Application Ratings:				
Motor Disconnect	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)
Group Installation	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)
Tap Conductor Protection	–	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)
Manual, Self Protected (Type E)	–	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)
Type F ratings with 100-C and 100-E Contactors	–	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)
Standards Compliance and Certifications:				
UL 60947-4-1, CSA C22.2, No. 60947-4-1	✓	✓	✓	✓
IEC/EN 60947-2, IEC/EN 60947-4-1	✓	✓	✓	✓
CE	✓	✓	✓	✓
ATEX	–	✓	✓ ⁽¹⁾	–
IECEX	–	✓	✓ ⁽¹⁾	–
EAC	✓	✓	✓	✓
CCC	✓	✓	✓	✓
KC	✓	–	–	–
CB Scheme	✓	✓	✓	✓
Accessories (Optional)				
External rotary operator	✓	✓	✓	✓
Auxiliary contacts	✓	✓	✓	✓
Trip Indication contacts	✓	✓	✓	✓
Undervoltage release	✓	✓	✓	✓
Shunt release	✓	✓	✓	✓
Insulated three-phase busbar	✓	✓	✓	✓
Connecting modules for 100-C contactors	✓	✓	✓	✓
Connecting modules for 100-E contactors	✓	✓	✓	–
Connecting modules for 100-K contactors	✓	✓	–	–
Lockable knob	✓	✓	Standard	✓
Anti-tamper cover	✓	✓	Standard	✓
Product Selection	page 5		page 24	

(1) Does not apply to Cat. No. 140MT-D9N... devices.

Product Overview

Bulletin 140MP Motor Protection Circuit Breakers (MPCBs) or Motor Protective Switching Devices (MPSDs) are UL Listed as Manual Motor Controllers (with approvals for Suitable as Motor Disconnect and Suitable for use in Group Installation).

Group motor installations eliminate the need for individual branch short circuit protective devices for each motor circuit, reducing panel space, installation & wiring time, and costs. There is only one Branch Circuit Protective Device (BCPD) for the "Group".



According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices may provide the following control and protection functions.

- Disconnect for Motor Branch Circuit
- Manual Switching (Motor control means)
- Overload Protection (Thermal Protection)

These devices meet requirement of Motor Protective Switching Devices (MPSD) according to IEC 60947-4-1 and Circuit Breaker according to IEC 60947-2 standard for application outside of North America. These devices provide the following functions.

- Disconnect for Motor Branch Circuit
- Short-circuit Protection (Magnetic Protection)
- Overload Protection (Thermal Protection)
- Manual Switching (Motor control means)

140MP devices provide Trip Class 10A overload protection and phase loss sensitivity protection. These are suitable for single- and three-phase application.

Group Installation with MPCBs

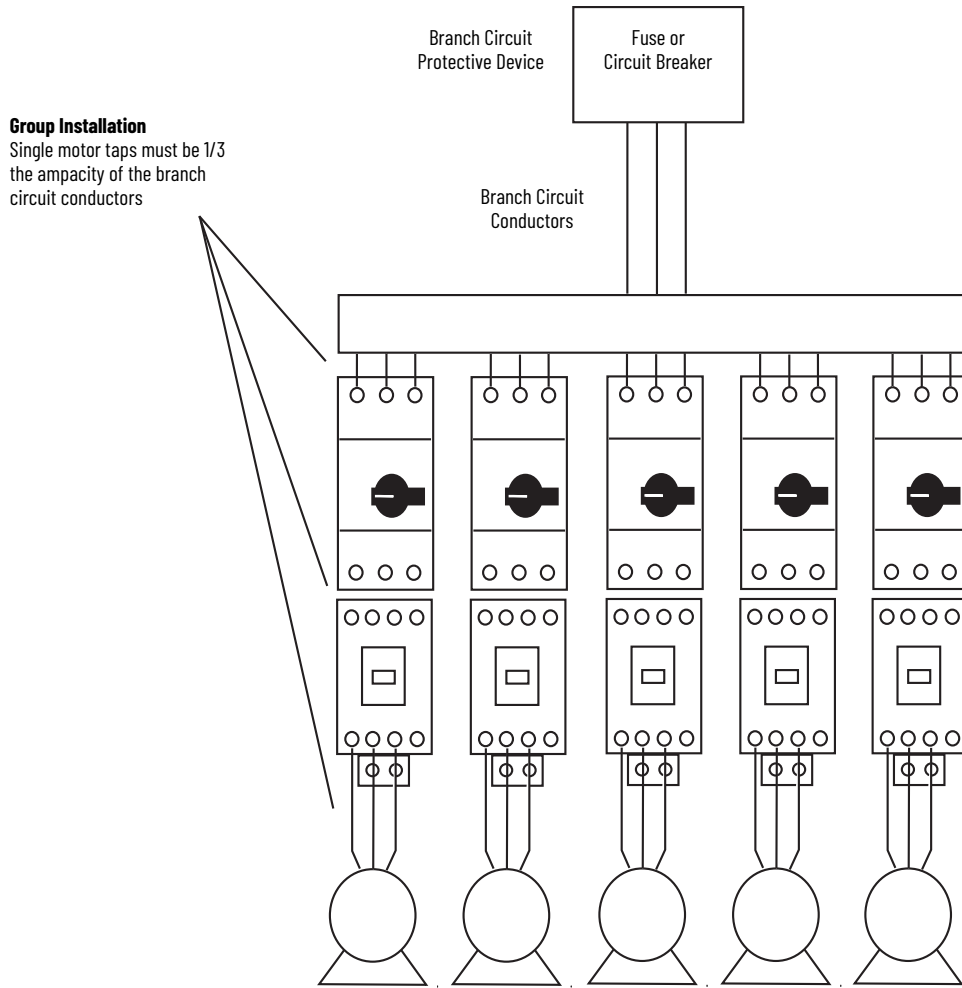
There is only one Branch Circuit Protective Device (BCPD) for the "Group".

Group installation has been successfully used for many years in the U.S. and Canada. It allows "two or motors or one or more motors and other loads to be connected to the same branch-circuit..." The most restrictive part of the conditions specified for Group Installation is the requirement for the protection of the conductors for each motor circuit.

[Figure 1](#) shows an example that illustrates installations involving multiple motors with a single BCPD protecting the entire "Group".

Bulletin 140MP Motor Protection Circuit Breakers are UL/CSA Listed for Group Installation: conductors from the BCPD to each motor must be a minimum of 1/3 the ampacity of the Branch Circuit conductors.

Figure 1 - Group Installation with MPCBs



Catalog Number Explanation

140MP
-
A
3
-
E
-
B10

a
b
c
d
e

a	
Bulletin Number	
Code	Description
140MP	140MP Motor Protection Circuit Breaker

b	
Frame Size	
Code	Description
A	Frame A

c	
Interrupting Rating/ Breaking Capacity	
Code	Description
3	Normal break

d	
Function	
Code	Description
E	Adjustable Thermal/ Fixed Magnetic MPCB

e	
Current Range	
Code	Description
A	0.10 (example: A16 = 0.16 A)
B	1.0 (example: B16 = 1.6 A)
C	10 (example: C16 = 16 A)

Product Selection

Table 1 - Bulletin 140MP MPCB Selection Using Current and Hp/kW Ratings

Rated Operational Current (I_e) [A]	Motor Current Adjustment Range [A]	Nominal Magnetic Trip Current [A]	Max. Short Circuit Current [kA]		Max. 3-phase Hp Ratings ⁽¹⁾				Max. kW, 3-Phase – AC-3 ⁽¹⁾				Cat. No.
			400V	480V	200V	230V	460V	575V	230V	400/415V	500V	690V	
			(I_{cu})	(group motor)									
0.16	0.10...0.16	2	100	30	–	–	–	–	–	0.02	0.06	0.06	140MP-A3E-A16
0.25	0.16...0.25	3.1	100	30	–	–	–	–	–	0.04	0.09	0.09	140MP-A3E-A25
0.4	0.25...0.40	5	100	30	–	–	–	0.25	0.06	0.09	0.12	0.18	140MP-A3E-A40
0.63	0.40...0.63	7.9	100	30	–	–	0.25	0.33	0.09	0.18	0.18	0.25	140MP-A3E-A63
1	0.63...1.0	12.5	100	30	–	–	0.5	0.75	0.18	0.25	0.37	0.55	140MP-A3E-B10
1.6	1.0...1.6	20	100	30	0.25	0.33	1	1	0.25	0.55	0.75	1.1	140MP-A3E-B16
2.5	1.6...2.5	31.3	75	30	0.5	0.75	1.5	2	0.37	0.75	1.1	1.8	140MP-A3E-B25
4	2.5...4.0	50	75	18	1	1	3	3	0.75	1.5	2.2	3	140MP-A3E-B40
6.3	4.0...6.3	78.8	50	18	1.5	2	5	5	1.5	2.2	3	4	140MP-A3E-B63
10	6.3...10	150	50	18	3	3	7.5	10	2.2	4	6.3	7.5	140MP-A3E-C10
12	8.0...12	180	50	18	3	3	7.5	10	3	5.5	6.3	7.5	140MP-A3E-C12
16	10...16	240	15	18	5	5	10	15	4	7.5	10	13	140MP-A3E-C16
20	16...20	300	15	18	5	7.5	15	20	5.5	10	11	17	140MP-A3E-C20
25	20...25	375	15	18	7.5	7.5	20	20	5.5	11	15	22	140MP-A3E-C25
32	25...32	480	15	18	7.5	10	25	30	7.5	15	20	25	140MP-A3E-C32

(1) Horsepower/kW ratings shown are for reference. The final selection of the MPCB/MPSD depends on the actual motor full load current.

Table 2 - Bulletin 140MP MPCB Selection Using Interrupting Rating/Breaking Capacity

Breaking Capacity, IEC 60947-2															Cat. No.			
230V AC			400V AC			440V AC			500V AC			690V AC						
I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]				
50	100	_(2)	50	100	_(2)	30	100	_(2)	30	100	_(2)	30	100	_(2)	140MP-A3E-A16			
50	100		50	100		30	100		30	100		30	100		30	100	140MP-A3E-A25	
50	100		50	100		30	100		30	100		30	100		30	100	140MP-A3E-A40	
50	100		50	100		30	100		30	100		30	100		30	100	140MP-A3E-A63	
50	100		50	100		30	100		30	100		30	100		30	100	140MP-A3E-B10	
50	100		50	100		30	100		30	100		30	100		30	100	140MP-A3E-B16	
50	75		50	75		10	30		25 ⁽³⁾	10		20	25 ⁽³⁾		5	10	25 ⁽³⁾	140MP-A3E-B25
50	75		50	75		6	18		25 ⁽³⁾	6		15	25 ⁽³⁾		2	3	25 ⁽³⁾	140MP-A3E-B40
50	50		50	50		6	18		63 ⁽³⁾	6		10	63 ⁽³⁾		2	3	40 ⁽³⁾	140MP-A3E-B63
50	50		50	50		6	18		63 ⁽³⁾	6		10	63 ⁽³⁾		2	3	50 ⁽³⁾	140MP-A3E-C10
25	50	80 ⁽³⁾	25	50	80 ⁽³⁾	6	15	63 ⁽³⁾	6	10	63 ⁽³⁾	2	3	50 ⁽³⁾	140MP-A3E-C12			
15	15	80 ⁽³⁾	15	15	80 ⁽³⁾	4	6	63 ⁽³⁾	4	6	63 ⁽³⁾	2	3	63 ⁽³⁾	140MP-A3E-C16			
10	15	125 ⁽³⁾	10	15	125 ⁽³⁾	3	6	125 ⁽³⁾	3	6	125 ⁽³⁾	2	3	80 ⁽³⁾	140MP-A3E-C20			
10	15	125 ⁽³⁾	10	15	125 ⁽³⁾	3	6	125 ⁽³⁾	3	6	125 ⁽³⁾	2	3	100 ⁽³⁾	140MP-A3E-C25			
10	15	125 ⁽³⁾	10	15	125 ⁽³⁾	3	6	125 ⁽³⁾	3	6	125 ⁽³⁾	2	3	100 ⁽³⁾	140MP-A3E-C32			

(1) Back-up fuses are type gG, aM.
 (2) No Back-up fuse required if $I_{cc} < I_{cs}$.
 (3) Rated back-up fuse for short-circuit up to 50 kA.

Accessories

Table 3 - Auxiliary Contacts











Description	Auxiliary Contacts		Connection Diagram	Pkg. Qty.	Cat. No.
	N.O	N.C			
 <p>Front-mounted Auxiliary Contact</p> <ul style="list-style-type: none"> No additional space required 1 and 2-pole 	1	1		10	140MP-A-AFA11
	1	0			140MP-A-AFA10
	0	1			140MP-A-AFA01
	2	0			140MP-A-AFA20
 <p>Right-side-mounted Auxiliary Contact</p> <ul style="list-style-type: none"> 2-pole Adds 9 mm (0.35 in.) to the width of the Manual Motor Starter Use compact bus bars with 54 mm (2.13 in.) spacing 	1	1		2	140MP-A-ASA11
	2	0			140MP-A-ASA20
	0	2			140MP-A-ASA02
	Lead Contacts				140MP-A-ASA20L

Table 4 - Trip Contacts





Description	Auxiliary Contacts		Connection Diagram	Pkg. Qty.	Cat. No.
	N.O	N.C			
 <p>Right-side-mounted Trip Signaling Contact</p> <ul style="list-style-type: none"> 2-pole Adds 9 mm (0.35 in.) to the width of the Manual Motor Starter Use compact bus bars with 54 mm (2.13 in.) spacing 	1	1		2	140MP-A-ASAR11
	2	0			140MP-A-ASAR20
	0	2			140MP-A-ASAR02

Table 5 - Undervoltage and Shunt Trip Units





Description		Trip Rating	Connection Diagram	Pkg. Qty.	Cat. No.
 <p>Undervoltage Trip Release</p> <ul style="list-style-type: none"> • Left-side mounted • Adds 18 mm (0.71 in.) to the width of the Manual Motor Starter 		20V, 50 Hz/ 24V, 60 Hz		1	140MP-A-UXJ
		24V, 50 Hz			140MP-A-UXK
		48V, 50 Hz			140MP-A-UXY
		60V, 50 Hz			140MP-A-UXYA
		110V, 50 Hz/ 120V, 60 Hz			140MP-A-UXC
		208V, 60 Hz			140MP-A-UXH
		230V, 50 Hz/ 240V, 60 Hz			140MP-A-UXF
		400V, 50 Hz			140MP-A-UXN
		415V, 50 Hz/ 480V, 60 Hz			140MP-A-UXB
		575V, 60 Hz			140MP-A-UXM
 <p>Shunt Trip Release</p> <ul style="list-style-type: none"> • Left-side mounted • Adds 18 mm (0.71 in.) to the width of the Manual Motor Starter 		20...24V, 50/60 Hz		1	140MP-A-SNKJ
		110V, 50/60 Hz			140MP-A-SND
		200...240V, 50/60 Hz			140MP-A-SNAF
		350...415V, 50/60 Hz			140MP-A-SNN

Table 6 - Bus Bars



Description		Terminal Links	For Use With	Pkg. Qty.	Cat. No.
 <p>Compact Bus Bars</p> <ul style="list-style-type: none"> - UL: 600V, 60 A - IEC: 690V, 65 A 	<ul style="list-style-type: none"> • 45 mm (1.77 in.) spacing • For use with front-mounted auxiliary contact 	2 x 3 connections	140MP	10	140MP-A-W452
		3 x 3 connections			140MP-A-W453
		4 x 3 connections			140MP-A-W454
		5 x 3 connections			140MP-A-W455
	<ul style="list-style-type: none"> • 54 mm (2.13 in.) spacing • For use with side-mounted auxiliary contact 	2 x 3 connections	140MP	10	140MP-A-W542
		3 x 3 connections			140MP-A-W543
		4 x 3 connections			140MP-A-W544
		5 x 3 connections			140MP-A-W545
	<ul style="list-style-type: none"> • 63 mm (2.5 in.) spacing • For use with side-mounted auxiliary contact 	2 x 3 connections	140MP	10	140MP-A-W632
		3 x 3 connections			140MP-A-W633
		4 x 3 connections			140MP-A-W634
		5 x 3 connections			140MP-A-W635
 <p>Bus Bar Feeder Terminal (Flat)</p> <ul style="list-style-type: none"> • Supply of compact bus bars • Increases terminal capacity 			140MP-A-W	10	140MP-A-WTN
	<p>Bus Bar Feeder Terminal (High)</p> <ul style="list-style-type: none"> • Supply of compact bus bars • Increases terminal capacity 			140MP-A-W	10

Table 7 - Connecting Modules




Description		For Use With	Cat. No.
 <p>ECO Connecting Module - 12 A (IEC), 11 A (UL)</p> <ul style="list-style-type: none"> • For DOL Starters • ECO Starters mount on single DIN Rail (140MP on DIN rail) • Electrical and mechanical interconnection of 140MP and 100-K Contactors 	140MP-A to 100-K	140MP-A-PEK12	
 <p>ECO Connecting Module - 25 A (IEC), 24 A (UL)</p> <ul style="list-style-type: none"> • For DOL Starters • ECO Starters mount on single DIN Rail (140MP on DIN rail) • Electrical and mechanical interconnection of 140MP and 100-C Contactors 	140MP-A to 100-C09...C23	140MP-A-PEC23	

Table 7 - Connecting Modules (Continued)




Description		For Use With	Cat. No.
 <p>ECO Connecting module ⁽¹⁾</p> <ul style="list-style-type: none"> For DOL starters ECO Starters mount on single DIN Rail (140MP on DIN Rail) Electrical and mechanical interconnection of 140MP and 100-E contactors Package quantity: 10 	16 A	140MP-A3E-A16...C25 to 100(S)-E09...16	140MP-A-PE16
		140MP-A3E-A16...C16 to 100(S)-E26...38	140MP-A-PE26
	38 A	140MP-A3E-C20...C32 to 100(S)-E26...38	140MP-A-PE38

(1) Not suitable for 100(S)-E09...380J or 300(S)-T0...B00J contactors.

Table 8 - Additional Accessories

Description		For Use With	Pkg. Qty.	Cat. No.
 <p>Blank Space Cover</p> <ul style="list-style-type: none"> For covering unused terminal links Must be ordered in multiples of 10 (10pieces/package) 	140MP-A-W	50	140MP-A-WSN	
 <p>Screw Adapter</p> <ul style="list-style-type: none"> For screw arrangement of a motor protection circuit breaker Hat (DIN) Rail 35 x 7.5 mm (1.4 x 0.3 in.) 44 mm (1.7 in.) length 	140MP	10	140MP-A-N45	
 <p>Enclosure</p> <ul style="list-style-type: none"> Up to three padlocks in OFF position Protection Class: IP65; UL/CSA Type 12 	Red/yellow handle	140MP	1	140MP-A-ENY65
	Black handle			140MP-A-ENN65
 <p>Door Mounting Kit</p> <ul style="list-style-type: none"> Up to three padlocks in OFF position Protection Class: IP65; UL/CSA Type 12 	Red/yellow handle	140MP	1	140MP-A-DMY65
	Black handle			140MP-A-DMN65
 <p>Door Coupling Handle</p> <ul style="list-style-type: none"> Up to three padlocks in OFF position Defeatable Type 1/3R/12 IP64 	Red/Yellow	140MP	1	140MP-A-DCY65
	Black			140MP-A-DC65
 <p>Coupler</p> <ul style="list-style-type: none"> Coded - Positioning of ON indication dependent from mounting orientation of the 140MP Uncoded - Positioning of ON indication independent from mounting orientation of the 140MP 	Driver with screw	140MP	1	140MP-A-DNC
	Driver without coding, with screw			140MP-A-DNUC
 <p>Shaft Alignment Ring</p> <ul style="list-style-type: none"> Supports the long shafts for alignment to the handle inlet. It makes closing panel doors more easy Use for shafts 	140MP	1	140MP-A-SAR	

Table 8 - Additional Accessories

Description		For Use With	Pkg. Qty.	Cat. No.	
	Extension Shaft	105 mm (4.13 in.)	140MP	10	140MP-A-DS
		180 mm (7.1 in.)			140MP-A-DSM
	Extension Shaft Support <ul style="list-style-type: none"> • Supports the shaft in the extension of handle (140MP-A-DC) • Required for shaft lengths >130 mm (5.1 in.) • Snaps on the right side of the MPCB • Width: 9 mm (0.35 in.) • For use with screw-mounted or hat rail mounted devices. 	140MP	1	140MP-A-SHS	
	Lockable Handle Accessory <ul style="list-style-type: none"> • For locking 140MP devices in the OFF position 	140MP	10	140MP-A-KN1	

Specifications

MPCB Specifications

Table 9 - General Ratings

Attribute		Value
Standards compliance	IEC	IEC/EN 60947-2, IEC/EN 60947-4-1, IEC/EN 60947-1
	cULus	UL 60947-1, UL 60947-4-1, CSA C22.2, No. 60947-4-1
Certifications	Global	RINA (Marine)
	Regional	CCC, KC, EAC, CE, IEC, cULus, CB Scheme
Rated operating voltage U_e		690V AC
Maximum operating voltage (UL)		600V
Rated Frequency		50/60 Hz
Trip Class		10A
Number of operations	Mechanical	100.000 Cycles
	Electrical	100,000 Cycles (0.1...16 A); 50,000 Cycles (20...32 A)
Rated impulse withstand voltage U_{imp}		6 kV
Rated insulation voltage U_i		690V
Pollution Degree		3
Phase loss sensitivity		Yes
Disconnect function per IEC/EN 60947-2		Yes
Resistance to shock per IEC 60068-2-27		25 G/11 ms
Resistance to vibrations per IEC 60068-2-6		5 G /3 ... 150 Hz
Mounting		DIN Rail (EN 60715)
Group mounting (side by side)		up to 40 °C (104 °F)
Minimum distance to other units same type	Horizontal	0 mm (0 in.)
	Vertical	150 mm (5.9 in.)
Minimum distance to electrical conductive board	Horizontal, up to 400V	0 mm (0 in.)
	Horizontal, up to 690V	> 1.5 mm (0.06 in.)
	Vertical	75 mm (2.96 in.)
Degree of Protection	Housing	IP20
	Main Terminals	IP10
Short-circuit ratings	@230V, 400V, 440V, 500V, and 690V	See Table 2
	@480V and 600V—for motor disconnect	See Table 14
	@480V and 600V—for group motor installation	
Utilization Category	IEC 60947-2 (Circuit breaker)	A
	IEC 60947-4-1 (Motor Starter)	AC-3

Table 10 - Power Loss

Power Loss	Rated Operating Current [A]	Rated Operating Current [A]				
		0.16...1.6	2.5...6.3	10...12	16...25	32
Power Loss in all 3 Poles up to: [W]		5.1	5.4	7.2	8.4	9.3

Table 11 - Environmental Ratings






Attribute		Value
Operating Ambient air temperature	Open—compensated	-25 ... +55 °C (-13...+131 °F) ⁽¹⁾
	Open	-25 ... +70 °C (-13...+158 °F) ⁽¹⁾
	Enclosed	0 ... +40 °C (32...104 °F)
Storage Ambient air temperature		-50 ... +80 °C (-58...+176 °F)
Maximum operating altitude permissible		2000 m (6561 ft)

(1) With derating. See [Table 12](#).

Table 12 - Ambient Temperature Derating

Cat. No.	Ambient Temperature Derating [A]		
	40 °C (104 °F)	55 °C (131 °F)	70 °C (158 °F)
140MP-A3E-C10	10	10	8
140MP-A3E-C12	12	12	10
140MP-A3E-C16	16	16	12
140MP-A3E-C20	20	20	18
140MP-A3E-C25	25	25	23
140MP-A3E-C32	32	32	29

Table 13 - MPCB Connecting Characteristics

Connection		No. of Conductors	Devices Rated ≤ 16 A	Devices Rated 20...32 A
Type of terminals				
Connection Screw			M3.5/Pozidriv No.2	M4/Pozidriv No.2
Wiring	Solid	 1 or 2	1...4 mm ²	1...2.5 mm ² 2.5...6 mm ²
	Flexible with ferrule	 1 or 2	0.75...2.5 mm ²	0.75...6 mm ²
	Flexible/finely stranded	 1 or 2	0.75...2.5 mm ² /No. 16...12 AWG	1.5...2.5 mm ² /No.16...8 AWG 2.5...6 mm ² /No.16...8 AWG
	Stranded per UL/CSA	 1 or 2	1...4 mm ² /No. 16...12 AWG	1...2.5 mm ² /No.16...8 AWG 2.5...6 mm ² /No.16...8 AWG
	Stripping length		9 mm (0.35 in.)	10 mm (0.39 in.)
Tightening torques			0.8...1.2 N•m/7...10 lb•in	2 N•m /18 lb•in

Application Ratings

Table 14 lists specific application ratings for MPCBs.

Table 14 - UL/CSA Listed Application Ratings, Motor Protection Circuit Breaker Only

Cat. No.	UL 60947-4-1 – Manual Motor Controller				
	Branch Circuit Protection Max. Size per NEC/CEC [A]	Max. Short Circuit Current [kA]			
		Motor Disconnect		Group Installation	
		480V	600V	480V	600V
140MP-A3E-A16	175	30	5	30	5
140MP-A3E-A25	175	30	5	30	5
140MP-A3E-A40	175	30	5	30	5
140MP-A3E-A63	175	30	5	30	5
140MP-A3E-B10	175	30	5	30	5
140MP-A3E-B16	175	30	5	30	5
140MP-A3E-B25	175	30	5	30	5
140MP-A3E-B40	175	18	5	18	5
140MP-A3E-B63	175	18	5	18	5
140MP-A3E-C10	175	18	5	18	5
140MP-A3E-C12	175	18	5	18	5
140MP-A3E-C16	175	18	5	18	5
140MP-A3E-C20	400	18	5	18	5
140MP-A3E-C25	400	18	5	18	5
140MP-A3E-C32	400	18	5	18	5

Table 15 through Table 20 lists specific application ratings for MPCBs in combination with Bulletin 100-K, 100-C, and 100-E contactors.

Type 1 Coordination—Specified 100-K contactors are suitable for motor group applications when they are used on the load side of the 140MP-A3E Manual Motor Controllers that are specified in Table 15.

Table 15 - Type 1 Application Ratings, 140MP to 100-K Miniature IEC Contactors

Manual Motor Controller	Contactor ⁽¹⁾	SCCR		
		480V AC [kA]	600V AC [kA]	Maximum Fuse or Circuit Breaker sized per NEC [A]
140MP-A3E-A16	100-K05 100-K09 100-K12	30	5	175
140MP-A3E-A25		30	5	175
140MP-A3E-A40		30	5	175
140MP-A3E-A63		30	5	175
140MP-A3E-B10		30	5	175
140MP-A3E-B16		30	5	175
140MP-A3E-B25		30	5	175
140MP-A3E-B40		18	—	175
140MP-A3E-B63		18	—	175
140MP-A3E-C10		100-K09 100-K12	18	—
140MP-A3E-C12	100-K12	18	—	175
140MP-A3E-C16		18	—	175

(1) May be used with 140MP-A-PEK12 connecting module between 140MP-A3E manual motor controller and 100-K contactor.

Type 1 Coordination—Specified 100-C contactors (without R suffix) are suitable for motor group applications when they are used on the load side of the specified Manual Motor Controllers.

Table 16 - Type 1 Application Ratings, 140MP to 100-C IEC Contactors

Manual Motor Controller	Contactor ⁽¹⁾	SCCR		
		480V AC [kA]	600V AC [kA]	Maximum Fuse or Circuit Breaker sized per NEC [A]
140MP-A3E-A16	100-C09 100-C12 100-C16 100-C23	30	5	175
140MP-A3E-A25		30	5	175
140MP-A3E-A40		30	5	175
140MP-A3E-A63		30	5	175
140MP-A3E-B10		30	5	175
140MP-A3E-B16		30	5	175
140MP-A3E-B25		30	5	175
140MP-A3E-B40		18	5	175
140MP-A3E-B63		18	5	175
140MP-A3E-C10		18	5	175
140MP-A3E-C12	100-C12 100-C16 100-C23	18	5	175
140MP-A3E-C16 ⁽²⁾	100-C16, 100-C23	18	5	175
140MP-A3E-C20	100-C23 100-C30 100-C37	18	5	400
140MP-A3E-C25 ⁽³⁾	100-C23	18	—	400
140MP-A3E-C25 ⁽³⁾	100-C30, 100-C37	18	5	400
140MP-A3E-C32 ⁽⁴⁾	100-C30, 100-C37	18	5	400

(1) 140MP-A-PEC23 connection modules may be used with 100-C09...-C23 up to 24 A.

(2) Limited to 15.5 FLA maximum when used in a 365 x 235 x 140 mm (14.4 x 9.3 x 5.5 in.) (200%) or larger enclosure. Limited to 14.5 FLA maximum when used in 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%) minimum sized enclosure.

(3) Minimum enclosure size is 170 x 670 x 235 mm (6.7 x 26.4 x 9.3 in.) (250%) at full load current. If end use current is 22.5 FLA or less, may be used in an enclosure as small as 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%).

(4) May be used at 30.8 FLA maximum when used ambient temperature of 40 °C (104 °F) maximum. May be used up to 29 FLA when used in a 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%) minimum size enclosure.

Table 17 - Type 2 Coordination Ratings per IEC 60947-4-1, 140MP to 100-C IEC Contactors, Standard Motor Protection

Cat. No.	Type 2 Coordination Ratings, IEC 60947-4-1	
	400/415V	
	Max. Short Circuit Current [kA]	For Use With Contactor Cat. No.
140MP-A3E-A16	50	100-C09
140MP-A3E-A25	50	100-C09
140MP-A3E-A40	50	100-C09
140MP-A3E-A63	50	100-C09
140MP-A3E-B10	50	100-C09
140MP-A3E-B16	50	100-C09
140MP-A3E-B25	50	100-C09
140MP-A3E-B40	50	100-C09
140MP-A3E-B63	50	100-C09
140MP-A3E-C10	50	100-C09
140MP-A3E-C12	25	100-C12
140MP-A3E-C16	10	100-C23
140MP-A3E-C20	10	100-C30
140MP-A3E-C25	10	100-C30
140MP-A3E-C32	10	100-C30

Table 18 - Type 2 Coordination Ratings per IEC 60947-4-1, 140MP to 100-E IEC Contactors, Standard Motor Protection

Cat. No.	Type 2 Coordination Ratings, IEC 60947-4-1	
	400V	
	Max. Short Circuit Current [kA]	Minimum Contactor Size
140MP-A3E-A16	50	100-E09
140MP-A3E-A25	50	100-E09
140MP-A3E-A40	50	100-E09
140MP-A3E-A63	50	100-E09
140MP-A3E-B10	50	100-E09
140MP-A3E-B16	50	100-E09
140MP-A3E-B25	50	100-E09
140MP-A3E-B40	50	100-E26
140MP-A3E-B63	50	100-E26
140MP-A3E-C10	50	100-E26
140MP-A3E-C12	25	100-E26
140MP-A3E-C16	16	100-E26
140MP-A3E-C20	10	100-E30
140MP-A3E-C25	10	100-E30
140MP-A3E-C32	10	100-E38

Table 19 - Type 2 Coordination Ratings per UL 60947-4-1, 140MP to 100-C IEC Contactors, Standard Motor Protection

Cat. No.	Contactor ⁽¹⁾	Type 2 Coordination Ratings, UL 60947-4-1		Max. Fuse or Circuit Breaker Size per NEC [A]
		480V	600V	
		Max. Short Circuit Current [kA]	Max. Short Circuit Current [kA]	
140MP-A3E-A16	100-C09 100-C12 100-C16 100-C23	30	5	175
140MP-A3E-A25		30	5	175
140MP-A3E-A40		30	5	175
140MP-A3E-A63		30	5	175
140MP-A3E-B10		30	5	175
140MP-A3E-B16		30	5	175
140MP-A3E-B25		100-C12 100-C16 100-C23	30	5
140MP-A3E-B40	100-C16 100-C23	18	5	175
140MP-A3E-B63	100-C23	18	5	175
140MP-A3E-C10	100-C30 100-C37	18	5	175
140MP-A3E-C12		18	5	175
140MP-A3E-C16 ⁽²⁾		18	5	175
140MP-A3E-C20		18	5	400
140MP-A3E-C25 ⁽³⁾		18	5	400
140MP-A3E-C32 ⁽⁴⁾		18	5	400

- (1) 140MP-A-PEC23 connection modules may be used with 100-C09...-C23 up to 24 A.
- (2) Limited to 15.5 FLA maximum when used in a 365 x 235 x 140 mm (14.4 x 9.3 x 5.5 in.) (200%) or larger enclosure.
Limited to 14.5 FLA maximum when used in 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%) minimum sized enclosure.
- (3) Minimum enclosure size is 170 x 670 x 235 mm (6.7 x 26.4 x 9.3 in.) (250%) at full load current.
If end use current is 22.5 FLA or less, may be used in an enclosure as small as 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%).
- (4) May be used at 30.8 FLA maximum when used ambient temperature of 40 °C (104 °F) maximum.
May be used up to 29 FLA when used in a 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%) minimum size enclosure.

Table 20 - Type 2 Coordination Ratings per UL 60947-4-1, 140MP to 100-E IEC Contactors, Standard Motor Protection

Cat. No.	Max. Fuse or Circuit Breaker per NEC	Type 2 Coordination Ratings, UL 60947-4-1			
		480V		600V	
		Max. Short-circuit Current [kA]	Minimum Contactor Size	Max. Short-circuit Current [kA]	Minimum Contactor Size
140MP-A3E-A16	175	30	100-E09	5	100-E09
140MP-A3E-A25	175	30	100-E09	5	100-E09
140MP-A3E-A40	175	30	100-E09	5	100-E09
140MP-A3E-A63	175	30	100-E09	5	100-E09
140MP-A3E-B10	175	30	100-E09	5	100-E09
140MP-A3E-B16	175	30	100-E09	5	100-E09
140MP-A3E-B25	175	30	100-E16	5	100-E16
140MP-A3E-B40	175	18	100-E26	5	100-E16
140MP-A3E-B63	175	18	100-E26	5	100-E26
140MP-A3E-C10	175	18	100-E26	5	100-E30
140MP-A3E-C12	175	18	100-E26	5	100-E30
140MP-A3E-C16	175	18	100-E26	5	100-E40
140MP-A3E-C20	400	18	100-E26	5	100-E40
140MP-A3E-C25	400	18	100-E30	5	100-E40
140MP-A3E-C32	400	18	100-E38	5	100-E40

Accessory Specifications

Table 21 - Auxiliary Contact, Signaling Contact, and Short-circuit Signaling Contact Specifications

Attribute		Side-mounted Auxiliary, Signaling, and Short-circuit Signaling Contacts	Front-mounted Auxiliary Contacts
Standards compliance	IEC	IEC/EN 60947-1, IEC/EN 60947-5-1	IEC/EN 60947-1, IEC/EN 60947-5-1
	UL/cULus	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1
Rated operating voltage U_e		690V AC/600V DC	250V AC/250V DC
Conventional free-air thermal current I_{th}		6 A	5 A
Rated Frequency		50/60 Hz	50/60 Hz
Rated impulse withstand voltage U_{imp}		6 kV	6 kV
Rated insulation voltage U_i		690V AC	250V AC
Pollution Degree		3	3
Ambient air temperature	Operation	-25 ... +60 °C (-13...+140 °F)	-25 ... +60 °C (-13...+140 °F)
	Storage	-50 ... +80 °C (-58...+176 °F)	-50 ... +80 °C (-58...+176 °F)
Resistance to shock per IEC 60068-2-27		25 G/11 ms	25 G/11 ms
Resistance to vibrations per IEC 60068-2-6		5 G/3 ... 150 Hz	5 G/3 ... 150 Hz
Rated operational current I_e AC-15 per IEC/EN 60947-5-1 for utilization category	24V, 120V	6 A	3 A
	240V	4 A	1.5 A
	400V	3 A	—
	440V, 690V	1 A	—
Rated operational current I_{eDC} -13 per IEC/EN 60947-5-1 for utilization category	24V	2 A	1 A
	125V	0.55 A	0.27 A
	250V	0.27 A	0.11 A
	440V, 600V	0.15 A	—
Minimum switching capacity		17V DC/5 mA	17V DC/5 mA
Short-circuit protective device (N.O, N.C)		10 A Type gG	10 A Type gG
Duty time		100%	100%
Mounting		Right side	Front
Number of operations	Mechanical	50,000 cycles	50,000 cycles
	Electrical		
Contact utilization characteristics according to UL/CSA			
Rated operating voltage U_e per UL/CSA		600V AC/600V DC	250V AC/250V DC
Pilot duty		B600, Q600	B300, R300
AC thermal rated current		5 A	5 A
AC maximum volt-ampere	making	3600	3600 VA
	breaking	360	360 VA
DC thermal rated current		2.5 A	2.5 A
DC maximum volt-ampere	making	69 VA	28 VA
	breaking		
Connecting characteristics		Table 24	Table 24

Table 22 - Undervoltage Release Specifications

Attribute		Value
Standards compliance	IEC	IEC/EN 60947-1, IEC/EN 60947-5-1
	UL/cULus	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1
Rated control supply voltage		See Table 5
Rated frequency		
Operating voltage	Tripping	0.35 ... 0.7 x U _s
	Coil	0.85 ... 1.1 x U _s
Rated impulse withstand voltage U _{imp}		6 kV
Rated insulation voltage U _i		690V
Pollution degree		3
Ambient air temperature	Operation	-25 ... +60 °C (-13...+140 °F)
	Storage	-50 ... +80 °C (-58...+176 °F)
Resistance to shock per IEC 60068-2-27		25 G/11 ms
Resistance to vibrations per IEC 60068-2-6		5 G/3 ... 150 Hz
Mounting		left side of MPCB

Table 23 - Shunt Trip Specifications

Attribute		Value
Standards compliance	IEC	IEC/EN 60947-1, IEC/EN 60947-5-1
	UL/cULus	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1
Rated control supply voltage		See Table 5
Rated frequency		
Operating voltage	Tripping	0.7 ... 1.1 x U _s
Rated impulse withstand voltage U _{imp}		6 kV
Rated insulation voltage U _i		690V
Pollution degree		3
Ambient air temperature	Operation	-25 ... +60 °C (-13...+140 °F)
	Storage	-50 ... +80 °C (-58...+176 °F)
Resistance to shock per IEC 60068-2-27		15 G/11ms
Resistance to vibrations per IEC 60068-2-6		5 G/3 ... 150 Hz
Mounting		left side of MPCB

Table 24 - Auxiliary Contact Connecting Characteristics










Connection		No. of Conductors	Side Mounted	Front Mounted
Wiring	Solid 	1 or 2	1...1.5 mm ²	1...2.5 mm ²
	Flexible with ferrule 	1 or 2	0.75...1.5 mm ²	
	Flexible 	1 or 2	0.75...1.5 mm ²	
	Stranded per UL/CSA 	1 or 2	No. 16...14 AWG	
	Stripping length		8 mm (0.31 in.)	
Tightening torques			0.8...1.2 N•m/7 lb•in	
Recommended screwdriver			Pozidriv No.2	

Table 25 - Feeder Terminal and Bus Bar Current Ratings

Attribute	140MP-A-W45..., -W54..., -W63...	140MP-A-WT...
Rated operational voltage U_e	690V	
Rated operational voltage U_e per UL/CSA	600V AC	
Rated operational current I_e	65 A	
Rated operational current I_e per UL/CSA	60 A	65 A
Suitable for enclosure size (UL)	200% of Size of 140MP-A with bus bars	
Rated frequency	50/60 Hz	
Rated impulse withstand voltage U_{imp}	6 kV	
Rated insulation voltage U_i	690V AC	

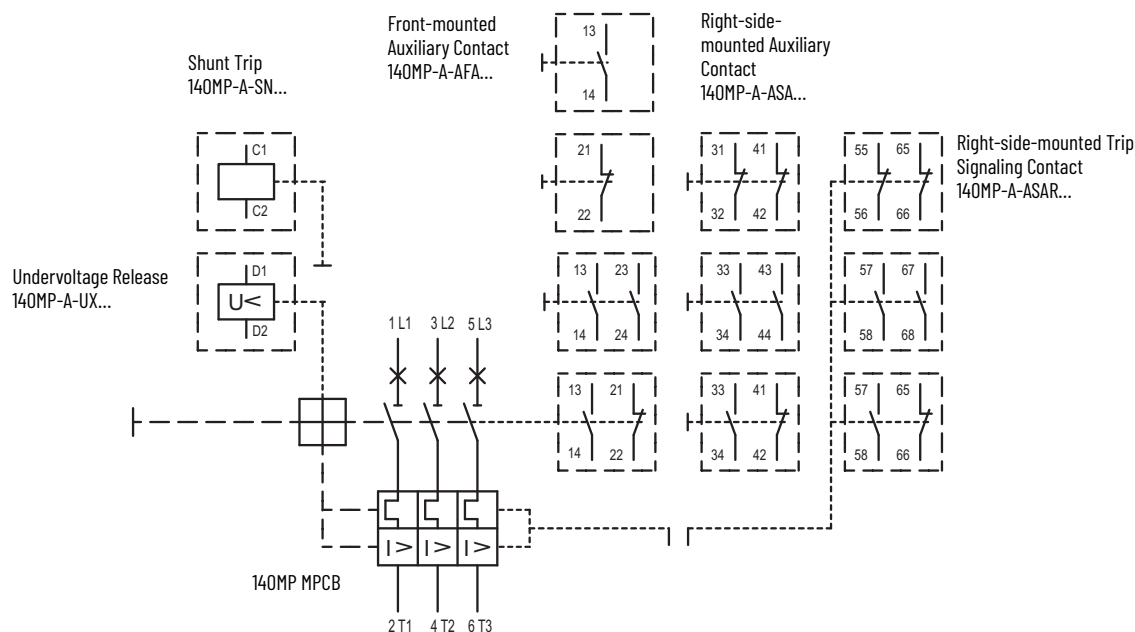
Table 26 - Main Circuit Connecting Characteristics

Connection		No. of Conductors	Value
Wiring	Solid 	1	6...25 mm ²
	Flexible with ferrule 	1	6...16 mm ²
	Flexible with insulated ferrule 	1	6...16 mm ²
	Flexible 	1	6...16 mm ²
	Stranded per UL/CSA 	1	No. 10...4 AWG
	Stripping length		10 mm (0.39 in.)
Tightening torques			2.5 N•m/22 lb•in
Recommended screwdriver			Pozidriv No.2

Wiring Diagrams

Figure 2 illustrates basic wiring for the 140MP MPCB and accessories.

Figure 2 - 140MP Wiring Example



Approximate Dimensions

Dimensions are in millimeters (inches) and are not intended for manufacturing purposes.

Figure 3 - Mounting Position

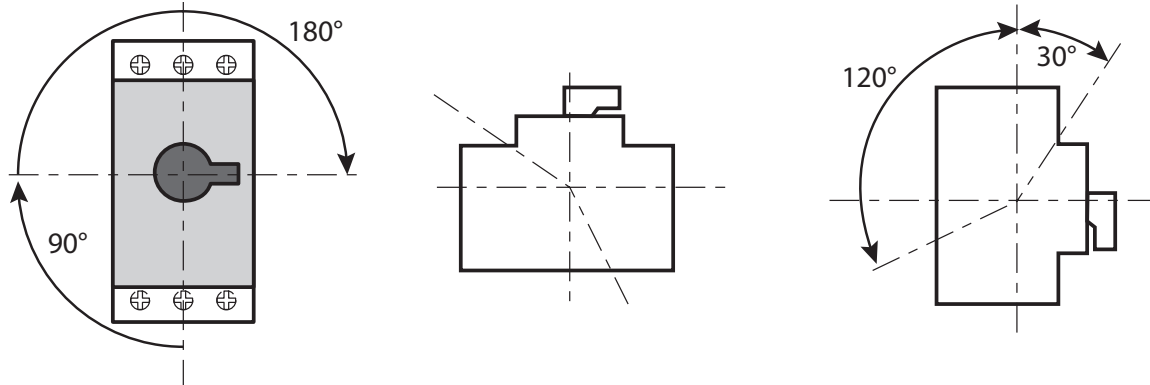


Figure 4 - Cat. No. 140MP-A3E..., 140MP-A-N45 ≤16 A

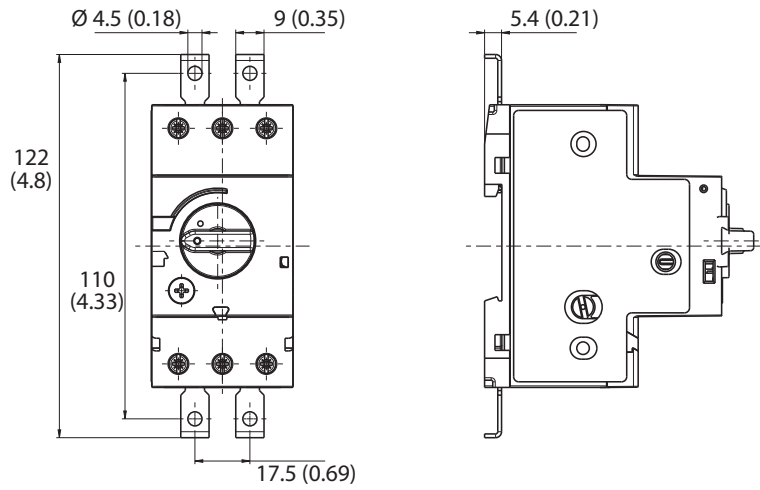


Figure 5 - Cat. No. 140MP-A3E..., 140MP-A-N45 ≥20 A

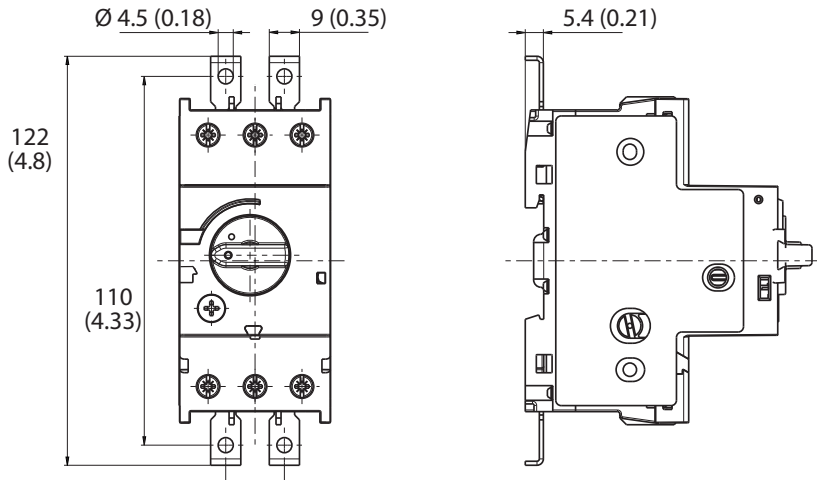


Figure 6 - Cat. No. 140MP-A3E-C16 with Accessories

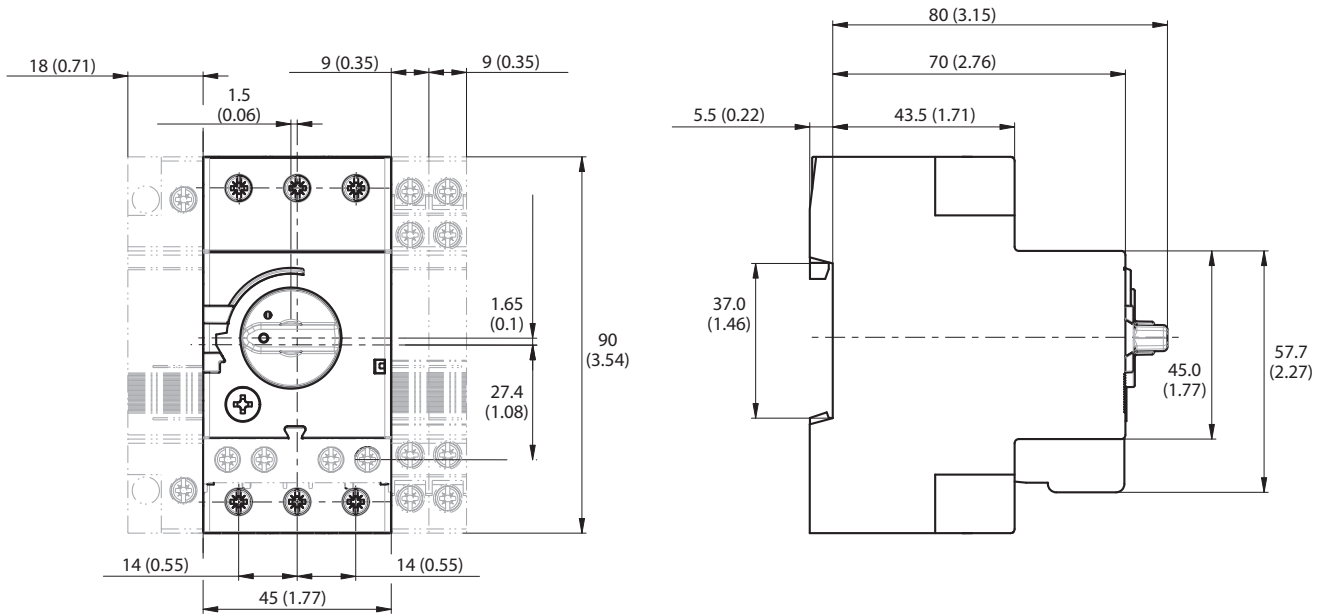
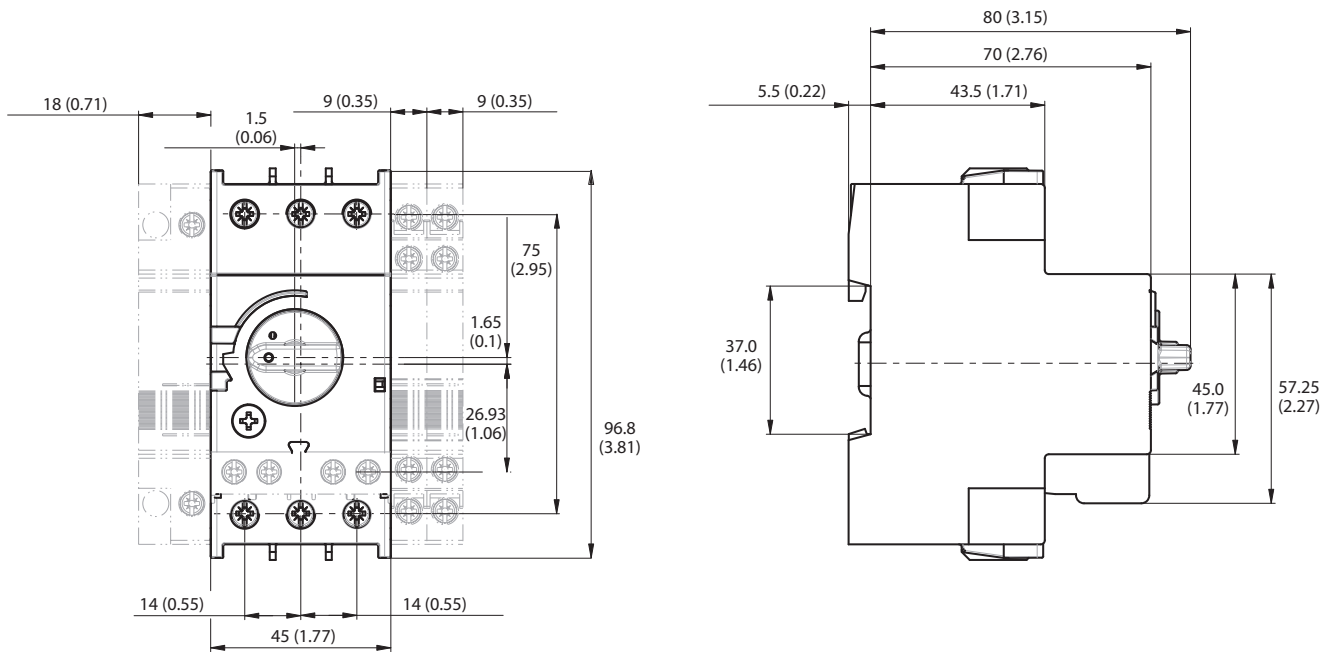


Figure 7 - Cat. No. 140MP-A3E-C32 with Accessories



Product Overview

Bulletin 140MT Motor Protection Circuit Breakers (MPCBs) or Motor Protective Switching Devices (MPSDs) are UL Listed as Manual, Self-Protected Combination Motor Controllers (Type E) and Manual Motor Controllers (with approvals for Suitable as Motor Disconnect and Suitable for use in Group Installation).

When UL/CSA Listed as Manual, Self-Protected Combination Motor Controllers, the 140MT Motor Protection Circuit Breakers provide all of the necessary NEC/CEC requirements for the protection and control of individual Motor Branch Circuits without additional branch circuit protective devices.



According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices may provide the following control and protection functions.

- Disconnect for motor branch circuit
- Short-circuit Protection (magnetic protection)
- Overload protection (thermal protection)
- Manual switching (motor control means)

Group motor installations eliminate the need for individual branch short-circuit protective devices for each motor circuit, reducing panel space, installation and wiring time, and costs. There is only one Branch Circuit Protective Device (BCPD) for the "Group". Bulletin 140MT devices are also UL Listed for Tap Conductor protection in group installations, which helps reduce conductor sizing.

According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices these devices certified for group motor installation may provide the following control and protection functions.

- Disconnect for motor branch circuit
- Overload protection (thermal protection)
- Manual switching (motor control means)

Bulletin 140MT devices meet requirement of Motor Protective Switching Devices (MPSD) according to IEC 60947-4-1 and Circuit Breaker according to IEC 60947-2 standard for application outside of North America. These devices provide the following functions.

- Disconnect for motor branch circuit
- Short-circuit Protection (magnetic protection)
- Overload protection (thermal protection)
- Manual switching (motor control means)

Bulletin 140MT devices provide Trip Class 10 overload protection and phase loss sensitivity protection. These are suitable for single- and three- phase applications.

Cat. No. 140MT-D9V devices can also be applied at the output of a variable frequency drive (VFD) in multi-motor applications.

Application Diagrams

Group Installation with MPCBs

There is only one Branch Circuit Protective Device (BCPD) for the "Group".

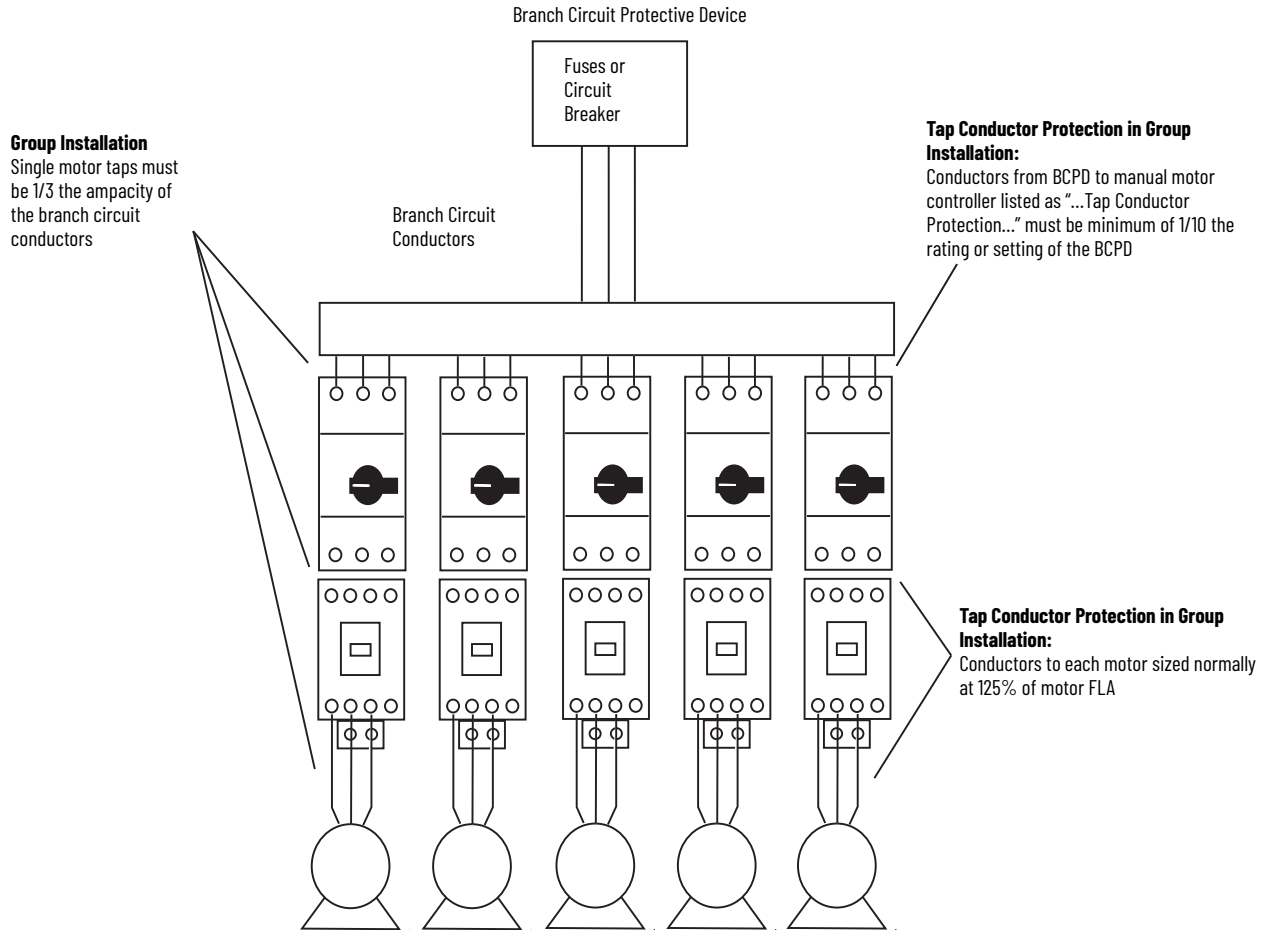
Group installation has been successfully used for many years in the U.S. and Canada. It allows "two or motors or one or more motors and other loads to be connected to the same branch-circuit...". The most restrictive part of the conditions specified for Group Installation is the requirement for the protection of the conductors for each motor circuit. In the U.S. NEC for 2002, a new rule for the conductor sizing was added for devices that are listed and marked "Suitable for use as Tap Conductor Protection".

[Figure 8](#) shows an example that illustrates installations involving multiple motors with a single BCPD protecting the entire "Group".

Bulletin 140MT Motor Protection Circuit Breakers UL/CSA Listed for Group Installation: conductors from the BCPD to each motor must be a minimum of 1/3 the ampacity of the Branch Circuit conductors.

Bulletin 140MT Motor Protection Circuit Breakers UL/CSA Listed for Tap conductor Protection in Group Installations: conductors from the BCPD to manual motor controller listed as "...Tap Conductor Protection..." must be minimum of 1/10 the rating or setting of the BCPD. Conductors from the controller to the motor must be 125% of the motor FLA.

Figure 8 - Group Installation with MPCBs

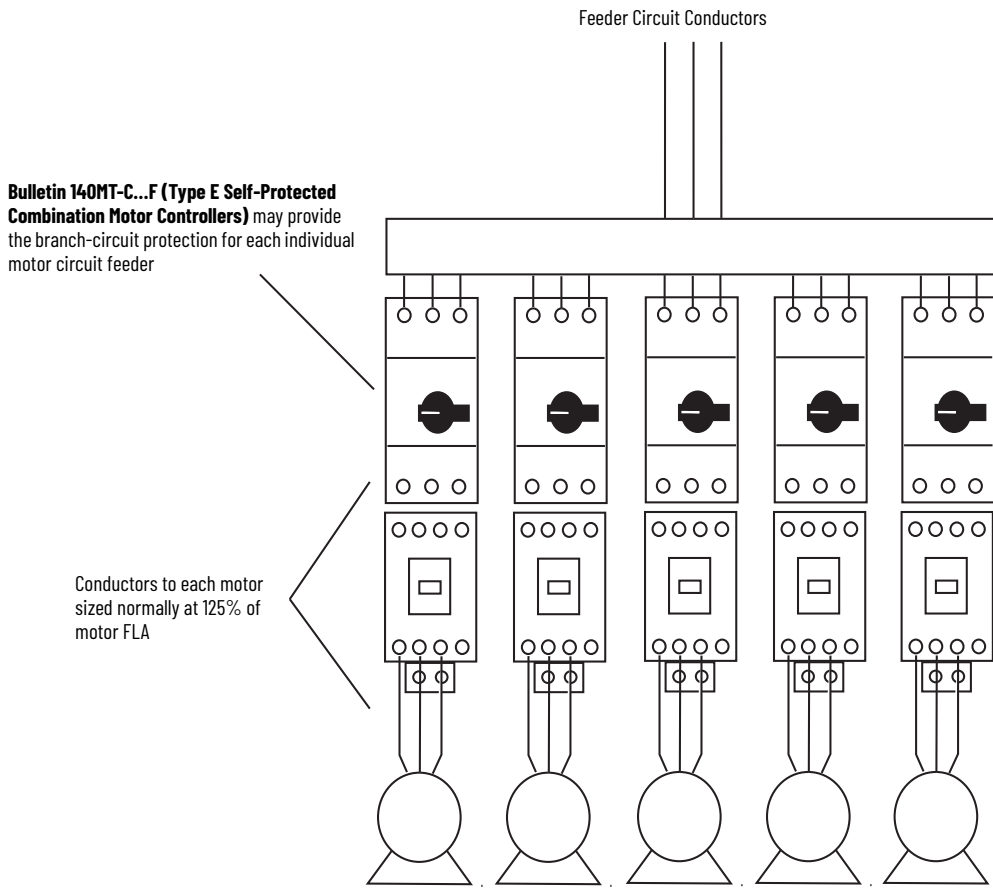


Multiple Motor Installation with MPCBs

Each Motor has an Individual Branch Circuit Protective Device.

Bulletin 140MT Motor Protection Circuit Breakers (MPCBs) are UL/CSA Listed as Type E Manual Self-Protected Combination Motor Controllers or UL/CSA Listed as Circuit Breakers. These UL/CSA Listings allow the Bulletin 140MT MPCBs to provide the branch-circuit, short-circuit protection (as well as overload protection) for each individual motor circuit. Additional short-circuit protection is not required for the protection of the individual motor circuits, leaving only the requirement for protection of the feeder circuit conductors by an upstream protective device. [Figure 9](#) shows an example that illustrates installations involving multiple motors, each with its own branch-circuit protection (BCPD).

Figure 9 - Multiple Motor Installation with MPCBs



Catalog Number Explanation

C- and D-Frame Devices

$\frac{140MT}{a} - \frac{C}{b} \frac{3}{c} \frac{E}{d} - \frac{B63}{e}$

a	
Bulletin Number	
Code	Description
140MT	140MT Motor Protective Switching Device (Thermal)

b	
Current Rating/ Frame Size	
Code	Description
C	32 A, Frame C
D	40 A, Frame D

c	
Interrupting Rating/ Breaking Capacity	
Code	Description
3	Normal break
7	UL 489
9	High break

d	
Function	
Code	Description
E	Adjustable Thermal/Fixed Magnetic ($14 \times I_n$) MPCB
N	Fixed Magnetic ($14 \times I_n$) MCP
T	Adjustable Thermal/Fixed Magnetic ($18...22 \times I_n$) TPCB
V	Fixed Magnetic (application at output of VFD multi-motor)

e	
Current Range	
Code	Description
A	0.10 (example: A16 = 0.16 A)
B	1.0 (example: B16 = 1.6 A)
C	10 (example: C16 = 16 A)

F-Frame Devices

$\frac{140M}{a} - \frac{F}{b} \frac{8}{c} \frac{E}{d} - \frac{C10}{e}$

a	
Bulletin Number	
Code	Description
140M	140M Motor Protection Circuit Breaker

b	
Current Rating/ Frame Size	
Code	Description
F	45 A, Frame F

c	
Interrupting Rating/ Breaking Capacity	
Code	Description
8	High break

d	
Function	
Code	Description
E	Adjustable Thermal/Fixed Magnetic ($14 \times I_n$) MPCB
N	Fixed Magnetic ($14 \times I_n$) MCP
T	Adjustable Thermal/Fixed Magnetic ($18...22 \times I_n$) TPCB

e	
Current Range	
Code	Description
C	10 (example: C16 = 16 A)

Product Selection

Selection Using Current and Hp/kW Ratings

Table 27 - Motor Protective Switching Devices

Rated Operational Current (I_e) [A]	Motor Current Adjustment Range [A]	Nominal Magnetic Trip Current [A]	Max Short-circuit Current [kA]		Max. 3-phase Hp Ratings ⁽¹⁾				Max. kW, 3-Phase – AC-3 ⁽¹⁾				Cat. No.
			400V (I_{cu})	480V (group motor)	200V	230V	460V	575V	230V	400/415V	500V	690V	
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)													
0.16	0.10...0.16	2.2	100	65	–	–	–	–	–	0.02	0.06	0.06	140MT-C3E-A16
0.25	0.16...0.25	3.5	100	65	–	–	–	–	–	0.04	0.09	0.09	140MT-C3E-A25
0.4	0.25...0.40	5.6	100	65	–	–	–	–	0.06	0.09	0.12	0.18	140MT-C3E-A40
0.63	0.40...0.63	8.8	100	65	–	–	–	–	0.09	0.18	0.18	0.25	140MT-C3E-A63
1	0.63...1.0	14	100	65	–	–	0.5	0.5	0.18	0.25	0.37	0.55	140MT-C3E-B10
1.6	1.0...1.6	22	100	65	0.25	0.33	0.75	0.75	0.25	0.55	0.75	1.1	140MT-C3E-B16
2.5	1.6...2.5	35	100	65	0.5	0.5	1	1.5	0.37	0.75	1.1	1.8	140MT-C3E-B25
4	2.5...4.0	56	100	65	0.75	0.75	2	3	0.75	1.5	2.2	3	140MT-C3E-B40
6.3	4.0...6.3	88	100	65	1	1.5	3	5	1.5	2.2	3	4	140MT-C3E-B63
10	6.3...10	140	100	65	2	2	5	7.5	2.2	4	6.3	7.5	140MT-C3E-C10
16	10...16	224	65	30	3	5	10	10	4	7.5	10	13	140MT-C3E-C16
20	14.5...20	280	50	30	5	5	10	15	5.5	10	11	17	140MT-C3E-C20
25	18...25	350	15	30	5	7.5	15	20	5.5	11	15	22	140MT-C3E-C25
29	23...29	406	15	30	7.5	10	20	25	7.5	13	18.5	25	140MT-C3E-C29
32	26.5...32	448	15	30	7.5	10	20	30	7.5	15	20	25	140MT-C3E-C32
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)													
0.63	0.40...0.63	8.8	100	65	–	–	–	–	0.09	0.18	0.18	0.25	140MT-D9E-A63
1	0.63...1.0	14	100	65	–	–	0.5	0.5	0.18	0.25	0.37	0.55	140MT-D9E-B10
1.6	1.0...1.6	22	100	65	0.25	0.33	0.75	0.75	0.25	0.55	0.75	1.1	140MT-D9E-B16
2.5	1.6...2.5	35	100	65	0.5	0.5	1	1.5	0.37	0.75	1.1	1.8	140MT-D9E-B25
4	2.5...4.0	56	100	65	0.75	0.75	2	3	0.75	1.5	2.2	3	140MT-D9E-B40
6.3	4.0...6.3	88	100	65	1	1.5	3	5	1.5	2.2	3	4	140MT-D9E-B63
10	6.3...10	140	100	65	2	3	5	7.5	2.2	4	6.3	7.5	140MT-D9E-C10
16	10...16	224	100	65	3	5	10	10	4	7.5	10	13	140MT-D9E-C16
20	14.5...20	280	100	65	5	5	10	15	5.5	10	11	17	140MT-D9E-C20
25	18...25	350	65	50	7.5	7.5	15	20	5.5	11	15	22	140MT-D9E-C25
29	23...29	406	50	50	7.5	10	20	25	7.5	13	18.5	25	140MT-D9E-C29
32	26.5...32	448	50	50	7.5	10	20	30	7.5	15	20	25	140MT-D9E-C32
36	30...36	432	50	30	10	10	25	30	–	18.5	20	25	140MT-D9E-C36 ⁽²⁾
40	34...40	480	50	30	10	10	30	30	11	20	24	30	140MT-D9E-C40 ⁽²⁾
D-Frame, Fixed Magnetic (application at output of VFD multi-motor)													
1.6	1.0...1.6	88	100	65	–	–	0.75	–	0.25	0.55	0.75	–	140MT-D9V-B16
2.5	1.6...2.5	88	100	65	0.5	0.5	1	–	0.37	0.75	1.1	–	140MT-D9V-B25
4	2.5...4.0	88	100	65	0.75	0.75	2	–	0.75	1.5	2.2	–	140MT-D9V-B40
6.3	4.0...6.3	88	100	65	1	1.5	3	–	1.5	2.2	3	–	140MT-D9V-B63
10	6.3...10	140	100	65	2	3	5	–	2.2	4	6.3	–	140MT-D9V-C10
16	10...16	224	100	65	3	5	10	–	4	7.5	10	–	140MT-D9V-C16
20	14.5...20	280	100	65	5	5	10	–	5.5	10	11	–	140MT-D9V-C20
25	18...25	350	65	50	7.5	7.5	15	–	5.5	11	15	–	140MT-D9V-C25
29	23...29	406	50	50	7.5	10	20	–	7.5	13	18.5	–	140MT-D9V-C29
32	26.5...32	448	50	50	7.5	10	20	–	7.5	15	20	–	140MT-D9V-C32
36	30...36	432	50	30	10	10	25	–	–	18.5	20	–	140MT-D9V-C36 ⁽²⁾
40	34...40	480	50	30	10	10	30	–	11	20	24	–	140MT-D9V-C40 ⁽²⁾

Table 27 - Motor Protective Switching Devices (Continued)

Rated Operational Current (I_e) [A]	Motor Current Adjustment Range [A]	Nominal Magnetic Trip Current [A]	Max Short-circuit Current [kA]		Max. 3-phase Hp Ratings ⁽¹⁾				Max. kW, 3-Phase – AC-3 ⁽¹⁾				Cat. No.
			400V (I_{cu})	480V (group motor)	200V	230V	460V	575V	230V	400/415V	500V	690V	
F-Frame, Adjustable Thermal/Fixed Magnetic (13 x I_n)													
10	6.3...10	130	100	65	2	3	5	7.5	2.2	4	6.3	7.5	140M-F8E-C10
16	10...16	208	100	65	3	5	10	10	4	7.5	10	13	140M-F8E-C16
20	14.5...20	260	100	65	5	5	10	15	5.5	10	11	17	140M-F8E-C20
25	18...25	325	100	65	7.5	7.5	15	20	5.5	11	15	22	140M-F8E-C25
32	23...32	416	65	65	7.5	10	20	30	7.5	15	20	25	140M-F8E-C32
45	32...45	585	65	65	10	15	30	40	13	22	30	40	140M-F8E-C45
25	18...25	416	65	65	7.5	7.5	15	20	5.5	11	15	22	140M-F8T-C25
32	23...32	585	65	65	7.5	10	20	30	7.5	15	20	25	140M-F8T-C32

(1) Horsepower/kW ratings shown are for reference. The final selection of the MPCB/MPSD depends on the actual motor full load current.

(2) Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).

Table 28 - High Inrush Motor Protection Switching Devices

Rated Operational Current (I_e) [A]	Motor Current Adjustment Range [A]	Nominal Magnetic Trip Current [A]	Max Short-circuit Current [kA]		Max. 3-phase Hp Ratings ⁽¹⁾				Max. kW, 3-Phase – AC-3 ⁽¹⁾				Cat. No.
			400V (I_{cu})	480V (group motor)	200V	230V	460V	575V	230V	400/415V	500V	690V	
0.16	0.10...0.16	3.5	100	65	–	–	–	–	–	0.02	0.06	0.06	140MT-D9T-A16
0.25	0.16...0.25	5.5	100	65	–	–	–	–	–	0.04	0.09	0.09	140MT-D9T-A25
0.4	0.25...0.40	8.8	100	65	–	–	–	–	0.06	0.09	0.12	0.18	140MT-D9T-A40
0.63	0.40...0.63	14	100	65	–	–	–	–	0.09	0.18	0.18	0.25	140MT-D9T-A63
1	0.63...1.0	22	100	65	–	–	0.5	0.5	0.18	0.25	0.37	0.55	140MT-D9T-B10
1.6	1.0...1.6	35	100	65	0.25	0.33	0.75	0.75	0.25	0.55	0.75	1.1	140MT-D9T-B16
2.5	1.6...2.5	55	100	65	0.5	0.5	1	1.5	0.37	0.75	1.1	1.8	140MT-D9T-B25
4	2.5...4.0	88	100	65	0.75	0.75	2	3	0.75	1.5	2.2	3	140MT-D9T-B40
6.3	4.0...6.3	139	100	65	1	1.5	3	5	1.5	2.2	3	4	140MT-D9T-B63
10	6.3...10	220	100	65	2	3	5	7.5	2.2	4	6.3	7.5	140MT-D9T-C10
16	10...16	320	100	65	3	5	10	10	4	7.5	10	13	140MT-D9T-C16
20	14.5...20	400	100	65	5	5	10	15	5.5	10	11	17	140MT-D9T-C20
25	18...25	450	65	50	7.5	7.5	15	20	5.5	11	15	22	140MT-D9T-C25
F-Frame, Adjustable Thermal/Fixed Magnetic (16...22 x I_n)													
25	18...25	416	65	65	7.5	7.5	15	20	5.5	11	15	22	140M-F8T-C25
32	23...32	585	65	65	7.5	10	20	30	7.5	15	20	25	140M-F8T-C32

(1) Horsepower/kW ratings shown are for reference. The final selection of the MPCB/MPSD depends on the actual motor full load current.

Table 29 - Motor Circuit Protectors

Rated Operational Current (I_e) [A]	Motor Current Adjustment Range [A]	Nominal Magnetic Trip Current [A]	Max. Short Circuit Current [kA]		Max. 3-phase Hp Ratings ⁽¹⁾				Max. kW, 3-Phase – AC-3 ⁽¹⁾				Cat. No.
			400V	480V	200V	230V	460V	575V	230V	400/415V	500V	690V	
			(I_{cu})	(group motor)									
D-Frame, Fixed Magnetic (14 x I_n)													
0.16	–	2.2	100	65	–	–	–	–	–	0.02	0.06	0.06	140MT-D9N-A16
0.25	–	3.5	100	65	–	–	–	–	–	0.04	0.09	0.09	140MT-D9N-A25
0.4	–	5.6	100	65	–	–	–	–	0.06	0.09	0.12	0.18	140MT-D9N-A40
0.63	–	8.8	100	65	–	–	–	–	0.09	0.18	0.18	0.25	140MT-D9N-A63
1	–	14	100	65	–	–	0.5	0.5	0.18	0.25	0.37	0.55	140MT-D9N-B10
1.6	–	22	100	65	0.25	0.33	0.75	0.75	0.25	0.55	0.75	1.1	140MT-D9N-B16
2.5	–	35	100	65	0.5	0.5	1	1.5	0.37	0.75	1.1	1.8	140MT-D9N-B25
4	–	56	100	65	0.75	0.75	2	3	0.75	1.5	2.2	3	140MT-D9N-B40
6.3	–	88	100	65	1	1.5	3	5	1.5	2.2	3	4	140MT-D9N-B63
10	–	140	100	65	2	3	5	7.5	2.2	4	6.3	7.5	140MT-D9N-C10
16	–	224	100	65	3	5	10	10	4	7.5	10	13	140MT-D9N-C16
20	–	280	100	65	5	5	10	15	5.5	10	11	17	140MT-D9N-C20
25	–	350	65	50	7.5	7.5	15	20	5.5	11	15	22	140MT-D9N-C25
29	–	406	50	50	7.5	10	20	25	7.5	13	18.5	25	140MT-D9N-C29
32	–	448	50	50	7.5	10	20	30	7.5	15	20	25	140MT-D9N-C32
36	–	432	50	30	10	10	25	30	–	18.5	20	25	140MT-D9N-C36 ⁽²⁾
40	–	480	50	30	10	10	30	30	11	20	24	30	140MT-D9N-C40 ⁽²⁾
F-Frame, Fixed Magnetic (13 x I_n)													
25	–	325	100	65	7.5	10	20	25	6.3	11	15	22	140M-F8N-C25
32	–	416	65	65	7.5	10	25	30	7.5	15	20	30	140M-F8N-C32
45	–	585	65	65	10	15	30	40	13	22	30	40	140M-F8N-C45

(1) Horsepower/kW ratings shown are for reference. The final selection of the MCP depends on the actual motor full load current.

(2) Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).



Motor Circuit Protectors (Cat. No. 140MT-D9N, 140M-F8N) do not provide thermal protection for themselves nor for downstream components. You must install a separate protective device against thermal overload, such as an overload relay as part of a starter combination. In applications that use these devices as the short-circuit protection device of heavy-duty starting motors, the rated operational current I_e of the devices must be over-sized using the factors in [Table 30](#).

Table 30 - Oversizing for Heavy-duty Starting

Current Range [A]	Device Type	Class 10	Class 20	Class 30
0.16...10	140MT-D9N	–	–	–
16...29		–	–	1.41
32...40		–	1.41	1.73
25...45	140M-F8N	–	1.41	1.73

Selection Using Application Ratings

See [page 41](#) for combination ratings.

Table 31 - UL/CSA Listed Application Ratings, Motor Protective Switching Devices

Max. Fuse or Circuit Breaker per NEC [A]	UL 60947-4-1 – Manual Motor Controller						UL 60947-4-1 Self-Protected (Type E) Combination Motor Controller		Cat. No.
	Max Short-circuit Current [kA]						Max Short-circuit Current [kA]		
	Group Motor Installation		Motor Disconnect		Tap Conductor Protection		480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾	
480V	600V	480V	600V	480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾				
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)									
450	65	50	65	50	65	50	65	50	140MT-C3E-A16
450	65	50	65	50	65	50	65	50	140MT-C3E-A25
450	65	50	65	50	65	50	65	50	140MT-C3E-A40
450	65	50	65	50	65	50	65	50	140MT-C3E-A63
450	65	50	65	50	65	50	65	50	140MT-C3E-B10
450	65	50	65	50	65	50	65	50	140MT-C3E-B16
450	65	30	65	30	65	30	65	30	140MT-C3E-B25
450	65	30	65	30	65	30	65	30	140MT-C3E-B40
450	65	30	65	30	65	–	65	–	140MT-C3E-B63
450	65	30	65	30	65	–	65	–	140MT-C3E-C10
450	30	30	30	30	30	–	30	–	140MT-C3E-C16
450	30	30	30	10	–	–	–	–	140MT-C3E-C20
450	30	18	30	5	–	–	–	–	140MT-C3E-C25
450	30	10	10	–	–	–	–	–	140MT-C3E-C29
450	30	10	10	–	–	–	–	–	140MT-C3E-C32
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)									
450	65	50	65	50	65	50	65	50	140MT-D9E-A63
450	65	50	65	50	65	50	65	50	140MT-D9E-B10
450	65	50	65	50	65	50	65	50	140MT-D9E-B16
450	65	30	65	30	65	30	65	30	140MT-D9E-B25
450	65	30	65	30	65	30	65	30	140MT-D9E-B40
450	65	30	65	30	65	30	65	30	140MT-D9E-B63
450	65	30	65	30	65	30	65	30	140MT-D9E-C10
450	65	30	65	30	65	30	65	30	140MT-D9E-C16
450	65	30	65	30	65	–	65	–	140MT-D9E-C20
450	50	30	50	30	50	–	50	–	140MT-D9E-C25
450	50	30	50	30	50	–	50	–	140MT-D9E-C29
450	50	30	30	18	30	–	30	–	140MT-D9E-C32
450	30	30	30	18	30	–	30	–	140MT-D9E-C36 ⁽²⁾
450	30	30	30	18	30	–	30	–	140MT-D9E-C40 ⁽²⁾
D-Frame, Adjustable Thermal/Fixed Magnetic (application at output of VFD multi-motor)									
450	65	–	65	–	65	–	65	–	140MT-D9V-B16
450	65	–	65	–	65	–	65	–	140MT-D9V-B25
450	65	–	65	–	65	–	65	–	140MT-D9V-B40
450	65	–	65	–	65	–	65	–	140MT-D9V-B63
450	65	–	65	–	65	–	65	–	140MT-D9V-C10
450	65	–	65	–	65	–	65	–	140MT-D9V-C16
450	65	–	65	–	65	–	65	–	140MT-D9V-C20
450	50	–	50	–	50	–	50	–	140MT-D9V-C25
450	50	–	50	–	50	–	50	–	140MT-D9V-C29
450	50	–	30	–	30	–	30	–	140MT-D9V-C32
450	30	–	30	–	30	–	30	–	140MT-D9V-C36 ⁽²⁾

Table 31 - UL/CSA Listed Application Ratings, Motor Protective Switching Devices (Continued)

Max. Fuse or Circuit Breaker per NEC [A]	UL 60947-4-1 – Manual Motor Controller						UL 60947-4-1 Self-Protected (Type E) Combination Motor Controller		Cat. No.
	Max Short-circuit Current [kA]						Max Short-circuit Current [kA]		
	Group Motor Installation		Motor Disconnect		Tap Conductor Protection				
480V	600V	480V	600V	480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾	480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾		
450	30	–	30	–	30	–	30	–	140MT-D9V-C40 ⁽²⁾
D-Frame, Adjustable Thermal/Fixed Magnetic (18...22 x I_n)									
450	65	50	65	50	65	50	65	50	140MT-D9T-A16
450	65	50	65	50	65	50	65	50	140MT-D9T-A25
450	65	50	65	50	65	50	65	50	140MT-D9T-A40
450	65	50	65	50	65	50	65	50	140MT-D9T-A63
450	65	50	65	50	65	50	65	50	140MT-D9T-B10
450	65	50	65	50	65	50	65	50	140MT-D9T-B16
450	65	30	65	30	65	30	65	30	140MT-D9T-B25
450	65	30	65	30	65	30	65	30	140MT-D9T-B40
450	65	30	65	30	65	30	65	30	140MT-D9T-B63
450	65	30	65	30	65	30	65	30	140MT-D9T-C10
450	65	30	65	30	65	30	65	–	140MT-D9T-C16
450	65	30	65	30	65	–	65	–	140MT-D9T-C20
450	50	30	50	18	50	–	50	–	140MT-D9T-C25
F-Frame, Adjustable Thermal/Fixed Magnetic (13 x I_n)									
600	65	30	65	30	65	30	65	30	140M-F8E-C10
600	65	30	65	30	65	30	65	30	140M-F8E-C16
600	65	30	65	30	65	30	65	30	140M-F8E-C20
600	65	30	65	30	65	30	65	30	140M-F8E-C25
600	65	30	65	30	65	30	65	30	140M-F8E-C32
600	65	18	65	18	65	–	65	–	140M-F8E-C45
F-Frame, Adjustable Thermal/Fixed Magnetic (16...22 x I_n)									
600	65	30	65	30	65	30	65	30	140M-F8T-C25
600	65	18	65	18	65	18	65	18	140M-F8T-C32

(1) For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.
 (2) Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).

Table 32 - UL/CSA Listed Application Ratings, Motor Circuit Protectors

UL 60947-4-1 – Manual Motor Controller							Cat. No.
Max. Fuse or Circuit Breaker per NEC [A]	Max. Short Circuit Current [kA]						
	Group Motor Installation		Motor Disconnect		Tap Conductor Protection		
	480V	600V	480V	600V	480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾	
D-Frame, Fixed Magnetic (14 x I_n)							
450	65	50	65	50	65	50	140MT-D9N-A16
450	65	50	65	50	65	50	140MT-D9N-A25
450	65	50	65	50	65	50	140MT-D9N-A40
450	65	50	65	50	65	50	140MT-D9N-A63
450	65	50	65	50	65	50	140MT-D9N-B10
450	65	50	65	50	65	50	140MT-D9N-B16
450	65	30	65	30	65	30	140MT-D9N-B25
450	65	30	65	30	65	30	140MT-D9N-B40
450	65	30	65	30	65	30	140MT-D9N-B63
450	65	30	65	30	65	30	140MT-D9N-C10
450	65	30	65	30	65	30	140MT-D9N-C16
450	65	30	65	30	65	–	140MT-D9N-C20
450	50	30	50	30	50	–	140MT-D9N-C25
450	50	30	50	30	50	–	140MT-D9N-C29
450	50	30	30	18	30	–	140MT-D9N-C32
450	30	30	30	18	30	–	140MT-D9N-C36 ⁽²⁾
450	30	30	30	18	30	–	140MT-D9N-C40 ⁽²⁾
F-Frame, Fixed Magnetic (13 x I_n)							
600	65	30	65	30	–	–	140M-F8N-C25
600	65	30	65	30	–	–	140M-F8N-C32
600	65	18	65	18	–	–	140M-F8N-C45

(1) For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.
 (2) Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).

Table 33 - IEC Application Ratings, Interrupting Rating/Breaking Capacity

Breaking Capacity, IEC 60947-2															Cat. No.
230/240V AC			400/415V AC			440/460V AC			500/525V AC			690V AC			
I _{cu} [kA]	I _{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I _{cu} [kA]	I _{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I _{cu} [kA]	I _{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I _{cu} [kA]	I _{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I _{cu} [kA]	I _{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)															
100	100	_(2)	100	100	_(2)	100	100	_(2)	100	100	_(2)	100	100	_(2)	140MT-C3E-A16
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100	100	100	100	100	100	100	100	100						
65	50	100	50	15	100	6	6	80	6	6	80	3	2	63	140MT-C3E-C20
65	50	100	15	15	100	6	4	80	6	4	80	3	2	63	140MT-C3E-C25
50	25	125	15	10	125	6	4	100	6	4	100	3	2	80	140MT-C3E-C29
50	25	125	15	10	125	6	4	100	6	4	100	3	2	80	140MT-C3E-C32

Table 33 - IEC Application Ratings, Interrupting Rating/Breaking Capacity (Continued)

Breaking Capacity, IEC 60947-2															Cat. No.				
230/240V AC			400/415V AC			440/460V AC			500/525V AC			690V AC							
I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]					
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)																			
100	100	_(2)	100	100	_(2)	100	100	_(2)	100	100	_(2)	100	100	_(2)	140MT-D9E-A63				
100	100		100	100		100	100		100	100		100	100		100	100	140MT-D9E-B10		
100	100		100	100		100	100		100	100		100	100		100	100	140MT-D9E-B16		
100	100		100	100		100	100		100	100		100	100		6	4	20	140MT-D9E-B25	
100	100		100	100		100	100		100	100		100	100		6	4	35	140MT-D9E-B40	
100	100		100	100		100	100		100	100		100	100		6	4	50	140MT-D9E-B63	
100	100		100	100		100	100		100	100		100	100		6	3	50	140MT-D9E-C10	
100	100		100	50		80	50		25	80		50	25		80	4	3	63	140MT-D9E-C16
100	100		100	25		100	50		25	100		50	25		80	4	3	63	140MT-D9E-C20
100	100		65	25		100	35		20	100		35	20		80	4	3	63	140MT-D9E-C25
65	50	125	50	25	125	25	15	125	25	15	100	4	3	80	140MT-D9E-C29				
65	50	125	50	25	125	25	15	125	25	15	100	4	3	80	140MT-D9E-C32				
50	35	125	50	25	125	12	6	125	12	6	100	3	2	100	140MT-D9E-C36 ⁽³⁾				
50	35	125	50	25	125	12	6	125	12	6	100	3	2	100	140MT-D9E-C40 ⁽³⁾				
D-Frame, Fixed Magnetic (application at output of VFD multi-motor)																			
100	100	_(2)	100	100	_(2)	100	100	_(2)	100	100	_(2)	-	-	_(2)	140MT-D9V-B16				
100	100		100	100		100	100		100	100		-	-		140MT-D9V-B25				
100	100		100	100		100	100		100	100		-	-		140MT-D9V-B40				
100	100		100	100		100	100		100	100		-	-		140MT-D9V-B63				
100	100		100	100		100	100		100	100		-	-		140MT-D9V-C10				
100	100		100	50		80	50		25	80		50	25		80	-	-	140MT-D9V-C16	
100	100		100	25		100	50		25	100		50	25		80	-	-	140MT-D9V-C20	
100	100		65	25		100	35		20	100		35	20		80	-	-	140MT-D9V-C25	
65	50		125	50		25	125		25	15		125	25		15	100	-	-	140MT-D9V-C29
65	50		125	50		25	125		25	15		125	25		15	100	-	-	140MT-D9V-C32
50	35	125	50	25	125	12	6	125	12	6	100	-	-	140MT-D9V-C36 ⁽³⁾					
50	35	125	50	25	125	12	6	125	12	6	100	-	-	140MT-D9V-C40 ⁽³⁾					
F-Frame, Adjustable Thermal/Fixed Magnetic (13 x I_n)																			
100	100	_(2)	100	50	80	65	50	80	50	50	80	10	10	63	140M-F8E-C10				
100	100		100	50	100	65	50	100	50	50	100	10	10	80	140M-F8E-C16				
100	100		100	50	100	65	50	100	50	50	100	10	10	80	140M-F8E-C20				
100	100		100	50	100	65	50	100	50	50	100	10	10	80	140M-F8E-C25				
100	100		65	50	125	65	50	125	50	50	125	10	6	100	140M-F8E-C32				
100	100		65	50	125	50	50	125	50	50	125	10	6	100	140M-F8E-C45				















Table 33 - IEC Application Ratings, Interrupting Rating/Breaking Capacity (Continued)

Breaking Capacity, IEC 60947-2															Cat. No.
230/240V AC			400/415V AC			440/460V AC			500/525V AC			690V AC			
I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	
D-Frame, High Inrush, Adjustable Thermal/Fixed Magnetic (18...22 x I_n)															
100	100	_(2)	100	100	_(2)	100	100	_(2)	100	100	_(2)	100	100	_(2)	140MT-D9T-A16
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100	_(2)	100	50	80	50	25	80	50	25	80	4	3	63	140MT-D9T-C16
100	100	_(2)	100	25	100	50	25	100	50	25	80	4	2	63	140MT-D9T-C20
100	100	_(2)	65	25	100	50	12	100	50	12	80	4	2	63	140MT-D9T-C25
F-Frame, High Inrush, Adjustable Thermal/Fixed Magnetic (16...22 x I_n)															
100	100	_(2)	65	50	100	65	50	100	50	50	100	10	6	80	140M-F8T-C25
100	100	_(2)	65	50	125	65	50	125	50	50	125	10	6	100	140M-F8T-C32
D-Frame, Motor Circuit Protectors, Fixed Magnetic (14 x I_n)															
100	100	_(2)	100	100	_(2)	100	100	_(2)	100	100	_(2)	100	100	_(2)	140MT-D9N-A16
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100		100	100		100	100		100	100		100	100		
100	100	_(2)	100	50	80	50	25	80	50	25	80	4	3	63	140MT-D9N-C16
100	100	_(2)	100	25	100	50	25	100	50	25	80	4	3	63	140MT-D9N-C20
100	100	_(2)	65	25	100	35	20	100	35	20	80	4	3	63	140MT-D9N-C25
65	50	125	50	25	125	25	15	125	25	15	100	4	3	80	140MT-D9N-C29
65	50	125	50	25	125	25	15	125	25	15	100	4	3	80	140MT-D9N-C32
50	35	125	50	25	125	12	6	125	12	6	100	3	2	100	140MT-D9N-C36 ⁽³⁾
50	35	125	50	25	125	12	6	125	12	6	100	3	2	100	140MT-D9N-C40 ⁽³⁾
F-Frame, Motor Circuit Protectors, Fixed Magnetic (13 x I_n)															
100	100	100	100	50	100	65	50	100	50	50	100	10	10	80	140M-F8N-C25
100	100	125	65	50	125	65	50	125	50	50	125	10	6	100	140M-F8N-C32
100	100	125	65	50	125	50	50	125	50	50	125	10	6	100	140M-F8N-C45

(1) Back-up fuses are type gG, aM.
 (2) No Back-up fuse required if $I_{cc} < I_{cs}$.
 (3) Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).


Accessories

Auxiliary Contacts



Description	Operator Position ⁽¹⁾			Term. No.	Contact Description	Connection Diagram ⁽²⁾	For Use With	Cat. No.	
	OFF	ON	Tripped						
 Front-Mounted Auxiliary Contact <ul style="list-style-type: none"> • 1-pole or 2-pole • No additional space required • Only one per device 	0	X	0	13-14	N.O. Aux		140MT-C, D 140UT-D	140MT-C-AFA10	
								140M-F	140M-C-AFA10
	X	0	X	11-12	N.C. Aux		140M-F	140M-C-AFA01	
	0	X	0	13-14	N.O. Aux		140MT-C, D 140UT-D	140MT-C-AFA11	
	X	0	X	21-22	N.C. Aux		140M-F	140M-C-AFA11	
	0	X	0	13-14	N.O. Aux		140MT-C, D 140UT-D	140MT-C-AFA20	
	X	0	X	21-22	N.C. Aux		140M-F	140M-C-AFA20	
	0	X	0	13-14	N.O. Aux		140MT-C, D 140UT-D	140MT-C-AFA20	
	0	X	0	23-24	N.O. Aux		140M-F	140M-C-AFA20	
	X	0	X	11-12	N.C. Aux		140M-F	140M-C-AFA02	
	X	0	X	21-22	N.C. Aux				
	 Right Side-Mounted Auxiliary Contact <ul style="list-style-type: none"> • 2-pole • Adds 9 mm to the width of the device • One per device • Not suitable for UL 489 applications 	0	X	0	33-34	N.O. Aux		140MT-C, D 140UT-D	140MT-C-ASA20
0		X	0	43-44	N.O. Aux	140M-F		140M-C-ASA20	
0		X	0	33-34	N.O. Aux		140MT-C, D 140UT-D	140MT-C-ASA02	
X		0	X	31-32	N.C. Aux		140M-F	140M-C-ASA02	
X		0	X	41-42	N.C. Aux		140MT-C, D 140UT-D	140MT-C-ASA11	
X		0	X	31-32	N.C. Aux		140M-F	140M-C-ASA11	
0		X	0	33-34	N.O. Aux		140MT-C, D 140UT-D	140MT-C-ASA11	
X		0	X	41-42	N.C. Aux		140M-F	140M-C-ASA11	
0		X	0	33-34	N.O. Aux		140MT-C, D 140UT-D	140MT-C-ASA11	
X		0	X	41-42	N.C. Aux		140M-F	140M-C-ASA11	

(1) X = Contact Closed; 0 = Contact Open

(2) Connection Diagram Reference:




Trip Contacts




Description	Operator Position ⁽¹⁾			Term. No.	Contact Description	Connection Diagram ⁽²⁾	For Use With	Cat. No.
	OFF	ON	Tripped					
 <p>Front-Mounted Trip Contact</p> <ul style="list-style-type: none"> • 2-pole • Indicates tripping of device • No additional space required 	0	X	0	13-14	N.O. Aux		140MT-C, D 140UT-D	140MT-C-AFAR10A10
	0	0	X	27-28	N.O. Trip (short-circuit and overload)			
	0	X	0	13-14	N.O. Aux		140M-F	140M-C-AFAR10A10
	0	0	X	27-28	N.O. Trip (short-circuit and overload)			
	X	0	X	11-12	N.C. Aux		140MT-C, D 140UT-D	140MT-C-AFAR10A01
	0	0	X	27-28	N.O. Trip (short-circuit and overload)			
	X	0	X	11-12	N.C. Aux		140M-F	140M-C-AFAR10A01
	0	0	X	27-28	N.O. Trip (short-circuit and overload)			
	0	X	0	13-14	N.O. Aux		140MT-C, D 140UT-D	140MT-C-AFAR01A10
	X	X	0	25-26	N.C. Trip (short-circuit and overload)			
	0	0	X	17-18	N.O. Trip (short-circuit and overload)			
	0	0	X	27-28	N.O. Trip (short-circuit)			
 <p>Right-Side Mounted Trip Contact</p> <ul style="list-style-type: none"> • 2-pole • Indicates tripping of the device • Adds 9 mm to the width of the device • One only per device • A right-side mounted auxiliary contact may be tandem mounted on top of this trip contact 	0	0	X	57-58	N.O. Trip (short-circuit and overload)		140M-C-ASAR10M10	
	0	0	X	67-68	N.O. Trip (short-circuit)			
	0	0	X	57-58	N.O. Trip (short-circuit and overload)		140M-C-ASAR10M01	
	X	X	0	65-66	N.C. Trip (short-circuit)			
	X	X	0	55-56	N.C. Trip (short-circuit and overload)		140M-F	140M-C-ASAR01M10
	0	0	X	67-68	N.O. Trip (short-circuit)			
	X	X	0	55-56	N.C. Trip (short-circuit and overload)		140M-C-ASAR01M01	
	X	X	0	65-66	N.C. Trip (short-circuit)			
	0	0	X	77-78	N.O. Trip (short-circuit)		140M-C-ASAM11	
	X	X	0	65-66	N.C. Trip (short-circuit)			

(1) X = Contact Closed; 0 = Contact Open


(2) Connection Diagram Reference:





Undervoltage Trip Units

	Description	Connection Diagram ⁽¹⁾	Trip Rating	For Use With	Cat. No.
	Undervoltage Trip <ul style="list-style-type: none"> • Left-side mounted • Adds 18 mm to the width of the device • Automatically trips MPCB/MCP when voltage falls below 35...70% 		24V, 50 Hz/24...28V, 60 Hz	140MT-C, D 140UT-D	140MT-C-UXK
			120V, 60 Hz		140MT-C-UXD
			220...230V, 50 Hz		140MT-C-UXF
			240...260V, 60 Hz		140MT-C-UXA
			380...400V, 50 Hz		140MT-C-UXN
			480V, 60 Hz/415V, 50 Hz		140MT-C-UXB
			24V, 60 Hz		140M-C-UXJ
			24V, 50 Hz	140M-C-UXK	
			120V, 60 Hz	140M-C-UXD	
			110V, 50 Hz	140M-C-UXC	
			208V, 60 Hz	140M-C-UXH	
			220...230V, 50 Hz	140M-C-UXF	
			240...260V, 60 Hz	140M-C-UXA	
			277V, 60 Hz	140M-C-UXT	
	380...400V, 50 Hz	140M-C-UXN			
	480V, 60 Hz/415V, 50 Hz	140M-C-UXB			
	575V, 60 Hz/500V, 50 Hz	140M-C-UXM			
	600V, 60 Hz	140M-C-UXVC			
	Undervoltage Trip <ul style="list-style-type: none"> • Left-side mounted • 2 early make contacts integrated • Adds 18 mm to the width of the device • Automatically trips MPCB/MCP when voltage falls below 35...70% 		24V, 60 Hz	140M-F	140M-C-UCJ
			24V, 50 Hz		140M-C-UCK
			120V, 60 Hz		140M-C-UCD
			110V, 50 Hz		140M-C-UCC
			208V, 60 Hz		140M-C-UCH
			220...230V, 50 Hz		140M-C-UCF
			240...260V, 60 Hz		140M-C-UCA
			277V, 60 Hz		140M-C-UCT
			380...400V, 50 Hz		140M-C-UCN
			480V, 60 Hz/415V, 50 Hz		140M-C-UCB
575V, 60 Hz/500V, 50 Hz			140M-C-UCM		
600V, 60 Hz			140M-C-UCVC		


(1) Connection Diagram Reference:







Shunt Trip Units

Description	Connection Diagram ⁽¹⁾	Trip Rating	For Use With	Cat. No.
 <p>Shunt Trip</p> <ul style="list-style-type: none"> • Left-side mounted • Adds 18 mm to the width of the device • Provides remote tripping of the MPCB/MCP • Maximum on time for DC operated devices: 5 sec. 		24V, 50 Hz/24...28V, 60 Hz	140MT-C, D 140UT-D	140MT-C-SNK
		110V, 50 Hz/120V, 60 Hz		140MT-C-SND
		220...230V, 50 Hz		140MT-C-SNF
		240...260V, 60 Hz		140MT-C-SNA
		277V, 60 Hz		140MT-C-SNT
		380...400V, 50 Hz		140MT-C-SNN
		480V, 60 Hz/415V, 50 Hz		140MT-C-SNB
		24V DC		140MT-C-SNZJ
		24V, 60 Hz	140M-F	140M-C-SNJ
		24V, 50 Hz		140M-C-SNK
		110V, 50 Hz/120V, 60 Hz		140M-C-SND
		208V, 60 Hz		140M-C-SNH
		220...230V, 50 Hz		140M-C-SNF
		240...260V, 60 Hz		140M-C-SNA
		277V, 60 Hz		140M-C-SNT
		380...400V, 50 Hz		140M-C-SNN
		480V, 60 Hz/415V, 50 Hz		140M-C-SNB
		575V, 60 Hz/500V, 50 Hz		140M-C-SNM
		600V, 60 Hz		140M-C-SNVC
		24V DC		140M-C-SNZJ









(1) Connection Diagram Reference:








Additional Accessories

Description	For Use With	Cat. No.	
 <p>Anti-Tamper Shield</p> <ul style="list-style-type: none"> • Provides protection against inadvertent adjustment of the current setting • Must be ordered in multiples of 10 (10 pieces/package) 	140MT-C, D	140MT-C-CA	
	140M-F	140M-C-CA	
 <p>Lockable Twist Knob</p> <ul style="list-style-type: none"> • For one padlock 4...6 mm (3/16 in.) diameter shackle • Can be locked in OFF position 	Blue	140MT-C-KB	
	Black	140MT-C, D 140UT-D	140MT-C-KN
	Red/Yellow	140MT-C-KRY	
 <p>Lockable Twist Knob</p> <ul style="list-style-type: none"> • For one padlock 5 mm (3/16 in.) diameter shackle • Can be locked in OFF position 	Black	140M-C-KN1	
	Red/Yellow	140M-F	140M-C-KRY1
 <p>Locking Tag</p> <ul style="list-style-type: none"> • Padlock attachment to the lockable handles • Up to three padlocks 4...8 mm (5/16 in.) diameter shackle 	140MT-C-KB 140MT-C-KN 140MT-C-KRY	140MT-C-M3	
	140M-C-KN1 140M-C-KRY1	140M-C-M3	




Additional Accessories (Continued)

	Description		For Use With	Cat. No.
	Door Coupling Handle <ul style="list-style-type: none"> For 3 padlocks 4...8 mm (5/16 in.) in diameter IP66 Protection/Type 1, 4, 4X, 12 Interlock override capability Can be modified for locking in ON position Ships with coupling – order extension shaft and legend plate separately 	Black	140MT-C, D 140UT- D	140MT-C-DN66
		Red/Yellow	140MT-C, D 140UT- D	140MT-C-DRY66
	Extension Shaft (Short length) <ul style="list-style-type: none"> Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) <ul style="list-style-type: none"> 140MT-C: 136 mm (5.35 in) 140MT-D: 143 mm (5.63 in) 140UT-D: 143 mm (5.63 in) For Cat. Nos. 140MT-C-DN66 and 140MT-C-DRY66 handles 			140MT-C-DSS
	Extension Shaft (Standard length) <ul style="list-style-type: none"> Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) <ul style="list-style-type: none"> 140MT-C: 136...358 mm (5.35...14.1 in) 140MT-D: 143...364 mm (5.63...14.33 in) 140UT-D: 143...364 mm (5.63...14.33 in) For Cat. Nos. 140MT-C-DN66 and 140MT-C-DRY66 handles 		140MT-C, D 140UT- D	140MT-C-DS
	Extension Shaft (Extended length) <ul style="list-style-type: none"> Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) <ul style="list-style-type: none"> 140MT-C: 136...507 mm (5.35...19.96 in) 140MT-D: 143...513 mm (5.63...20.2 in) 140UT-D: 143...513 mm (5.63...20.2 in) For Cat. Nos. 140MT-C-DN66 and 140MT-C-DRY66 handles 			140MT-C-DSL
	Extension Shaft <ul style="list-style-type: none"> Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) For Cat. Nos. 140M-C-DN66 and 140M-C-DRY66 handles 	Standard Length		140M-C-DS
		Black	140MT-C, D 140UT- D	140MT-SB
	Door Coupling Handle <ul style="list-style-type: none"> Type 3, 3R, 4, 4X, 12 (IP66) For up to 2 padlocks Fits in 30.5 mm cutout Requires 140MT-C-DNC (140MT-C, 140MT-D, 140UT-D) or 140M-C-DNC (140M-F) coupler 	Red/Yellow	140MT-C, D 140UT- D	140MT-SY
			140MT-C, D 140UT- D	140M-SY
	Extension Shaft <ul style="list-style-type: none"> Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) 	12 in. (30.48 cm)	140MT-SB, 140MT-SY	140MT-S1
			140MT-SB, 140MT-SY	140M-S1
		21 in. (53.34 cm)	140MT-SB, 140MT-SY	140MT-S2
	Coupler <ul style="list-style-type: none"> Included with Cat. Nos. 140MT-C-DN66 and 140MT-C-DRY66 		140MT-C, D 140UT- D	140MT-C-DNC
	Coupler <ul style="list-style-type: none"> Included with Cat. Nos. 140M-C-DN66 and 140M-C-DRY66 		140M-F	140M-C-DNC

Additional Accessories (Continued)

	Description	For Use With	Cat. No.
	Extension Shaft Support <ul style="list-style-type: none"> Provides consistent alignment of the 140M/MT-C-DS and 140M/MT-C-DSL shafts with the 140M/MT-C-DN66 or 140M/MT-C-DRY66 door coupling handles Recommended for shaft lengths >200 mm 	140MT-C, D 140UT- D	140MT-C-SHS
	<ul style="list-style-type: none"> Snaps on the right side of the 140MT-C, -D, 140M-F, or 140UT-D device and allows the addition of one side-mounted auxiliary contact. Width: 9 mm. For use with screw-mounted or hat rail mounted devices. 	140M-F	140M-C-SHS
	Legend Plate	Marking: "Hauptschalter" and "Main Switch" 140MT-C-DN66 140M-C-DN66 Marking: "Not-Aus" and "Emergency Off" 140MT-C-DRY66 140M-C-DRY66	140MT-C-DFCN 140M-C-DFCN 140MT-C-DFCRY 140M-C-DFCRY
	Screw Adapter <ul style="list-style-type: none"> For screw arrangement of a motor protection circuit breaker Must be ordered in multiples of 10 (10 pieces/pkg) 	140MT-C, D 140UT- D	140MT-C-N45
		140M-F	140M-C-N45

Modules and Adapters

	Description	For Use With	Cat. No.
	ECO Connecting Module – 12 A (IEC), 11 A (UL) <ul style="list-style-type: none"> For DOL and reversing starters Eco-starters mount on single DIN Rail (140MT on DIN Rail) Electrical and mechanical interconnection of 140MT and 100-K contactors 	140MT-C to 100-K	140MT-C-PEK12
	ECO Connecting Modules – 16 A <ul style="list-style-type: none"> Eco-starters mount on single DIN Rail (140MT on DIN Rail) Electrical and mechanical interconnection of 140MT MPCB and 100-E (with AC coils or 24V DC electronic coils) contactors 	140MT-C to 100(S)-E09...16 ⁽¹⁾	140MT-C-PE16
		140MT-D to 100(S)-E09...16 ⁽¹⁾	140MT-D-PE16
	ECO Connecting Modules – 25 A (IEC), 22 A (UL) <ul style="list-style-type: none"> Eco-starters mount on single DIN Rail (140MT on DIN Rail) Electrical and mechanical interconnection of 140MT MPCB and 100-C (with AC coils or 24V DC electronic coils) contactors 	140MT-C to 100-C09...C23	140MT-C-PEC23
		140MT-D to 100-C09...C23	140MT-D-PEC23
ECO Connecting Modules – 38 A (IEC), 34 A (UL) <ul style="list-style-type: none"> Eco-starters mount on single DIN Rail (140MT on DIN Rail) Electrical and mechanical interconnection of 140MT MPCB and 100-C or 100-E (with AC coils or 24V DC electronic coils) contactors 	140MT-D to 100-C30...C37	140MT-D-PEC37	
	140MT-C to 100(S)-E26...38 ⁽¹⁾	140MT-C-PE38	
	140MT-D to 100(S)-E26...38 ⁽¹⁾	140MT-D-PE38	
	Connecting Modules – 25 A (IEC), 22 A (UL) and 38 A (IEC), 34 A (UL) <ul style="list-style-type: none"> Contactor and MPCB MUST BE mounted separately on (2) DIN Rails Electrical interconnection of 140MT and 100-C (with AC coils) 	140MT-C to 100-C09...C23	140MT-C-PNC23
		140MT-D to 100-C09...C23	140MT-D-PNC23
		140MT-D to 100-C30...C37	140MT-D-PNC37
	Connecting Modules – 25 and 45 A <ul style="list-style-type: none"> Contactor and MPCB MUST BE mounted separately on (2) DIN Rails Electrical interconnection of 140M-F and 100-C (with AC coils) 	140M-F to 100-C30...C37	140M-F-PNC37
140M-F to 100-C43		140M-F-PNC43	
	Spacing Adapter <ul style="list-style-type: none"> Required for self-protected combination motor controller (Type E) applications of Bul. 140MT-C, -D, and 140M-F MPCBs. Not for use with bus bars. 	140MT-C, -D	140MT-C-TE
		140M-F	140M-F-TE

(1) Not suitable for 100(S)-E09...380J or 300(S)-T0...B00J contactors.

Other Accessories

		Description	For Use With	Cat. No.
	Feeder Block for Compact Busbar <ul style="list-style-type: none"> • Supply of compact busbars • Increases terminal capacity 		140MT-C	140MT-C-WBE
			140M-F	140M-F-WBE
	Feeder Terminal for Compact Busbar <ul style="list-style-type: none"> • For supply of compact busbars • Top feed – overlaps compact busbar • Meets UL Type E spacing requirements 		140MT-C, -D	140MT-C-WTEN
			140M-F	140M-F-WTE
	Three-phase Compact Busbar for MPCBs – 64 A Max Continuous Current <ul style="list-style-type: none"> • 45 mm (1.77 in.) spacing • For use with front-mounted auxiliary contact 	2 connections	140MT-C, -D 140UT-D	140MT-C-W452
		3 connections		140MT-C-W453
		4 connections		140MT-C-W454
		5 connections		140MT-C-W455
	Three-phase Compact Busbar for MPCBs – 64 A Max Continuous Current <ul style="list-style-type: none"> • 54 mm (2.13 in.) spacing • For use with side-mounted auxiliary contact 	2 connections	140MT-C, -D 140UT-D	140MT-C-W542
		3 connections		140MT-C-W543
		4 connections		140MT-C-W544
		5 connections		140MT-C-W545
	Three-phase Compact Busbar for 45 A Motor Protection Circuit Breakers – 115 A Max. Continuous Current <ul style="list-style-type: none"> • 54 mm (2.13 in.) spacing • For use with front-mounted auxiliary contact 	2 connections	140M-F	140M-F-W542
		3 connections		140M-F-W543
		4 connections		140M-F-W544
	Three-phase Compact Busbar for 45 A Motor Protection Circuit Breakers – 115 A Max. Continuous Current <ul style="list-style-type: none"> • 63 mm spacing • For use with side-mounted auxiliary contact 	2 connections	140M-F	140M-F-W632
		3 connections		140M-F-W633
		4 connections		140M-F-W634
	Terminal Cover <ul style="list-style-type: none"> • For covering of unused compact bus bar terminals IP2X finger protection • Must be ordered in multiples of 10 • 10 pieces/pkg 		140MT-C, -D	140MT-C-WSN
			140M-F	140M-F-WS
	Top Hat Rail Adapter – 10 mm <ul style="list-style-type: none"> • Adjusts the depth of the 140MT-C to the 140MT-D • Allows the use of compact busbars across both frame sizes • Must be ordered in multiples of 10 • 10 pieces/pkg 		140MT-C	140MT-KBH
	DIN (#3) symmetrical hat rail <ul style="list-style-type: none"> • 35 mm x 7.5 mm x 1 m (1.4 x 0.3 x 39 in.) long • 10 pieces/package 		140MT-C, -D 140UT-D 140M-F	199-DR1
	DIN (#3) Symmetrical Rail <ul style="list-style-type: none"> • 35 mm x 15 mm x 1 m (1.4 x 0.6 x 39 in.) long • Top Hat Rail (DIN #3 Symmetrical Rail) • 5 pieces/package 		140MT-C, -D 140UT-D 140M-F	1492-DR9

Specifications

Table 34 - General Data








Attribute			140MT-C	140MT-D	140M-F	
Standards compliance		IEC	IEC/EN 60947-2, IEC/EN 60947-4-1			
		cULus ⁽¹⁾	UL 60947-4-1, CSA C22.2, No. 60947-4-1			
Certifications		Regional ⁽¹⁾	CCC, EAC, CE, IEC, cULus Listed, CB Scheme		cULus Listed, CCC, EAC, CE	
Rated Insulation Voltage U_i	IEC	[V]	690			
	UL/CSA	[V]	600			
Rated Impulse Withstand Voltage U_{imp}	Pollution degree		3			
	Main circuits U_{imp} /Overvoltage Category		6 kV/III, 8 kV (Disconnect)			
	Auxiliary circuits U_{imp} /Overvoltage Category		6 kV/III			
Rated Frequency		[Hz]	45-65			
Utilization Category	IEC 60947-2 (Circuit breaker)		A			
	IEC 60947-4-1 (Motor starter)		AC-3			
Life Span	Mechanical	[operations]	100,000		30,000	
	Electrical (I_e max.)	[operations]	100,000		30,000	
Switching Frequency		[operations/hour]	max. 25			
Ambient Temperature	Storage	[°C (°F)]	-40...+85 (-40...185)			
	Operation	[°C (°F)]	-25...+70 (-13...158)			
Climatic resistance	Operating Humidity/Moisture heat (60068-2-3)		5...95% Non-condensing			
Site Altitude		[m]	to 2000 N.N. (6561 ft)			
Protection Class			IP2X from all directions			
Resistance to Shock, Transport (60068-2-27)	ON		15 G/11 ms			
	OFF		30 G/11 ms			
Resistance to Vibration, Operation (60068-2-6)			5 G			
Rated Thermal Current I_{th}	up to 40 °C (104 °F) ambient temperature		[A]	0.1...32	0.63...40	6.3...45
	up to 60 °C (140 °F) ambient temperature		[A]	0.1...32	0.63...40	6.3...45
Rated Supply Current I_e		[A]	0.1...32	0.63...40	6.3...45	
Dependence on Temperature	40 °C (104 °F)		[A]	no reduction		
	50 °C (122 °F)		[A]	no reduction		
	60 °C (140 °F)		[A]	no reduction		
	70 °C (158 °F)		[A]	15% current reduction of the upper rated current I_e		
Overload Protection Characteristics			IEC 60947-4-1 Motor protection (except Cat. Nos. 140MT-D9N, 140M-F9N)			
Ambient Temperature Compensation		[°C (°F)]	-25...+60 (-13...+140)			
Phase-loss Protection			Differential release			
Trip class			10 (except Cat. Nos. 140MT-D9N, 140M-F8N) fixed setting			
Magnetic Release			fixed setting			
Release current ($\pm 20\%$)	for E, N Version		[A]	14 x I_e max. ⁽²⁾		13 x I_e max
	for E, N Version C36, C40		[A]	12 x I_e max. ⁽²⁾		—
	for T Version		[A]	18...22 x I_e max. ⁽³⁾		
Total Power loss P_v	Circuit Breaker at rated load/operating temp.	[W]	4...11	4...14	7...22	
Main Disconnect Switch Application			Yes, with accessories			
Application Conditions	140MT-D...C36, -C40: Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).					
	For utilization outside North America, assemblies (of products) shall comply to the IEC 61439-1 requirements					
	140M manual motor starters are intended for use in closed areas without hazardous operating conditions such as dust or explosive or corrosive gases. Enclosures of appropriate manner need to be in place to protect devices in such environments.					

(1) cULus Listing in process.

 (2) I_e max. = maximum values of setting ranges fixed magnetic setting for 140MT-D9V; see ratings.

 (3) I_e max. = maximum values of setting ranges; see ratings.

Table 35 - MPCB Connecting Characteristics

Connection		No. of Conductors	140MT-C, 140MT-D ≤ 16 A	140MT-C, 140MT-D > 16 A	140M-F	
Type of terminals						
			Screw Clamp up to 16 A, M4	Screw Clamp greater than 16 A, M4		
Connection Screw			Pozidriv No.2/Blade No.3	Pozidriv No.2/Blade No.3	Pozidriv No.2/Blade No.3	
Wiring	Solid or stranded 	1	1...6 mm ²	1.5...10 mm ²	2.5...25 mm ²	
		2	1...2.5 mm ² 2.5...6 mm ²	1.5...4 mm ² 4...10 mm ²	2.5...25 mm ²	
	Flexible with ferrule (end sleeve) 	1	1...6 mm ²	1.5...10 mm ²	2.5...25 mm ²	
		2	1...2.5 mm ² 2.5...4 mm ²	1.5...4 mm ² 4...10 mm ²	2.5...25 mm ²	
	Finely stranded 	1	1.5...6 mm ²	2.5...10 mm ²	16...25 mm ²	
		2	1.5...4 mm ² 2.5...6 mm ²	2.5...6 mm ² 4...10 mm ²	16...25 mm ²	
	Cross section per UL/CSA solid, stranded 	1	No. 14...10 AWG	No. 14...8 AWG	No.14...8	
		2	No. 14...10 AWG	No. 14...10 AWG No. 12...8 AWG	No.14...8	
	Stripping length			10 mm (0.39 in.)	10 mm (0.39 in.)	10 mm (0.39 in.)
	Tightening torques		[N•m]/[lb•in]	2...2.5/18...22	2...2.5/18...22	3...3.5/27...30

Combination Ratings

Bulletin 140MT Devices with Bulletin 100-K Miniature IEC Contactors

Table 36 - UL 60947 Application Ratings, MPSDs and MCPs with Bulletin 100-K Miniature IEC Contactors

Cat. No.	UL 60947-4-1 Manual Motor Controller						UL 60947-4-1 Type F		
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size	Group Motor Installation		Motor Disconnect		Combination Motor Controller		
			Max Short-circuit Current [kA]		Max Short-circuit Current [kA]		Minimum Contactor Size	Max Short-circuit Current [kA]	
			480V	600V	480V	600V		480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)									
140MT-C3E-A16	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-A25	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-A40	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-A63	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-B10	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-B16	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-B25	450	100-K05	65	30	65	30	100-K05	65	30
140MT-C3E-B40	450	100-K05	65	30	65	30	100-K05	65	30
140MT-C3E-B63	450	100-K05	65	30	65	30	100-K05	65	—
140MT-C3E-C10	450	100-K09	65	30	65	30	100-K09	65	—
140MT-C3E-C16	450	100-K12	30	30	30	30	100-K12	30	—
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)									
140MT-D9E-A63	450	100-K05	65	50	65	50	100-K05	65	50
140MT-D9E-B10	450	100-K05	65	50	65	50	100-K05	65	50
140MT-D9E-B16	450	100-K05	65	50	65	50	100-K05	65	50
140MT-D9E-B25	450	100-K05	65	30	65	30	100-K05	65	30
140MT-D9E-B40	450	100-K05	65	30	65	30	100-K05	65	30
140MT-D9E-B63	450	100-K05	65	30	65	30	100-K05	65	30
140MT-D9E-C10	450	100-K09	65	30	65	30	100-K09	65	30
140MT-D9E-C16	450	100-K12	65	30	65	30	100-K12	65	30

(1) For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

Bulletin 140MT/M Devices with Bulletin 100-C IEC Contactors

Table 37 - UL 60947 Application Ratings, MPSDs with Bulletin 100-C IEC Contactors

Cat. No.	UL 60947-4-1 Manual Motor Controller						UL 60947-4-1 Type F		
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size	Group Motor Installation		Motor Disconnect		Combination Motor Controller		
			Max Short-circuit Current [kA]		Max Short-circuit Current [kA]		Minimum Contactor Size	Max Short-circuit Current [kA]	
			480V	600V	480V	600V		480V/277V ⁽¹⁾	600V/347V ⁽¹⁾
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)									
140MT-C3E-A16	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-A25	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-A40	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-A63	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-B10	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-B16	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-B25	450	100-C09	65	30	65	30	100-C09	65	30
140MT-C3E-B40	450	100-C09	65	30	65	30	100-C09	65	30
140MT-C3E-B63	450	100-C09	65	30	65	30	100-C09	65	—
140MT-C3E-C10	450	100-C09	65	30	65	30	100-C09	65	—
140MT-C3E-C16	450	100-C12	30	30	30	30	100-C12	30	—
140MT-C3E-C20	450	100-C16	30	30	30	10	—	—	—
140MT-C3E-C25	450	100-C23	30	18	10	5	—	—	—
	450	100-C30	30	18	30	5	—	—	—
140MT-C3E-C29	450	100-C30	30	10	10	—	—	—	—
140MT-C3E-C32	450	100-C37	30	10	10	—	—	—	—
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)									
140MT-D9E-A63	450	100-C09	65	50	65	50	100-C09	65	50
140MT-D9E-B10	450	100-C09	65	50	65	50	100-C09	65	50
140MT-D9E-B16	450	100-C09	65	50	65	50	100-C09	65	50
140MT-D9E-B25	450	100-C09	65	30	65	30	100-C09	65	30
140MT-D9E-B40	450	100-C09	65	30	65	30	100-C09	65	30
140MT-D9E-B63	450	100-C09	65	30	65	30	100-C09	65	30
140MT-D9E-C10	450	100-C09	65	30	65	30	100-C09	65	30
140MT-D9E-C16	450	100-C12	65	30	65	30	100-C12	65	30
140MT-D9E-C20	450	100-C23	65	30	65	30	100-C23	65	—
140MT-D9E-C25	450	100-C23	50	30	50	30	100-C23	50	—
140MT-D9E-C29	450	100-C30	50	30	50	30	100-C30	50	—
140MT-D9E-C32	450	100-C37	50	30	30	18	100-C37	30	—
140MT-D9E-C36	450	100-C37	30	30	30	18	100-C37	30	—
140MT-D9E-C40	450	100-C37	30	30	30	18	100-C37	30	—
F-Frame, Adjustable Thermal/Fixed Magnetic (13 x I_n)⁽²⁾									
140M-F8E-C10	600	100-C30	65	30	65	30	100-C30	65	30
140M-F8E-C16	600	100-C30	65	30	65	30	100-C30	65	30
140M-F8E-C20	600	100-C30	65	30	65	30	100-C30	65	30
140M-F8E-C25	600	100-C30	65	30	65	30	100-C30	65	30
140M-F8E-C32	600	100-C30	65	30	65	30	100-C30	65	30
140M-F8E-C45	600	100-C37	65	18	65	18	100-C37	65	—

(1) For full-voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

(2) Combination ratings for Cat. Nos. 140M-F... devices to Bulletin 100-C contactors are UL Listed. These ratings are not pending.

Table 38 - UL 60947 Application Ratings (Pending), MCPs with Bulletin 100-C IEC Contactors

Cat. No.	UL 60947-4-1 Manual Motor Controller					
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size	Group Motor Installation		Motor Disconnect	
			Max Short-circuit Current [kA]		Max Short-circuit Current [kA]	
			480V	600V	480V	600V
D-Frame, Motor Circuit Protectors, Fixed Magnetic (14 x I_n)						
140MT-D9N-A16	450	100-C09	65	50	65	50
140MT-D9N-A25	450	100-C09	65	50	65	50
140MT-D9N-A40	450	100-C09	65	50	65	50
140MT-D9N-A63	450	100-C09	65	50	65	50
140MT-D9N-B10	450	100-C09	65	50	65	50
140MT-D9N-B16	450	100-C09	65	50	65	50
140MT-D9N-B25	450	100-C09	65	30	65	30
140MT-D9N-B40	450	100-C09	65	30	65	30
140MT-D9N-B63	450	100-C09	65	30	65	30
140MT-D9N-C10	450	100-C09	65	30	65	30
140MT-D9N-C16	450	100-C12	65	30	65	30
140MT-D9N-C20	450	100-C23	65	30	65	30
140MT-D9N-C25	450	100-C23	50	30	50	30
140MT-D9N-C29	450	100-C30	50	30	50	30
140MT-D9N-C32	450	100-C37	50	30	30	18
140MT-D9N-C36	450	100-C37	30	30	30	18
140MT-D9N-C40	450	100-C37	30	30	30	18
F-Frame, Motor Circuit Protectors, Fixed Magnetic (13 x I_n)⁽¹⁾						
140M-F8N-C25	600	100-C23	65	30	65	30
140M-F8N-C32	600	100-C30	65	30	65	30
140M-F8N-C45	600	100-C37	65	18	65	18

(1) Combination ratings for Cat. Nos. 140M-F... devices to Bulletin 100-C contactors are UL Listed. These ratings are not pending.

Table 39 - Type 2 Coordination Ratings, MPSDs with Bulletin 100-C IEC Contactors

Cat. No.			400V		480V		600V	
Standard Motor Protection	High Inrush Motor Protection	Motor Circuit Protection	Max Short-circuit Current [kA]	Minimum Contactor Size	Max Short-circuit Current [kA]	Minimum Contactor Size	Max Short-circuit Current [kA]	Minimum Contactor Size
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)								
140MT-C3E-A16	—	—	100	100-C09	—	—	—	—
140MT-C3E-A25	—	—	100	100-C09	—	—	—	—
140MT-C3E-A40	—	—	100	100-C09	—	—	—	—
140MT-C3E-A63	—	—	100	100-C09	—	—	—	—
140MT-C3E-B10	—	—	100	100-C09	—	—	—	—
140MT-C3E-B16	—	—	100	100-C09	—	—	—	—
140MT-C3E-B25	—	—	65	100-C23	—	—	—	—
140MT-C3E-B40	—	—	65	100-C23	—	—	—	—
140MT-C3E-B63	—	—	65	100-C23	—	—	—	—
140MT-C3E-C10	—	—	65	100-C23	—	—	—	—
140MT-C3E-C16	—	—	50	100-C30	—	—	—	—
140MT-C3E-C20	—	—	50	100-C30	—	—	—	—
140MT-C3E-C25	—	—	15	100-C30	—	—	—	—
140MT-C3E-C29	—	—	15	100-C30	—	—	—	—
140MT-C3E-C32	—	—	15	100-C30	—	—	—	—
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)								
140MT-D9E-A63	—	—	100	100-C09	—	—	—	—
140MT-D9E-B10	140MT-D9T-A63	140MT-D9N-B10	100	100-C09	—	—	—	—
140MT-D9E-B16	140MT-D9T-B10	140MT-D9N-B16	100	100-C09	—	—	—	—
140MT-D9E-B25	140MT-D9T-B16	140MT-D9N-B25	100	100-C09	—	—	—	—
140MT-D9E-B40	140MT-D9T-B25	140MT-D9N-B40	65	100-C09	—	—	—	—
140MT-D9E-B63	140MT-D9T-B40	140MT-D9N-B63	65	100-C09	—	—	—	—
140MT-D9E-C10	140MT-D9T-B63	140MT-D9N-C10	65	100-C09	—	—	—	—
140MT-D9E-C16	140MT-D9T-C10	140MT-D9N-C16	65	100-C23	—	—	—	—
140MT-D9E-C20	140MT-D9T-C16	140MT-D9N-C20	65	100-C23	—	—	—	—
140MT-D9E-C25	140MT-D9T-C20	140MT-D9N-C25	65	100-C23	—	—	—	—
140MT-D9E-C29	140MT-D9T-C25	140MT-D9N-C29	65	100-C30	—	—	—	—
140MT-D9E-C32	140MT-D9T-C29	140MT-D9N-C32	65	100-C30/C37	—	—	—	—
140MT-D9E-C36	140MT-D9T-C32	—	65	100-C30/C37	—	—	—	—
140MT-D9E-C40	140MT-D9T-C36	140MT-D9N-C40	65	100-C30/C37	—	—	—	—
F-Frame, Adjustable Thermal/Fixed Magnetic (13 x I_n)⁽¹⁾								
140M-F8E-C10	—	—	100	100-C09	65	100-C09	30	100-C30
140M-F8E-C16	—	—	100	100-C12	65	100-C12	30	100-C30
140M-F8E-C20	—	—	100	100-C23	65	100-C23	30	100-C30
140M-F8E-C25	—	140M-F8N-C25	100	100-C30	65	100-C30	30	100-C30
140M-F8E-C32	140M-F8T-C25	140M-F8N-C32	100	100-C30	65	100-C30	30	100-C30
140M-F8E-C45	140M-F8T-C32	140M-F8N-C45	100	100-C37	65	100-C37	10	100-C37

(1) Combination ratings for Cat. Nos. 140M-F... devices to Bulletin 100-C contactors are UL Listed. These ratings are not pending.

Bulletin 140MT/M Devices with Bulletin 100-E IEC Contactors

Table 40 - UL 60947 Application Ratings, MPSDs with Bulletin 100-E IEC Contactors

Cat. No.	UL 60947-4-1 Manual Motor Controller						UL 60947-4-1 Type F		
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size	Group Motor Installation		Motor Disconnect		Combination Motor Controller		
			Max Short-circuit Current [kA]		Max Short-circuit Current [kA]		Minimum Contactor Size	Max Short-circuit Current [kA]	
			480V	600V	480V	600V		480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)									
140MT-C3E-A16	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-A25	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-A40	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-A63	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-B10	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-B16	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-B25	450	100-E09	65	30	65	30	100-E09	65	30
140MT-C3E-B40	450	100-E09	65	30	65	30	100-E09	65	30
140MT-C3E-B63	450	100-E09	65	30	65	30	100-E09	65	—
140MT-C3E-C10	450	100-E09	65	30	65	30	100-E09	65	—
140MT-C3E-C16	450	100-E12	30	30	30	30	100-E12	30	—
140MT-C3E-C20	450	100-E16	30	30	30	10	—	—	—
140MT-C3E-C25	450	100-E26	30	18	10	5	—	—	—
	450	100-E30	30	18	30	5	—	—	—
140MT-C3E-C29	450	100-E30	30	10	10	—	—	—	—
140MT-C3E-C32	450	100-E38	30	10	10	—	—	—	—
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)									
140MT-D9E-A63	450	100-E09	65	50	65	50	100-E09	65	50
140MT-D9E-B10	450	100-E09	65	50	65	50	100-E09	65	50
140MT-D9E-B16	450	100-E09	65	50	65	50	100-E09	65	50
140MT-D9E-B25	450	100-E09	65	30	65	30	100-E09	65	30
140MT-D9E-B40	450	100-E09	65	30	65	30	100-E09	65	30
140MT-D9E-B63	450	100-E09	65	30	65	30	100-E09	65	30
140MT-D9E-C10	450	100-E09	65	30	65	30	100-E09	65	30
140MT-D9E-C16	450	100-E12	65	30	65	30	100-E12	65	30
140MT-D9E-C20	450	100-E26	65	30	65	30	100-E26	65	—
140MT-D9E-C25	450	100-E26	50	30	50	30	100-E26	50	—
140MT-D9E-C29	450	100-E30	50	30	50	30	100-E30	50	—
140MT-D9E-C32	450	100-E38	50	30	30	18	100-E38	30	—
140MT-D9E-C36	450	100-E38	30	30	30	18	100-E38	30	—
140MT-D9E-C40	450	100-E38	30	30	30	18	100-E38	30	—
140MT-D9E-C40	450	100-E40	30	30	30	18	100-E40	30	—

(1) For full-voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

Accessory Specifications

Table 41 - Auxiliary Contact Specifications—For 140MT-C... and 140MT-D... Devices







Attribute			Front-mounted Auxiliary Contacts Cat. Nos. 140MT-C-AFA, -AFAR/ -AFAR10M10	Right Side-mounted Auxiliary Contacts Cat. No. 140MT-C-ASA	
Rated Thermal Current I_{th}	at 40 °C (104 °F) ambient temperature	[A]	5	10	
	at 60 °C (140 °F) ambient temperature	[A]	4	6	
Back-up Fuses gG, gL			[A]	10	
General Use current			[A]	5	
Rated insulation voltage U_i	IEC	[V]	250	690	
	UL/CSA	[V]	240	600	
Contact rating code designation (UL/CSA)			AC	B300	
			DC	R300	
Rated Supply Current I_e	AC-15	24V	[A]	4	6
		120V	[A]	3	5
		240V	[A]	1.5	3
		415V	[A]	—	2
		690V	[A]	—	1
	DC-13	24V	[A]	1.2	2
		125V	[A]	0.22	0.55
		250V	[A]	0.11	0.27
		400V	[A]	—	0.15
		500V	[A]	—	0.13
Type of Terminals					
Recommended screwdriver			Pozidriv No. 2/Blade No.3	Pozidriv No. 2/Blade No.3	
Flexible with insulated ferrule		1 or 2 conductors	0.5...1.5 mm ² /No. 18...14 AWG	0.5...2.5 mm ² /No. 18...14 AWG	
Flexible		1 or 2 conductors	0.5...1.5 mm ² /No. 18...14 AWG	0.75...2.5 mm ² /No. 18...14 AWG	
Stranded per UL/CSA		1 or 2 conductors	0.5...1.5 mm ² /No. 18...14 AWG	0.75...2.5 mm ² /No. 18...14 AWG	
Solid		1 or 2 conductors	0.5...1.5 mm ² /No. 18...14 AWG	0.5...2.5 mm ² /No. 18...14 AWG	
Conductor steps			Max 2 conductor steps allowed	Max 2 conductor steps allowed	
Tightening torque			1...1.2 N•m/8.9...10.6 lb•in	1...1.2 N•m/8.9...10.6 lb•in	

Table 42 - Auxiliary Contact Specifications—For 140M-F... Devices






Attribute			Front-mounted Auxiliary Contacts Cat. Nos. 140M-C-AFA..., 140M-C-AFAR...	Right Side-mounted Auxiliary Contacts Cat. Nos. 140M-C-ASA..., 140M-C-ASAR...	
Rated Thermal Current I_{th}	at 40 °C (104 °F) ambient temperature	[A]	5	10	
	at 60 °C (140 °F) ambient temperature	[A]	4	6	
Back-up Fuses gG, gL		[A]	10	10	
Contact rating code designation (UL/CSA)		AC	B300	B600	
		DC	Q300	Q600	
Rated Supply Current I_e	AC-15	24V	[A]	4	6
		120V	[A]	3	5
		240V	[A]	1.5	3
		415V	[A]	—	2
		690V	[A]	—	0.7
	DC-13	24V	[A]	2	2
		120V	[A]	0.5	0.5
		240V	[A]	0.25	0.25
	415V	[A]	—	0.15	
Type of Terminals					
Recommended screwdriver			Pozidriv No. 2/Blade No.3	Pozidriv No. 2/Blade No.3	
Flexible with insulated ferrule 	1 conductor		0.5...1.5 mm ²	0.5...2.5 mm ²	
	2 conductors		0.75...1.5 mm ²	0.75...2.5 mm ²	
Stranded per UL/CSA 	1 or 2 conductors		0.75...1.5 mm ² /No. 18...14 AWG	0.75...2.5 mm ² /No. 18...14 AWG	
Solid 	1 or 2 conductors		0.75...1.5 mm ² /No. 18...14 AWG	0.75...2.5 mm ² /No. 18...14 AWG	
Tightening torque			1.2...1.5 N•m/10.6...13 lb•in	1.2...1.5 N•m/10.6...13 lb•in	

Table 43 - Undervoltage and Shunt Trip Specifications—For 140MT-C... and 140MT-D... Devices







Attribute				Undervoltage Trip for Left-side Mounting Cat. No. 140MT-C-UX	Shunt Trip for Left-side Mounting Cat. No. 140MT-C-SN	
Actuating Voltage	Pick-up		[V]	$0.85...1.1 \times U_s$	$0.7...1.1 \times U_s$	
	Drop-out		[V]	$0.7...0.35 \times U_s$	$0.7...1.1 \times U_s$	
Rated AC Control Voltage	140MT-C-UXK	50 Hz	[V AC]	24	—	
		60 Hz	[V AC]	28	—	
	140MT-C-UXD	50 Hz	[V AC]	110	—	
		60 Hz	[V AC]	120	—	
	140MT-C-UXF	50 Hz	[V AC]	220...230	—	
		60 Hz	[V AC]	—	—	
	140MT-C-UXA	50 Hz	[V AC]	—	—	
		60 Hz	[V AC]	240...260	—	
	140MT-C-UXN	50 Hz	[V AC]	380...400	—	
		60 Hz	[V AC]	440...460	—	
	140MT-C-UXB	50 Hz	[V AC]	415	—	
		60 Hz	[V AC]	480	—	
	140MT-C-SNK	50 Hz	[V AC]	—	24	
		60 Hz	[V AC]	—	24...28	
	140MT-C-SND	50 Hz	[V AC]	—	110	
		60 Hz	[V AC]	—	120	
	140MT-C-SNF	50 Hz	[V AC]	—	220...230	
		60 Hz	[V AC]	—	—	
	140MT-C-SNA	50 Hz	[V AC]	—	—	
		60 Hz	[V AC]	—	240...260	
	140MT-C-SNT	50 Hz	[V AC]	—	240	
		60 Hz	[V AC]	—	277	
	140MT-C-SNN	50 Hz	[V AC]	—	380...400	
		60 Hz	[V AC]	—	440...460	
	140MT-C-SNB	50 Hz	[V AC]	—	415	
		60 Hz	[V AC]	—	480	
	On-time				Continuous duty	Continuous duty
	Coil consumption	Pick-up	[VA/W]	8.5/8	8.5/8	
		Hold-in	[VA/W]	4/2	4/2	
	Rated DC Control Voltage	140MT-C-SNZJ		[V DC]	—	24
		On-time				Max 5 s
		Coil consumption	Pick-up	[W]		50
Type of Terminals						
Recommended screwdriver				Pozidriv No. 2/Blade No.3	Pozidriv No. 2/Blade No.3	
Flexible with insulated ferrule		1 or 2 conductors	0.5...2.5 mm ² / No. 18...14 AWG	0.5...2.5 mm ² / No. 18...14 AWG		
Flexible		1 or 2 conductors	0.75...2.5 mm ² / No. 18...14 AWG	0.75...2.5 mm ² / No. 18...14 AWG		
Stranded per UL/CSA		1 or 2 conductors	0.75...2.5 mm ² / No. 18...14 AWG	0.75...2.5 mm ² / No. 18...14 AWG		
Solid		1 or 2 conductors	0.5...2.5 mm ² / No. 18...14 AWG	0.5...2.5 mm ² / No. 18...14 AWG		
Conductor steps				Max 2 conductor steps allowed	Max 2 conductor steps allowed	
Tightening torque				1...1.2 N•m/8.9...10.6 lb•in	1...1.2 N•m/8.9...10.6 lb•in1...1.2	

Table 44 - Undervoltage and Shunt Trip Specifications—For 140M-F... Devices

Attribute			Undervoltage Trip for Left-side Mounting Cat. No. 140M-C-UX..., -UC...	Shunt Trip for Left-side Mounting Cat. No. 140M-C-SN...
Actuating Voltage	Pick-up	[V]	0.85...1.1 x U _s	0.7...1.1 x U _s
	Drop-out	[V]	0.7...0.35 x U _s	0.7...1.1 x U _s
Rated AC Control Voltage	Min	50 Hz	[V AC]	21
		60 Hz	[V AC]	24
	Max	60 Hz	[V AC]	600
	On-time			Continuous duty
	Coil consumption	Pick-up	[VA/W]	8.5/8
Hold-in		[VA/W]	4/2	
Type of Terminals				
Recommended screwdriver			Pozidriv No. 2/Blade No.3	Pozidriv No. 2/Blade No.3
Flexible with insulated ferrule	1 conductor		0.5...2.5 mm ²	0.5...2.5 mm ²
	2 conductors		0.75...2.5 mm ²	0.75...2.5 mm ²
Stranded per UL/CSA	1 or 2 conductors		0.75...2.5 mm ² /No. 18...14 AWG	0.75...2.5 mm ² /No. 18...14 AWG
Solid	1 or 2 conductors		0.75...2.5 mm ² /No. 18...14 AWG	0.75...2.5 mm ² /No. 18...14 AWG
Tightening torque			1.2...1.5 N•m/10.6...13.3 lb•in	1.2...1.5 N•m/10.6...13.3 lb•in

Table 45 - Feeder Terminals

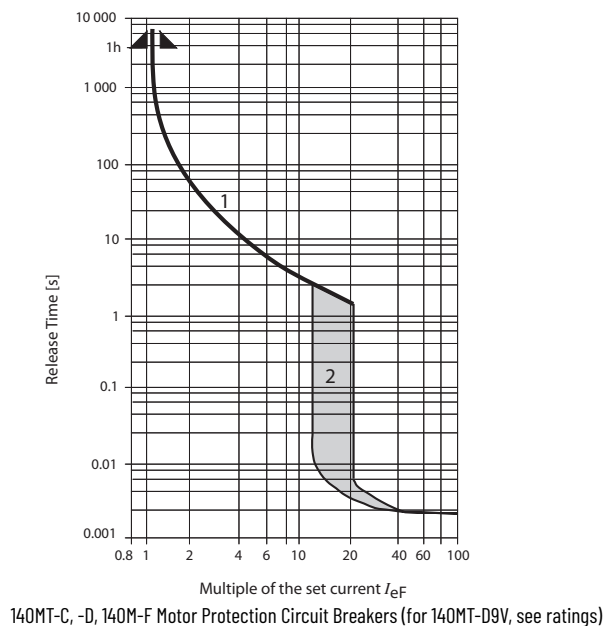
		Compact Busbar Feeder Terminal		Compact Busbar	
		140MT-C-WTEN	140M-F-WTE	140MT-C-W...	140M-F-W...
Rated Thermal Current I _{th} at 60 °C (140 °F) ambient temperature	[A]	64	120	64	120
Flexible with insulated ferrule	1 conductor	2.5...25 mm ² /No. 14...4 AWG	—	—	—
Stranded per UL/CSA	1 conductor	2.5...25 mm ² /No. 14...4 AWG	4...50 mm ² /No. 12...1/0 MCM	—	—
Solid	1 conductor	2.5...25 mm ² /No. 14...4 AWG	2.5...50 mm ² /No. 12...1/0 MCM	—	—
De-isolation (stripping) length	[mm (in)]	14 (0.55)	—	—	—
Tightening torque		3...3.5 N•m/27...31 lb•in	5...6 N•m/45...54 lb•in	—	—

Table 46 - Feeder Blocks for Compact Busbars

		IEC 60947		UL 60947/CAN/CSA-C22.2 No. 60947			
		140MT-C-WBE 1, 3, 5	140MT-C-WBE 2, 4, 6	140MT-C-WBE L1, L2, L3	140MT-C-WBE T1, T2, T3	140M-F-WBE L1, L2, L3	140M-F-WBE T1, T2, T3
Rated Thermal Current I _{th} at 60 °C (140 °F) ambient temperature	[A]	64		64		IEC120/UL115	
Flexible with insulated ferrule	1 conductor	4...25 mm ²	for use with 140MT-C-W	No. 10...4 AWG	for use with 140MT-C-W	4...50 mm ² / No. 10...4 AWG	for use with 140M-F-W
Flexible	1 conductor	4...25 mm ²	for use with 140MT-C-W	No. 10...4 AWG	for use with 140MT-C-W	—	—
Stranded per UL/CSA	1 conductor	4...25 mm ²	for use with 140MT-C-W	No. 10...4 AWG	for use with 140MT-C-W	4...25 mm ² / No. 10...4 AWG	for use with 140M-F-W
Solid	1 conductor	2.5...25 mm ²	for use with 140MT-C-W	No. 14...4 AWG	for use with 140MT-C-W	2.5...25 mm ² / No. 14...4 AWG	for use with 140M-F-W
Tightening torque		3...3.5 N•m	2...2.5 N•m	27...31 lb•in	18...22 lb•in	5...6 N•m/45...54 lb•in	

Time-Current Characteristic

Figure 10 - Motor Protection Circuit Breakers Time-Current Characteristic



Thermal Release Trip Current

The adjustable current-dependent delayed bimetal release protects motors against overload. The curve shows the mean operating current at an ambient temperature of 20 °C (68 °F) starting from the cold state. Careful testing and setting ensures effective motor protection even in the case of single phasing. The overload characteristic is also valid for transformer protection.

Magnetic Release Trip Current

The instantaneous magnetic trip has a fixed operating current setting. This corresponds to 13...14 times the maximum value of the setting range. (Transformer protection up to 20 x I_e max.) At a lower setting, it is correspondingly higher.

Current Setting $I_e F$

The overload trip corresponds to a thermal overload relay in a motor starter conforming to IEC 60947-4-1. If a different value is prescribed (for example, reduced I_e for cooling medium having a temperature higher than 40 °C (104 °F) or a place of installation higher than 2000 m (6561 ft) above sea level), the setting current is equal to the reduced rated current I_e of the motor.

Approximate Dimensions

Dimensions are in millimeters (inches) and are not intended for manufacturing purposes.

140MT-C, 140MT-D Devices and Accessories

Figure 11 - Mounting Position

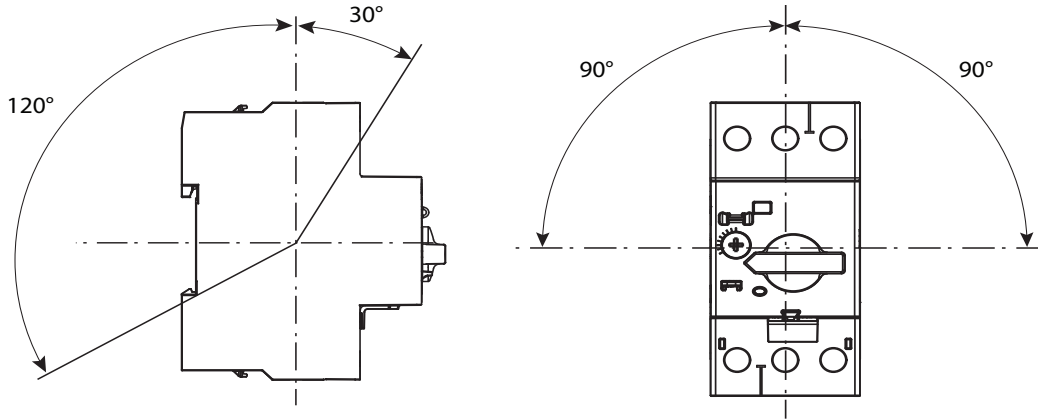
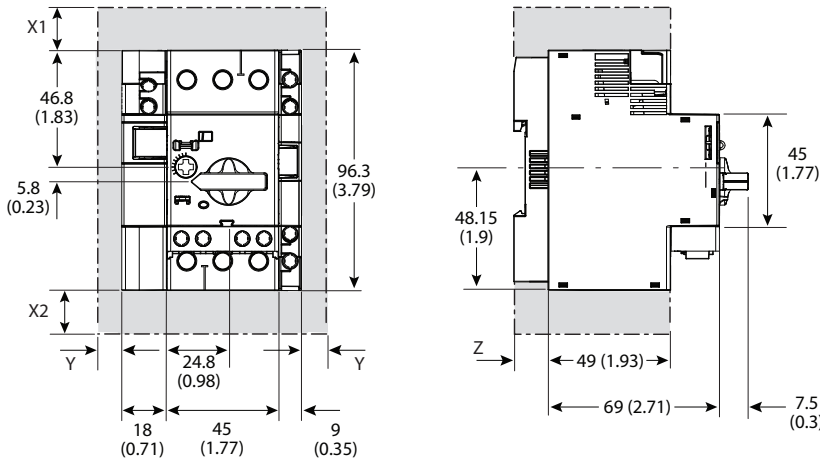
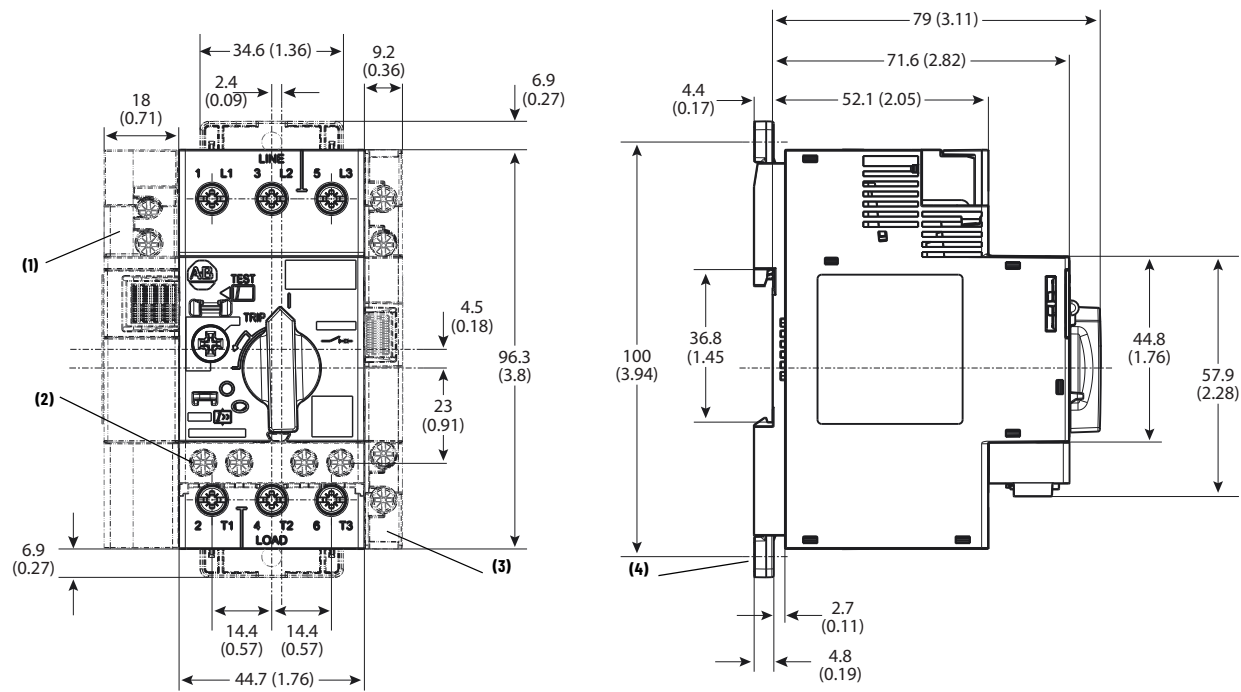


Figure 12 - Spacing Requirements



Frame Size	Voltage [V AC]	Minimum Distance to Grounded Parts or Walls [mm (in)]			Z
		X1	X2	Y	
C-Frame	400	30 (1-3/16)	30 (1-3/16)	9 (23/64)	7.5 (19/64)
	500	30 (1-3/16)	30 (1-3/16)	9 (23/64)	
	690	50 (1-31/32)	50 (1-31/32)	30 (1-3/16)	
D-Frame	400	30 (1-3/16)	30 (1-3/16)	9 (23/64)	13.5 (17/32)
	500	30 (1-3/16)	30 (1-3/16)	9 (23/64)	
	690	50 (1-31/32)	50 (1-31/32)	30 (1-3/16)	

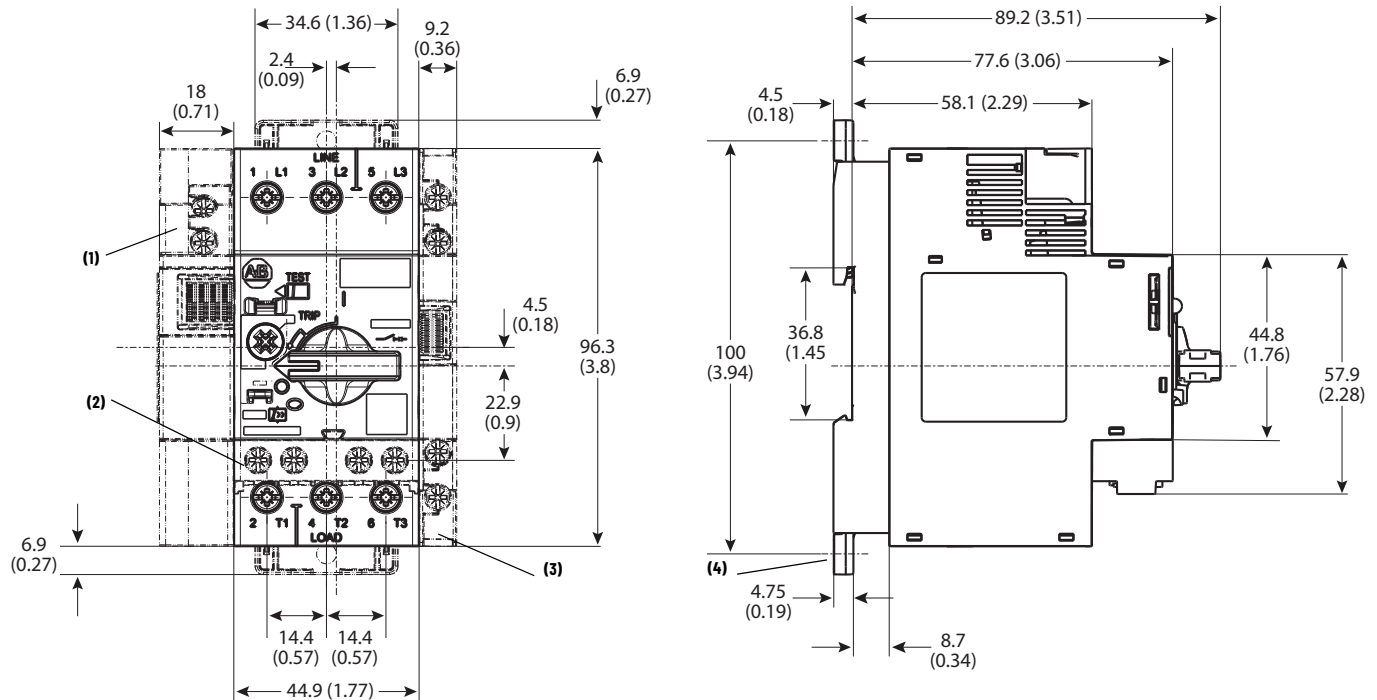
Figure 13 - Motor Protection Circuit Breaker (C-Frame), Cat. No. 140MT-C3...



Note	Information
1	Undervoltage/shunt trip
2	Auxiliary contact (front mounted)

Note	Information
3	Auxiliary contact (side mounted)
4	Screw mounting adapter

Figure 14 - Motor Protection Circuit Breaker (D-Frame), Cat. No. 140MT-D9...



Note	Information
1	Undervoltage/shunt trip
2	Auxiliary contact (front mounted)

Note	Information
3	Auxiliary contact (side mounted)
4	Screw mounting adapter

Figure 15 - Feeder Terminal for Compact Busbar, Cat. No. 140MT-C-WTEN

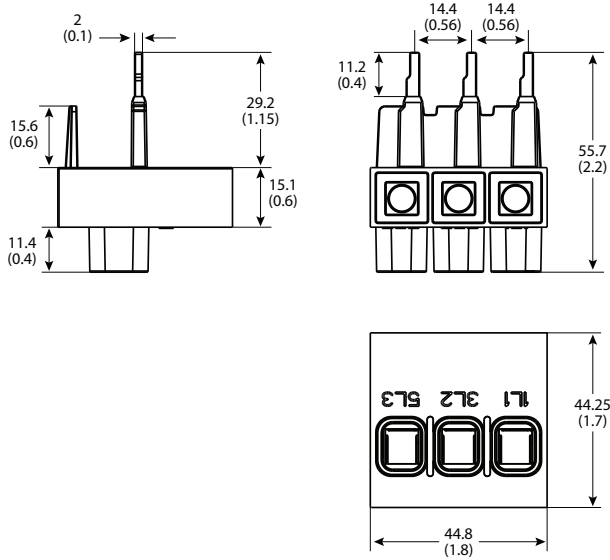


Figure 16 - Terminal Cover, Cat. No. 140MT-C-WSN

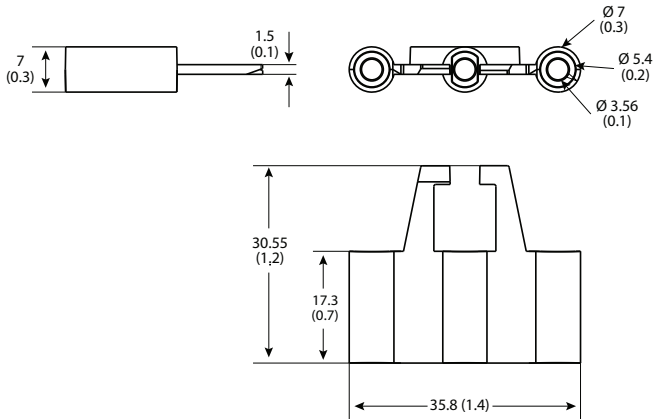
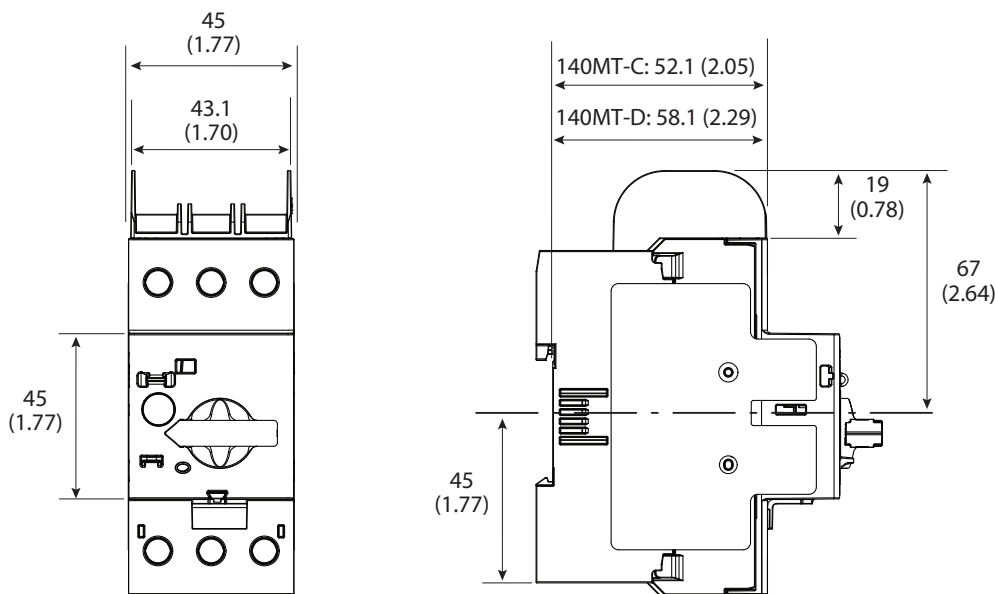
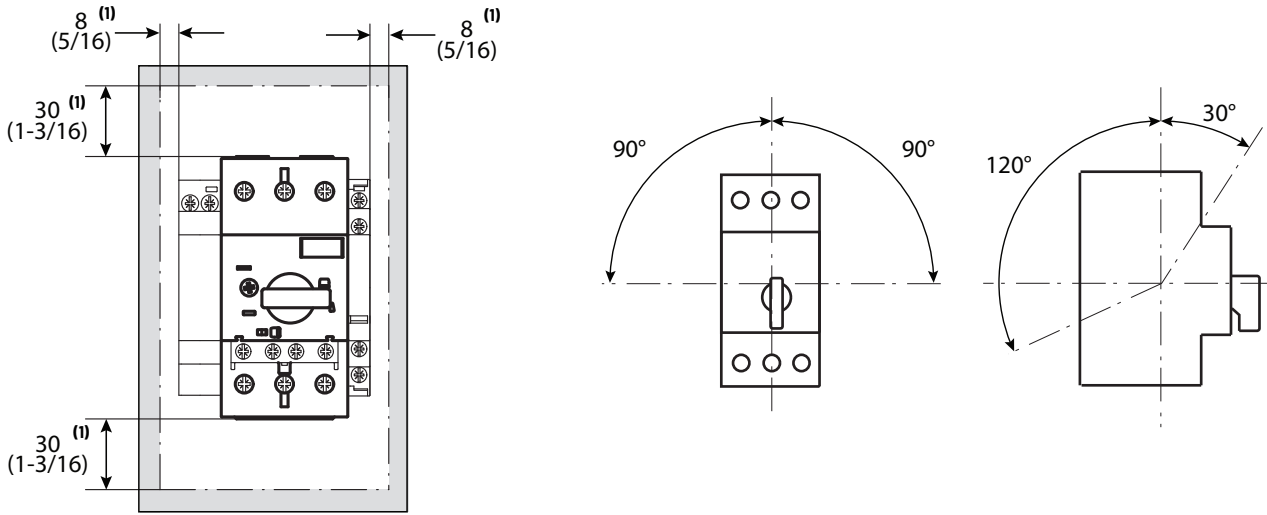


Figure 17 - 140MT-C and 140MT-D with Cat. No. 140MT-C-TE Type E Adapter



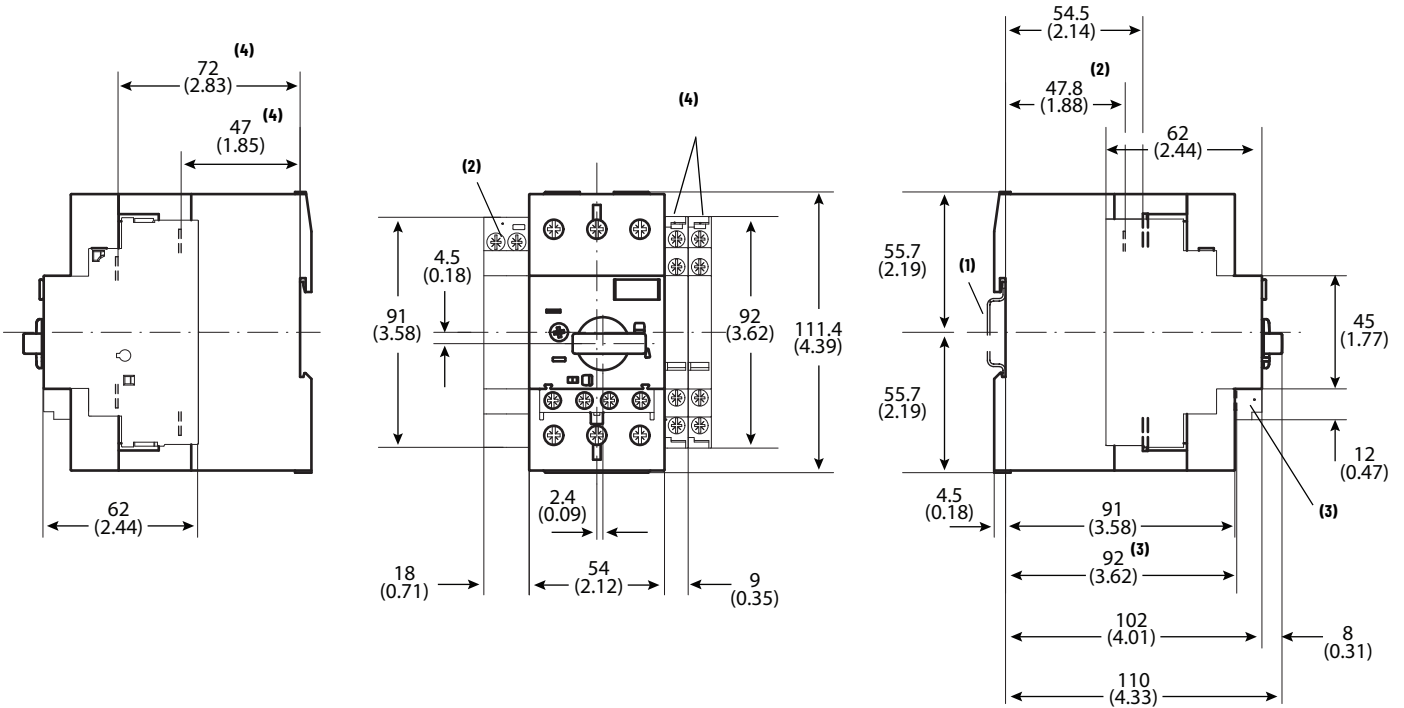
140M-F Devices and Accessories

Figure 18 - Mounting Position/Safety Clearance



Note	Information
1	Minimum distance to grounded parts or walls

Figure 19 - Motor Protection Circuit Breaker (F-Frame), Cat. No. 140M-F8...



Note	Information
1	Mounting on 35 mm DIN Rail
2	Undervoltage/shunt trip
3	Auxiliary contact (front mounted)
4	Auxiliary contact (side mounted)

Figure 20 - Cat. No. 140M-F-TE Type E adapter on Cat. No. 140M-F8E...

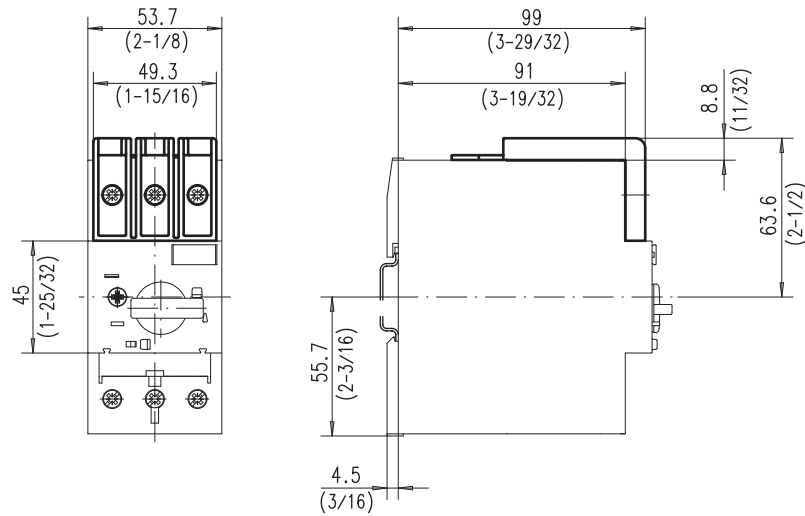


Figure 21 - Screw Adapter, Cat. No. 140M-C-N45

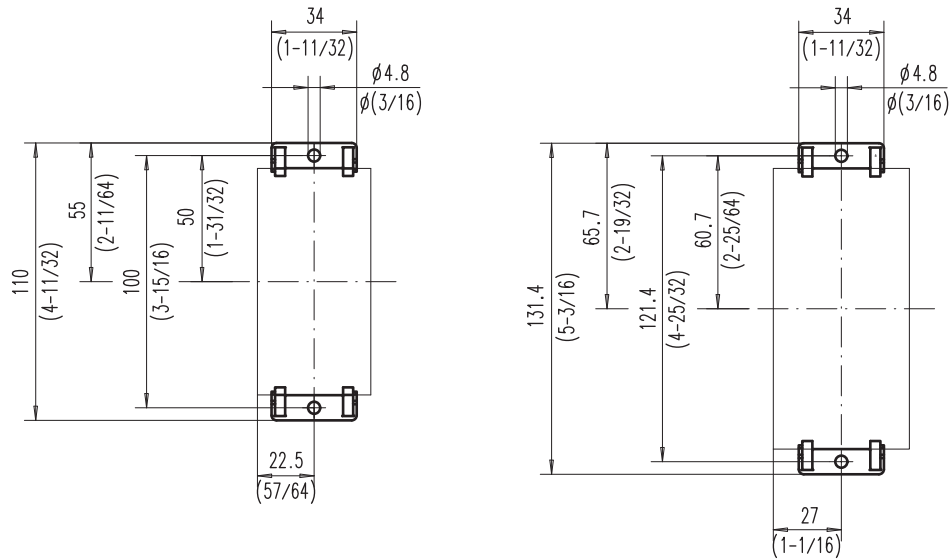
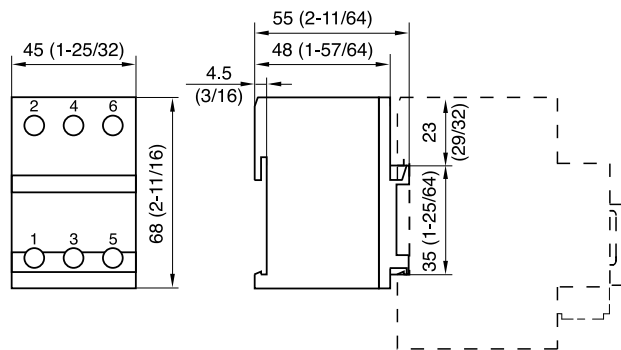


Figure 22 - 140M-C-WBE



Notes:

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation.

Resource	Description
Molded Case Circuit Breaker Specifications, publication 14OUT-TD001	Provides product selection and specification information for Bulletin 140UT molded case circuit breakers.
Short-circuit Current Ratings and Your Industrial Control Panel, publication SCCR-AT002	Provides examples for short-circuit current ratings of panels based on the methods stated in UL 508A Supplement B
Rockwell Automation Global SCCR tool, rok.auto/sccr	Provides coordinated high-fault branch circuit solutions for motor starters, soft starters, and component drives.
IEC Contactor Specifications, publication 100-TD013	Provides product selection and specification information for IEC contactors.
American Standards, Configurations, and Ratings: Introduction to Motor Circuit Design, publication IC-AT001	Provides an overview of American motor circuit design based on methods that are outlined in the NEC.
Industrial Components Preventive Maintenance, Enclosures, and Contact Ratings Specifications, publication IC-TD002	Provides a quick reference tool for Allen-Bradley industrial automation controls and assemblies.
Safety Guidelines for the Application, Installation, and Maintenance of Solid-state Control, publication SGI-1.1	Designed to harmonize with NEMA Standards Publication No. ICS 1.1-1987 and provides general guidelines for the application, installation, and maintenance of solid-state control in the form of individual devices or packaged assemblies incorporating solid-state components.
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
Product Certifications website, rok.auto/certifications	Provides declarations of conformity, certificates, and other certification details.

You can view or download publications at rok.auto/literature.

Rockwell Automation Support

Use these resources to access support information.

Technical Support Center	Find help with how-to videos, FAQs, chat, user forums, and product notification updates.	rok.auto/support
Knowledgebase	Access Knowledgebase articles.	rok.auto/knowledgebase
Local Technical Support Phone Numbers	Locate the telephone number for your country.	rok.auto/phonesupport
Literature Library	Find installation instructions, manuals, brochures, and technical data publications.	rok.auto/literature
Product Compatibility and Download Center (PCDC)	Download firmware, associated files (such as AOP, EDS, and DTM), and access product release notes.	rok.auto/pcdc

Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.

Allen-Bradley, expanding human possibility, and Rockwell Automation are trademarks of Rockwell Automation, Inc. Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Automation maintains current product environmental compliance information on its website at rok.auto/pec.

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752, İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

rockwellautomation.com ————— expanding **human possibility**[™]

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

ASIA PACIFIC: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846