



# PowerLogic™

Energy management, revenue metering and power quality monitoring

Electrical network management



[www.se.com](http://www.se.com)

Life Is On

**Schneider**  
Electric




Contents

|   |     |
|---|-----|
| Introduction to PowerLogic™   | 4   |
| Product Panorama  | 8   |
| Current Transformers  | 16  |
| Panel Instruments<br>DIN ammeter/voltmeter                                    | 35  |
| Basic Energy Metering<br>iEM2xxx, iEM3000, PM3000, and PowerTag Energy series | 46  |
| Wireless Products<br>PowerTag control and HeatTag                             | 106 |
| Basic Multi-function Metering<br>PM5000 and PM5350 series                     | 114 |
| Advanced Metering<br>PM8000 and ION9000 series                                | 135 |
| Advanced Utility Metering<br>ION7400 and ION8650 series                       | 159 |
| Multi-circuit Metering<br>HDPM6000, BCPM<br>EM4000, EM4800, and EM4900 series | 181 |
| Retrofit Products<br>EM3500 and EM4200 series                                 | 231 |
| Insulation Monitoring Devices<br>Vigilohm insulation monitoring devices       | 244 |
| EcoStruxure™ Panel Server<br>Entry, Universal and Advanced                    | 251 |
| Commercial Reference Numbers  | 262 |

Clicking on a  
Commercial Reference  
Number  
or scanning the product's  
QR Code  
links you to further product  
information on  
[www.se.com](http://www.se.com)

# PowerLogic™ System is...

Schneider Electric believes every business can increase productivity while consuming less and achieving energy savings of 10% to 30%.

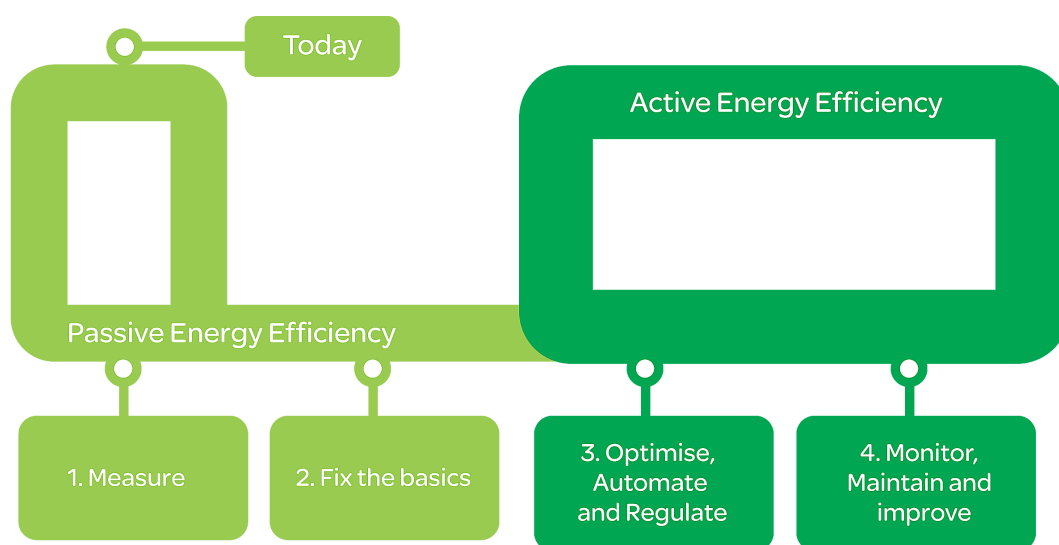

PowerLogic technology forms one part of your total energy management solution from Schneider Electric. As the global energy management specialist, we offer end-to-end power, building and process management solutions that help you optimize energy use and costs, improve performance, enhance comfort and safety, and deliver uninterrupted service while taking responsible care of our planet.

Saving energy reduces costs and pollution, but you need the tools to uncover all opportunities, avoid risks, track progress against goals, and verify success. Schneider Electric provides these tools via the world's most advanced energy intelligence technology: PowerLogic.

A PowerLogic system of meters, software and power quality solutions help manage all energy assets, every second of the day. A PowerLogic system enables all stakeholders, from CEO to facility and engineering managers, to respond quickly to potential problems and manage energy in financial and environmental terms.

PowerLogic technology delivers the key performance indicators and analytics that you need to strategically balance emissions, efficiency, reliability and cost.


Our expert services can help you audit your energy use and build your energy action plan. From power factor correction systems, harmonic filtering and variable speed drives to HVAC and lighting controls, we offer a complete range of energy efficient technologies.

# Gain energy insight and control with PowerLogic™ systems

## Cutting-edge technology to increase profitability

PowerLogic technology converts the complex dynamics governing the relationship between power generation and distribution on the utility side, and energy consumption, cost and reliability on the consumer side, into timely, easily understood information. Businesses can use this powerful to improve tactical actions and strategic decision making.

From a single facility to an entire enterprise, PowerLogic meters monitor key distribution points 24 hours a day. Whether from generators, substations, service entrances, mains, feeders, loads or 3rd party equipment and systems, PowerLogic technology tracks, records and reports all real-time conditions and historical performance data. Intuitive web-based interfaces give stakeholders access to this data as well as advanced analytics, alarm annunciation and control capabilities. It supports comprehensive energy management programs by tracking performance and empowering you to make effective decisions.

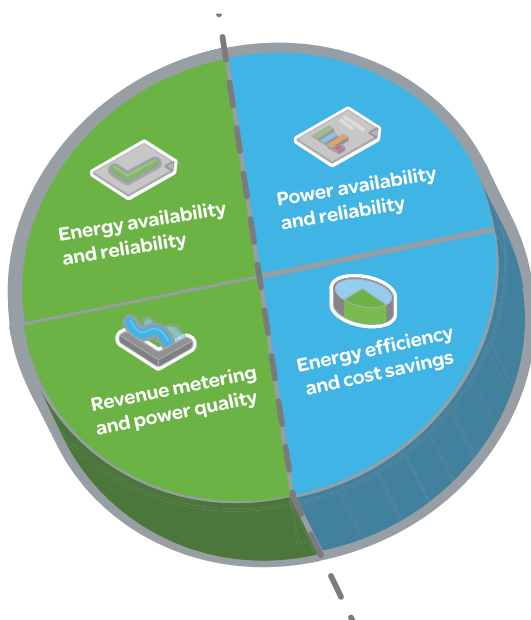

### Supply

#### Energy availability and reliability

- Improve T&D network reliability
- Enhance substation automation
- Maximize the use of your existing infrastructure

#### Revenue metering and power quality

- Maximize metering accuracy at all interchange points
- Verify compliance with new power quality standards
- Analyse and isolate the source of power quality problems

### Demand

#### Power availability and reliability

- Validate that power quality complies with the energy contract
- Identify power quality issues and fix them quickly with reliable mitigation solutions
- Improve response to power-related problems
- Leverage existing infrastructure capacity and avoid over-building
- Support proactive maintenance to prolong asset life

#### Energy efficiency and cost savings

- Measure efficiency, reveal opportunities and verify savings
- Manage greenhouse gas emissions
- Allocate energy costs to departments or processes
- Reduce peak demand and power factor penalties
- Enable participation in load curtailment programs (e.g. demand response)
- Strengthen rate negotiation with energy suppliers
- Identify billing discrepancies
- Sub-bill tenants for energy costs

# Market segments



## Industry

From finance to engineering, PowerLogic technology gives industry professionals the energy intelligence and control they need to support strategic decisions and establish best energy practices. It will help you reduce operational costs and meet new emissions standards without compromising production schedules or product quality.

Key points are monitored throughout your power distribution, building and backup systems. Enterprise-level software helps you maximize the use of your existing energy assets, increase energy efficiency and avoid demand or power factor penalties. Use it to uncover and solve hidden power problems that can shorten equipment life or cause costly downtime.

- Cost allocation
- Procurement optimization
- Power factor correction
- Continuity of service even in case of an earth fault

## Buildings

Building managers through operations staff can cut energy and maintenance costs without effecting the comfort or productivity of their tenants, employees, students, patients or customers. A PowerLogic system will track all utilities and equipment conditions, and enterprise-level software will help you analyse and improve electrical reliability.

You can forecast energy requirements, optimize multi-site contracts and accurately allocate or sub-bill costs. Key performance indicators help you find and sustain energy savings, reduce emissions and meet “green” building standards in order to increase asset value and attract or retain tenants.

- Tenant sub-billing
- Cost allocation
- Energy efficiency & benchmarking
- Procurement optimization
- Power availability
- Demand response / load curtailment



## Utilities

Today's energy market is more complex than ever before. Whether you generate, transmit or distribute electricity, more stakeholders need shared access to timely, accurate energy data from more exchange points and you need to maintain power availability and reduce price volatility in the face of rising demand and transmission congestion. A PowerLogic energy information system helps you meet all of these challenges by:

- Metering all key interchange points with the highest possible accuracy
- Improving the quality of power delivered to your customers
- Ensuring the reliability and efficiency of your network and equipment

From advanced energy and power quality metering systems to enterprise-level analytic software and power quality mitigation solutions, PowerLogic systems deliver business-critical information that conventional metering, SCADA and billing systems cannot. It gives you the energy intelligence and control needed to track performance, stay informed of critical conditions and empower you to make strategic decisions. It will help you increase reliability, maximize the use of resources and improve service.

- Revenue metering
- Power quality monitoring
- Power availability and reliability
- Insulation monitoring

## Critical infrastructure

PowerLogic technology helps keep your systems operating continuously and securely with an economical supply of energy. Whether you manage data, communication, transportation or environmental services, minimising the risk of power-related downtime and keeping costs under control is a priority.

A PowerLogic system monitors all power and cooling systems, accurately tracks their energy consumption, and allows you to identify and fix power quality issues as soon as they arise. Enterprise-level software delivers insightful diagnostics and metrics to help verify the reliability of your backup systems and maximize the use of existing capacity to defer new capital investments. You can also reveal energy inefficiencies and strengthen energy procurement across multiple sites.

- Infrastructure optimization
- Power quality analysis compliance
- Alarming and event notification
- Energy efficiency
- Cost allocation
- Procurement optimization

# Panorama of the PowerLogic™ range

Use this panorama to select the most efficient products for your application needs

## Current transformers



### CTs Ip / 5 A

current transformer

#### Installation


##### i. Solid Core CTs

- Insulated Cable, diameter 21 to 35 mm
- busbar through transformer
- cable connections

##### ii. Split Core CTs

- CT installation without the need to uninstall and reinstall power conductors
- Cable and Busbar connections

## Panel instruments

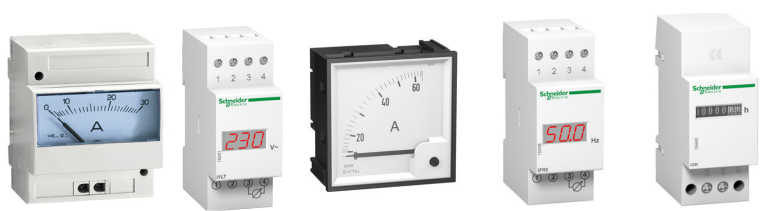

| Name            | iAMP               | iVLT               | AMP/VLT            | iFRE            | iCH/iCI                    |
|-----------------|--------------------|--------------------|--------------------|-----------------|----------------------------|
| <b>Function</b> | ammeter, voltmeter | ammeter, voltmeter | ammeter, voltmeter | frequency meter | hour counter pulse counter |

### Applications

#### Panel instrumentation

|                       |       |       |       |   |              |
|-----------------------|-------|-------|-------|---|--------------|
| Panel instrumentation | I / U | I / U | I / U | F | hours/pulses |
|-----------------------|-------|-------|-------|---|--------------|

#### Energy efficiency & cost

|                               |  |
|-------------------------------|--|
| Sub-billing & cost allocation |  |
| Demand & load management      |  |
| Billing analysis              |  |

#### Power availability & reliability

|                       |  |
|-----------------------|--|
| Compliance monitoring |  |
| Sag/swell, transient  |  |
| Harmonics             |  |

#### Revenue metering

|               |  |
|---------------|--|
| Revenue meter |  |
|---------------|--|

### Characteristics

##### i. Solid Core CTs

- transformation ratio : 40/5 A to 6000/5 A
- accuracy : class 0.5 to 3
- maximum rated operational voltage : 720 V AC
- tropicalised range 25 °C to +60 °C <sup>(1)</sup>
- relative humidity > 95 %
- <sup>(1)</sup> Warning: some products are limited to +50 °C.

##### ii. Split Core CTs

- transformation ratio : 100/5A to 4000/5A
- accuracy : class 0.5 to 3
- maximum rated operational voltage : 720 V AC
- Cable connection : -5°C to +50°C
- relative humidity 5–85 %
- Busbar connection : 5°C to +40°C
- relative humidity 5–85 %

### Characteristics

|                      |                                  |                                      |   |                            |   |
|----------------------|----------------------------------|--------------------------------------|---|----------------------------|---|
| Measurement accuracy | Class 1.5                        | ± 0.5 % ± 1 digit                    | Class 1.5   | ± 0.5 % ± 1 digit          |   |
| Installation         | DIN rail 4 x 18 mm modules       | DIN rail 2 x 18 mm modules           | flush mounted 72 x 72 mm 96 x 96 mm                     | DIN rail 2 x 18 mm modules | iCI, iCH: DIN rail 2 x 18 mm modules<br>CH: flush mount |
| Measurement          | iAMP: 30 A direct or external CT | iVLT: 600 V AC direct or external VT | VLT: 500 V AC direct or external VT<br>AMP: external CT | 400 V AC direct            |   |
| Communication ports  |                                  |                                      |   |                            |   |
| Inputs / Outputs     |                                  |                                      |   |                            |   |
| Memory capacity      |                                  |                                      |   |                            |   |

page 16

page 36

page 37

page 38


page 37

page 42

# Panorama of the PowerLogic™ range (cont'd)

## Basic energy metering



| Name     | iEM2xxx Range<br>iEM2000, iEM2100, iEM2400  | iEM3000 Series   | PM3000 Series  | PowerTag Energy Series  |
|----------|---|--|--|--|
| Function | kilowatt-hour meter<br>IEC 62052-31:2015<br>BS/EN/IEC 62053-21<br>EN 50470-1:2006<br>EN 50470-3:2006<br>IEC 61557-12:2018 | kilowatt-hour meters<br>power and energy meters<br>metering & sub-metering<br>IEC 62052-31:2015<br>BS/EN/IEC 62053-21:2020 ed 2<br>BS/EN/IEC 62053-22:2020 ed 2<br>BS/EN/IEC 62053-23:2020 ed 2<br>EN 50470-1:2006<br>EN 50470-3:2006<br>IEC 61557-12:2018 | metering & sub-metering<br>Class 0.5S IEC 62053-22<br>Class 1 IEC 62053-21<br>Class 2 IEC 62053-23 | wireless power & energy meter  |

## Applications

### Panel instrumentation

|                       |  |  |  |   |
|-----------------------|--|--|--|---|
| Panel instrumentation | E (in all range)<br>I, U, F, P, Q, S, PF<br>(in selected ranges) | I, U, F, P, Q, S, PF, E<br>(Power demand and current demand) | I, U, F, P, Q, S, PF, E<br>(Power demand and current demand) | I, U, F, P, Q, S, PF, E<br>(Depending on reference;<br>Power demand depending on gateway) |
|-----------------------|--|--|--|---|

### Energy efficiency and cost

|                               |  |  |  |                      |
|-------------------------------|--|--|--|----------------------|
| Sub-billing & cost allocation |  |  |  | cost allocation only |
| Demand & load management      |  |  |  |                      |
| Billing analysis              |  |  |  |                      |

### Power availability & reliability

|                       |  |  |  |  |
|-----------------------|--|--|--|--|
| Compliance monitoring |  |  |  |  |
| Dip/swell, transient  |  |  |  |  |
| Harmonics             |  |  |  |  |

### Revenue metering

|               |  |  |  |  |
|---------------|--|--|--|--|
| Revenue meter |  |  |  |  |
|---------------|--|--|--|--|

## Characteristics

|                      |   |  |  |   |
|----------------------|---|--|--|---|
| Measurement accuracy | Class 1 (Wh)/ Class 2 (VARh)            | Class 0.5S / Class 1 (Wh)<br>Class 2 (VARh)  | Class 0.5  | IEC 61557-12 PMD/DD<br>Class 1 (active energy)                            |
| Installation         | DIN rail<br>1, 2 x 18 mm modules        | DIN rail<br>5, 7 x 18 mm modules   | DIN rail   | on product or on cables<br>depending on the reference                     |
| Voltage measurement  | up to 276 V (Ph-N) AC direct            | 100 - 277 V L-N,<br>173 - 480 V L-L<br>up to 1MV AC (ext VT)   | 50 V to 330 V AC (Ph-N)<br>80 V to 570 V AC (Ph-Ph)<br>up to 1MV AC (ext VT) | up to 277 V AC (Ph-N) / 480 V<br>AC (Ph-Ph) depending on the<br>reference |
| Current measurement  | 40 to 125 A direct                      | external CT (iEM3200),<br>external LVCT (iEM3400/3500)<br>direct 63 A (iEM3100),<br>direct 125 A (iEM3300) | external CT  | 63 to 2000 A  |
| Communication ports  | RS-485, M-Bus in selected<br>references | RS-485, M-Bus, BACnet,<br>LonWorks in selected<br>references   | 1  | Wireless  |
| Inputs / Outputs     | 1/1 (in selected)                       | up to 2 Inputs and 1 Output  | 2 I/O  |   |
| Memory capacity      |   |  |  |   |

page 47

page 52

page 58

page 64

# Panorama of the PowerLogic™ range (cont'd)

## Wireless products



## Basic multi-function metering



| Name     | PowerTag Control   | HeatTag Smart Sensor  | PM5000 Series   | PM5350 Series   |
|----------|--|---|---|---|
| Function | Circuit monitoring & control<br>IEC 60364-8-1<br>EN 17267<br>ISO 50010 | Early detection of<br>overheating wire connections<br>or overheating cables | metering & sub-metering<br>IEC 62052-31:2015<br>BS/EN/IEC 62053-22:2020 ed 2<br>BS/EN/IEC 62053-23:2020 ed 2<br>EN 50470-1:2006<br>EN 50470-3:2006<br>IEC 61557-12:2018 | Class 0.5S IEC 62053-22<br>Class 2 IEC 62053-23<br>Class 1 IEC 61557-12 |

## Applications

### Panel instrumentation

|                       |  |   |   |
|-----------------------|--|---|---|
| Panel instrumentation | Analysis of gas and<br>micro-particles,<br>Temperature, Humidity | I, U, F, P, Q, S, PF, E<br>(Power demand and<br>current demand) | I, U, F, P, Q, S, PF, E<br>(Power demand and<br>current demand) |
|-----------------------|--|---|---|

### Energy efficiency and cost

|                               |  |  |  |
|-------------------------------|--|--|--|
| Sub-billing & cost allocation |  |  |  |
| Demand & load management      |  |  |  |
| Billing analysis              |  |  |  |

### Power availability & reliability

|                       |  |  |  |
|-----------------------|--|--|--|
| Compliance monitoring |  |  |  |
| Dip/swell, transient  |  |  |  |
| Harmonics             |  |  |  |
| Residual current M    |  |  |  |

### Revenue metering

|               |  |  |  |
|---------------|--|--|--|
| Revenue meter |  |  |  |
|---------------|--|--|--|

## Characteristics

|                      |          |  |   |  |
|----------------------|----------|--|---|--|
| Measurement accuracy |          | Temperature $\pm 1.1$ °C<br>Humidity $\pm 9$ RH% | Class 0.5S  | Class 0.5                              |
| Installation         | DIN rail | DIN rail<br>6 x 18 mm modules                    | Flush mount 96 mm x 96 mm or<br>DIN rail (PM5563) | Flush mount<br>96 mm x 96 mm           |
| Voltage measurement  |          |  | 20 V to 400 V AC L-N<br>35 V to 690 V AC L-L      | 20 V to 300 V L-N<br>35 V to 520 V L-L |
| Current measurement  |          |  | external CT                                       | external CT                            |
| Communication ports  | Wireless |  | RS-485, Ethernet, BACnet,<br>Ethernet IP          | RS-485                                 |
| Inputs / Outputs     | 2 I/O    |  | up to 4 inputs/ 2 outputs                         | up to 4 inputs/ 2 outputs              |
| Memory capacity      |          |  | Available   |  |

page 107

page 111

page 115

page 128

# Panorama of the PowerLogic™ range (cont'd)

## Advanced metering



| Name     | PM8000 Series   | ION9000   |
|----------|---|---|
| Function | Energy & Advanced Power Quality Meter<br>IEC 62053-22 Class 0.2S<br>ANSI C12.20 Class 0.2<br>IEC 61000-4-30 Class S<br>IEC 62586-2<br>IEC 61557-12 PMD/Sx/K70/0.2<br>IEC / UL 61010-1 | Energy & Advanced Power Quality Meter<br>IEC62052-11 ed.2 Class 0.1S<br>ANSI C12.20 Class 0.1<br>PQI Class A<br>IEC 62586-1 / -2<br>IEC 61557-12 PMD/Sx/K70/0.2<br>IEC / UL 61010-1 |

### Applications

#### Panel instrumentation

|                       |  |  |
|-----------------------|--|--|
| Panel instrumentation | I, U, F, P, Q, S, PF, E, THD, Min/Max, harm, alarm, I/O (I, U unbalance, demand, clock/cal, dip/swell) | I, U, F, P, Q, S, PF, E, THD, Min/Max, harm, alarm, I/O (I, U unbalance, demand, clock/cal, dip/swell, transients, flicker, RVC, mains signaling, 1/2 cycle RMS) |
|-----------------------|--|--|

#### Energy efficiency and cost

|                                 |  |  |
|---------------------------------|--|--|
| Sub-billing and cost allocation |  |  |
| Demand and load management      |  |  |
| Billing analysis                |  |  |

#### Power availability & reliability

|                       |                |  |
|-----------------------|----------------|--|
| Harmonics             |                |  |
| Dip/swell, transient  | dip/swell only |  |
| Compliance monitoring |                |  |

#### Revenue metering

|                  |  |  |
|------------------|--|--|
| Revenue metering |  |  |
|------------------|--|--|

### Characteristics

|                                      |  |   |
|--------------------------------------|--|---|
| Measurement accuracy (active energy) | IEC 62053-22 Class 0.2S<br>ANSI C12.20 Class 0.2 | IEC62052-11 ed.2 Class 0.1S<br>ANSI C12.20 Class 0.1            |
| Installation                         | Flush & DIN 96 mm x 96 mm                        | Flush & DIN 160 mm x 160 mm<br>Display 96 mm or 197 mm x 175 mm |
| Voltage measurement                  | 57-400 V AC L-N 3P<br>(100-690 V AC L-L)         | 57-400 V L-N AC or<br>100-690 V L-L AC                          |
| Current measurement                  | external CT                                      | external CT and LVCT  |
| Communication ports                  | 3  | 4   |
| Inputs / Outputs                     | up to 27 DI, 9 DO<br>up to 16 AI, 8 AO           | up to 32 DI, 4 DO, 10 RO (relay)<br>up to 16 AI, 8 AO           |
| Memory capacity                      | 512 MB   | 2 GB  |

page 136

page 146

# Panorama of the PowerLogic™ range (cont'd)


## Advanced utility metering



| Name                                 | ION7400   |          | ION8650  |      |      |
|--------------------------------------|---|----------|--|------|------|
| Function                             | Energy & Advanced Power Quality Meter<br>IEC 61557-12<br>IEC 62053-22<br>IEC 61000-4-30 Class S<br>IEC 62586<br>ANSI C12.20 Class 0.2<br>PMD/Sx/K70/0.2 |          | A  | B    | C    |
| Applications                         |   |          |  |      |      |
| Panel instrumentation                | Panel instrumentation   |          | I, U, F, P, Q, S, PF, E (demand, minimum and maximum values)       |      |      |
| Energy efficiency & cost             |   |          |  |      |      |
| Sub-billing and cost allocation      |   |          |  |      |      |
| Demand and load management           |   |          |  |      |      |
| Billing analysis                     |   |          |  |      |      |
| Power availability & reliability     |   |          |  |      |      |
| Harmonics                            |   |          |  |      |      |
| Dip/swell, transient                 | dip/swell only  |          |  |      |      |
| Compliance monitoring                |   |          |  |      |      |
| Revenue metering                     |   |          |  |      |      |
| Revenue metering                     |   |          |  |      |      |
| Characteristics                      |   |          |  |      |      |
| Measurement accuracy (active energy) | IEC 61053-22 Class 0.2S<br>ANSI 12.20 Class 0.2S  |          | Class 0.2S   |      |      |
| Installation                         | Flush & DIN rail mount<br>96 mm x 96 mm   |          | ANSI socket mount 9S, 35S, 36S, 39S and 76S; FT21 switchboard case |      |      |
| Voltage measurement                  | 57-400 V AC L-N 3P<br>(100-690 V AC L-L)  |          | 57-277 V L-N AC (9S, 36S); 120-480 V L-L AC (35S)                  |      |      |
| Current measurement                  | external CT   |          | external CT  |      |      |
| Communication ports                  | 3   |          | 5  |      |      |
| Inputs / Outputs                     | up to 27 DI, 9 DO<br>up to 16 AI, 8 AO  |          | up to 22 I/O   |      |      |
| Memory capacity                      | 512 MB  |          | 10 MB  | 4 MB | 2 MB |
|                                      |   |          |  |      |      |
|                                      |   |          |  |      |      |
|                                      |   | page 159 | page 169   |      |      |
|                                      |   |          |  |      |      |

# Panorama of the PowerLogic™ range (cont'd)

## Multi-circuit metering

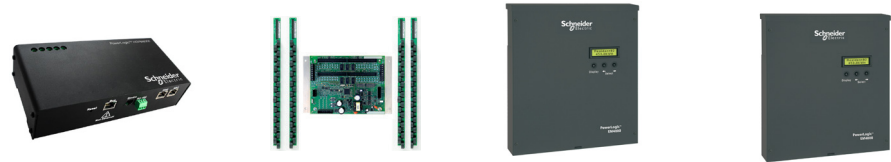

| Name     | HDPM6000  | BCPM   | EM4000   | EM4800   |
|----------|---|--|--|--|
| Function | 3-phase power quality meter;<br>branch-circuit accessory module hub | branch circuit monitor<br>IEC 61036<br>Class 1 | multi-circuit energy meter<br>Class 0.5 ANSI<br>C12.1, C12.20<br>Class 0.5S IEC 62053-22 | multi-circuit energy meter<br>Class 0.5 ANSI<br>C12.1, C12.20<br>Class 0.5S IEC 62053-22 |

### Applications

#### Panel instrumentation

|                       |  |   |   |   |
|-----------------------|--|---|---|---|
| Panel instrumentation |  | I, U, F, P, Q, S,<br>PF, E<br>(Power demand and current demand) | I, U, F, P, Q, S,<br>PF, E<br>(Power demand and current demand) | I, U, F, P, Q, S,<br>PF, E<br>(Power demand and current demand) |
|-----------------------|--|---|---|---|

#### Energy efficiency and cost

|                                 |  |  |  |  |
|---------------------------------|--|--|--|--|
| Sub-billing and cost allocation |  |  |  |  |
| Demand and load management      |  |  |  |  |
| Billing analysis                |  |  |  |  |

#### Power availability and reliability

|                       |  |  |  |  |
|-----------------------|--|--|--|--|
| Compliance monitoring |  |  |  |  |
| Sag/swell, transient  |  |  |  |  |
| Harmonics             |  |  |  |  |

#### Revenue metering

|               |  |  |  |  |
|---------------|--|--|--|--|
| Revenue meter |  |  |  |  |
|---------------|--|--|--|--|

### Characteristics

|                      |  |  |  |  |
|----------------------|--|--|--|--|
| Measurement accuracy |  | Class 1 (mains active energy)                            | Class 0.5S   | Class 0.5S   |
| Installation         |  | Panel or enclosure                                       | Panel or enclosure   | Panel or enclosure   |
| Voltage measurement  |  | 90 – 277 V L-N voltage Inputs                            | 80 - 480 V AC L-L without PTs,<br>Up to 999 kV with external PTs | 80 - 480 V AC L-L without PTs,<br>Up to 999 kV with external PTs |
| Current measurement  |  | CT strips for branch circuits and external CTs for mains | Split- or solid-core CTs   | Split- or solid-core CTs   |
| Communication ports  |  | 1 for main   | 2  | 2  |
| Inputs / Outputs     |  |  | 2  | 2  |
| Memory capacity      |  |  |  |  |

|  |          |          |          |          |
|--|----------|----------|----------|----------|
|  | page 180 | page 192 | page 206 | page 215 |
|--|----------|----------|----------|----------|

# Panorama of the PowerLogic™ range (cont'd)

## Multi-circuit metering

## Retrofit products



| Name     | EM4900   | EM3500   | EM4200  |
|----------|--|--|---|
| Function | multi-circuit energy meter<br>Class 0.5 ANSI<br>C12.1, C12.20<br>Class 0.5S IEC 62 | DIN rail power & energy meter<br>ANSI 12.20 0.2% accuracy,<br>IEC 62053-22 Class 0.2S for<br>EM35xx models, ANSI<br>C12.20 0.5% accuracy, IEC<br>62053-22 Class 0.2S for<br>EM35xxA models | power & energy meter<br>ANSI C12.20 0.2% IEC<br>62053-22 Class 0.2S |

### Applications

#### Panel instrumentation

|                       |  |  |  |
|-----------------------|--|--|--|
| Panel instrumentation | I, U, F, P, Q, S,<br>PF, E<br>(Power demand<br>and current demand) | I, U, F, P, Q, S,<br>PF, E<br>(Power demand and<br>current demand) | I, U, F, P, Q, S,<br>PF, E<br>(Power demand and<br>current demand) |
|-----------------------|--|--|--|

#### Energy efficiency and cost

|                                 |  |  |  |
|---------------------------------|--|--|--|
| Sub-billing and cost allocation |  |  |  |
| Demand and load management      |  |  |  |
| Billing analysis                |  |  |  |

#### Power availability and reliability

|                       |  |  |  |
|-----------------------|--|--|--|
| Compliance monitoring |  |  |  |
| Sag/swell, transient  |  |  |  |
| Harmonics             |  |  |  |

#### Revenue metering

|               |  |  |  |
|---------------|--|--|--|
| Revenue meter |  |  |  |
|---------------|--|--|--|

### Characteristics

|                      |  |   |   |
|----------------------|--|---|---|
| Measurement accuracy | Class 0.5S   | Class 1 (mains active energy)                           | ANSI C12.20 Class 0.2S<br>IEC 62053-22 Class 0.2S |
| Installation         | Panel or enclosure   | Panel or enclosure                                      | DIN or screw, clip-on or hook                     |
| Voltage measurement  | 150 – 480 V AC L-L without PTs<br>Up to 999 kV with external PTs | UL: 90 V L-N to 600 V L-L;<br>CE: 90 V L-N to 300 V L   | 890 - 480 V AC L-L                                |
| Current measurement  | Split- or solid-core CTs   | EM35xxA models work exclusively with Rogowski coil CTs. | 5 A to 5000 A                                     |
| Communication ports  | 2  | 1 for main  | 2   |
| Inputs/Outputs       | 2  | (see Datasheet)   |   |
| Memory capacity      |  |   |   |

page 220

page 230

page 236

# Panorama of the PowerLogic™ range (cont'd)

## Insulation monitoring Devices



## EcoStruxure™ Panel Server



| Name     | Vigilohm™<br>Insulation monitoring devices         | EcoStruxure™<br>Panel Server              |
|----------|--|---|
| Function | Insulation monitoring for IT / Ungrounded networks | IoT gateway for intelligent power network |

### Features

|                                     |   |   |
|-------------------------------------|---|---|
| RS-485 / Ethernet gateway           | RS-485  | Supports IEEE 802.15.4 and Modbus devices   |
| Devices supported                   | Insulation Monitors:<br>IM9, IM9-OL, IM10, IM20<br>IM10-H, IM20-H, IM400 series<br>IM400THR<br>Insulation Fault Locators:<br>IFL 12, IFL 12C, IFL 12MC, IFL 12H<br>Accessories:<br>Including voltage adaptors, cardews, toroids | Wired devices communicating through Modbus-SL, Modbus TCP/IP, or digital inputs:<br>Circuit breakers and switch-disconnectors, Protection relays, Power meters, Energy meters, Pulse meters, IO modules, Gateways<br>Wireless devices: PowerTag Energy sensors, Environmental sensors, Acti9 Active, HeatTage sensors, PowerTag Control modules, Wireless indication auxiliaries for ComPacT NSX and ComPacT NSXm, circuit breakers |
| Web server with standard HTML pages |   |   |
| Web server with custom HTML pages   |   |   |
| Real time data                      | Available on product supervision<br>e.g.PME, Com'X 510  | Available on web server embedded in Panel Server  |
| Historical data                     | Available on product supervision<br>e.g.PME, Com'X 510  | Available on web server embedded in Panel Server (Advanced Panel Server only)   |
| Automatic notification              | Available in supervision PME  | Available on embedded web server (Advanced Panel Server only), edge control system & cloud-hosted application   |
| Alarm and event logs                | Available in supervision PME  | Available on embedded web server (Advanced Panel Server only), edge control system & cloud-hosted application   |
| Waveform display                    |   |   |
| Custom animated graphics            |   |   |
| Manual/automatic reports            |   |   |

### Characteristics

|   |   |  |
|---|---|--|
| Ethernet ports<br>Modbus TCP/IP protocol        | An IT earthing system -also called ungrounded system- allows the network to operate even in the presence of an insulation fault, without endangering people or property. Required as part of the IT network, an Insulation Monitoring Device (IMD) detects the insulation fault and locates it so it can be repaired. | Two Ethernet 10Base-T/100Base-T port<br>Wi-Fi<br>Bluetooth communication for commissioning<br>Modbus RS485 serial communication<br>IEEE 802.15.4 wireless communication<br>Modbus TCP/IP server and client<br>Support of HTTPS, NTP, SNTP, DHCP client and server with proxy management<br>Modbus RS485 to Modbus/TCP Gateway<br>Wireless devices concentrator to Modbus/TCP<br>Two digital inputs (24VDC version only)<br>Commissioning through EcoStruxure™ Power Commission or through Embedded Web-Pages |
| RS-485 (2-wire / 4-wire) ports, Modbus protocol |   |  |
| Number of devices connected directly            |   |  |
| RS-232 configuration ports                      |   |  |
| Miscellaneous                                   |   |  |
| Installation                                    |   |  |

page 242

page 249

# PowerLogic™ Current Transformers (CT)

## IEC certified Solid core and Split core types

Schneider Electric is the global specialist in energy management with the most complete power monitoring product line. Current Transformers are essential components designed to be used with Schneider Electric's extensive power monitoring product portfolio. From simple energy meters to world class power quality meters, these proven products satisfy any requirement.


### Solid core CTs

PB11246




METSECT5CCxxx

PB112460

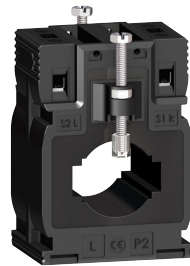

METSECT5MAxxx

PB112456

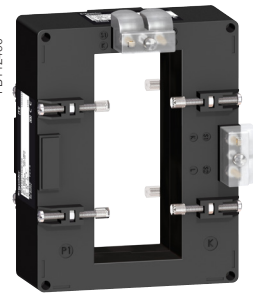

METSECT5DCxxx

PB112467



METSECT5VVxxx

### Split core CTs

PB119872



METSECT5HAxxx

PB119862



METSECT5GAxxx

PB119868



METSECT5GJxxx

PB119876



METSECT5HJxxx



# Solid Core CTs

These current transformers from Schneider Electric are a comprehensive offer, ideally suited throughout the entire low voltage network, from 40 A to 6000 A. They deliver secondary current (0-5 A) proportional to the current measured at the primary. They can be used in combination with measurement devices (switchboard instrumentation, Ammeters, kilowatt-hour meters, power-monitoring units, control relays etc.). CTs with low VA burden allows them to be used in combination of measurement equipments.

## The solution for

- Perfect for new and existing installations and expansion projects in a variety of markets:
- Commercial buildings
- Industrial facilities
- Medical facilities
- Data centers
- Education
- Oil & Gas

## Benefits

- Safety: sealable insulating cover
- Installation: on symmetrical DIN rail, on mounting plate, on busbar
- Well adapted CT as the accuracy class is better than rated accuracy
- Multiple secondary terminal options for different mounting profile
- Current Transformers for coaxial cable
- Current Transformers for vertical or horizontal bar
- Current Transformers for cable or bar profile
- Compact size suitable for different sizes of conductors
- Tropicalized rating for harsh environmental condition
- Adaptable for different conductor profile and primary current intensity

## Features


- A broad selection of ratings: from 40 A to 6000 A  $I_p$  with 120% max. range
- Fully compatible with Schneider Electric's complete portfolio of industry leading metering products as well as Third Party measurement devices.
- Safety through sealable insulating cover
- Compliance with IEC measurement standards with accuracy class ranges from Class 0.5 to Class 3
- Higher safety factor during installation and for facility
- For indoor use

## Conformity of standards

- BS / EN 61869-1:2009
- BS / EN 61869-2:2012
- BS / EN 63000:2018
- VDE 0414
- Green Premium Ecolabel
- CE / UKCA certified
- EAC, Metrology

## $I_p/5$ A ratio


When the primary is energized, the measurement equipment nearly acts as a short circuit which keeps the secondary voltage very low. This voltage will increase significantly if the short circuit is removed. Hence, always keep the secondary circuit connected to low impedance path or current signal terminals of the measuring instrument.

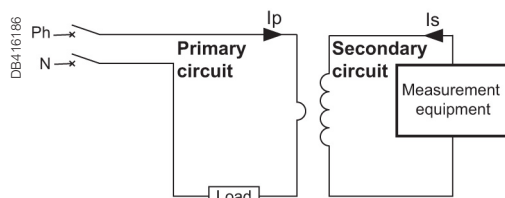

Application diagram of a CT.

$I_p$  - Primary Current

## CTs with multi secondary output

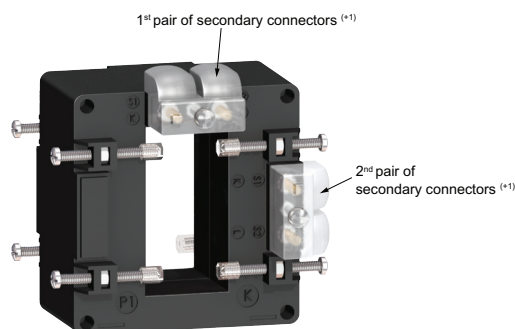

(\*) Two pairs of secondary connectors are provided (parallel internal wiring - only one secondary winding) for easier cable access. 1 lateral + 1 on one extremity.

Hence, only one pair of secondary connectors must be used at a time.

# Solid Core CTs








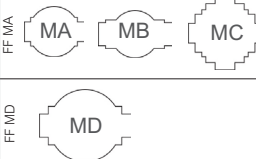


## CT selection - conductor rating aspects

- The choice depends on the conductor profile and the maximum intensity of the primary circuit.
- CTs are available in different form factors and sizes to meet varied applications

Primary current can be measured in two ways:

- CT with let-through primary
- CT with connection of primary by screws and nuts


## CT with let-through primary
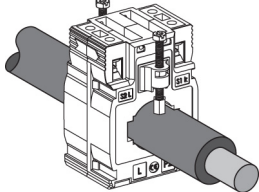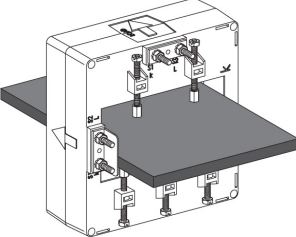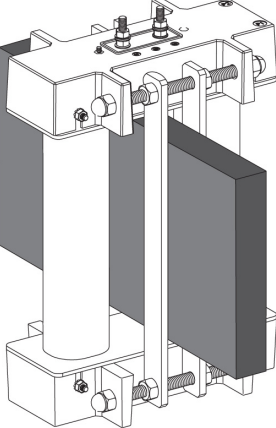
| Conductor type                             | Cable   | Mixed, bars or cables   | Vertical or horizontal bars   | Vertical bars   |
|--|---|---|---|---|
| Suggested Current Transformer and mounting |    | <br> | <br> |   |
| Ratings (A)                                | 40 to 250   | 150 to 800  | 200 to 4000   | 5000 to 6000  |
| CT internal                                | Type C  | Type M  | Type D <sup>(+)</sup>   | Type V  |
|  |  |    |    |  |

<sup>(+)</sup> Two pairs of secondary connectors are provided (parallel internal wiring - only one secondary winding) for easier cable access. 1 lateral + 1 on one extremity. Hence, only one pair of secondary connectors must be used at a time.

## Mounting method


### CT Mounting

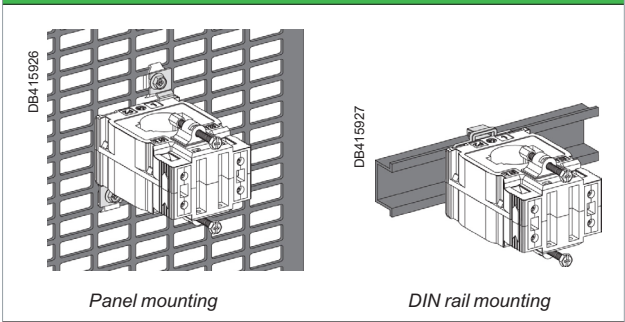

### Specific mounting: use of cylinder

A cylindrical metallic spacer ensures a proper CT positioning when the conductor or the CT cannot be positioned perpendicular. Secured by bolt + nut.

### CT with primary connection by screw and nut (example: use of cylinder with bar or cable)

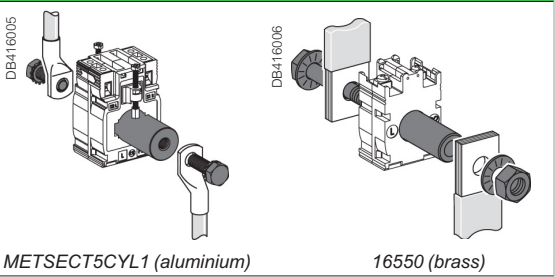

NOTE: This document is not intended to be used as an installation guide.

### CT selection criterion - Electrical aspect of $I_p$ primary ( $I_p$ )/5 A

- We recommend that you choose the ratio immediately higher than the maximum load current.  
Example: Maximum load current = 1103 A; ratio chosen = 1250/5 ( $I_p = 1250$  or  $I_{nom} = 1250$ ).
- For lower ratings:** From 40/5 to 75/5 and for an application with digital devices, we recommend that you choose the next higher rating of  $I_p$ , for example 50/5 for 40/5, 60/5 for 50/5, and so on.
- Specific case of the motor starter:** to measure motor starter current, you must choose a CT with primary current  $I_p = I_d/2$  ( $I_d$  = motor starting current).

### Validation of measurement solution according to accuracy class

It consists in controlling the right adaptation of the CT on the accuracy class aspect. The accuracy class is specified in the project. The total dissipated power of the measurement circuit (meter + cables) should not be superior to the specified limit of the CT. This limit is for different standard classes. If necessary, the choice of the cable section, the CT or meter should be modified to fit the requirement.

| Copper cable cross-section (mm <sup>2</sup> ) | Approximate Power burden at 20 °C (VA) | Schneider Electric make power monitoring device     | Maximum VA burden at Nominal current (secondary) input (VA) |
|---|--|---|---|
| 1   | 1                                      | Analog Ammeter, form factor 72 x 72 mm / 96 x 96 mm | 1.1   |
| 1.5   | 0.685                                  | Digital ammeter                                     | 0.3   |
| 2.5   | 0.41                                   | PM8000  | 0.15  |
| 4   | 0.254                                  | PM3000 / iEM3200                                    | 0.3   |
| 6   | 0.169                                  | PM5000 / PM2000                                     | 0.15  |
| 10  | 0.0975                                 | PM / EM1000H / EM64xxH                              | 0.15  |
| 16  | 0.062                                  |   |   |


For each temperature variation per 10 °C bracket, the power drawn up by the cables increases by 4 %.

### Application example

Project specification: 200 A, in Ø27 mm cable, accuracy class 1.

Our choice is [METSECT5MA020](#).

For this CT selected on the chart (next page), the maximum VA burden is 7 VA (for "Accuracy class 1" which is specified in the project).

| Internal profile type   | Cables (mm) | Bars (mm)          | Rating $I_p/5$ A (A) | Commercial reference number | Accuracy class  |    |   |
|---|-------------|--------------------|----------------------|-----------------------------|-----------------|----|---|
|   |             |                    |                      |                             | 0.5             | 1  | 3 |
|   |             |                    |                      |                             | Max. power (VA) |    |   |
|  | Ø27         | 10 x 32<br>15 x 25 | 150                  | METSECT5MA015               | 3               | 4  | - |
|   |             |                    | 200                  | METSECT5MA020               | 4               | 7  | - |
|   |             |                    | 250                  | METSECT5MA025               | 6               | 8  | - |
|   |             |                    | 300                  | METSECT5MA030               | 8               | 10 | - |
|   |             |                    | 400                  | METSECT5MA040               | 10              | 12 | - |

Control of the conformity of the measurement chain:

■ PM3000 multi-meter: 0.3 VA.

■ 4 m length of 2.5 mm<sup>2</sup> cable: 0.41 x 4 = 1.64 VA.

Calculated burden: 0.3 + 1.64 = 1.94 VA (< 7 VA)

Conclusion: this CT is well adapted as the accuracy class will be even better than 1.

### Typical limits of current error and phase displacement error for measuring current transformers (classes from 0.1 to 1)

| Accuracy Class | ± Percentage current (ratio) error at percentage of rated current shown below |      |     |     | ± Phase displacement at percentage of rated current as shown below |    |     |     |              |      |      |      |
|----------------|---|------|-----|-----|--|----|-----|-----|--------------|------|------|------|
|                |   |      |     |     | Minutes  |    |     |     | Centiradians |      |      |      |
|                | 5   | 20   | 100 | 120 | 5  | 20 | 100 | 120 | 5            | 20   | 100  | 120  |
| 0.1            | 0.4   | 0.2  | 0.1 | 0.1 | 15   | 8  | 5   | 5   | 0.45         | 0.24 | 0.15 | 0.15 |
| 0.2            | 0.75  | 0.35 | 0.2 | 0.2 | 30   | 15 | 10  | 10  | 0.9          | 0.45 | 0.3  | 0.3  |
| 0.5            | 1.5   | 0.75 | 0.5 | 0.5 | 90   | 45 | 30  | 30  | 2.7          | 1.35 | 0.9  | 0.9  |
| 1.0            | 3.0   | 1.5  | 1.0 | 1.0 | 180  | 90 | 60  | 60  | 5.4          | 2.7  | 1.8  | 1.8  |


# Solid Core CTs

## Type C




METSECT5CCxxx

## Type V

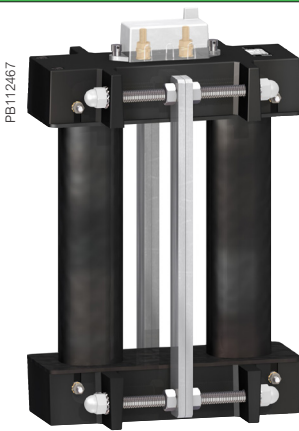


METSECT5VVxxx


## Type M

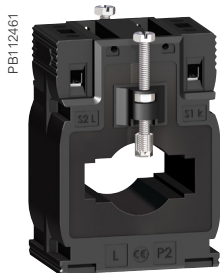


METSECT5MBxxx

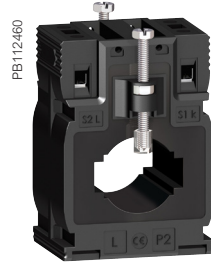

METSECT5MAxxx

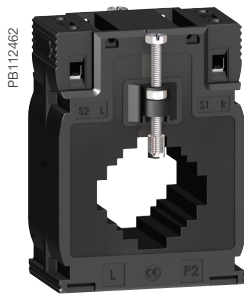

METSECT5MCxxx

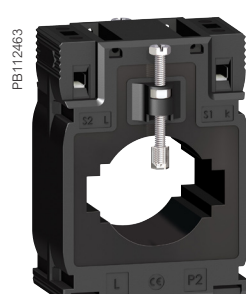


METSECT5MDxxx


## General characteristics

|   |   |
|---|---|
| Secondary current Is (A)                            | 5 A (S1- S2 terminals, multiple secondary terminal options for different mounting profile)  |
| Maximum voltage rating Ue (V)                       | 720 V   |
| Dielectric strength test                            | 3 kV, 50 Hz for one minute  |
| Frequency (Hz)                                      | 50/60 Hz nominal (47 - 63 Hz)   |
| Instrument security/ safety factor (FS/sf)          | 40 to 4000 A: FS ≤ 5<br>5000 to 6000 A: FS ≤ 10   |
| Rated short time thermal current (I <sub>th</sub> ) | 60 times the I <sub>p</sub> current for 1 s (max 60 kA)   |
| Rated dynamic current (I <sub>dyn</sub> )           | 2.5 I <sub>th</sub>   |
| Degree of protection                                | IP20  |
| Operating temperature                               | Tropicalised range:<br>-25 to 60 °C (for I <sub>p</sub> up to 1000 A),<br>-25 to 50 °C (for I <sub>p</sub> 1250 A up to 6000A)<br>Relative humidity - 5 % to 95 % |
| Storage temperature                                 | -40°C to +85°C  |
| Compliance with standards                           | BS / EN 61869-1:2009, BS / EN 61869-2:2012, BS / EN 63000:2018<br>VDE 0414  |
| Secondary connection (as per model)                 | by terminals for lug or by tunnel terminals or by screws  |
| Pollution degree                                    | 2   |
| Installation category                               | III   |
| Insulation class                                    | B   |
| Altitude  | ≤ 3000 m (9843 ft)  |


## Type D




METSECT5DAxxx




METSECT5DDxxx

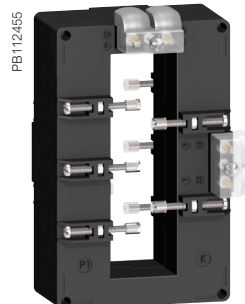


METSECT5DBxxx

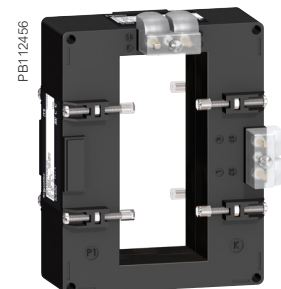

METSECT5DCxxx

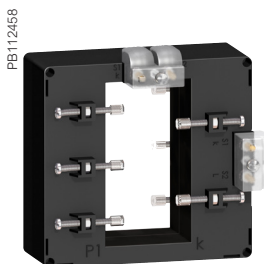

METSECT5DExxx

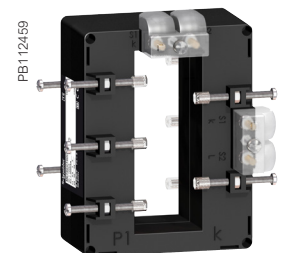

METSECT5DHxxx

# Solid Core CTs

Representation of commercial reference numbers for CTs

**MET SE CT** X XX XXX

1 = 1 Amp  
5 = 5 Amp  
R = Rogowski

2 letters = Form Factor

Last 3 digits = Primary rating/10  
(Rounded off to next digit)



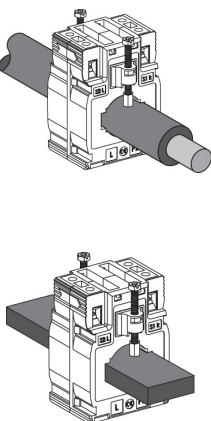




**Examples:**

**Solid core**  
**METSECT5CC008**  
CT - Current transformer  
5 - 5 A CT secondary  
CC - Form factor suitable for Coaxial cable (round) only  
008 - 75 A primary rating, divide by 10

**Split core**  
**METSECT5GA020**  
CT - Current transformer  
5 - 5 A CT secondary  
GA - Form factor suitable for bus bars of max. size 23 x 33 mm  
020 - 200 A primary rating, divide by 10

**Rogowski coil**  
**METSECTR30500**  
CT - Current transformer  
R - Rogowski coil  
30 - 300 mm coil length  
500 - Primary current 5000 A, multiply by 10

## Commercial reference scheme











| CT with let-through primary   | CT internal type | Internal profile type and dimension in mm  | Fastening mode                              | Ip/5 A rating (A) <sup>(*)</sup> | Accuracy class VA rating |      |     | CT Commercial reference | Accessories commercial reference |                |
|---|------------------|--|---|----------------------------------|--------------------------|------|-----|-------------------------|----------------------------------|----------------|
|   |                  |  |   |                                  | 0.5                      | 1    | 3   |                         | Cylinder                         | Sealable cover |
| Type C - solid-core CT (cable profile)  |                  |  |   |                                  |                          |      |     |                         |                                  |                |
|   | CC               | <br>Ø21                               | • Adapter for DIN rails<br>• Mounting plate | 40                               | -                        | -    | 1   | METSECT5CC004           | METSECT5CYL1                     | Included       |
|   |                  |  |   | 50                               | -                        | 1.25 | 1.5 | METSECT5CC005           |                                  |                |
|   |                  |  |   | 60                               | -                        | 1.25 | 2   | METSECT5CC006           |                                  |                |
|   |                  |  |   | 75                               | -                        | 1.5  | 2.5 | METSECT5CC008           |                                  |                |
|   |                  |  |   | 100                              | 2                        | 2.5  | 3.5 | METSECT5CC010           |                                  |                |
|   |                  |  |   | 125                              | 2.5                      | 3.5  | 4   | METSECT5CC013           |                                  |                |
|   |                  |  |   | 150                              | 3                        | 4    | 5   | METSECT5CC015           |                                  |                |
|   |                  |  |   | 200                              | 4                        | 5.5  | 6   | METSECT5CC020           |                                  |                |
|   |                  |  |   | 250                              | 5                        | 6    | 7   | METSECT5CC025           |                                  |                |
| Type M - solid-core CT (mixed: cable/bar profile)                                   |                  |  |   |                                  |                          |      |     |                         |                                  |                |
|  | MB               | <br>Ø26 12 x 40<br>15 x 32            | • Adapter for DIN rails<br>• Mounting plate | 250                              | 3                        | 4    | -   | METSECT5MB025           | -                                | METSECT5COVER  |
|   |                  |  |   | 300                              | 4                        | 6    | -   | METSECT5MB030           |                                  |                |
|   |                  |  |   | 400                              | 6                        | 8    | -   | METSECT5MB040           |                                  |                |
|   | MA               | <br>Ø27 10 x 32<br>15 x 25            |   | 150                              | 3                        | 5    | -   | METSECT5MA015           | METSECT5CYL2                     | METSECT5COVER  |
|   |                  |  |   | 200                              | 4                        | 7    | -   | METSECT5MA020           |                                  |                |
|   |                  |  |   | 250                              | 6                        | 8    | -   | METSECT5MA025           |                                  |                |
|   |                  |  |   | 300                              | 8                        | 10   | -   | METSECT5MA030           |                                  |                |
|   | MC               | <br>Ø32 10 x 40<br>20 x 32<br>25 x 25 |   | 400                              | 10                       | 12   | -   | METSECT5MA040           | -                                | METSECT5COVER  |
|   |                  |  |   | 250                              | 3                        | 5    | -   | METSECT5MC025           |                                  |                |
|   |                  |  |   | 300                              | 5                        | 8    | -   | METSECT5MC030           |                                  |                |
|   |                  |  |   | 400                              | 8                        | 10   | -   | METSECT5MC040           |                                  |                |
|   |                  |  |   | 500                              | 10                       | 12   | -   | METSECT5MC050           |                                  |                |
|   |                  |  |   | 600                              | 12                       | 15   | -   | METSECT5MC060           |                                  |                |
|   | MD               | <br>Ø40 10 x 50<br>20 x 40            |   | 800                              | 10                       | 12   | -   | METSECT5MC080           | -                                | METSECT5COVER  |
|   |                  |  |   | 500                              | 4                        | 6    | -   | METSECT5MD050           |                                  |                |
|   |                  |  |   | 600                              | 6                        | 8    | -   | METSECT5MD060           |                                  |                |
|   |                  |  |   | 800                              | 10                       | 12   | -   | METSECT5MD080           |                                  |                |
|   |                  |  |   |                                  |                          |      |     |                         |                                  |                |

<sup>(\*)</sup> Maximum rated current (Imax) is 120% of the primary current (Ip).

Please contact your Schneider Electric representative for complete ordering information.

# Solid Core CTs

## Commercial reference scheme (contd.)

| CT with let-through primary  | CT internal type | Internal profile type and dimension in mm  | Fastening mode          | Ip/5 A rating (A) <sup>(+1)</sup> | Accuracy class VA rating |    |    | CT Commercial reference       | Accessories commercial reference |                |  |
|--|------------------|--|-------------------------|-----------------------------------|--------------------------|----|----|-------------------------------|----------------------------------|----------------|--|
|  |                  |  |                         |                                   | 0.5                      | 1  | 3  |                               | Cylinder                         | Sealable cover |  |
| Type D <sup>(+2)</sup> - solid-core CT (vertical or horizontal bar - dual secondary terminals)   |                  |  |                         |                                   |                          |    |    |                               |                                  |                |  |
| <div>DB415368</div>  <div>DB415987</div>  | DA               | <div>FFD</div>  <div>32 x 65</div>      | Insulated locking screw | 400                               | 4                        | 8  | -  | METSECT5DA040                 | -                                | Included       |  |
|  |                  |  |                         | 500                               | 8                        | 10 | -  | METSECT5DA050                 |                                  |                |  |
|  |                  |  |                         | 600                               | 8                        | 12 | -  | METSECT5DA060                 |                                  |                |  |
|  |                  |  |                         | 800                               | 12                       | 15 | -  | METSECT5DA080                 |                                  |                |  |
|  |                  |  |                         | 1000                              | 15                       | 20 | -  | METSECT5DA100                 |                                  |                |  |
|  |                  |  |                         | 1250                              | 15                       | 20 | -  | METSECT5DA125 <sup>(+3)</sup> |                                  |                |  |
|  |                  |  |                         |                                   | 1500                     | 20 | 25 | -                             | METSECT5DA150 <sup>(+3)</sup>    |                |  |
|  | DB               | <div>FFD</div>  <div>38 x 127</div>     | Insulated locking screw | 1000                              | 6                        | 10 | -  | METSECT5DB100                 | -                                | Included       |  |
|  |                  |  |                         | 1250                              | 8                        | 12 | -  | METSECT5DB125 <sup>(+3)</sup> |                                  |                |  |
|  |                  |  |                         | 1500                              | 10                       | 15 | -  | METSECT5DB150 <sup>(+3)</sup> |                                  |                |  |
|  |                  |  |                         | 2000                              | 15                       | 20 | -  | METSECT5DB200 <sup>(+3)</sup> |                                  |                |  |
|  |                  |  |                         | 2500                              | 20                       | 25 | -  | METSECT5DB250 <sup>(+3)</sup> |                                  |                |  |
|  |                  |  |                         |                                   | 3000                     | 25 | 30 | -                             | METSECT5DB300 <sup>(+3)</sup>    |                |  |
|  | DC               | <div>FFD</div>  <div>52 x 127</div>     | Insulated locking screw | 2000                              | 25                       | 30 | -  | METSECT5DC200 <sup>(+3)</sup> | -                                | Included       |  |
|  |                  |  |                         | 2500                              | 30                       | 50 | -  | METSECT5DC250 <sup>(+3)</sup> |                                  |                |  |
|  |                  |  |                         | 3000                              | 30                       | 50 | -  | METSECT5DC300 <sup>(+3)</sup> |                                  |                |  |
|  |                  |  |                         | 4000                              | 30                       | 50 | -  | METSECT5DC400 <sup>(+3)</sup> |                                  |                |  |
|  | DD               | <div>FFD</div>  <div>34 x 84</div>     | Insulated locking screw | 1000                              | 10                       | 15 | -  | METSECT5DD100                 | -                                | Included       |  |
|  |                  |  |                         | 1250                              | 12                       | 15 | -  | METSECT5DD125 <sup>(+3)</sup> |                                  |                |  |
|  |                  |  |                         | 1500                              | 15                       | 20 | -  | METSECT5DD150 <sup>(+3)</sup> |                                  |                |  |
|  | DE               | <div>FFD</div>  <div>54 x 102</div>   | Insulated locking screw | 1000                              | 12                       | 15 | -  | METSECT5DE100                 | -                                | Included       |  |
|  |                  |  |                         | 1250                              | 15                       | 20 | -  | METSECT5DE125 <sup>(+3)</sup> |                                  |                |  |
|  |                  |  |                         | 1500                              | 20                       | 25 | -  | METSECT5DE150 <sup>(+3)</sup> |                                  |                |  |
|  |                  |  |                         | 2000                              | 20                       | 25 | -  | METSECT5DE200 <sup>(+3)</sup> |                                  |                |  |
|  | DH               | <div>FFD</div>  <div>38 x 102</div>   | Insulated locking screw | 1250                              | 12                       | 15 | -  | METSECT5DH125 <sup>(+3)</sup> | -                                | Included       |  |
|  |                  |  |                         | 1500                              | 12                       | 15 | -  | METSECT5DH150 <sup>(+3)</sup> |                                  |                |  |
|  |                  |  |                         | 2000                              | 20                       | 25 | -  | METSECT5DH200 <sup>(+3)</sup> |                                  |                |  |
| Type V - solid-core CT (vertical bar profile)  |                  |  |                         |                                   |                          |    |    |                               |                                  |                |  |
| <div>DB415989</div>   | VV               | <div>FF V2</div>  <div>55 x 165</div> | Insulated locking screw | 5000                              | 60                       | -  | -  | METSECT5VV500 <sup>(+3)</sup> | -                                | Included       |  |
|  |                  |  |                         | 6000                              | 70                       | -  | -  | METSECT5VV600 <sup>(+3)</sup> |                                  |                |  |

<sup>(+1)</sup> Maximum rated current (Imax) is 120% of the primary current (Ip).


<sup>(+2)</sup> Two pairs of secondary connectors are provided (parallel internal wiring - only one secondary winding) for easier cable access. One lateral and one on extremity. Hence, only one pair of secondary connector must be used at a time.

<sup>(+3)</sup> Operating temperature: -25 to +50 °C (-13 to +122 °F)


Please contact your Schneider Electric representative for complete ordering information.

# Solid core CT dimensions


## CC internal profile type

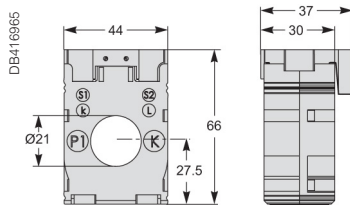


## MB internal profile type

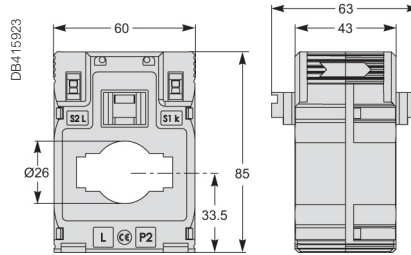


## MA internal profile type

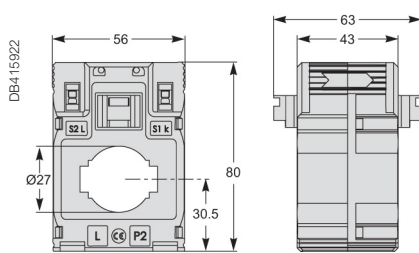


## MC internal profile type

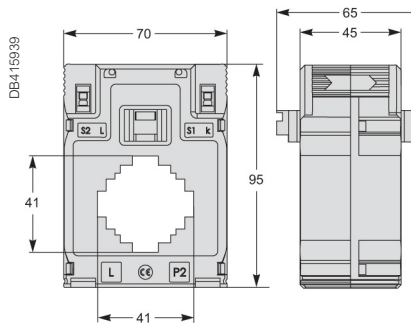


## MD internal profile type

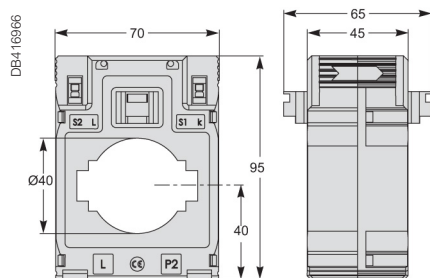


## DA internal profile type

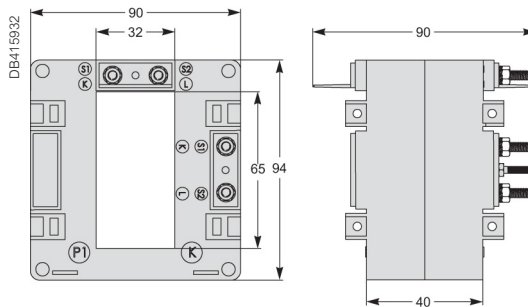

## DB internal profile type

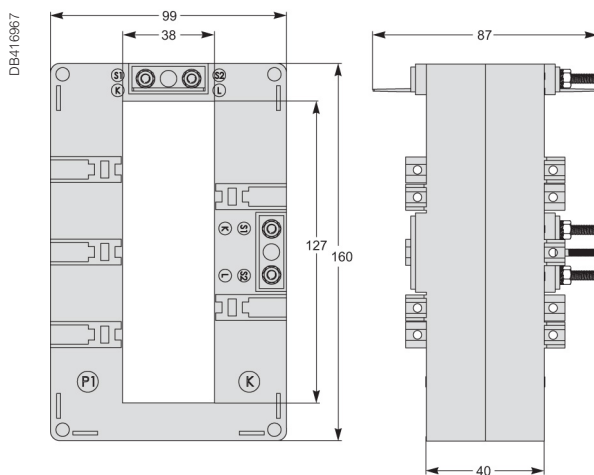


## DC internal profile type

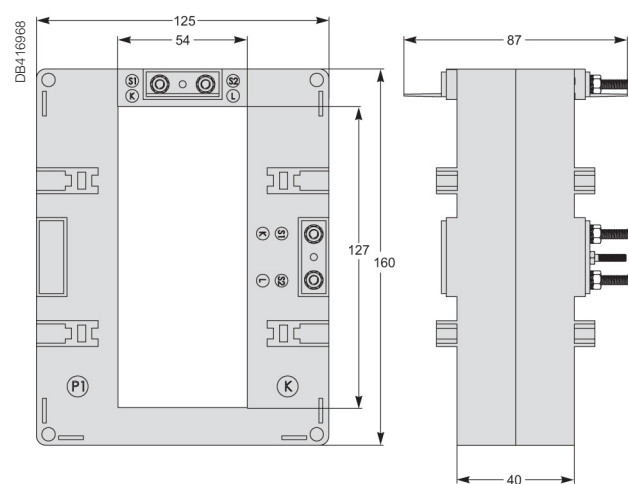


# Solid core CT dimensions contd.


## DD internal profile type

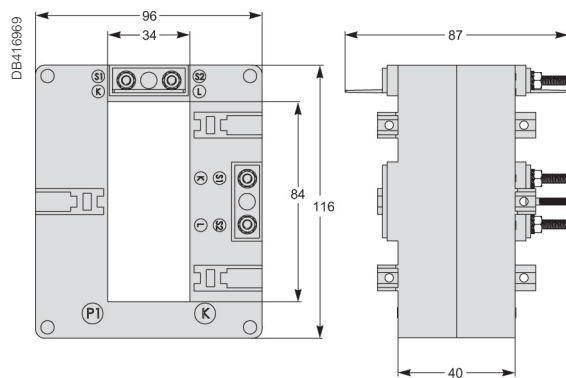


## DE internal profile type

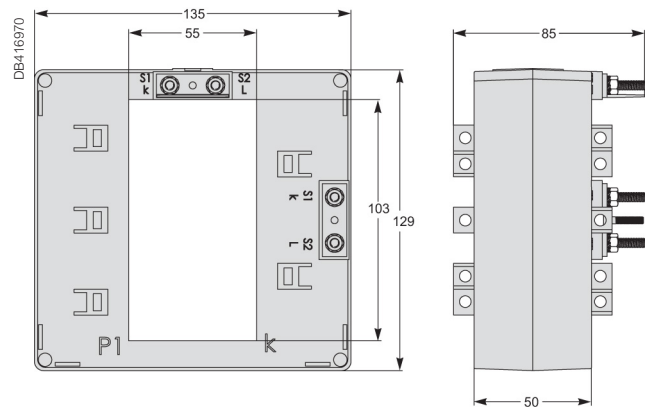






## DH internal profile type

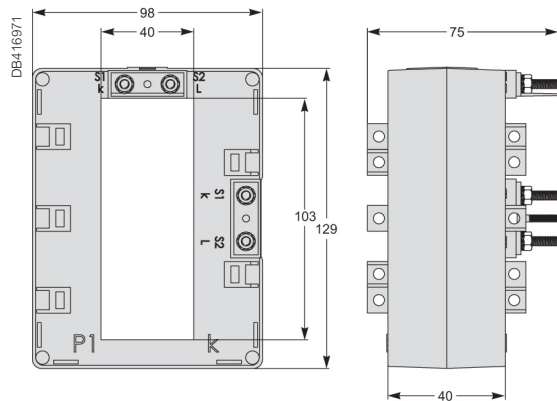

## VV internal profile type

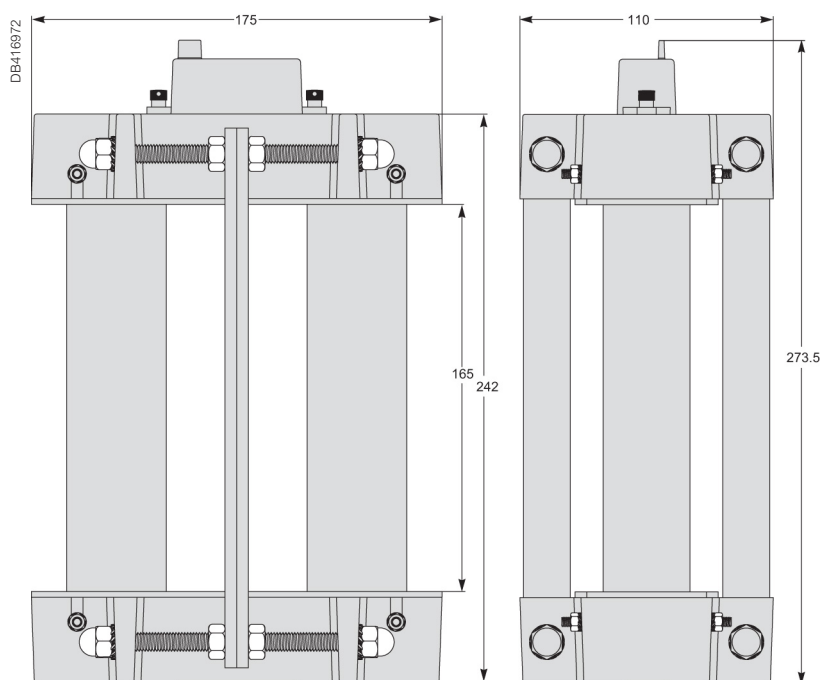

Solid core cylinders dimensions
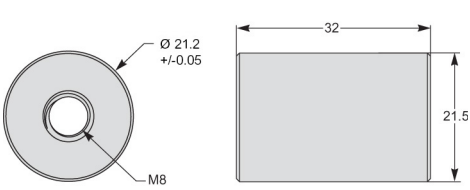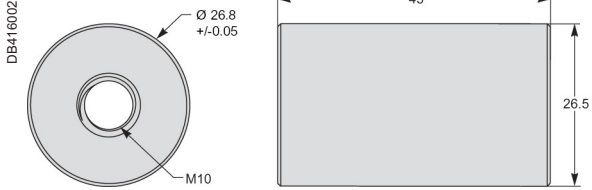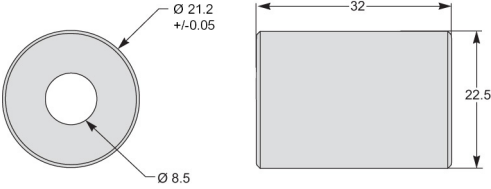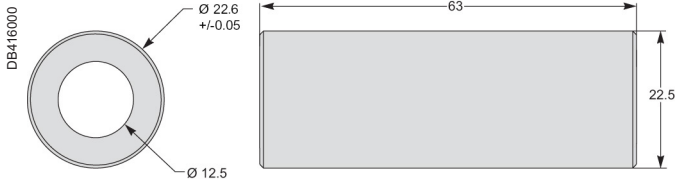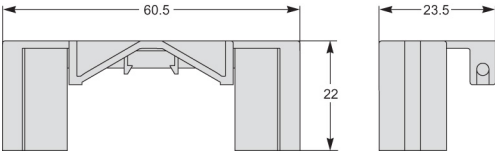
| Cylinders  |   |
|--|---|
| METSECT5CYL1   | METSECT5CYL2  |
| <div><div>DB416004</div><div></div><div>Aluminium</div></div> | <div><div>DB416002</div><div></div><div>Aluminium</div></div> |
| 16550  | 16551   |
| <div><div>DB416082</div><div></div><div>Brass</div></div>     | <div><div>DB416000</div><div></div><div>Brass</div></div>     |
| Covers   |   |
| METSECT5COVER  |   |
| <div><div>DB416008</div><div></div></div>                    |   |

See the appropriate **Installation Guide** for correct installation instructions.

## Split core CTs

These current transformers from Schneider Electric are a comprehensive offer, ideally suited throughout the entire low voltage network, from 100 A to 4000 A. They deliver secondary current (0-5 A) proportional to the current measured at the primary. They can be used in combination with measurement devices (switchboard instrumentation, Ammeters, kilowatt-hour meters, power-monitoring units, control relays etc.). CTs with low VA burden allows them to be used in combination of measurement equipments.

### The solution for

- Perfect for new and existing installations and expansion projects in a variety of markets:
- Commercial buildings
- Industrial facilities
- Medical facilities
- Data centers
- Education
- Oil & Gas

### Benefits


- Installation: on symmetrical DIN rail, on mounting plate, on busbar
- Well adapted CT as the accuracy class is better than rated accuracy
- Current Transformers for coaxial cable (input range 100 A to 1000 A)
- Current Transformers for bus bar (input range 100 A to 4000 A)
- Current Transformers for cable or bar profile
- Compact size suitable for different sizes of conductors
- Tropicalized rating for harsh environmental condition
- Adaptable for different conductor profile and primary current intensity

### Features

- A broad selection of ratings: from 100 A to 4000 A  $I_p$  with 120% max. range
- Split core design allows for CT installation without the need to uninstall and reinstall power conductor
- The split core CTs are designed for easy fit and assembly into existing installations, without separating the primary conductor.
- Click-system and fixing clasps allow single-handed mounting
- Fully compatible with Schneider Electric's complete portfolio of industry leading metering products as well as Third Party measurement devices.
- Safety through sealable insulating cover
- Compliance with IEC measurement standards with accuracy class ranges from Class 0.5 to Class 3
- Higher safety factor during installation and for facility
- For indoor use

### $I_p/5$ A ratio

When the primary is energized, the measurement equipment nearly acts as a short circuit which keeps the secondary voltage very low. This voltage will increase significantly if the short circuit is removed. Hence, always keep the secondary circuit connected to low impedance path or current signal terminals of the measuring instrument.

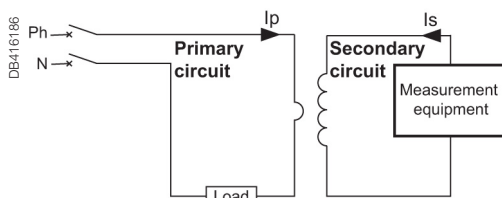

Application diagram of a CT.

$I_p$  - Primary Current


### Conformity of standards

- BS / EN 61869-1:2009
- BS / EN 61869-2:2012
- BS / EN 63000:2018
- VDE 0414
- Green Premium Ecolabel
- CE / UKCA certified
- EAC, Metrology

# Split Core CTs


## Mounting method

CT Mounting

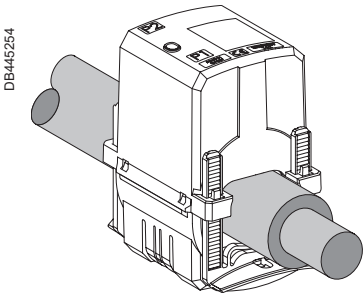

DB445254

Type H

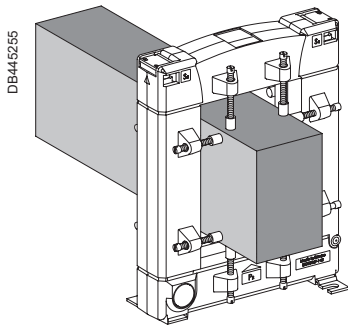


DB445255

Type G


| General characteristics                    |   |
|--|---|
| Secondary current Is (A)                   | 5 A (S1- S2 terminals)  |
| Maximum voltage rating Ue (V)              | 720 V   |
| Dielectric strength test                   | 3 kV, 50 Hz for one minute  |
| Frequency (Hz)                             | 50/60 Hz nominal (47 - 63 Hz)   |
| Instrument security/ safety factor (FS/sf) | up to 1000 A: FS ≤ 5<br>≥1000 A: FS ≤ 10                                      |
| Rated short time thermal current (Ith)     | 60 times the Ip current for 1 s (max 60 kA)                                   |
| Rated dynamic current (Idyn)               | 2.5 Ith   |
| Degree of protection                       | IP20  |
| Operating temperature                      | Tropicalised range: -5 to +60 °C<br>Relative humidity: 5 % to 85 %            |
| Storage temperature                        | -25°C to +70°C  |
| Compliance with standards                  | BS / EN 61869-1:2009, BS / EN 61869-2:2012,<br>BS / EN 63000:2018<br>VDE 0414 |
| Secondary connection (as per model)        | by terminals for lug or by tunnel terminals or by screws                      |
| Pollution degree                           | 2   |
| Installation category                      | III   |
| Insulation class                           | E   |
| Altitude                                   | ≤ 3000 m (9843 ft)  |

## Type H




PB119872

METSECT5HAxxx




PB119872

METSECT5HDxxx

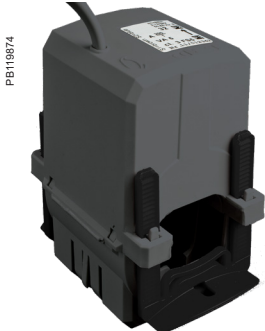


PB119874

METSECT5HGxxx




PB119876

METSECT5HJxxx



PB119878

METSECT5HMxxx

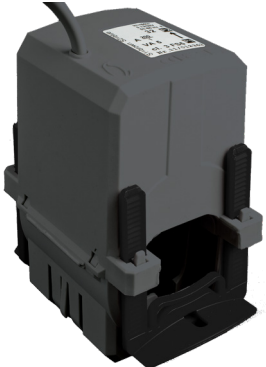

PB119874









METSECT5HPxxx

# Split Core CTs

## Type G














## Commercial reference scheme

| CT with let-through primary   |    | CT internal type   | Internal profile type and dimension in mm | Ip/5 A rating (A) <sup>(+1)</sup> | Accuracy class VA rating |      |               | CT Commercial reference |
|---|----|--|---|-----------------------------------|--------------------------|------|---------------|-------------------------|
|   |    |  |   |                                   | 0.5                      | 1    | 3             |                         |
| Type G - split core CT (bus bar)  |    |  |   |                                   |                          |      |               |                         |
| <div>PB119862</div>   | GA | <div>FF V2</div>  <div>23 x 33</div>   | 100                                       | -                                 | -                        | 1.25 | METSECT5GA010 |                         |
|   |    |  | 150                                       | -                                 | -                        | 1.5  | METSECT5GA015 |                         |
|   |    |  | 200                                       | -                                 | -                        | 2.5  | METSECT5GA020 |                         |
|   |    |  | 250                                       | -                                 | 1.5                      | -    | METSECT5GA025 |                         |
|   |    |  | 300                                       | -                                 | 3.75                     | -    | METSECT5GA030 |                         |
|   |    |  | 400                                       | 1                                 | -                        | -    | METSECT5GA040 |                         |
| <div>PB119864</div>  | GD | <div>FF V2</div>  <div>55 x 85</div>  | 250                                       | -                                 | 1.5                      | -    | METSECT5GD025 |                         |
|   |    |  | 300                                       | -                                 | 2.5                      | -    | METSECT5GD030 |                         |
|   |    |  | 400                                       | 1                                 | -                        | -    | METSECT5GD040 |                         |
|   |    |  | 500                                       | 2.5                               | -                        | -    | METSECT5GD050 |                         |
|   |    |  | 600                                       | 2.5                               | -                        | -    | METSECT5GD060 |                         |
|   |    |  | 750                                       | 2.5                               | -                        | -    | METSECT5GD075 |                         |
|   |    |  | 800                                       | 2.5                               | -                        | -    | METSECT5GD080 |                         |
|   |    |  | 1000                                      | 5                                 | -                        | -    | METSECT5GD100 |                         |
| <div>PB119866</div>  | GG | <div>FF V2</div>  <div>85 x 125</div> | 250                                       | -                                 | 1.5                      | -    | METSECT5GG025 |                         |
|   |    |  | 300                                       | -                                 | 2.5                      | -    | METSECT5GG030 |                         |
|   |    |  | 400                                       | -                                 | 2.5                      | -    | METSECT5GG040 |                         |
|   |    |  | 500                                       | 2.5                               | -                        | -    | METSECT5GG050 |                         |
|   |    |  | 600                                       | 2.5                               | -                        | -    | METSECT5GG060 |                         |
|   |    |  | 750                                       | 2.5                               | -                        | -    | METSECT5GG075 |                         |
|   |    |  | 800                                       | 2.5                               | -                        | -    | METSECT5GG080 |                         |
|   |    |  | 1000                                      | 5                                 | -                        | -    | METSECT5GG100 |                         |
|   |    |  | 1200                                      | 5                                 | -                        | -    | METSECT5GG120 |                         |
|   |    |  | 1250                                      | 7.5                               | -                        | -    | METSECT5GG125 |                         |
|   |    |  | 1500                                      | 7.5                               | -                        | -    | METSECT5GG150 |                         |
| <div>PB119868</div>  | GJ | <div>FF V2</div>  <div>85 x 165</div> | 1000                                      | 10                                | -                        | -    | METSECT5GJ100 |                         |
|   |    |  | 1200                                      | 10                                | -                        | -    | METSECT5GJ120 |                         |
|   |    |  | 1500                                      | 10                                | -                        | -    | METSECT5GJ150 |                         |
|   |    |  | 1600                                      | 10                                | -                        | -    | METSECT5GJ160 |                         |
|   |    |  | 2000                                      | 10                                | -                        | -    | METSECT5GJ200 |                         |
|   |    |  | 2500                                      | 10                                | -                        | -    | METSECT5GJ250 |                         |
|   |    |  | 3000                                      | 15                                | -                        | -    | METSECT5GJ300 |                         |
|   |    |  | 4000                                      | 15                                | -                        | -    | METSECT5GJ400 |                         |

<sup>(+1)</sup> Maximum rated current (Imax) is 120% of the primary current (Ip).

# Split Core CTs

## Commercial reference scheme (contd.)

| CT with let-through primary   |    | CT internal type   | Internal profile type and dimension in mm | Ip/5 A rating (A) <sup>(*)</sup> | Accuracy class VA rating |     |               | CT Commercial reference |
|---|----|--|---|----------------------------------|--------------------------|-----|---------------|-------------------------|
|   |    |  |   |                                  | 0.5                      | 1   | 3             |                         |
| Type H - split core CT (cable)  |    |  |   |                                  |                          |     |               |                         |
| <div>PB119872</div>    | HA | <br>18.4 x 19   | 150                                       | -                                | 1                        | -   | METSECT5HA015 |                         |
|   |    |  | 200                                       | -                                | 1.5                      | -   | METSECT5HA020 |                         |
|   |    |  | 250                                       | 1                                | -                        | -   | METSECT5HA025 |                         |
|   | HD | <br>27.9 x 27   | 250                                       | -                                | 1                        | -   | METSECT5HD025 |                         |
|   |    |  | 300                                       | -                                | 1.5                      | -   | METSECT5HD030 |                         |
|   |    |  | 400                                       | -                                | 2.5                      | -   | METSECT5HD040 |                         |
|   |    |  | 500                                       | 1                                | -                        | -   | METSECT5HD050 |                         |
| <div>PB119874</div>    | HG | <br>Ø32.5       | 100                                       | -                                | -                        | 1.5 | METSECT5HG010 |                         |
|   |    |  | 125                                       | -                                | -                        | 2.5 | METSECT5HG013 |                         |
|   |    |  | 150                                       | -                                | -                        | 3   | METSECT5HG015 |                         |
|   |    |  | 200                                       | -                                | -                        | 3   | METSECT5HG020 |                         |
|   |    |  | 250                                       | -                                | -                        | 3   | METSECT5HG025 |                         |
|   |    |  | 300                                       | -                                | 2.5                      | -   | METSECT5HG030 |                         |
|   |    |  | 400                                       | -                                | 5                        | -   | METSECT5HG040 |                         |
|   |    |  | 500                                       | -                                | 5                        | -   | METSECT5HG050 |                         |
|   |    |  | 600                                       | -                                | 5                        | -   | METSECT5HG060 |                         |
| <div>PB119876</div>   | HJ | <br>42.4 x 43 | 300                                       | -                                | 2.5                      | -   | METSECT5HJ030 |                         |
|   |    |  | 400                                       | -                                | 5                        | -   | METSECT5HJ040 |                         |
|   |    |  | 500                                       | -                                | 5                        | -   | METSECT5HJ050 |                         |
|   |    |  | 600                                       | 2.5                              | -                        | -   | METSECT5HJ060 |                         |
|   |    |  | 750                                       | 2.5                              | -                        | -   | METSECT5HJ075 |                         |
|   |    |  | 800                                       | 2.5                              | -                        | -   | METSECT5HJ080 |                         |
| <div>PB119878</div>  | HM | <br>42.4 x 85 | 300                                       | -                                | 2.5                      | -   | METSECT5HM030 |                         |
|   |    |  | 400                                       | -                                | 5                        | -   | METSECT5HM040 |                         |
|   |    |  | 500                                       | -                                | 5                        | -   | METSECT5HM050 |                         |
|   |    |  | 600                                       | 2.5                              | -                        | -   | METSECT5HM060 |                         |
|   |    |  | 750                                       | 2.5                              | -                        | -   | METSECT5HM075 |                         |
|   |    |  | 800                                       | 2.5                              | -                        | -   | METSECT5HM080 |                         |
| <div>PB119874</div>  | HP | <br>Ø44       | 250                                       | -                                | 1.5                      | -   | METSECT5HP025 |                         |
|   |    |  | 300                                       | -                                | 2.5                      | -   | METSECT5HP030 |                         |
|   |    |  | 400                                       | -                                | 5                        | -   | METSECT5HP040 |                         |
|   |    |  | 500                                       | -                                | 5                        | -   | METSECT5HP050 |                         |
|   |    |  | 600                                       | -                                | 5                        | -   | METSECT5HP060 |                         |
|   |    |  | 750                                       | -                                | 5                        | -   | METSECT5HP075 |                         |
|   |    |  | 800                                       | -                                | 5                        | -   | METSECT5HP080 |                         |
|   |    |  | 1000                                      | -                                | 5                        | -   | METSECT5HP100 |                         |


\* Maximum rated current (Imax) is 120% of the primary current (Ip).

Please contact your Schneider Electric representative for complete ordering information.


# Split core CT dimensions

## Gx products


### GA Dimensions

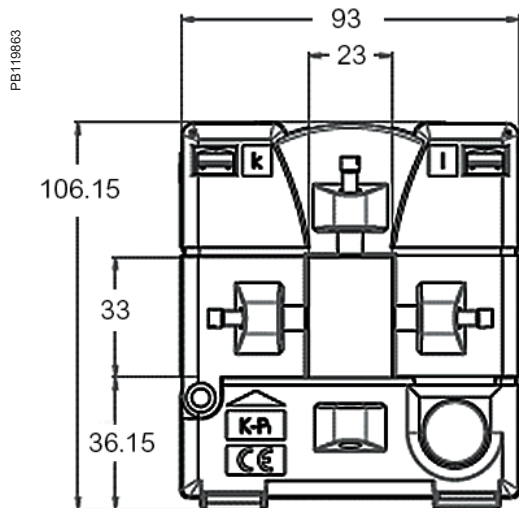


### GD Dimensions

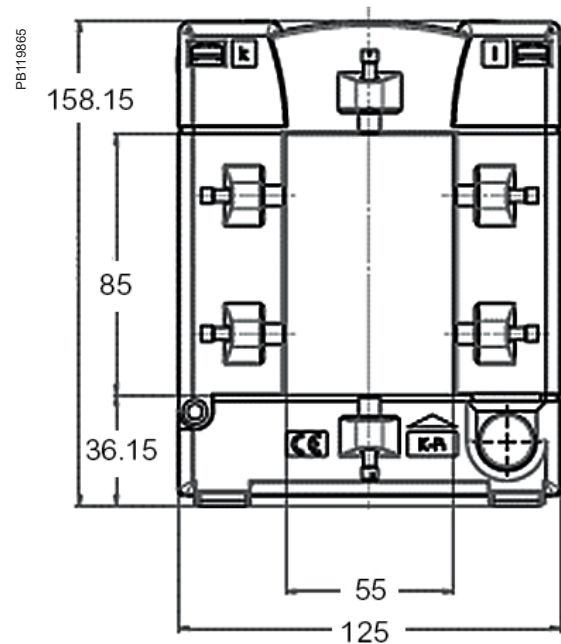

### GG Dimensions

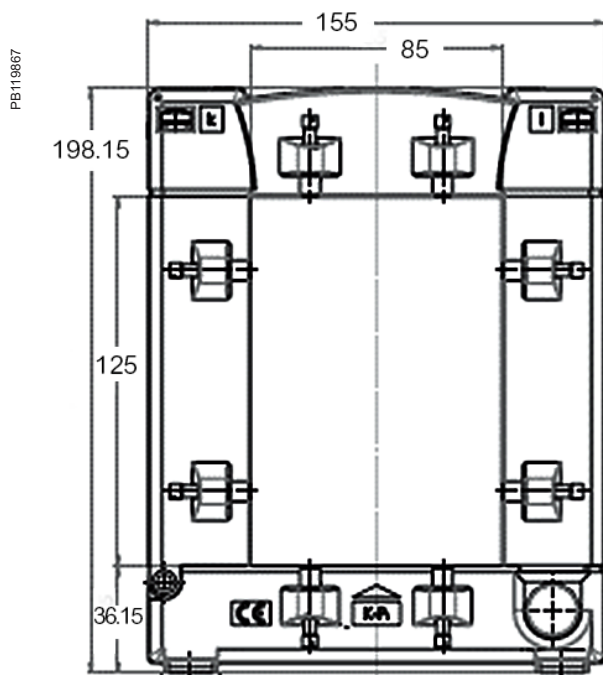


### GJ Dimensions

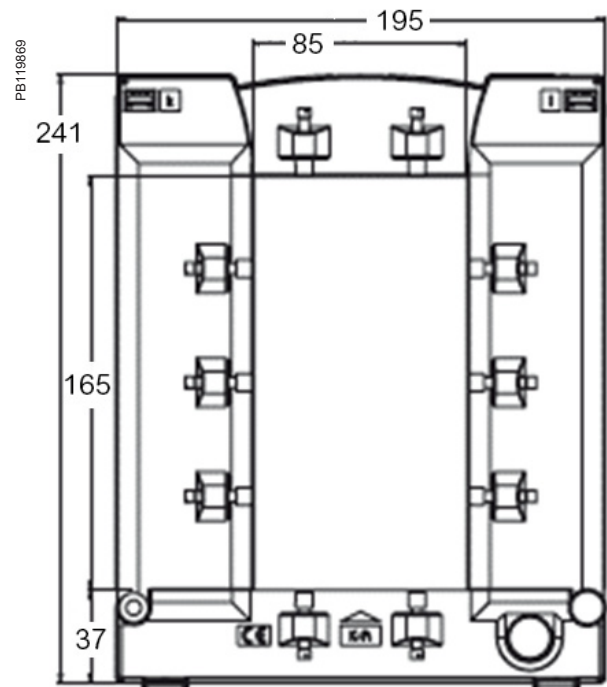


# Split core CT dimensions (contd.)

Hx products


## HA Dimensions

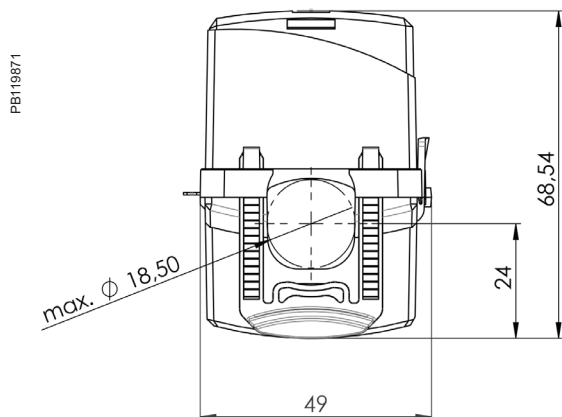


## HD Dimensions

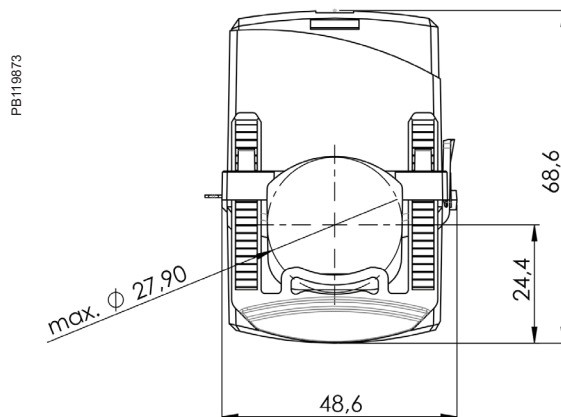

## HG Dimensions

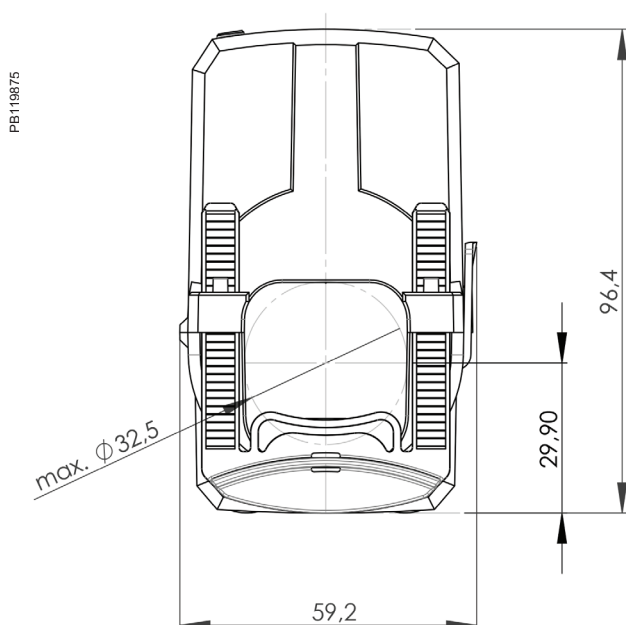


## HJ Dimensions

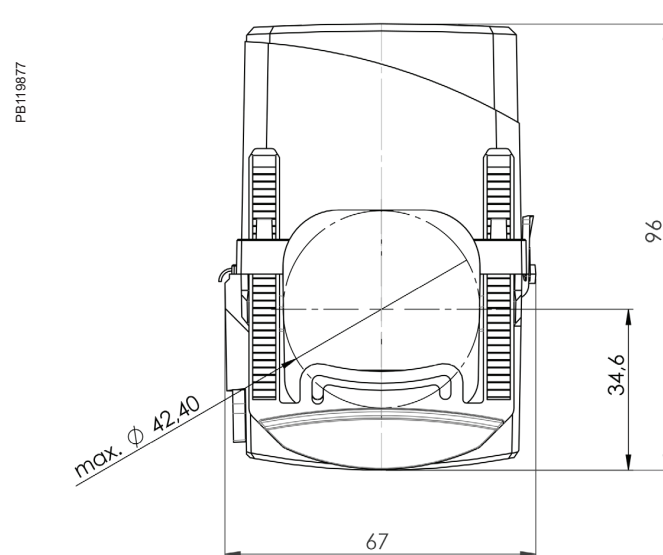


## Split core CT dimensions (contd.)

Hx products

HM Dimensions

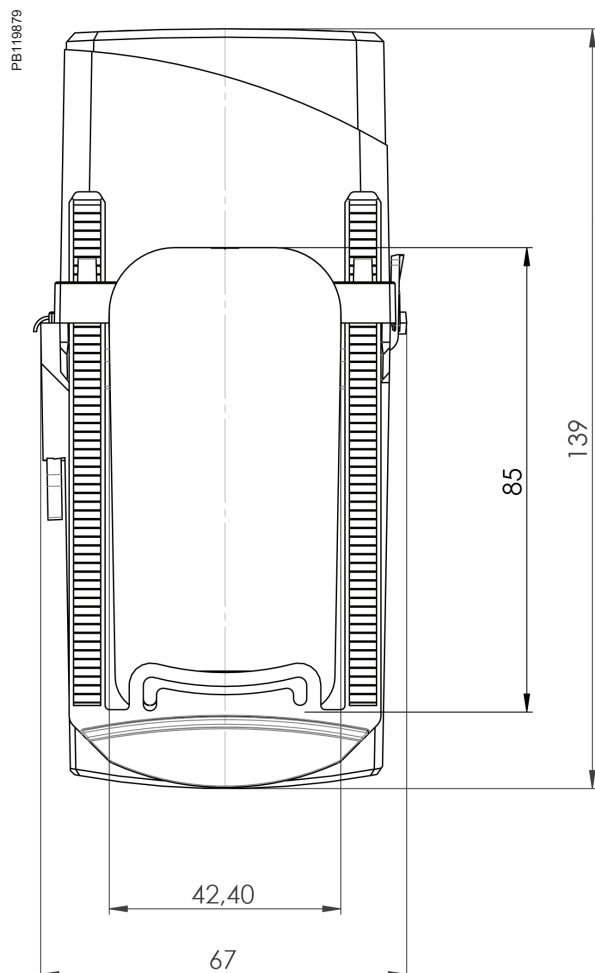

HP Dimensions

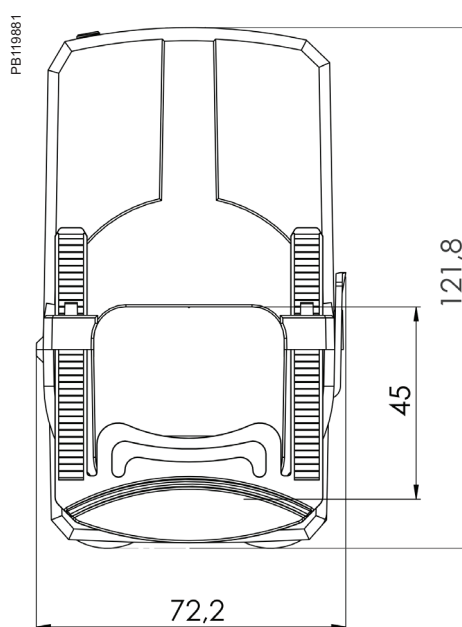

See the appropriate **Installation Guide** for correct installation instructions.

# METSECTRx Series Rogowski Current Transducers

Schneider Electric is the global specialist in energy management with the most complete power monitoring product line. From simple indicators (analogue meters) and CTs, to world class energy meters and powerful compact power meters, these proven products satisfy any requirement.

## Applications

Schneider Electric currently offers four proven models of PowerLogic™ Rogowski flexible core current transformers. These are available from 300 mm to 900 mm in length operating in a current range of 50 to 5000 A.

PB118060



## METSECTRx Series Rogowski Current Transducers

The CTRx Series of Rogowski flexible rope style current transducers (CTs) provide secondary AC voltage proportional to the primary (sensed) current. Recommended to use with Schneider make EM35xxA, iEM35x5 and EM42xx series power meters.


The CTRx Series CTs provide a cost-effective means to transform electrical service amperages to a voltage compatible with monitoring equipment. The flexible core makes it easy to fit in tight enclosures. These products provide reinforced insulation between the sensed conductor and the output leads.

### Technical specification

| Specification for commercial reference | METSECTR25500, METSECTR30500, METSECTR46500, METSECTR60500, METSECTR90500   |
|--|---|
| Range                                  | PowerLogic™   |
| Product or component type              | Current transducer  |
| Accessory / part category              | Measurement accessory   |
| Range compatibility                    | PowerLogic™ EM3500 - EM3555A EM3502A EM3560 EM3550A EM3560 EM3561A<br>PowerLogic™ EM4200 - EM4236 EM4235<br>Acti9 iEM3000 - iEM3555 iEM3565 |
| Current transformer type               | Flexible core   |
| <b>Specification</b>                   |   |
| Connecting cable - flying lead         | 2.4 m 600 V AC max, voltage L-N sensed conductor  |
| Connecting cable specification         | 1000 V AC UL style 21223 cable with 22 AWG leads  |
| Coil current range                     | 50 A to 5000 A  |
| Network frequency of coil              | 50/60 Hz  |
| Measurement accuracy of coil           | ±1 % from 50 A to 5000 A  |
| Installation category of coil          | 600 V AC Cat IV   |
| Pollution degree of coil               | 2   |
| <b>Environmental characteristics</b>   |   |
| Standards                              | EN61010-1; UL61010-1; EN61010-2-032; UL61010-2-032, CAN/CSA-C22.2 No. 61010-1   |
| Product certifications                 | CURus, UL recognized  |
| Ambient air temperature for operation  | -15 °C to 60 °C   |
| Ambient air temperature for storage    | -40 °C to 70 °C   |
| Humidity range                         | 0 to 95 % non-condensing  |
| Altitude                               | 2000 m max.   |
| Protection degree                      | IP67  |
| <b>Commercial Reference Numbers</b>    |   |
| <b>METSECTR25500</b>                   | PowerLogic™ Rogowski current transducers, 250 mm CT core length, 80 mm dia. CT, rope, 600 V AC, 5 kA  |
| <b>METSECTR30500</b>                   | PowerLogic™ Rogowski current transducers, 300 mm CT core length, 96 mm dia. CT, rope, 600 V AC, 5 kA  |
| <b>METSECTR46500</b>                   | PowerLogic™ Rogowski current transducers, 460 mm CT core length, 146 mm dia. CT, rope, 600 V AC, 5 kA                                       |
| <b>METSECTR60500</b>                   | PowerLogic™ Rogowski current transducers, 600 mm CT core length, 191 mm dia. CT, rope, 600 V AC, 5 kA                                       |
| <b>METSECTR90500</b>                   | PowerLogic™ Rogowski current transducers, 900 mm CT core length, 287 mm dia. CT, rope, 600 V AC, 5 kA                                       |

Please contact your Schneider Electric representative for complete ordering information.

### Rogowski Current Transducers Dimensions

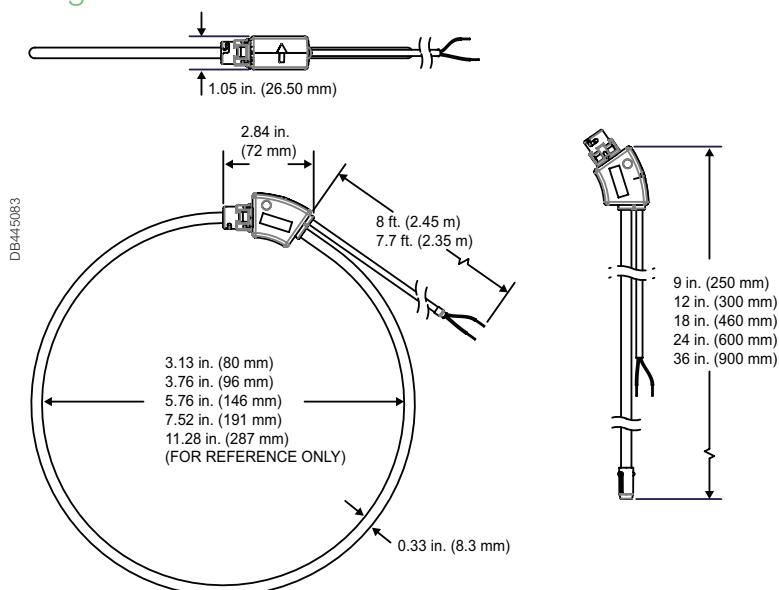

| Dimensions    | CT core thickness | CT core length (open) | Diameter (closed) |
|---------------|-------------------|-----------------------|-------------------|
| METSECTR25500 | 8 mm dia.         | 250 mm                | 80 mm             |
| METSECTR30500 | 8 mm dia.         | 300 mm                | 96 mm             |
| METSECTR46500 | 8 mm dia.         | 460 mm                | 146 mm            |
| METSECTR60500 | 8 mm dia.         | 600 mm                | 191 mm            |
| METSECTR90500 | 8 mm dia.         | 900 mm                | 287 mm            |

See the appropriate **Installation Guide** for correct installation instructions.

# Panel Instruments

Schneider Electric panel instruments reliably comply with the most stringent standards, including IEC, EMI/EMC and safety, and we thoroughly test all products with recognized, third-party laboratories.

Our products are simple to install, configure, and use. This saves our partners time and money and lets them deliver the best solutions in a timely and cost-effective manner.




Whatever the size or type of application, the PowerLogic™ product line is an integral part of smart panels.

Analog Voltmeters and Ammeters are available in different form factors, panel mount 96 x 96 mm and 72 x 72 mm, DIN rail mount types.

Digital Voltmeters and Ammeters are available in DIN rail form factor.

Selector switches for selecting different line voltages and line current.


Hour counters for counting the operating hours of machineries.

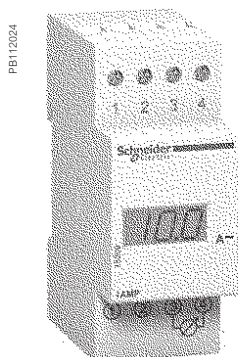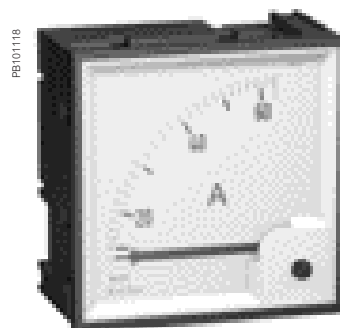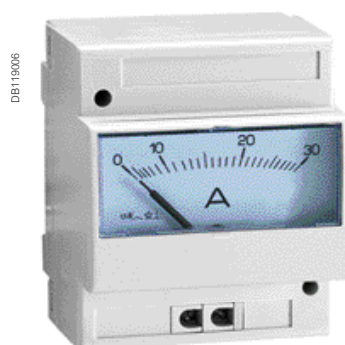

16029



16003




15126



15440




15202

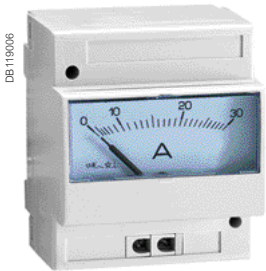

iAMP



16029

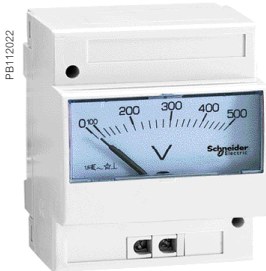

iVLT



16061

Function

iAMP

Ammeters measure the current flowing through an electric circuit in amps.

iVLT

Voltmeters measure the potential (voltage) difference of an electric circuit in volts.

Common technical data


- Accuracy: Class 1.5
- Complies with standards IEC 60051-1, IEC 61010-1 and IEC 61000-4
- Ferromagnetic device
- Pseudo-linear scale over 90°
- Ammeters (except catalog number 16029):
  - connection on CT, ratio In/5, to be ordered separately
  - interchangeable dials
- Temperature:
  - operating temperature: -25 °C to 55 °C
  - reference temperature: 23 °C
- Influence of temperature on accuracy: ±0.03 %/°C
- Utilisation frequency: 50 Hz to 60 Hz
- Consumption:
  - AMP: 1.1 VA
  - VLT catalog number 15060: 2.5 VA
  - VLT catalog number 16061: 3.5 VA
- Permanent overload:
  - AMP: 1.2 In
  - VLT: 1.2 Un
- Maximum overload for 5 s:
  - AMP: 10 In
  - VLT: 2 Un
- Connection: tunnel terminals for 1.5 to 6 mm<sup>2</sup> rigid cables

Commercial reference numbers

| Type                                  | Scale    | Connection with CT | Width in mod. of 9 mm | Comm. ref. no. |
|---------------------------------------|----------|--------------------|-----------------------|----------------|
| iAMP with direct connection           |          |                    |                       |                |
|                                       | 0-30 A   | no                 | 8                     | 16029          |
| iAMP with connection on CT            |          |                    |                       |                |
| Basic device (delivered without dial) |          | X/5                | 8                     | 16030          |
| Dial                                  | 0-5 A    |                    |                       |                |
|                                       | 0-50 A   | 50/5               |                       | 16032          |
|                                       | 0-75 A   | 75/5               |                       | 16033          |
|                                       | 0-100 A  | 100/5              |                       | 16034          |
|                                       | 0-150 A  | 150/5              |                       | 16035          |
|                                       | 0-200 A  | 200/5              |                       | 16036          |
|                                       | 0-250 A  | 250/5              |                       | 16037          |
|                                       | 0-300 A  | 300/5              |                       | 16038          |
|                                       | 0-400 A  | 400/5              |                       | 16039          |
|                                       | 0-500 A  | 500/5              |                       | 16040          |
|                                       | 0-600 A  | 600/5              |                       | 16041          |
|                                       | 0-800 A  | 800/5              |                       | 16042          |
|                                       | 0-1000 A | 1000/5             |                       | 16043          |
|                                       | 0-1500 A | 1500/5             |                       | 16044          |
|                                       | 0-2000 A | 2000/5             |                       | 16045          |
| iVLT                                  |          |                    |                       |                |
|                                       | 0-300 V  |                    | 8                     | 16060          |
|                                       | 0-500 V  |                    | 8                     | 16061          |

See your Schneider Electric representative for complete ordering information.

PB112024

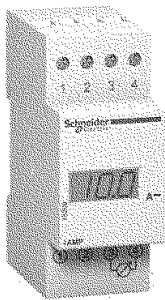

15202

iAMP

PB112023



15201

iVLT

PB112025



15208

iFRE

Function

iAMP

Ammeters measure in amps the current flowing through an electric circuit.

iVLT

Voltmeters measure in volts the potential (voltage) difference of an electric circuit.

iFRE

Frequency meters measure in hertz the frequency of an electric circuit from 20 to 600 V AC.

Common technical data

- Supply voltage: 230 V AC
- Operating frequency: 50 Hz to 60 Hz
- Display by red LED: 3 digits, h = 8 mm (0.31 in)
- Accuracy at full-scale : 0.5 % ±1 digit.
- Consumption: max. 5 VA or rated 2.5 VA
- Degree of protection:
  - IP40 on front face
  - IP20 at terminal level
- Connection: tunnel terminals for 2.5 mm<sup>2</sup> cables

Specific data

10 A direct reading ammeter

- Minimum value measured: 4 % of rating
- Measurement input consumption: 1 VA

Multi-rating ammeter

- Ratings:
  - in direct reading: 5 A
  - by CT (not supplied) configurable on the front face of the ammeter: 10, 15, 20, 25, 40, 50, 60, 100, 150, 200, 250, 400, 500, 600, 800, 1000, 1500, 2000, 2500, 4000, 5000 A
- Minimum value measured: 4 % of rating
- Measurement input consumption: 0.55 VA

Voltmeter

- Direct measurement: 0...600 V AC
- Input impedance: 2 MW
- Minimum value measured: 4 % of rating

Frequency meter

- Minimum value measured: 20 Hz
- Maximum value measured: 100 Hz
- Full-scale display: 99.9 Hz


Compliance with standards

- Safety: IEC/EN 61010-1
- EMC electromagnetic compatibility: IEC/EN 65081-1 and IEC/EN 65082-2

Commercial reference numbers

| Type                | Scale     | Connection with CT | Width in mod. of 9 mm | Comm. ref. no. |
|---------------------|-----------|--------------------|-----------------------|----------------|
| Direct reading iAMP |           |                    |                       |                |
|                     | 0-10 A    | No                 | 4                     | 15202          |
| Multi-rating iAMP   |           |                    |                       |                |
|                     | 0-5000 A  | As per rating      | 4                     | 15209          |
| iVLT                |           |                    |                       |                |
|                     | 0-600 V   |                    | 4                     | 15201          |
| iFRE                |           |                    |                       |                |
|                     | 20-100 Hz |                    | 4                     | 15208          |


See your Schneider Electric representative for complete ordering information.



AMP for standard feeder




16009



AMP for motor feeder



16006



VLT



16005

Function

The 72 x 72 measurement devices are designed for flush-mounted installation on doors, wicket doors and front plates of enclosures and cubicles.

AMP

The ammeters measure in amps the current flowing through an electrical circuit.

VLT

The voltmeter measure in volts the potential difference (voltage) of an electrical circuit.

Common technical data

- Accuracy: Class 1.5
- Compliance with standard IEC 60051-1, IEC 61010-1 and IEC 61000-4
- Ferromagnetic device
- Scale length: 62 mm over 90°
- Mounting in enclosure or in cubicle
- Degree of protection: IP52
- Maximum operating position: 30° / vertical
- Temperature:
  - operation: -25 °C to 50 °C
  - reference: 23 °C
- Influence of temperature on accuracy:  $\pm 0.003 \text{ \% / } ^\circ\text{C}$
- Utilisation frequency: 50 Hz to 60 Hz

AMP specific technical data

- Needs a In/5 CT to be ordered separately
- Interchangeable dials to be ordered separately
- Consumption: 1.1 VA
- Permanent overload: 1.2 In
- Maximum overload for 5 s: 10 In

VLT specific technical data

- Consumption: 3 VA
- Permanent overload: 1.2 Un
- Maximum overload for 5 s: 2 Un

Commercial reference numbers

| Type                                  | Scale       | Connection on CT | Comm. ref. no. |
|---------------------------------------|-------------|------------------|----------------|
| <b>AMP for standard feeder</b>        |             |                  |                |
| Basic device (delivered without dial) |             | X/5              | 16004          |
| 1.3 In dial                           | 0-50 A      | 50/5             | 16009          |
|                                       | 0-100 A     | 100/5            | 16010          |
|                                       | 0-200 A     | 200/5            | 16011          |
|                                       | 0-400 A     | 400/5            | 16012          |
|                                       | 0-600 A     | 600/5            | 16013          |
|                                       | 0-1000 A    | 1000/5           | 16014          |
|                                       | 0-1250 A    | 1250/5           | 16015          |
|                                       | 0-1500 A    | 1500/5           | 16016          |
|                                       | 0-2000 A    | 2000/5           | 16019          |
| <b>AMP for motor feeder</b>           |             |                  |                |
| Basic device (delivered without dial) |             | X/5              | 16003          |
| 3 In dial                             | 0-30-90 A   | 30/5             | 16006          |
|                                       | 0-75-225 A  | 75/5             | 16007          |
|                                       | 0-200-600 A | 200/5            | 16008          |
| <b>VLT</b>                            |             |                  |                |
|                                       | 0-500 V     |                  | 16005          |


See your Schneider Electric representative for complete ordering information.



AMP for standard feeder




16079

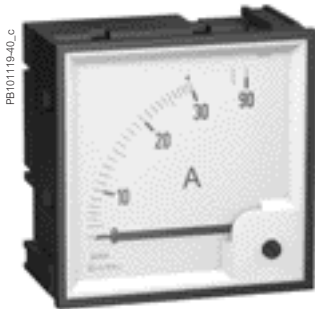

AMP for motor feeder



16076

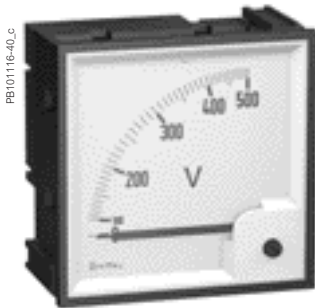

VLT



16075

Function

The 96 x 96 measurement devices are designed for flush-mounted installation on doors, wicket doors and front plates of enclosures and cubicles.

AMP

The ammeters measure in amps the current flowing through an electrical circuit.

VLT

The voltmeter measure in volts the potential difference (voltage) of an electrical circuit.

Common technical data

- Accuracy: class 1.5
- Compliance with standard IEC 60051-1, IEC 61010-1 and IEC 61000-4
- Ferromagnetic device
- Scale length: 80 mm over 90°
- Mounting in enclosure or in cubicle
- Degree of protection: IP52
- Maximum operating position: 30° / vertical
- Temperature:
  - operation: -25 °C to 50 °C
  - reference: 23 °C
- Influence of temperature on accuracy: ±0.003 % / °C
- Utilisation frequency: 50 Hz to 60 Hz

AMP specific technical data

- Needs a In/5 CT to be ordered separately
- Interchangeable dials to be ordered separately
- Consumption: 1.1 VA
- Permanent overload: 1.2 In
- Maximum overload for 5S: 10 In

VLT specific technical data

- Consumption: 3 VA
- Permanent overload: 1.2 Un
- Maximum overload for 5S: 2 Un

Commercial reference numbers

| Type                                  | Scale       | Connection on CT | Comm. ref. no. |
|---------------------------------------|-------------|------------------|----------------|
| AMP for standard feeder               |             |                  |                |
| Basic device (delivered without dial) |             | X/5              | 16074          |
| 1.3 In dial                           | 0-50 A      | 50/5             | 16079          |
|                                       | 0-100 A     | 100/5            | 16080          |
|                                       | 0-200 A     | 200/5            | 16081          |
|                                       | 0-400 A     | 400/5            | 16082          |
|                                       | 0-600 A     | 600/5            | 16083          |
|                                       | 0-1000 A    | 1000/5           | 16084          |
|                                       | 0-1250 A    | 1250/5           | 16085          |
|                                       | 0-1500 A    | 1500/5           | 16086          |
|                                       | 0-2000 A    | 2000/5           | 16087          |
|                                       | 0-2500 A    | 2500/5           | 16088          |
|                                       | 0-3000 A    | 3000/5           | 16089          |
|                                       | 0-4000 A    | 4000/5           | 16090          |
|                                       | 0-5000 A    | 5000/5           | 16091          |
|                                       | 0-6000 A    | 6000/5           | 16092          |
| AMP for motor feeder                  |             |                  |                |
| Basic device (delivered without dial) |             | X/5              | 16073          |
| 3 In dial                             | 0-30-90 A   | 30/5             | 16076          |
|                                       | 0-75-225 A  | 75/5             | 16077          |
|                                       | 0-200-600 A | 200/5            | 16078          |
| VLT                                   |             |                  |                |
|                                       | 0-500 V     |                  | 16075          |

See your Schneider Electric representative for complete ordering information.

Function

The 48 x 48 selector switches are designed for flush-mounted installation on doors, wicket doors and front plates of enclosures and cubicles.

CMA

The ammeter selector switch uses a single ammeter (by means of current transformers) for successive measurement of the currents of a three-phase circuit.

CMV

The voltmeter selector switch uses a single voltmeter for successive measurement of the voltages (phase-to-phase and phase-to-neutral) of a three-phase circuit.

Common technical data


- Durability:
  - electrical: 100,000 operations
  - mechanical: 2,000,000 operations
- AgNi contact
- Operating temperature: -25 °C to 50 °C
- Compliance with standards IEC/EN 60947-3
- Degree of protection:
  - IP65 on front face
  - IP20 at terminal level

Commercial reference numbers

| Type | Rating (A) | Voltage (V) | Number of positions | Comm. ref. no. |
|------|------------|-------------|---------------------|----------------|
| CMA  | 20         |             | 4                   | 16017          |
| CMV  |            | 500         | 7                   | 16018          |


See your Schneider Electric representative for complete ordering information.

Connection

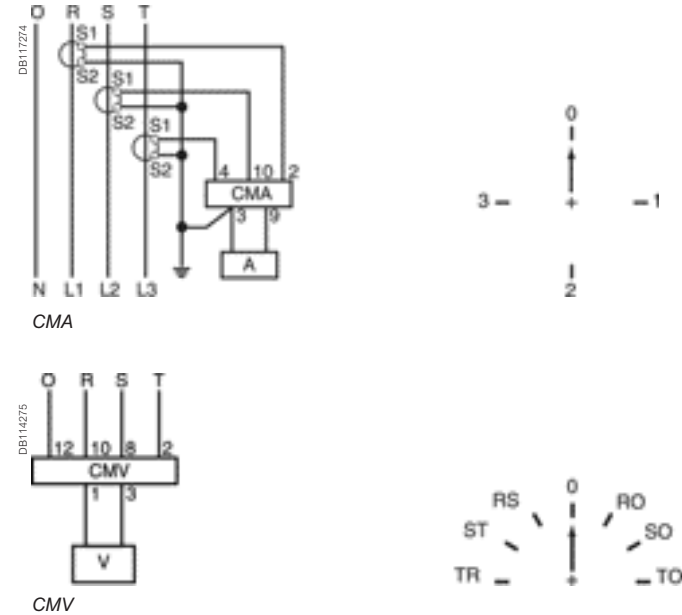


Reading 3 phase-to-earth voltages + 3 phase-to-phase voltages.

Note: when connecting do not remove the pre-cabling.  
See appropriate Installation Guide for this product.

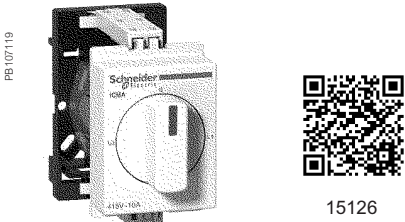

iCMA

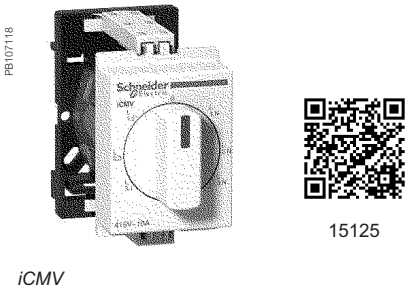

iCMV

Function

**iCMA**  
This 4-position ammeter selector switch uses a single ammeter (using current transformers) for successive measurement of the currents of a three-phase circuit.

**iCMV**  
This 7-position voltmeter selector switch uses a single voltmeter for successive measurement of voltages (phase-to-phase and phase-to-neutral) of a three-phase circuit.

Common technical data


- Rotary handle
- Maximum operating voltage: 440 V, 50/60 Hz
- Nominal thermal current: 10 A
- Operating temperature: -20 °C to 55 °C
- Storage temperature: -25°C to 80°C
- Mechanical durability (AC21A-3 x 440 V): 2,000,000 operations
- Degree of protection:
  - IP66 on front face
  - IP20 at terminal level
- Electrical durability: 1,000,000 operations
- Connection: jumper terminals with captive screws, for cables up to 1.5 mm²
- Complies with standards: IEC/EN 60947-3

Commercial reference numbers

| Type | Rating (A) | Voltage (V AC) | Width in mod. of 9 mm | Comm. ref. no. |
|------|------------|----------------|-----------------------|----------------|
| iCMA | 10         | 415            | 4                     | 15126          |
| iCMV | 10         | 415            | 4                     | 15125          |

See your Schneider Electric representative for complete ordering information.

Connection

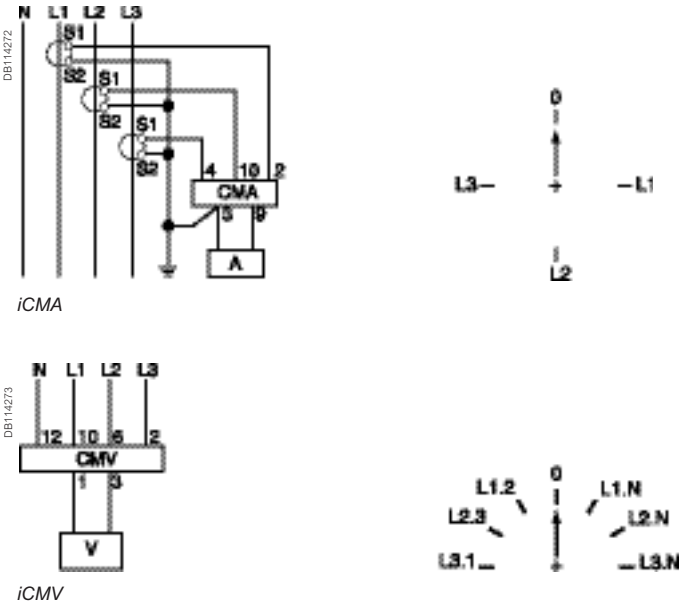

See appropriate Installation Guide for this product.



iCH "DIN"



15440



CH "48 x 48"



15607

Function

Electromechanical counter that counts the operating hours of a machine or piece of electrical equipment. Giving a precise indication of operating time, the counter is used to decide when to carry out preventive maintenance.

Common technical data

- Electromechanical display
- Maximum display: 99999.99 hours
- Display accuracy: 0.01 %
- Without reset
- Storage temperature: -25 °C to 85 °C
- Connection: tunnel terminals for 2.5 mm<sup>2</sup> cable

Specific technical data

iCH "DIN"

- Consumption: 0.15 VA
- Operating temperature: -10 °C to 70 °C
- Mounting on DIN rail

CH "48 x 48"


- Consumption:
  - 15607: 0.25 VA
  - 15608: 0.15 VA
  - 15609: 0.02 VA to 12 V and 0.3 VA to 36 V
- Operating temperature: -20 °C to 70 °C
- Degree of protection: IP65 on front face
- Mounting on front face of monitoring switchboards

Commercial reference numbers


| Type         | Voltage (V)               | Width in mod. of 9 mm | Comm. ref. no. |
|--------------|---------------------------|-----------------------|----------------|
| iCH "DIN"    | 230 V AC $\pm$ 10 %/50 Hz | 4                     | 15440          |
| CH "48 x 48" | 24 V AC $\pm$ 10 %/50 Hz  |                       | 15607          |
|              | 230 V AC $\pm$ 10 %/50 Hz |                       | 15608          |
|              | 12 to 36 V DC             |                       | 15609          |

See your Schneider Electric representative for complete ordering information.

Connection




iCH "DIN"



CH "48 x 48"

See appropriate Installation Guide for this product.

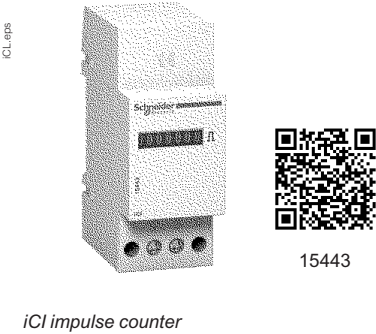

Function

Electromechanical counter designed to count impulses emitted by: kilowatt-hour meters, temperature overrun detectors, people meters, speed meters, etc.



Common technical data

- Supply and metering voltage: 230 V AC  $\pm$  10 %, 50/60 Hz
- Consumption: 0.15 VA
- Maximum display: 9 999 999 impulses
- Without reset
- Metering data:
  - minimum impulse time: 50 ms
  - minimum time between 2 impulses: 50 ms
- Storage temperature: -25 °C to 85 °C
- Operating temperature: -10 °C to 70 °C
- Connection: tunnel terminals for 2.5 mm<sup>2</sup> cable

Commercial reference numbers


| Type | Width in mod. of 9 mm | Comm. ref. no. |
|------|-----------------------|----------------|
| iCI  | 4                     | 15443          |

Connection

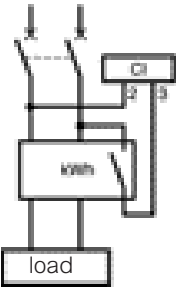

See appropriate Installation Guide for this product.


## Analog ammeters and voltmeters iAMP, iVLT

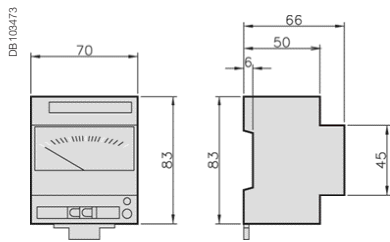


## Digital ammeters, voltmeter and frequency meter iAMP, iVLT




## iCMA and iCMV selector switches

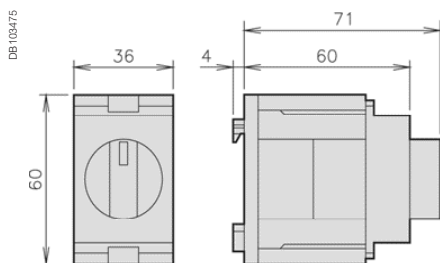

## 72 x 72 analog ammeters and voltmeter

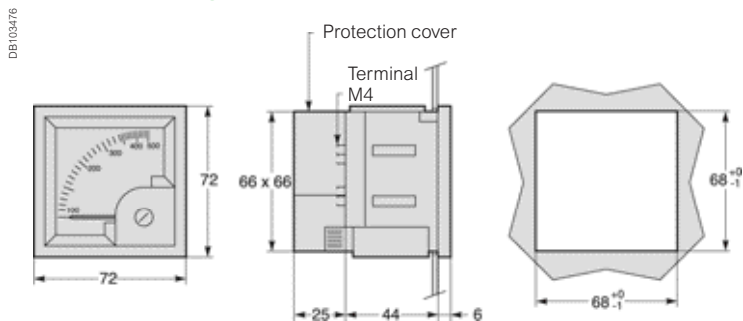


## 96 x 96 analog ammeters and voltmeter

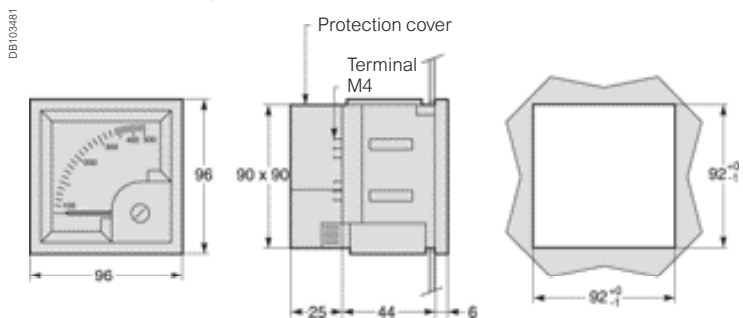


See the appropriate *Installation Guide* for this product.


48 x 48 CMA and CMV selector switches

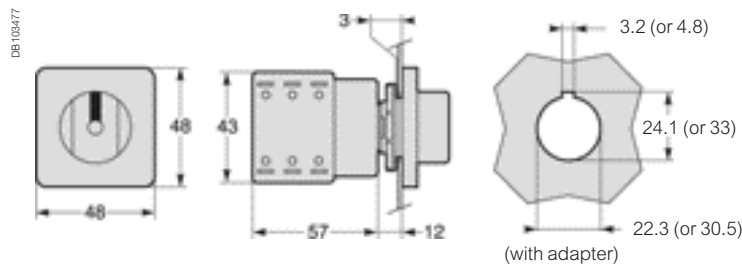

iCI impulse counter and iCH hour counter

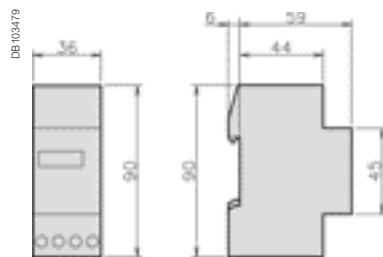

48 x 48 CH hour counters

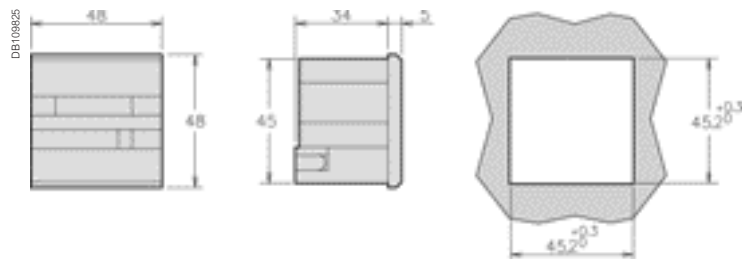

See the appropriate Installation Guide for this product.

# Basic Energy Metering

Basic energy meters comply with a variety of applications: single-phase or three-phase circuits, basic kWh meters for elementary applications, to full-featured, dual tariff energy meters and power metering for network monitoring applications. Data is visible locally or accessible remotely. Wireless communication energy sensors with compact design allow to optimize panel size.

- PowerLogic™ iEM2000 series
- PowerLogic™ iEM2100 series
- PowerLogic™ iEM2400 series
- PowerLogic™ iEM3000 series
- PowerLogic™ PM3000 series
- PowerLogic™ PowerTag Energy series



A9MEM2000




A9MEM2055



A9MEM2155



A9MEM2435

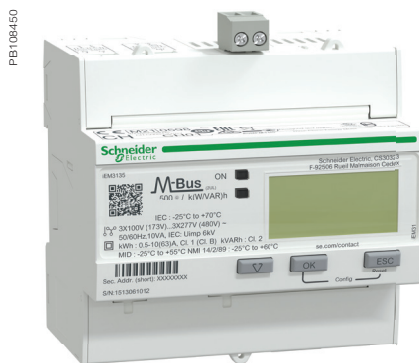

A9MEM3135



METSEPM3250



A9MEM1580


# Acti9 iEM2xxx Range

## iEM2000, iEM2100, iEM2400 series

The Acti9 iEM2xxx range energy meters offer a cost-attractive, competitive range of single-phase DIN rail-mounted energy meters ideal for sub-billing, cost allocation applications and support two protocols (Modbus RS-485 or M-Bus) that allow them to integrate seamlessly into any energy monitoring system.

### Applications

- Monitor power consumption for each floor, office sector, unit or workshop with maximum current from 40 A, 45 A, 63 A and 100 A
- Allocate energy cost to lower cost of operations, optimise building's power efficiency
- Connect to power management software to take full advantage of the IoT digital power installation
- Various businesses, industrial and residential applications

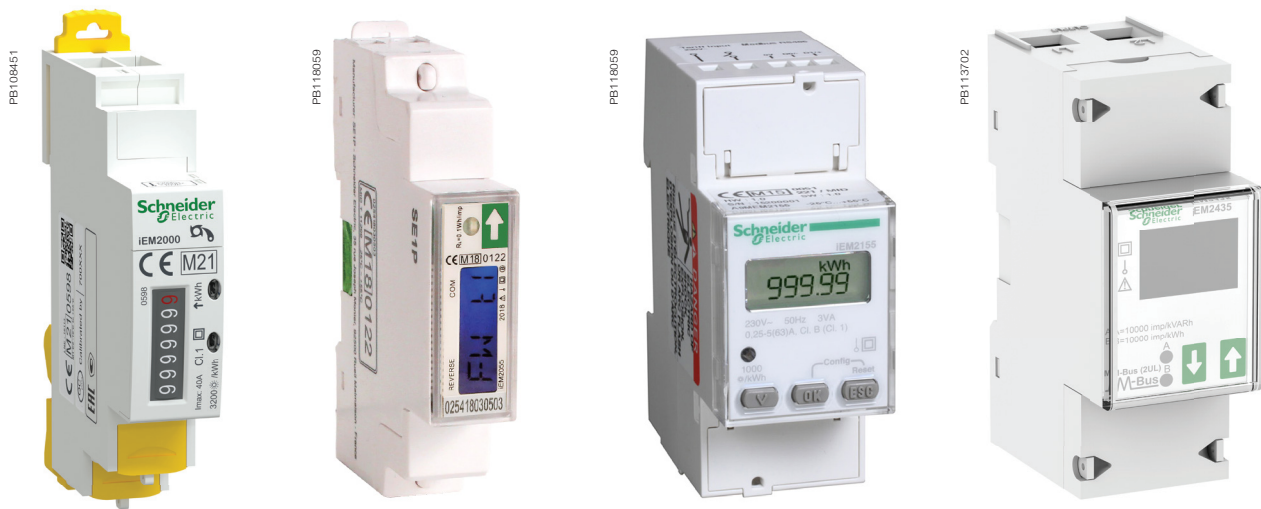

A9MEM2000



A9MEM2055



A9MEM2155



A9MEM2435

**The solution for:**

All markets that can benefit from a solution that includes Acti9 PowerLogic™ iEM2000, iEM2100, iEM2400 series meters:

- Buildings
- Industry
- Data Centre & networks
- Infrastructures (airport, road tunnels, telecom...)

**Benefits**

The Acti9 PowerLogic™ iEM2xxx meters are economical and easy to install in panelboards and switchboards:

- DIN rail mounted, compact size
- Accurate data measurement with Class 1 accuracy for kWh and Class 2 accuracy for kVARh\*
- Measures basic electrical parameters like voltage, current, frequency, power factor and power\*

**Energy management system:**

To get the most effective use from your Schneider Electric measurement and metering devices, we offer a range of dedicated data loggers and gateways for your building energy management.

\*in selected references.

**Competitive advantages\***

- Compact size - Compatible with Acti9 range, 18 mm width in iEM2000, 36 mm width in iEM2100 and iEM2400
- Display - available in displayless, electromech counter display or LCD display
- Communication - Pulse output, Modbus RS-485 or M-Bus communication port
- Self-powered, direct connect upto 100 A
- MID compliant providing certified accuracy and data security
- Four quadrant measurement
- Two tariffs
- Basic electrical parameter measurement eg. V, I, F, PF, PQS

**Conformity of standards**

- BS/EN/IEC 61557-12:2018/AMD1:2021\*
- EN / IEC 62053-21
- EN / IEC 62053-23\*
- EN 50470-1/3:2006\*
- EN / IEC 62052-11
- IEC 62052-31:2015\*
- BS / EN / IEC 61326-1
- BS / IEC / EN 61010-1
- CE and UKCA certified

**iEM2xxx Range Feature selection**

| Functions                          | iEM2000T | iEM2000/iEM2010              | iEM2050/<br>iEM2055 | iEM2100/<br>iEM2105 | iEM2110 | iEM2135/<br>iEM2155                       | iEM2150 | iEM2435/<br>iEM2455                       |
|------------------------------------|----------|------------------------------|---------------------|---------------------|---------|---|---------|---|
| 40A I <sub>max</sub>               | ■        | ■                            |                     |                     |         |   |         |   |
| 45A I <sub>max</sub>               |          |                              | ■                   |                     |         |   |         |   |
| 63A I <sub>max</sub>               |          |                              |                     | ■                   | ■       | ■   | ■       |   |
| 100A I <sub>max</sub>              |          |                              |                     |                     |         |   |         | ■   |
| Communication port                 |          |                              | RS-485              |                     |         | M-Bus<br>(iEM2135)<br>RS-485<br>(iEM2155) | RS-485  | M-Bus<br>(iEM2435)<br>RS-485<br>(iEM2455) |
| Pulse output (Energy)              | 1        | 1<br>(iEM2010)               | 1                   | 1<br>(iEM2105)      | 2       |   |         | 2   |
| Digital inputs (Tariff switching)  |          |                              |                     |                     | 1       | 1   |         |   |
| Display Type                       | No       | Electromechanical<br>Counter | LCD                 |                     |         |   |         |   |
| Width (mm)                         | 18       |                              | 17.5                | 36                  |         |   |         | 35.7                                      |
| Multi Tariff counter               |          |                              | 2                   |                     | 2       | 2   |         | 2   |
| Wh accuracy (IEC 62053-21)         | Class 1  |                              |                     |                     |         |   |         |   |
| Compliance to IEC 61557-12         | ■        | ■                            |                     | ■                   |         |   |         |   |
| VARh accuracy<br>(IEC 62053-23)    | Class 2  |                              |                     |                     | Class 2 |   |         |   |
| 4 Quadrants measurement            |          |                              | ■                   |                     |         | ■   |         |   |
| MID Class B (EN 50470-3),<br>50 Hz |          | ■                            | ■<br>(iEM2055)      |                     | ■       | ■   |         | ■   |
| V A F PF                           |          |                              | ■                   |                     |         | ■   |         |   |
| Power (P Q S)                      |          |                              | ■                   |                     |         | ■   |         |   |

See your Schneider Electric representative for complete ordering information.

# Acti9 iEM2xxx Range technical specifications


## iEM2000, iEM2100, iEM2400 series technical specifications

|  | iEM2000/ iEM2000T/<br>iEM2010   | iEM2050/iEM2055   | iEM2100/iEM2105   | iEM2110/iEM2135/<br>iEM2150/iEM2155                                       | iEM2435/iEM2455  |
|--|---|---|---|---|--|
| Type of measurement  | True rms for single-phase AC systems with direct connect/whole current measurement  |   |   |   |  |
| Max. current (Imax)  | 40 A  | 45 A  | 63 A  | 63 A  | 100 A  |
| Basic current (Inom)   | 5 A   |   | 10 A  | 5 A   | 5 A  |
| Starting current   | 40 mA   | 20 mA   | 40 mA   | 15 mA   | 20 mA  |
| Voltage range (L-N)  | 184 to 276 V AC   | 195 to 253 V AC   | 207 to 253 V AC   | 184 to 276 V AC   | 195 to 253 V AC  |
| Frequency range  | 50 Hz MID and IEC / 60 Hz IEC   |   |   |   |  |
| Max. kWh resolution  | 999999.9 kWh  | 9999.99 kWh to<br>99999.9 MWh   | 999.99 kWh/MWh  | 999999.99 kWh   | 9999.99 kWh to<br>99999.9 MWh  |
| Pulse output   | 100 pulses/kWh<br>(120 ms),<br>5...35 V DC,<br>1...20 mA<br>(except iEM2000)  | 10000, 2000, 1000,<br>100, 10, 1, 0.1, 0.01<br>pulses/kWh<br>(11.2 or 32 ms),<br>5...27 V DC,<br>max 100 mA | 1 pulse/kWh<br>(200 ms),<br>18 mA at 24 V DC or<br>100 mA at 230 V AC<br>(only for iEM2105) | 1 to 1000 pulses/<br>kWh or kVARh<br>(30 to 100 ms)<br>(only for iEM2110) | 10000, 2000, 1000,<br>100, 10, 1, 0.1, 0.01<br>pulses/kWh,<br>(5...32 ms),<br>5...27 V DC,<br>max 100 mA |
| Meter constant LED   | 3200 flashes per<br>kWh   | 10000 flashes per<br>kWh  | 1000 flashes per<br>kWh   | 1000 flashes per<br>kWh   | 10000 flashes per<br>kWh   |
| Cable size (power connection)                                | 10 mm²  | 10 mm²  | 16 mm²  | 33 mm²  | 35 mm²   |
| Cable size (for communications)                              | 4 mm²   | 2.5 mm²   | 6 mm²   | 4 mm²   | 2.5 mm²  |
| Internal burden, at 240 V L-N,<br>50 Hz                      | <10 VA  |   | <2.5 VA   | <3 VA   | <10 VA   |
| Active energy  | ■   |   |   |   |  |
| Reactive energy  |   | ■   |   | ■   | ■  |
| Active power   |   | ■   |   | ■   | ■  |
| Reactive power   |   | ■   |   | ■   | ■  |
| Apparent power   |   | ■   |   |   | ■  |
| Power Factor   |   | ■   |   | ■   | ■  |
| Current and voltage  |   | ■   |   | ■   | ■  |
| Frequency  |   | ■   |   | ■   | ■  |
| LED for local signalling                                     | Green LED: power<br>ON<br>Yellow LED: 3200<br>impulse per kWh   | Red LED: 10000<br>impulse per kWh   | Yellow LED: 1000<br>impulse per kWh   | Yellow LED: 1000<br>impulse per kWh                                       | Red LED: 10000<br>impulse per kWh  |
| CE, UKCA* certification                                      | ■   |   |   |   |  |
| IP degree of protection (IEC 60529)                          | IP40 front panel and<br>IP20 casing   | IP51 front panel and<br>IP20 casing   | IP40 front panel and IP20 casing  |   | IP51 front panel and<br>IP20 casing  |
| Operating temperature  | -10°C to +55°C<br><br>For iEM2000T: Temp<br>range is:<br>I <32 A: -25 °C to<br>+65 °C,<br>I > 32 A: -25 °C to<br>+55 °C (K55) | -25°C to +55°C  |   |   |  |
| Storage Temperature  | -40°C to +70°C  | -30°C to +70°C  | -25°C to +70°C  | -25°C to +70°C  | -30°C to +70°C   |
| Humidity at +55°C  | <95 %   | <75 %   | <95 %   | <95 %   | <75 %  |
| Green Premium product (RoHS,<br>China RoHS, REACH, PEP, EOL) | ■   |   |   |   |  |
| Altitude   | <2000 m   | <2000 m   | <3000 m   | <2000 m   | <2000 m  |
| Measurement category   | Category III  |   |   |   |  |
| Pollution degree   | 2   |   |   |   |  |
| Commercial reference number                                  | A9MEM2000<br>A9MEM2000T<br>A9MEM2010  | A9MEM2050<br>A9MEM2055  | A9MEM2100<br>A9MEM2105  | A9MEM2110<br>A9MEM2135<br>A9MEM2150<br>A9MEM2155                          | A9MEM2435<br>A9MEM2455   |

\* in selected references.


# Acti9 iEM2xxx range dimensions

## iEM2000/iEM2000T/iEM2010 dimensions

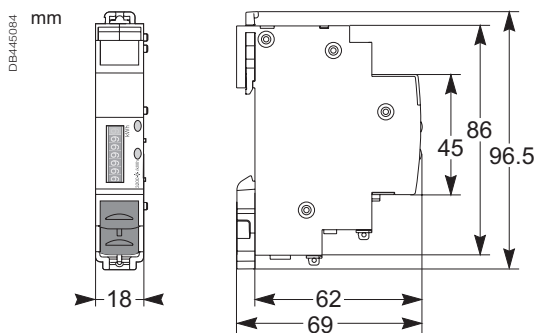


Maximum diameter power connection clamps 8 mm<sup>2</sup> (solid copper). See the appropriate product Installation Guide for complete instructions.

## iEM2050/iEM2055 dimensions

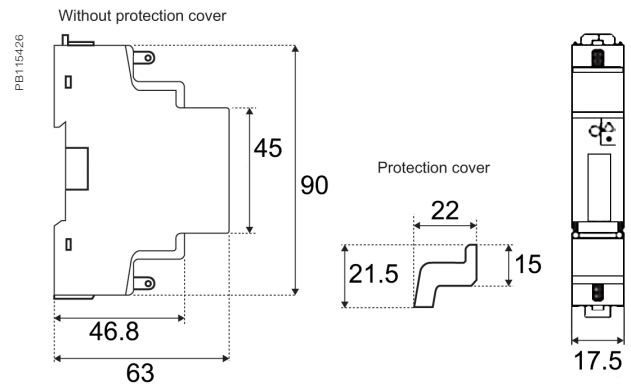


Maximum diameter power connection clamps 8 mm<sup>2</sup> (solid copper). See the appropriate product Installation Guide for complete instructions.


## iEM2100/iEM2105 dimensions

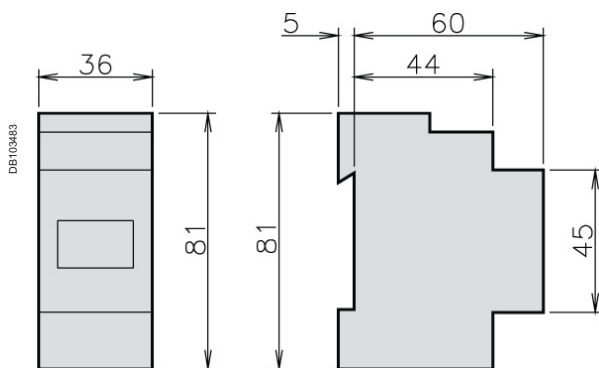

## iEM2110/iEM2135/iEM2150/iEM2155 dimensions

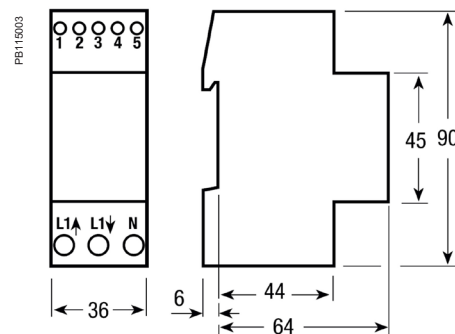

## iEM2435/iEM2455 dimensions

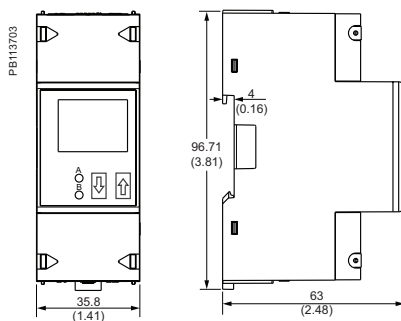

Please see the appropriate *Installation Guide* for accurate and complete information on the installation of this product.

# Acti9 iEM2xxx range commercial reference numbers

## iEM2000, iEM2100, iEM2400 series commercial/ordering reference numbers

| Commercial reference number | Product description  |
|-----------------------------|--|
| A9MEM2000T                  | iEM2000T energy meter, Class 1, 230 V, 40 A, pulse output, no display  |
| A9MEM2000                   | iEM2000 energy meter, Class 1, 230 V, 40 A, MID, electromechanical counter display                                       |
| A9MEM2010                   | iEM2010 energy meter, Class 1, 230 V, 40 A, MID, pulse output, electromechanical counter display                         |
| A9MEM2050                   | iEM2050 power and energy meter, Class 1, 230 V, 45 A, RS-485, 2 tariffs, pulse output, LCD display                       |
| A9MEM2055                   | iEM2055 power and energy meter, Class 1, 230 V, 45 A, RS-485, MID, 2 tariffs, pulse output, LCD display                  |
| A9MEM2100                   | iEM2100 energy meter, Class 1, 230 V, 63 A, LCD display  |
| A9MEM2105                   | iEM2105 energy meter, Class 1, 230 V, 63 A, pulse output, LCD display  |
| A9MEM2110                   | iEM2110 power and energy meter, Class 1, 230 V, 63 A, MID, 2 tariffs, 2 pulse outputs, 4 quadrants, LCD display          |
| A9MEM2135                   | iEM2135 power and energy meter, Class 1, 230 V, 63 A, M-Bus, MID, 2 tariffs, 4 quadrants, LCD display                    |
| A9MEM2150                   | iEM2150 power and energy meter, Class 1, 230 V, 63 A, RS-485, 4 quadrants, LCD display                                   |
| A9MEM2155                   | iEM2155 power and energy meter, Class 1, 230 V, 63 A, RS-485, MID, 2 tariffs, 4 quadrants, LCD display                   |
| A9MEM2435                   | iEM2435 power and energy meter, Class 1, 230 V, 100 A, M-Bus, MID, 2 tariffs, 2 pulse outputs, 4 quadrants, LCD display  |
| A9MEM2455                   | iEM2455 power and energy meter, Class 1, 230 V, 100 A, RS-485, MID, 2 tariffs, 2 pulse outputs, 4 quadrants, LCD display |

See your Schneider Electric representative for complete ordering information.

# Acti9 iEM3000 Series

The Acti 9 iEM3000 series energy meters is a cost-attractive, feature-rich energy metering offer for DIN rail, modular enclosures. With Modbus, BACnet, M-Bus and LonWorks protocol support, you can easily integrate these meters into commercial and non-critical buildings to add simple energy management applications to any BMS, AMR or EMS system.


## Applications

### Cost management applications


- Bill checking to verify that you are only charged for the energy you use.
- Sub-billing individual tenants for their energy consumption, including WAGES.
- Aggregation of energy consumption, including WAGES, and allocating costs per area, per usage, per shift, or per time within the same facility.

### Network management applications

- Basic metering of electrical parameters to better understand the behaviour of your electrical distribution system.

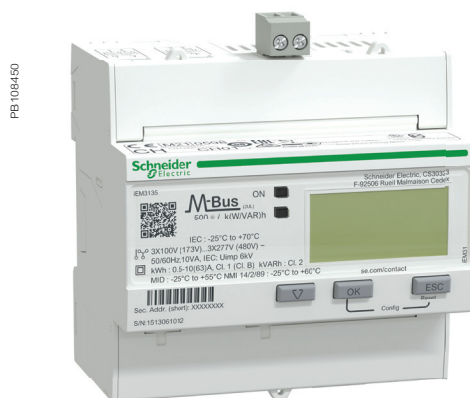

A9MEM3135

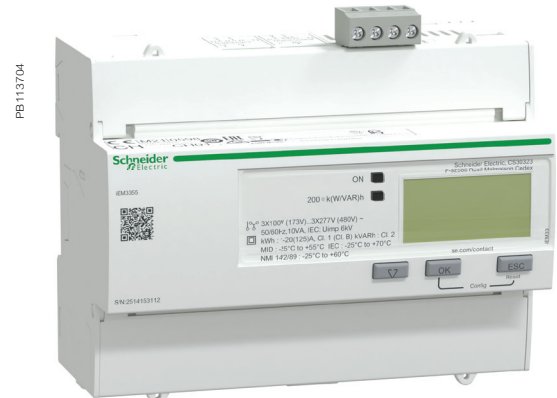

A9MEM3355



A9MEM3255

More than just kWh meters, the Acti 9 iEM3000 series meters provide a full view of both energy consumption and on-site generation with full four-quadrant measurement of active and reactive energy delivered and received. Additionally, extensive real-time measurements (V, I, P, PF) give customers greater detail on their energy usage, and multiple tariffs give customers the flexibility to match the billing structure of their utility.

### The solution for

All markets that can benefit from a solution that includes PowerLogic™ iEM3000 series meters:

- Buildings & industry
- Data centres and networks
- Infrastructure (airports, road tunnels, telecom)

### Benefits

Optimise your energy consumption & enable energy efficiency practices:

- Collect and analyse energy consumption data from each area for each type of load or circuit
- Gain an accurate understanding of business expenses by allocating the energy-related costs
- Identify energy savings opportunities and monitor continuously
- Use information to implement actions designed to reduce energy consumption

Monitor the energy consumption of your tenants or customers and establish accurate invoices:

- Drive energy-efficient behaviour
- Allow building owners to bill tenants for individual measured utility usage
- Give accurate and achievable objectives for energy savings

### Features

- Multi-line circuit: Measure individual phase energy in three phase network system
- Partial and Total energy: Separate counters for measuring active, reactive and apparent energy
- 4 Quadrant measurement: For measuring quadrant based power and energy
- Multi tariff energy: Up to 4 counters activated through RTC, digital inputs or command register
- Digital input/output: For status monitoring/tariff control and energy pulsing/overload alarm
- Demand measurement: Per-phase and average current, total power for active, reactive and apparent
- Current: Direct connected/ whole current with the option of 63 A or 125 A, 1 A or 5 A CT operated, LVCT or Rogowski coil supported
- Internal clock: Quartz crystal based back up by super capacitor

### Competitive advantages

- Compact size
- MID compliant for Wh and VARh (selected models) providing certified accuracy and data security
- Programmable digital inputs/outputs
- Multi-tariff capability
- Onboard Modbus, LonWorks, M-Bus or BACnet communication\*
- Baud Rate configurable
- Communication protection: enable or disable through communication
- A complete range of energy meters
- Compatible with Acti 9 range
- Direct connect up to 125 A
- Password: configurable from 0-9999\*
- Pulse output\*: configurable pulse constant (imp/kWh, imp/kVARh), pulse width (ms)

### Energy management system:

To get the most effective use from your Schneider Electric measurement and metering devices, we offer a range of dedicated data loggers and gateways for your building energy management.

### Conformity of standards\*

- BS / EN / IEC 61557-12
- EN / IEC 62053-21
- EN / IEC 62053-22
- EN / IEC 62053-23
- EN 50470-3
- EN 50470-1
- METAS
- EN / IEC 62052-11
- BS / EN / IEC 61326-1
- EN / IEC 62052-31:2015
- BS / IEC / EN / UL 61010-1
- ANSI C12.20 / ANSI C12.16
- NMI M 6-1, RCM
- UL, CE and UKCA certified
- CAN/CSA-C22.2
- EAC, KZ

\* Available in selected references

# Acti 9 iEM3000 Series

## Feature selection

| Current Input/ Wh Accuracy  | iEM3000 series Energy meters        |                        |                                     |                                     |                                     |   |   |                                     |
|---|-------------------------------------|------------------------|-------------------------------------|-------------------------------------|-------------------------------------|---|---|-------------------------------------|
| 63 A Direct/ Class 1  | iEM3100                             | iEM3115                | iEM3110                             | iEM3135                             | iEM3150                             | iEM3155   | iEM3165   | iEM3175                             |
| 1 A or 5 A CT/ Class 0.5S <sup>(+1)</sup>                                     | iEM3200                             | iEM3215                | iEM3210                             | iEM3235                             | iEM3250                             | iEM3255   | iEM3265   | iEM3275                             |
| 125 A Direct/ Class 1   | iEM3300                             |                        | iEM3310                             | iEM3335                             | iEM3350                             | iEM3355   | iEM3365   | iEM3375                             |
| 1/3rd or 1 V LVCT/ Class 0.5S   |                                     |                        |                                     |                                     |                                     | iEM3455   | iEM3465   |                                     |
| Rogowski coil/ Class 0.5S   |                                     |                        |                                     |                                     |                                     | iEM3555   | iEM3565   |                                     |
| Communication Protocol  |                                     |                        |                                     |                                     |                                     |   |   |                                     |
| Modbus  |                                     |                        |                                     |                                     | ■                                   | ■   |   |                                     |
| M-Bus   |                                     |                        |                                     | ■                                   |                                     |   |   |                                     |
| BACnet  |                                     |                        |                                     |                                     |                                     |   | ■   |                                     |
| LonWorks  |                                     |                        |                                     |                                     |                                     |   |   | ■                                   |
| Measurement (Integrated)  |                                     |                        |                                     |                                     |                                     |   |   |                                     |
| Active energy - Total and Partial energy                                      | ■                                   | ■                      | ■                                   | ■                                   | ■                                   | ■   | ■   | ■                                   |
| 4 Quadrant Active, Reactive energy and Apparent energy                        |                                     |                        |                                     | ■                                   |                                     | ■   | ■   | ■                                   |
| MID compliant (Wh) <sup>(+2)</sup><br>MID compliant (VARh) <sup>(+2)</sup>    |                                     | ■                      | ■                                   | ■                                   |                                     | ■   | ■   | ■                                   |
| Demand (per-ph & average current, total power for P Q S) <sup>(+3)</sup>      |                                     |                        |                                     |                                     |                                     | ■   | ■   |                                     |
| Peak Demand (per-ph & average current, total power for P Q S) <sup>(+3)</sup> |                                     |                        |                                     |                                     |                                     | ■   | ■   |                                     |
| Measurement (Instantaneous)   |                                     |                        |                                     |                                     |                                     |   |   |                                     |
| Voltage   |                                     |                        |                                     | ■                                   | ■                                   | ■   | ■   | ■                                   |
| Current   |                                     |                        |                                     | ■                                   | ■                                   | ■   | ■   | ■                                   |
| Power - P Q S   |                                     |                        |                                     | ■                                   | ■                                   | ■   | ■   | ■                                   |
| Power factor  |                                     |                        |                                     | ■                                   | ■                                   | ■   | ■   | ■                                   |
| Frequency   |                                     |                        |                                     | ■                                   | ■                                   | ■   | ■   | ■                                   |
| Multi-Tariff, control by  |                                     |                        |                                     |                                     |                                     |   |   |                                     |
| Internal clock  |                                     | 4                      |                                     | 4                                   |                                     | 4   | 4   | 4                                   |
| Digital Inputs  |                                     | 4                      |                                     | 2                                   |                                     | 2   | 2   | 2                                   |
| Communication   |                                     | -                      |                                     | 4                                   |                                     | 4   | 4   | 4                                   |
| Digital inputs  |                                     |                        |                                     |                                     |                                     |   |   |                                     |
| For Status, Tariff control or Input monitoring                                |                                     |                        |                                     | 1                                   |                                     | 1   | 1   | 1                                   |
| Tariff control only   |                                     | 2                      |                                     |                                     |                                     |   |   |                                     |
| Digital outputs   |                                     |                        |                                     |                                     |                                     |   |   |                                     |
| Energy pulsing or Overload alarm  |                                     |                        |                                     | 1                                   |                                     | 1   | 1   |                                     |
| Pulse output only   |                                     |                        | 1                                   |                                     |                                     |   |   |                                     |
| Internal clock  |                                     |                        |                                     |                                     |                                     |   |   |                                     |
| Quartz crystal based  |                                     | ■                      |                                     | ■                                   |                                     | ■   | ■   | ■                                   |
| Date/time format (DD-MMM-YYYY/hh:mm)  |                                     | ■                      |                                     | ■                                   |                                     | ■   | ■   | ■                                   |
| Commercial reference  |                                     |                        |                                     |                                     |                                     |   |   |                                     |
| Commercial References/ordering references                                     | A9MEM3100<br>A9MEM3200<br>A9MEM3300 | A9MEM3115<br>A9MEM3215 | A9MEM3110<br>A9MEM3210<br>A9MEM3310 | A9MEM3135<br>A9MEM3235<br>A9MEM3335 | A9MEM3150<br>A9MEM3250<br>A9MEM3350 | A9MEM3155<br>A9MEM3255<br>A9MEM3355<br>A9MEM3455<br>A9MEM3555 | A9MEM3165<br>A9MEM3265<br>A9MEM3365<br>A9MEM3465<br>A9MEM3565 | A9MEM3175<br>A9MEM3275<br>A9MEM3375 |

<sup>(+1)</sup> MID certification available for x/5 A and x/1 A.

<sup>(+2)</sup> MID certification not applicable for iEM34xx and iEM35xx series.

<sup>(+3)</sup> Demand parameters available in iEM34xx and iEM35xx series only.

See your Schneider Electric representative for complete ordering information.

# Acti 9 iEM3000 Series

## Technical Specifications

|  |  | iEM31xx   | iEM32xx  | iEM33xx             | iEM34xx   | iEM35xx                       |
|--|--|---|--|---------------------|---|-------------------------------|
| Width in mm x number of modules          |  | 18 mm x 5   | 18 mm x 5  | 18 mm x 7           | 18 mm x 5   | 18 mm x 5                     |
| Wiring type (scheme)                     |  | 3PH3W, 3PH4W, 1PH2W L-N, 1PH2W L-L, 1PH3W L-L-N                           |  |                     |   |                               |
| Operating Temperature                    |  | -25°C to 70°C (-13 °F to 158 °F)  |  |                     |   |                               |
| Storage temperature                      |  | -40 °C to 85 °C<br>(-40 °F to 185 °F)                                     |  |                     |   |                               |
| Wiring capacity                          |  | 16 mm²  | 6 mm² for I and<br>4 mm² for V                           | 50 mm²              | 6 mm² for I and<br>4 mm² for V  |                               |
| LCD display                              |  | 99999999.9 kWh  | 99999999.9 kWh /<br>MWh                                  | 99999999.9 kWh      | 99999999.9 kWh / MWh  |                               |
| IP Protection                            |  | IP40 front, IP20 casing   |  |                     |   |                               |
| Over voltage and measurement             |  | Category III, Pollution Degree 2  |  |                     |   |                               |
| Operating Voltage                        |  | 3 x 100/173 V AC to 3 x 277/480 V AC (50/60 Hz)                           |  |                     |   |                               |
| Operating Current                        |  | 0.5 A to 63 A   | Inom 5 A: 50 mA<br>to 6 A<br>Inom 1 A: 10 mA to<br>1.2 A | 1 A to 125 A        | 0.022 V to 0.4 V<br>(0.333 V Inom)<br>or<br>0.05 V to 1.2 V<br>(1 V Inom) LVCTs | 50 to 5000 A<br>Rogowski Coil |
| Altitude                                 |  | < 3000 m (9842 ft)  |  |                     |   |                               |
| Humidity                                 |  | 5% – 95%  |  |                     |   |                               |
| Voltage inputs                           | Measured voltage                         | Wye: 100 - 277 V L-N, 173 - 480 V L-L ±20%<br>Delta: 173 - 480 V L-L ±20% |  |                     |   |                               |
|  | Overload                                 | 332 V L-N or 575 V L-L  |  |                     |   |                               |
|  | Impedance                                | 3 MΩ  | 3 MΩ   | 6 MΩ                | 3 MΩ  |                               |
|  | Frequency                                | 50 / 60 Hz ±10%   |  |                     |   |                               |
|  | Measurement category                     | III   |  |                     |   |                               |
|  | Minimum wire temperature rating required | 90 °C (194 °F)  | 90 °C (194 °F)   | 105 °C (221 °F)     | 90 °C (194 °F)  |                               |
|  | Maximum device consumption               | -   | < 10 VA  | -                   | < 10 VA   |                               |
|  | Wire                                     | 16 mm² / 6 AWG  | 2.5 mm² / 14 AWG   | 50 mm² / 1 AWG      | 2.5 mm² / 14 AWG  |                               |
|  | Wire strip length                        | 11 mm / 0.43 in   | 8 mm / 0.31 in   | 13 mm / 0.5 in      | 8 mm / 0.31 in  |                               |
|  | Torque                                   | 1.8 Nm / 15.9 in•lb   | 0.5 Nm / 4.4 in•lb                                       | 3.5 Nm / 30.9 in•lb | 0.5 Nm / 4.4 in•lb  |                               |
| Current inputs                           | Nominal current                          | -   | 1 A or 5 A   | -                   | -   | -                             |
|  | Measured current                         | 0.5 A to 63 A   | 20 mA to 6 A   | 1 A to 125 A        | -   | -                             |
|  | Withstand                                | 10 A continuous, 20 A at 10 sec/hr  |  |                     | -   | -                             |
|  | Minimum wire temperature rating required | -   | 90 °C (194 °F)   | -                   | 90 °C (194 °F)  |                               |
|  | Impedance                                | < 0.3 mΩ  | < 1 mΩ   | < 0.2 mΩ            | -   | -                             |
|  | Frequency                                | 50 / 60 Hz ±10%   |  |                     |   |                               |
|  | Burden                                   | < 10 VA at 63 A   | < 0.036 VA at 6 A  | < 10 VA at 125 A    |   |                               |
|  | Wire                                     | 16 mm² / 6 AWG  | 6 mm² / 10 AWG   | 50 mm² / 1 AWG      | 6 mm² / 10 AWG  |                               |
|  | Wire strip length                        | 11 mm / 0.43 in   | 8 mm / 0.31 in   | 13 mm / 0.5 in      | 8 mm / 0.31 in  |                               |
|  | Torque                                   | 1.8 Nm / 15.9 in•lb   | 0.8 Nm / 7.0 in•lb                                       | 3.5 Nm / 30.9 in•lb | 0.8 Nm / 7.0 in•lb  |                               |
|  | Split-core LVCTs                         | -   | -  | -                   | 0.333 V or 1 V nominal  |                               |
|  | Rogowski Coil                            | -   | -  | -                   | U018 Series of Rogowski Coils<br>(up to 5000 A)                                 |                               |
| Minimum wire temperature rating required | -  | -   | -  | 90 °C (194 °F)      |   |                               |


# Acti 9 iEM3000 Series



A9MEM3455



LVCT00102S

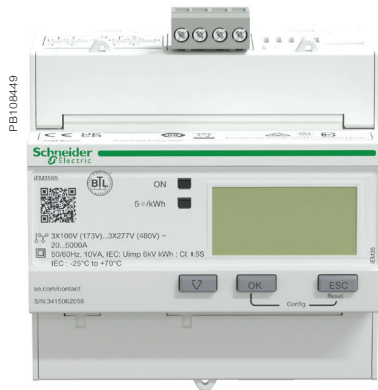

A9MEM3555



METSECTR25500

## Recommended\* Schneider make Split-core LVCT for iEM3455 and iEM3465

| Part Number | Sensing Current | Frequency | Output    |
|-------------|-----------------|-----------|-----------|
| LVCT00102S  | 100A            | 50/60Hz   | 0 to 1/3V |
| LVCT00202S  | 200A            | 50/60Hz   | 0 to 1/3V |
| LVCT00302S  | 300A            | 50/60Hz   | 0 to 1/3V |
| LVCT00403S  | 400A            | 50/60Hz   | 0 to 1/3V |
| LVCT00603S  | 600A            | 50/60Hz   | 0 to 1/3V |
| LVCT00803S  | 800A            | 50/60Hz   | 0 to 1/3V |
| LVCT00804S  | 800A            | 50/60Hz   | 0 to 1/3V |
| LVCT01004S  | 1000A           | 50/60Hz   | 0 to 1/3V |
| LVCT01204S  | 1200A           | 50/60Hz   | 0 to 1/3V |
| LVCT01604S  | 1600A           | 50/60Hz   | 0 to 1/3V |
| LVCT02004S  | 2000A           | 50/60Hz   | 0 to 1/3V |
| LVCT02404S  | 2400A           | 50/60Hz   | 0 to 1/3V |
| LVCT00050S  | 50A             | 50/60Hz   | 0 to 1/3V |
| LVCT00101S  | 100A            | 50/60Hz   | 0 to 1/3V |
| LVCT00201S  | 200A            | 50/60Hz   | 0 to 1/3V |

\* Split core LVCT with 1 V output can also be used.

## Rogowski Coil for iEM3555 and iEM3565



| Part Number   | Sensing Current | Frequency | Lead length (m) | Approximate Inside Diameter (mm) |
|---------------|-----------------|-----------|-----------------|----------------------------------|
| METSECTR25500 | 5000A           | 50/60Hz   | 2.35            | 80                               |
| METSECTR30500 | 5000A           | 50/60Hz   | 2.35            | 96                               |
| METSECTR46500 | 5000A           | 50/60Hz   | 2.35            | 146                              |
| METSECTR60500 | 5000A           | 50/60Hz   | 2.35            | 191                              |
| METSECTR90500 | 5000A           | 50/60Hz   | 2.35            | 287                              |

## Measurement accuracy


|   |                 | As per EN / IEC 62053-21/22/23 | As per BS / EN / IEC 61557-12 | As per EN 50470-3 | Current range of operation   |
|---|-----------------|--------------------------------|-------------------------------|-------------------|--|
| iEM31xx   | Active energy   | Class 1 (IEC 62053-21)         | Class 1 (PMD DD)              | Class B           | $I_{max}=63$ A, $I_{ref}=10$ A, $I_{min}=0.5$ A, and $I_{st}=0.04$ A                             |
|   | Reactive energy | Class 2 (IEC 62053-23)         | Class 2 (PMD DD)              | -                 | $I_{max}=63$ A, $I_b=10$ A, and $I_{st}=0.05$ A  |
| iEM33xx   | Active energy   | Class 1 (IEC 62053-21)         | Class 1 (PMD DD)              | Class B           | $I_{max}=125$ A, $I_{ref}=20$ A, $I_{min}=1$ A, and $I_{st}=0.08$ A                              |
|   | Reactive energy | Class 2 (IEC 62053-23)         | Class 2 (PMD DD)              | -                 | $I_{max}=125$ A, $I_b=20$ A, and $I_{st}=0.1$ A  |
| iEM32xx (x/1 A Current input)                                 | Active energy   | Class 1 (IEC 62053-21)         | Class 1 (PMD SD, PMD Sx)      | Class B           | $I_{max}=1.2$ A, $I_{nom}=1$ A, and $I_{st}=0.002$ A   |
|   | Reactive energy | Class 2 (IEC 62053-23)         | Class 2 (PMD Sx)              | -                 | $I_{max}=1.2$ A, $I_{nom}=1$ A, and $I_{st}=0.003$ A   |
| iEM32xx (x/5 A Current input)                                 | Active energy   | Class 0.5S (IEC 62053-22)      | Class 1 (PMD SD, PMD Sx)      | Class C           | $I_{max}=6$ A, $I_{nom}=5$ A, and $I_{st}=0.005$ A   |
|   | Reactive energy | Class 2 (IEC 62053-23)         | Class 2 (PMD Sx)              | -                 | $I_{max}=6$ A, $I_{nom}=5$ A, and $I_{st}=0.015$ A   |
| iEM34xx (LVCT, 0.333/1.0 V at $I_{nom}$ )<br>Field selectable | Active energy   | $\pm 1\%$                      | -                             | -                 | Low voltage output for 0.333 V LVCT, $I_{max}=0.399$ V, $I_{nom}=0.333$ V, and $I_{min}=0.022$ V |
|   | Reactive energy | $\pm 2\%$                      | -                             | -                 |  |
| iEM35xx (from 50 A to 5000 A)                                 | Active energy   | $\pm 1\%$                      | -                             | -                 | $I_{max}=5000$ A, $I_{min}=50$ A   |
|   | Reactive energy | $\pm 2\%$                      | -                             | -                 |  |

# Acti 9 iEM3000 Series dimensions

## iEM3000/iEM3200 series dimensions

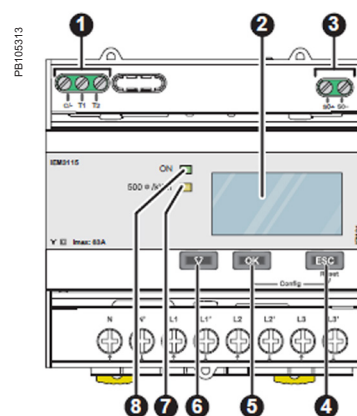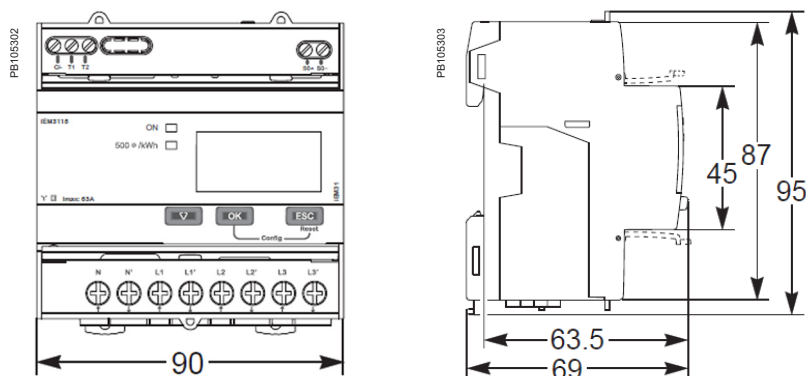




## Acti 9 iEM3100/iEM3200 Series front flaps open and closed

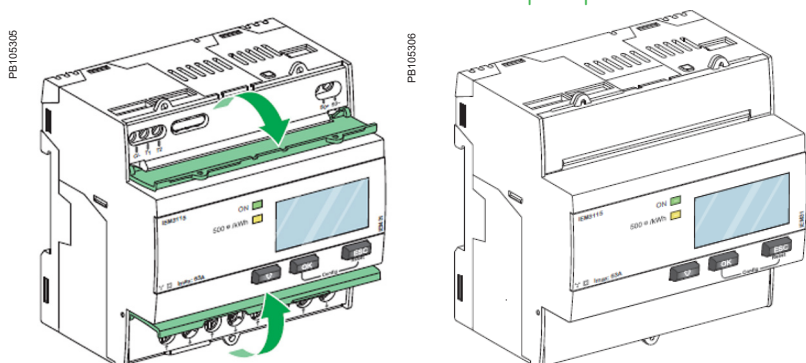

### Acti 9 iEM3000 Series parts

1. Digital inputs for tariff control (iEM3115 / iEM3215)
2. Display for measurement and configuration
3. Pulse out for remote transfer (iEM3110 / iEM3210)
4. **ESC** Cancellation
5. **OK** Confirmation
6. **V** Selection
7. Flashing yellow meter indicator to check accuracy
8. Green indicator: on/off, error

## iEM3300 series dimensions

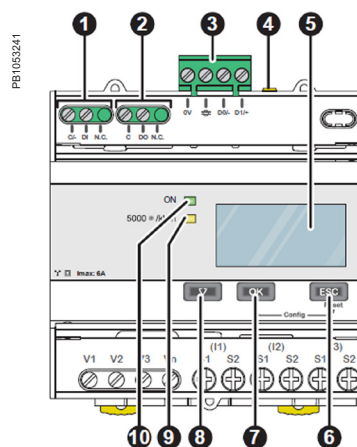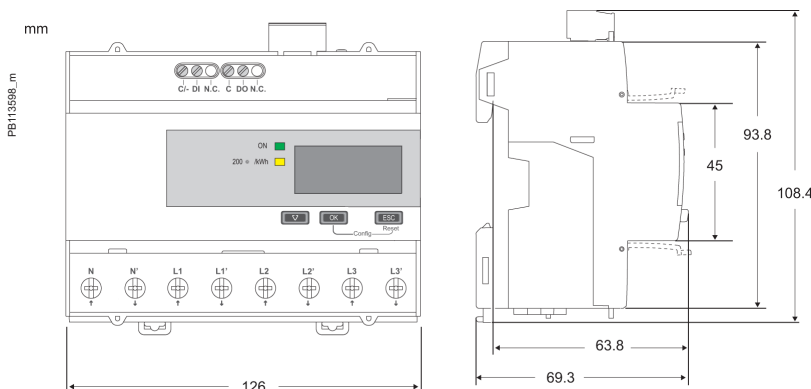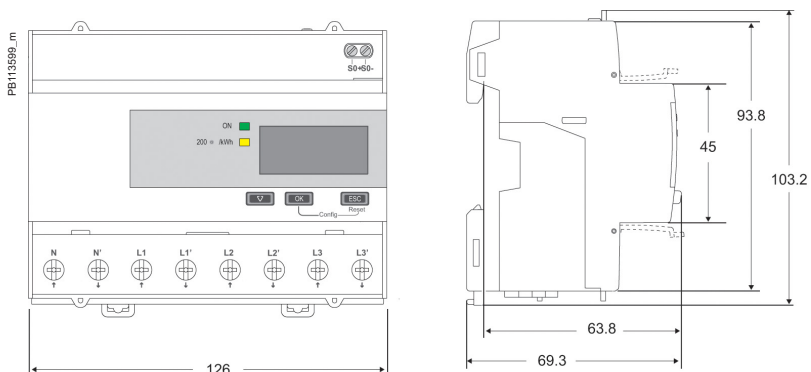

### Acti 9 iEM3000 Series parts

1. Digital inputs for tariff control (iEM3115 / iEM3215)
2. Display for measurement and configuration
3. Pulse out for remote transfer (iEM3110 / iEM3210)
4. **ESC** Cancellation
5. **OK** Confirmation
6. **V** Selection
7. Flashing yellow meter indicator to check accuracy
8. Green indicator: on/off, error

Please see the appropriate **Installation Guide** for accurate and complete information on the installation of this product.

# PM3000 series

The PowerLogic™ PM3000 series power meters are a cost-attractive, feature-rich range of DIN rail-mounted power meters that offers all the measurement capabilities required to monitor an electrical installation.

Ideal for power metering and network monitoring applications that seek to improve the availability and reliability of your electrical distribution system, the meters are also fully capable of supporting sub-metering and cost allocation applications.

## Applications

### Cost management applications

- Bill checking to verify that you are only charged for the energy you use
- Aggregation of energy consumption, including WAGES, and cost allocation per area, per usage, per shift or per time within the same facility
- Energy cost and usage analysis per zone, per usage or per time period to optimise energy usage

### Network management applications

- Metering of electrical parameters to better understand the behaviour of your electrical distribution system



PM3200



PM3250

### The solution for

All markets that can benefit from a solution that includes PowerLogic™ PM3000 series meters:

- Buildings
- Industry
- Data centres and networks
- Infrastructure (e.g. airports, road tunnels, telecom)

### Benefits

Optimise your energy consumption & enable energy efficiency practices

- Collect and analyse energy consumption data from each area for each type of load or circuit
- Gain an accurate understanding of business expenses by allocating the energy-related costs
- Identify savings opportunities
- Use information to implement actions designed to reduce energy consumption

### Competitive advantages

Connectivity advantages

- Programmable digital input
  - External tariff control signal (4 tariff)
  - Remote reset partial counter
  - External status like breaker status
  - Collect WAGES pulses
- Programmable digital output
  - Alarm (PM3255)
  - KWh pulses
- Graphic LCD display
- Modbus RS-485 with screw terminals
- Multi-tariff capability
 

The PM3000 series allows users to arrange KWh consumption in four different registers. This can be controlled by:

  - Digital inputs. Signal can be provided by PLC or utilities
  - Internal clock programmable by HMI
  - Through communication

This function allows users to:

- Make tenant metering for dual source applications to differentiate backup source or utility source
- Understand well the consumption during peak time and off-peak time, weekdays and weekends, holiday and working days etc.
- Follow up feeders consumption in line with utility tariff rates

### Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximise electrical network reliability and availability, and optimise electrical asset performance.

### Conformity of standards

- |                |                |
|----------------|----------------|
| • IEC 61557-12 | • IEC 62053-23 |
| • IEC 61326-1  | • EN 50470-1   |
| • IEC 62052-11 | • EN 50470-3   |
| • IEC 62053-21 | • IEC 61010-1  |
| • IEC 62053-22 | • EN 55022     |

# PM3000 series

## PM3000 series feature selection

|   | PM3200      | PM3210      | PM3250      | PM3255      |
|---|-------------|-------------|-------------|-------------|
| Performance standard  |             |             |             |             |
| IEC61557-12 PMD/Sx/K55/0.5                                  | ■           | ■           | ■           | ■           |
| General   |             |             |             |             |
| Use on LV and HV systems                                    | ■           | ■           | ■           | ■           |
| Number of samples per cycle                                 | 32          | 32          | 32          | 32          |
| CT input 1A/5A  | ■           | ■           | ■           | ■           |
| VT input  | ■           | ■           | ■           | ■           |
| Multi-tariff  | 4           | 4           | 4           | 4           |
| Multi-lingual backlit display                               | ■           | ■           | ■           | ■           |
| Instantaneous rms values                                    |             |             |             |             |
| Current, voltage Per phase and average                      | ■           | ■           | ■           | ■           |
| Active, reactive, apparent power Total and per phase        | ■           | ■           | ■           | ■           |
| Power factor Total and per phase                            | ■           | ■           | ■           | ■           |
| Energy values   |             |             |             |             |
| Active, reactive and apparent energy; import and export     | ■           | ■           | ■           | ■           |
| Demand value  |             |             |             |             |
| Current, power (active, reactive, apparent) demand; present | ■           | ■           | ■           | ■           |
| Current, power (active, reactive, apparent) demand; peak    |             | ■           | ■           | ■           |
| Power quality measurements                                  |             |             |             |             |
| THD Current and voltage                                     |             | ■           | ■           | ■           |
| Data recording  |             |             |             |             |
| Min/max of the instantaneous values                         | ■           | ■           | ■           | ■           |
| Power demand logs   |             |             |             | ■           |
| Energy consumption log (day, week, month)                   |             |             |             | ■           |
| Alarms with timestamping                                    |             | 5           | 5           | 15          |
| Digital inputs/digital outputs                              |             | 0/1         |             | 2/2         |
| Communication   |             |             |             |             |
| RS-485 port   |             |             | ■           | ■           |
| Modbus protocol   |             |             | ■           | ■           |
| Commercial reference number                                 | METSEPM3200 | METSEPM3210 | METSEPM3250 | METSEPM3255 |

See your Schneider Electric representative for complete ordering information.

# PM3000 series



PowerLogic™ PM3200 front view



PowerLogic™ PM3250 front view

## PM3000 technical specifications

|                                       |   |
|---------------------------------------|---|
| Type of measurement                   | True rms up to the 15th harmonic on three-phase (3P,3P+N) and single-phase AC systems.<br>32 samples per cycle                      |
| Measurement accuracy                  |   |
| Current with x/5A CTs                 | 0.3 % from 0.5 A to 6 A   |
| Current with x/1A CTs                 | 0.5 % from 0.1 A to 1.2 A   |
| Voltage                               | 0.3 % from 50 V to 330 V (Ph-N), from 80 V to 570 V (Ph-Ph)   |
| Power factor                          | ±0.005 from 0.5 A to 6 A with x/5 A CTs; from 0.1 A to 1.2 A with x/1 A CTs and from 0.5 L to 0.8 C                                 |
| Active/Apparent Power with x/5A CTs   | Class 0.5   |
| Active/Apparent Power with x/1A CTs   | Class 1   |
| Reactive power                        | Class 2   |
| Frequency                             | 0.05 % from 45 to 65 Hz   |
| Active energy with x/5A CTs           | IEC 62053-22 Class 0.5s   |
| Active energy with x/1A CTs           | IEC 62053-21 Class 1  |
| Reactive energy                       | IEC 62053-23 Class 2  |
| Data update rate                      |   |
| Update rate                           | 1s  |
| Input-voltage characteristics         |   |
| Measured voltage                      | 50 V to 330 V AC (direct / VT secondary Ph-N)<br>80 V to 570 V AC (direct / VT secondary Ph-Ph)<br>up to 1 MV AC (with external VT) |
| Frequency range                       | 45 Hz to 65 Hz  |
| Input-current characteristics         |   |
| CT primary                            | Adjustable from 1 A to 32767 A  |
| CT secondary                          | 1 A or 5 A  |
| Measurement input range with x/5A CTs | 0.05 A to 6 A   |
| Measurement input range with x/1A CTs | 0.02 A to 1.2 A   |
| Permissible overload                  | 10 A continuous, 20 A for 10s/hour  |
| Control Power                         |   |
| AC                                    | 100/173 to 277/480 V AC (+/-20%), 3 W/5 VA;<br>45 Hz to 65 Hz   |
| DC                                    | 100 to 300 V DC, 3 W  |
| Input                                 |   |
| Digital inputs (PM3255)               | 11 to 40 V DC, 24 V DC nominal, ≤4mA maximum burden, 3.5kVrms insulation  |
| Output                                |   |
| Digital output (PM3210)               | Optocoupler, polarity sensitive, 5 to 30 V, 15 mA max, 3.5kVrms insulation  |
| Digital outputs (PM3255)              | Solid state relay, polarity insensitive, 5 to 40 V, 50 mA max, 50 Ω max, 3.5kVrms insulation  |

# PM3000 series


## PM3000 technical specifications

| Mechanical characteristics                  |  |
|---|--|
| Weight                                      | 0.26 kg  |
| IP degree of protection (IEC 60529)         | IP40 front panel, IP20 meter body  |
| Dimension                                   | 90 x 95 x 70 mm  |
| Environmental conditions                    |  |
| Operating temperature                       | -25 °C to 55 °C  |
| Storage temperature                         | -40 °C to 85 °C  |
| Humidity rating                             | 5 to 95% RH at 50 °C (non-condensing)  |
| Pollution degree                            | 2  |
| Metering category                           | III, for distribution systems up to 277/480 V AC   |
| Dielectric withstand                        | As per IEC61010-1, Doubled insulated front panel display   |
| Altitude                                    | 3000 m max   |
| Electromagnetic compatibility               |  |
| Electrostatic discharge                     | Level IV (IEC 61000-4-2)   |
| Immunity to radiated fields                 | Level III (IEC 61000-4-3)  |
| Immunity to fast transients                 | Level IV (IEC 61000-4-4)   |
| Immunity to surge                           | Level IV (IEC 61000-4-5)   |
| Conducted immunity                          | Level III (IEC 61000-4-6)  |
| Immunity to power frequency magnetic fields | 0.5mT (IEC 61000-4-8)  |
| Conducted and radiated emissions            | Class B (EN 55022)   |
| Safety                                      |  |
|   | CE as per IEC 61010-1★   |
| Communication                               |  |
| RS-485 port                                 | Half duplex, from 9600 up to 38400 baud, Modbus RTU (double insulation)  |
| Display characteristics                     |  |
| Dimensions (VA)                             | 43 mm x 34.6 mm  |
| Display resolution                          | 128 x 96 dots  |
| Standard compliance                         |  |
|   | IEC 61557-12, EN 61557-12<br>IEC 61010-1, UL 61010-1<br>IEC 62052-11, IEC 62053-21, IEC 62053-22, IEC 62053-23<br>EN 50470-1, EN 50470-3 |


★ Protected throughout by double insulation

# PM3000 dimensions


## PM3200/PM3210 dimensions

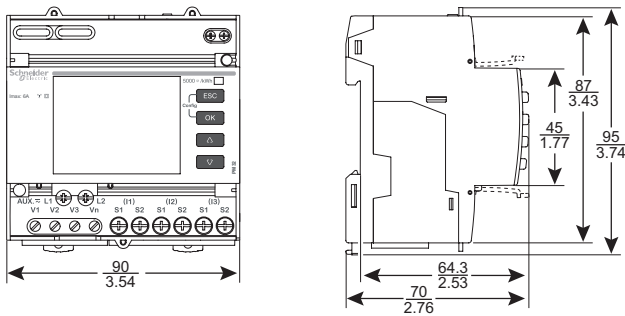


## PM3250/PM3255 dimensions

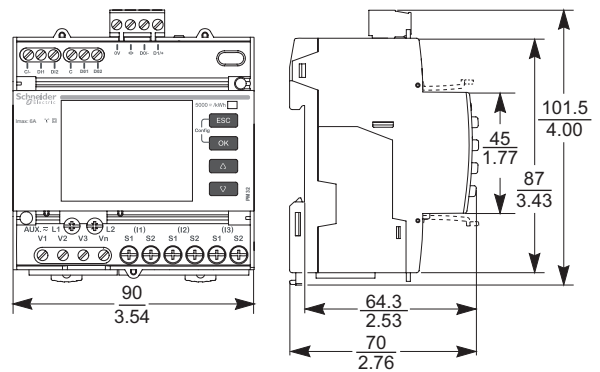


## PM3200/PM3210 mounting

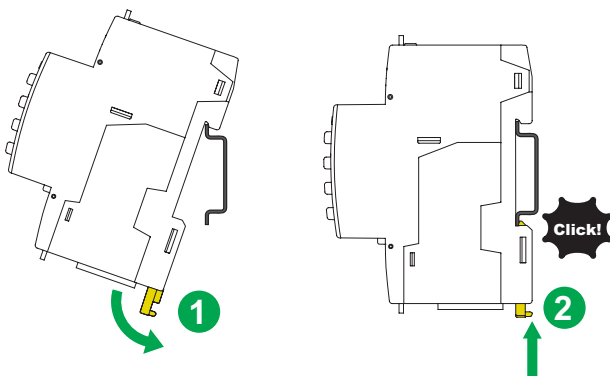

## PM3250/PM3255 mounting

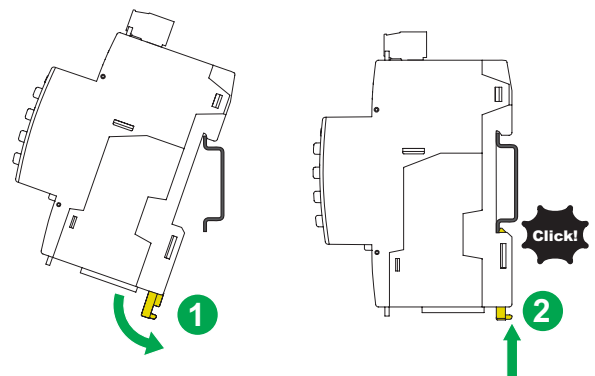


## PM3200/PM3210 overview

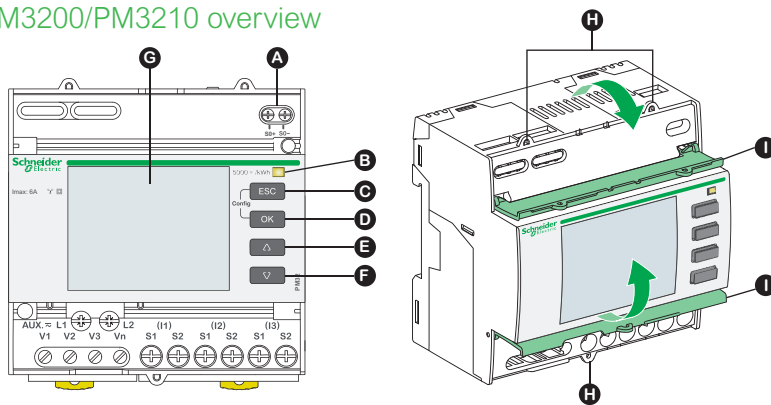

- A Pulse output for remote transfer (PM3210)
- B Energy pulse LED (5000 / kWh)
- C Cancellation
- D Confirmation
- E Up
- F Down
- G Display with white backlight
- H Sealing points
- I Sealable covers

## PM3250/PM3255 overview

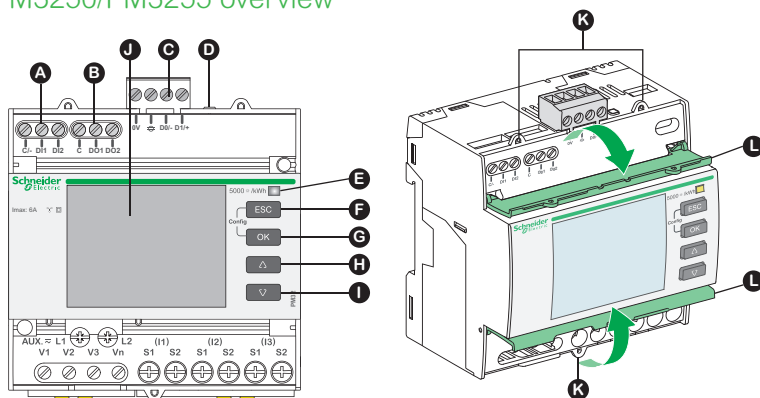

- A Digital inputs x 2 (PM3255)
- B Digital outputs x 2 (PM3255)
- C Communications port
- D Communications LED
- E Energy pulse LED (5000 / kWh)
- F Cancellation
- G Confirmation
- H Up
- I Down
- J Display with white backlight
- K Sealing points
- L Sealable covers

Please see the appropriate **Installation Guide** for accurate and complete information on the installation of this product.




# PowerLogic™ PowerTag Energy series

PowerTag Energy is a wireless-communication energy sensor.

PowerTag Energy is designed specifically for Energy Management, Load Monitoring and Power Availability applications. Associated to a concentrator or a gateway, PowerTag Energy provides a full wireless class 1 solution to monitor energy at any level of a distribution panel.

Applications:

- Monitors your electrical installation from main incomer down to load level
- Suitable for various businesses, buildings, industrial and residential applications with easy integration in upper systems
- Supports and enables Energy Efficiency programs and standards such as:
  - European Energy Efficiency Directive (EED)
  - Energy Performance of Buildings Directive (EPBD)
  - IEC 60364-8-1 "Low Voltage Electrical installations - Energy Efficiency"
  - EN 17267 "Energy Measurement and Monitoring plan"
  - ISO 50001 "Energy Management System"

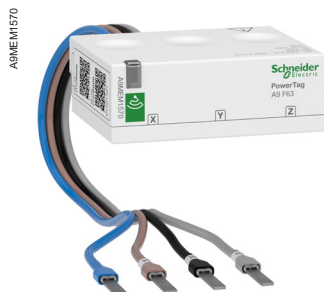

PowerTag Energy  
Flex 63 A (F63)



PowerTag Energy  
PhaseNeutral 63 A (P63)



PowerTag Energy Monoconnect 250 A (M250)



PowerTag Energy Rope 2000 A (R2000)



PowerTag Energy Flex 160 A (F160)



PowerTag Energy  
Monoconnect 63 A (M63)



PowerTag Energy

## The solution for

Markets that benefit from a solution that includes PowerLogic™ PowerTag Energy series:

- Residential
- Small business
- Medium & large buildings
- Industrial sites

## Benefits

PowerTag Energy sensor incorporates all features required to perform accurate real-time measurements (U, V, I, P, PF) and energy values up to 2000 A.

Different designs of PowerTag Energy are available to ensure it fits the protective device on which it is mounted.

- PowerTag Energy Monoconnect (M): can be mounted directly on the device, no additional wiring is required
- PowerTag Energy PhaseNeutral (P): for DIN offers with 9 mm pitch between phase and neutral
- PowerTag Energy Flex (F): can be mounted on a wide range of protective devices thanks to its design
- PowerTag Energy Rope (R) thanks to its openable current sensors can be easily installed on busbars or wires in new installations and in retrofit applications

PowerTag Energy sensor is acting as an autonomous meter. Energy counters are stored inside PowerTag Energy sensor.

## Energy management system

To get the most effective use from your Schneider Electric measurement and metering devices, we offer a range of dedicated gateways / concentrators depending on your application.

## Advantages

- Wireless-communication
- Range up to 2000 A
- Voltage loss alarming
- Class 1 accuracy
- Compact design
- Easy installation and commissioning
- Scalable solution
- Perfect for retrofit or new panels

## Conformity of standards

- IEC 61557-12
- IEC 61010-1
- IEC 61010-2-030
- IEC 61326-1 (Industrial Environment)
- IEC 62311
- ETSI EN 300 328
- ETSI EN 301 487-1
- ETSI EN 301 489-17 (Radiated EMC)



## Feature selection

|                        |                           |                |                  |                |                   |
|------------------------|---------------------------|----------------|------------------|----------------|-------------------|
|                        |                           |                |                  |                |                   |
|                        | A9MEM15••                 | A9MEM15••      | A9MEM15••        | A9MEM1580      | LV434020/LV434021 |
| Product name           | M63                       | P63            | F63              | F160           | M250              |
| Max current (I Max) A  | 63                        | 63             | 63               | 160            | 250               |
| Starting current (Ist) | 40 mA                     | 40 mA          | 40 mA            | 100 mA         | 160 mA            |
| Design                 | Monoconnect               | PhaseNeutral   | Flex             | Flex           | Monoconnect       |
| Mounting type          | On device                 | On device      | On wires         | On wires       | On device         |
| Current sensors type   | Solid core                | Solid core     | Solid core       | Solid core     | Solid core        |
| Poles                  | 1P + W / 1P+N / 3P / 3P+N | 1P+N / 3P+N    | 1P+N / 3P / 3P+N | 3P / 3P+N      | 3P / 3P+N         |
| Self-powered           | ■                         | ■              | ■                | ■              | ■                 |
| Voltage (L-N)          | Depends on ref            | 200 - 240 V AC | Depends on ref   | 100 - 277 V AC | 230 V AC          |
| Measurements*          |                           |                |                  |                |                   |
| Nb quadrant            | 2                         | 2              | 2                | 4              | 4                 |
| Active Energy          | Class 1                   | Class 1        | Class 1          | Class 1        | Class 1           |
| Reactive Energy        |                           |                |                  | ■              | ■                 |
| Apparent Energy        |                           |                |                  | ■              |                   |
| Active Power           | ■                         | ■              | ■                | ■              | ■                 |
| Reactive Power         |                           |                |                  | ■              | ■                 |
| Apparent Power         | ■                         | ■              | ■                | ■              | ■                 |
| Power Factor           | ■                         | ■              | ■                | ■              | ■                 |
| Frequency              |                           |                |                  | ■              | ■                 |
| Current and Voltage    | ■                         | ■              | ■                | ■              | ■                 |


\* Data availability depending on the concentrator / gateway

|                        |                   |                |                |                |                |
|------------------------|-------------------|----------------|----------------|----------------|----------------|
|                        |                   |                |                |                |                |
|                        | LV434022/LV434023 | A9MEM1590      | A9MEM1591      | A9MEM1592      | A9MEM1593      |
| Product name           | M630              | R200           | R600           | R1000          | R2000          |
| Max current (I Max) A  | 630               | 200            | 600            | 1000           | 2000           |
| Starting current (Ist) | 400 mA            | 120 mA         | 400 mA         | 600 mA         | 1.2 A          |
| Design                 | Monoconnect       | Rope           | Rope           | Rope           | Rope           |
| Mounting type          | On device         | On wires       | On wires       | On wires       | On wires       |
| Current sensors type   | Solid core        | Split core     | Split core     | Split core     | Split core     |
| Poles                  | 3P / 3P+N         | 3P / 3P+N      | 3P / 3P+N      | 3P / 3P+N      | 3P / 3P+N      |
| Self-powered           | ■                 | ■              | ■              | ■              | ■              |
| Voltage (L-N)          | 230 V AC          | 100 - 277 V AC | 100 - 277 V AC | 100 - 277 V AC | 100 - 277 V AC |
| Measurements*          |                   |                |                |                |                |
| Nb quadrant            | 4                 | 4              | 4              | 4              | 4              |
| Active Energy          | Class 1           | Class 1        | Class 1        | Class 1        | Class 1        |
| Reactive Energy        | ■                 | ■              | ■              | ■              | ■              |
| Apparent Energy        |                   | ■              | ■              | ■              | ■              |
| Active Power           | ■                 | ■              | ■              | ■              | ■              |
| Reactive Power         | ■                 | ■              | ■              | ■              | ■              |
| Apparent Power         | ■                 | ■              | ■              | ■              | ■              |
| Power Factor           | ■                 | ■              | ■              | ■              | ■              |
| Frequency              | ■                 | ■              | ■              | ■              | ■              |
| Current and Voltage    | ■                 | ■              | ■              | ■              | ■              |

\* Data availability depending on the concentrator / gateway



Connection possibilities

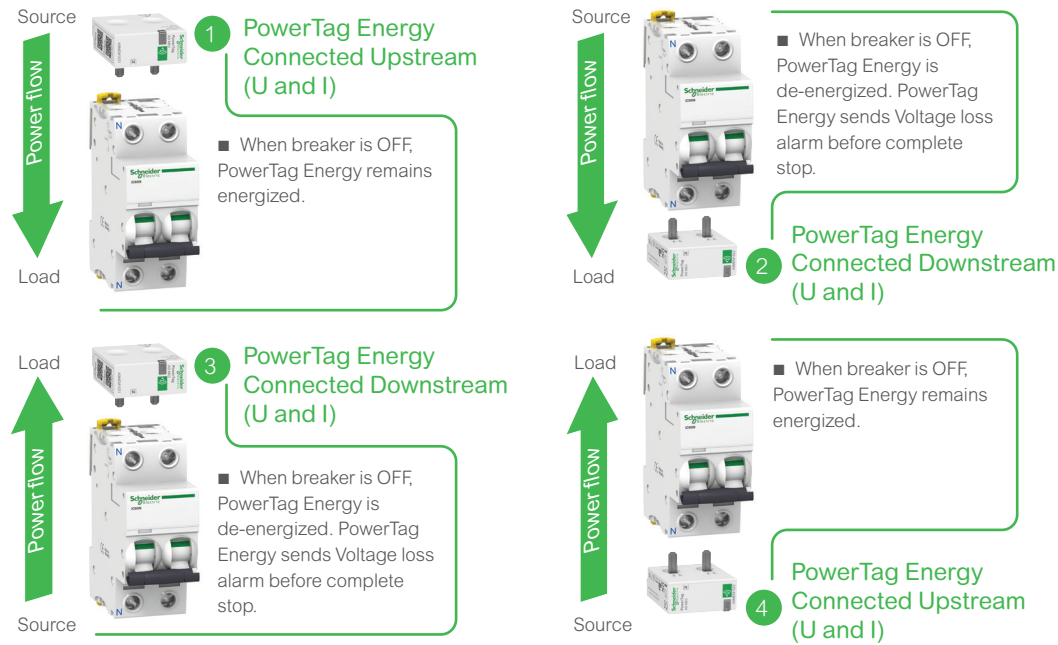

- Note:
- In association with a contactor, a Variable Speed Drive or a motor starter: PowerTag Energy can ONLY be installed UPSTREAM these devices.
  - Some PowerTag Energy can be installed either on the TOP or on the BOTTOM of the protective devices.
  - Check the possible mounting position as indicated in the “Catalog numbers” chapter.

| Connection (Voltage and Current)  |   | Features  |
|---|---|---|
| Upstream  | 1 | <ul style="list-style-type: none"><li>• Energy management: consumption in kWh</li><li>• Load monitoring: real-time measurements</li></ul>   |
|   | 4 |   |
| Downstream<br>Preferred installation to take full benefit of voltage loss alarming in diagnosing the load | 2 | <ul style="list-style-type: none"><li>• Energy management: consumption in kWh</li><li>• Load monitoring: real-time measurements</li><li>• Power availability: voltage loss alarming</li></ul> |
|   | 3 |   |

Main associated concentrators / gateways (\*)

| For Commercial & Building applications |                                     |  |
|--|-------------------------------------|--|
| PowerTag Link                          | EcoStruxure™ Panel Server           | Wireless Panel Server for PrismaSeT Active |
|  |                                     |  |
| A9XMWD20                               | PAS600●                             |  |
| For Small Business applications        | For Residential applications        | For Industrial applications                |
| PowerTag Link C<br>PowerTag Link C+    | Wiser IP Module<br>Wiser IP Module+ | Harmony Hub                                |
|  |                                     |  |
| A9XELC10                               | EER31800                            | ZBRN1, ZBRN2, ZBRN32                       |

(\*) Refer to Selection Guide for complete compatibility pages 95 to 105.



# PowerLogic™ PowerTag Energy 63 A

IEC 61557-12 PMD-I/DD/K55/1

As per the above standard:

With its compact design and innovative concept, PowerTag Energy 63 A fits directly on the protective device and as a result has no impact on DIN rail occupancy and switchboard size.

It is therefore well adapted to be mounted from head of group down to final circuits.

Since voltage and current are measured directly at the same point on the circuit to be monitored, it provides accurate measurement and relevant information such as voltage loss.

PowerTag Energy is compatible with SE product ranges as per the selection guide CA908058.

## Main characteristics

PowerTag Energy measures the following values in accordance with the IEC 61557-12 standard PMD-I/DD/K55/1:

- Energy:
  - Active energy (kWh): total and partial, delivered and received.
- Real-time measurement values:
  - Voltages (V): phase-to-phase and phase-to-neutral.
  - Currents (A): per phase.
  - Power:
    - Active power (W): total and per phase.
    - Apparent power (VA): total.
  - Power factor.
- Voltage loss alarms:
  - PowerTag Energy sends a “voltage loss” alarm and the current-per-phase value before being de-energized.
  - At “voltage loss”, PowerTag Energy adds an overload alarm if the current is higher than the rated current of the associated protective device.

Note: Functions listed above depends on Concentrator/Gateway.



PowerTag Energy  
Monoconnect 63 A (M63)



PowerTag Energy  
PhaseNeutral 63 A (P63)



PowerTag Energy  
Flex 63 A (F63)



## Product selection

### Neutral position

Some references of PowerTag Energy 63 A (Monoconnect and PhaseNeutral) exist in Top or Bottom version.

This is linked to the position of the neutral of the PowerTag Energy.



PowerTag Energy  
"Top"

- Designed to be mounted on the Top of the circuit breaker.



- Designed to be mounted on the Bottom of the circuit breaker.

PowerTag Energy  
"Bottom"

#### Note:

- Some PowerTag Energy can be installed either on the TOP or on the BOTTOM of the protective devices.
- Check the possible mounting position as indicated in the "Catalog numbers" chapter.
- In association with a contactor, a Variable Speed Drive or a motor starter: PowerTag Energy can ONLY be installed UPSTREAM these devices.

### Number of poles

Choose the PowerTag Energy according to the number of poles of the protective device: one PowerTag Energy per protective device.

Ex.: 3 Pole PowerTag Energy 63 A for a 3 pole CB.






# PowerLogic™ PowerTag Energy 63 A

## Technical specifications

| Main characteristics                   |             |   |                  |                                       |
|--|-------------|---|------------------|---------------------------------------|
| Rated voltage                          | 1P+N / 1P+W | Un  | Phase-to-neutral | 200... 240 V AC ± 20 %                |
|  | 3P          | Un  | Phase-to-phase   | 380... 415 V AC ± 20 %                |
|  | 3P+N        | Un  | Phase-to-neutral | 220... 240 V AC ± 20 %                |
|  |             |   | Phase-to-phase   | 380... 415 V AC ± 20 %                |
|  | A9MEM1543   | Un  | Phase-to-phase   | 200... 240 V AC ± 20 %                |
|  | A9MEM1564   | Un  | Phase-to-neutral | 100... 127 V AC ± 20 %                |
|  | A9MEM1574   | Un  | Phase-to-neutral | 120... 137 V AC ± 20 %                |
|  |             |   |                  | 208... 240 V AC ± 20 %                |
| Frequency                              |             |   |                  | 50/60 Hz                              |
| Maximum current                        |             | Imax  |                  | 63 A                                  |
| Basic current                          |             | Ib  |                  | 10 A                                  |
| Saturation current                     |             |   |                  | 130 A                                 |
| Maximum consumption                    |             | 1P+N  |                  | ≤ 1 VA                                |
|  |             | 3P/3P+N   |                  | ≤ 2 VA                                |
| Starting current                       |             | Ist   |                  | 40 mA                                 |
| Additional characteristics             |             |   |                  |                                       |
| Operating temperature                  |             |   |                  | -25°C to +60°C                        |
| Storage temperature                    |             |   |                  | -40°C to +85°C                        |
| Overvoltage category                   |             | As per IEC 61010-1  |                  | Cat. III                              |
| Measuring category                     |             | As per IEC 61010-2-030                                    |                  | Cat. III                              |
| Pollution degree                       |             |   |                  | 3                                     |
| Altitude                               |             |   |                  | ≤ 2000 m                              |
| Degree of protection                   |             | Device only   |                  | IP20                                  |
|  |             | IK  |                  | 05                                    |
| Radio-frequency communication          |             |   |                  |                                       |
| ISM band 2.4 GHz                       |             |   |                  | 2.4 GHz to 2.4835 GHz                 |
| Channels                               |             | As per IEEE 802.15.4                                      |                  | 11 to 26                              |
| Isotropic Radiated Power               |             | Equivalent (EIRP)   |                  | 0 dBm                                 |
| Maximum transmission time              |             |   |                  | < 5 ms                                |
| Channel occupancy                      |             | Messages sent every                                       |                  | 5 seconds minimum                     |
| Characteristics of measuring functions |             |   |                  |                                       |
| Function                               | Symbol      | Performance category as per IEC 61557-12 (PMD-I/DD/K55/1) |                  | Device measuring range                |
|  |             | Class   |                  |                                       |
| Active power                           | P           | 1   |                  | 9 W to 63 kW                          |
| Active energy                          | Ea          | 1   |                  | Total and partial 0 to 99999999.9 kWh |
| Current                                | I           | 1   |                  | 40 mA to 63 A                         |
| Voltage                                | U           | 0.5   |                  | Un ± 20 %                             |
| Power factor                           | PFA         | 1   |                  | 0 to 1                                |



# PowerLogic™ PowerTag Energy 63 A

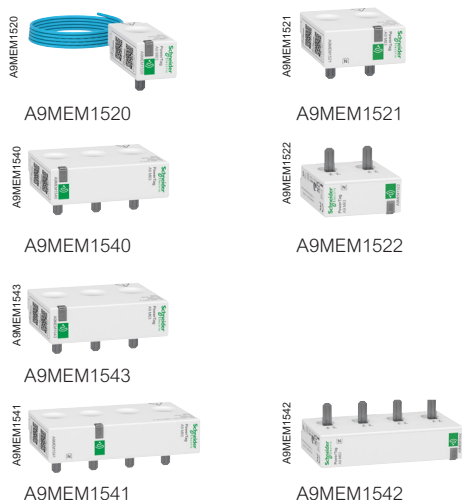

## PowerTag Energy Monoconnect 63 A Commercial reference numbers

PowerTag Energy for Acti9 and Multi9 **Monoconnect** offers: «Single-terminal» circuit breakers, RCDs and switches with **18 mm pitch between phase and neutral**, rating less than or equal to 63 A.



| Commercial reference number | Type    | Mounting      | Description                    |
|-----------------------------|---------|---------------|--------------------------------|
| A9MEM1520                   | 1P+wire | Top or bottom | PowerTag Energy M63 1PW        |
| A9MEM1521                   | 1P+N    | Top           | PowerTag Energy M63 1PN T      |
| A9MEM1522                   |         | Bottom        | PowerTag Energy M63 1PN B      |
| A9MEM1540                   | 3P      | Top or bottom | PowerTag Energy M63 3P         |
| A9MEM1543                   |         |               | PowerTag Energy M63 3P 230V LL |
| A9MEM1541                   | 3P+N    | Top           | PowerTag Energy M63 3PN T      |
| A9MEM1542                   |         | Bottom        | PowerTag Energy M63 3PN B      |

Designed to fit the following devices: iC60, Reflex iC60, DT60, iID.

Check the Concentrators /Gateways compatibility and the list of Schneider Electric compatible devices with the Selection Guide pages 95 to 105.

## PowerTag Energy PhaseNeutral 63 A Commercial reference numbers


PowerTag Energy for Acti9 and Multi9 **PhaseNeutral** offers: «Single-terminal» circuit breakers, RCDs and switches at **pitch of 9 mm between phase and neutral**, rating less than or equal to 63 A.



| Commercial reference number | Type      | Mounting | Description                         |
|-----------------------------|-----------|----------|-------------------------------------|
| A9MEM1561                   | 1P+N      | Top      | PowerTag Energy P63 1PN T           |
| A9MEM1562                   | 1P+N      | Bottom   | PowerTag Energy P63 1PN B           |
| A9MEM1563                   | 1P+N RCBO | Bottom   | PowerTag Energy P63 1PN B RCBO 18mm |
| A9MEM1571                   | 3P+N      | Top      | PowerTag Energy P63 3PN T           |
| A9MEM1572                   | 3P+N      | Bottom   | PowerTag Energy P63 3PN B           |

Designed to fit the following devices: DT40, iDPN, C40, i DPN Vigi.

Check the Concentrators /Gateways compatibility and the list of Schneider Electric compatible devices with the Selection Guide pages 95 to 105.

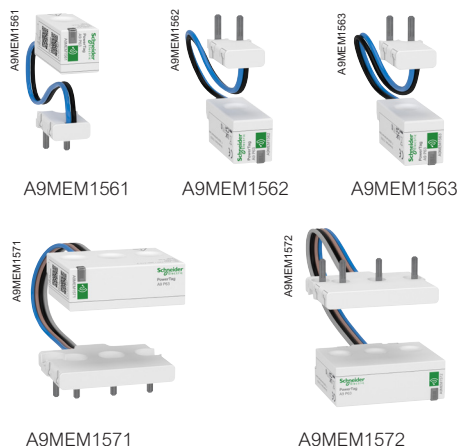

## PowerTag Energy Flex 63 A Commercial reference numbers


PowerTag Energy **Flex** for other devices and specific installations, rating less than or equal to 63 A.



| Commercial reference number | Type | Mounting      | Description                      |
|-----------------------------|------|---------------|----------------------------------|
| A9MEM1560                   | 1P+N | Top or bottom | PowerTag Energy F63 1PN          |
| A9MEM1564                   | 1P+N | Top or bottom | PowerTag Energy F63 1PN 110V     |
| A9MEM1573                   | 3P   | Top or bottom | PowerTag Energy F63 3P           |
| A9MEM1570                   | 3P+N | Top or bottom | PowerTag Energy F63 3PN          |
| A9MEM1574                   | 3P+N | Top or bottom | PowerTag Energy F63 3PN 127/220V |

Designed to fit the following devices: Vigi iDT40, Vigi iC40, Vigi iC60, iC60 double terminal, iID double terminal.


Check the Concentrators /Gateways compatibility and the list of Schneider Electric compatible devices with the Selection Guide pages 95 to 105.

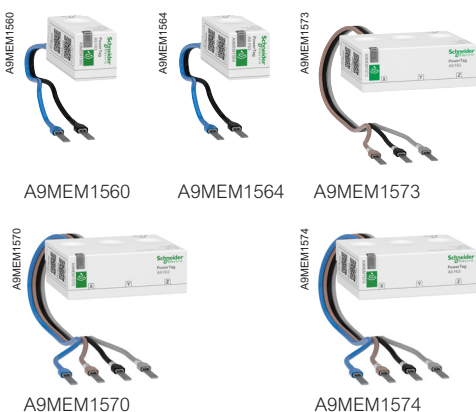





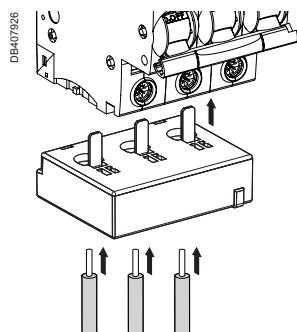

Contact your Schneider Electric representative for complete ordering information.




## PowerTag Energy Monoconnect 63 A connection



| Stripping length | Copper cables   |   |   |   |   |   |
|------------------|---|---|---|---|---|---|
|                  | Rigid   |   | Flexible  |   | Flexible with ferrule   |   |
|                  | <br>DB122945 | <br>DB112804 | <br>DB123553 | <br>DB112805 | <br>DB123554 | <br>DB124008 |
| 18 mm            | 1.5 to 16 mm <sup>2</sup><br>AWG: 16...6  | 2 x 1.5 to 2.5 mm <sup>2</sup><br>AWG: 16...14  | 1.5 to 16 mm <sup>2</sup><br>AWG: 16...6  | 2 x 1.5 to 2.5 mm <sup>2</sup><br>AWG: 16...14  | 1.5 to 16 mm <sup>2</sup><br>AWG: 16...6  | 2 x 1.5 to 2.5 mm <sup>2</sup><br>AWG: 16...14  |

Mounting with 18 mm ferrule recommended.

### PowerTag Energy Monoconnect 63 A dimensions (mm)

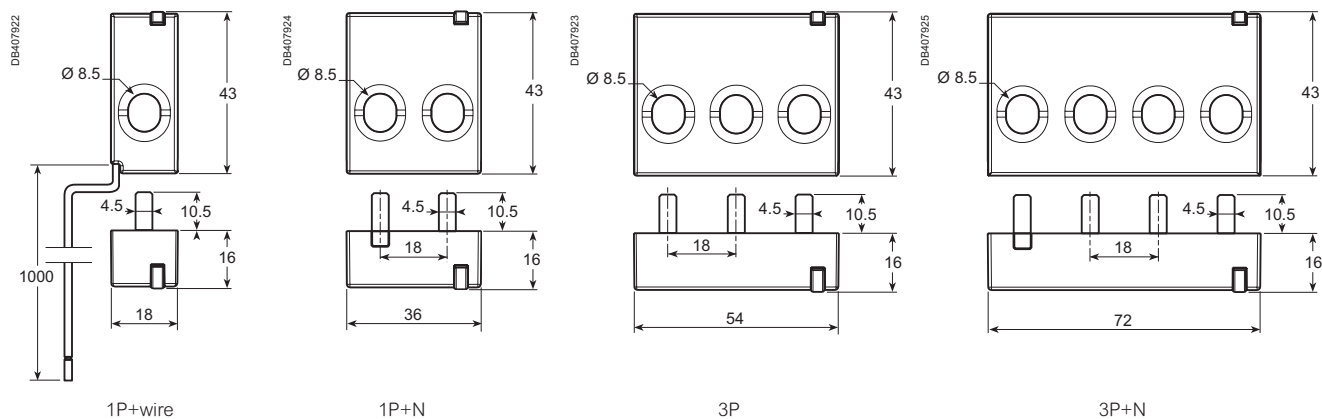


## PowerTag Energy Monoconnect 63 A weight







| Type    | Weight (g) |
|---------|------------|
| 1P+wire | 16.4       |
| 1P+N    | 17.5       |
| 3P      | 28         |
| 3P+N    | 35         |

Please refer to PowerTag Energy 63 A Installation Sheet for accurate and complete information on the installation of this product.

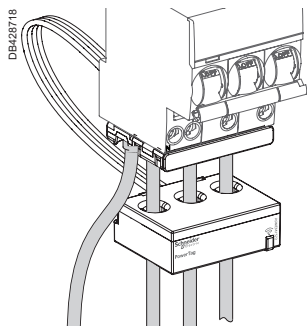


## PowerTag Energy PhaseNeutral 63 A connection



| Copper cables  |  |  |  |  |  |
|--|--|--|--|--|--|
| Rigid  |  | Flexible   |  | Flexible with ferrule  |  |
| <br>DB 122945 | <br>DB 112804 | <br>DB 123553 | <br>DB 112805 | <br>DB 123554 | <br>DB 123506 |
| 1.5 to 16 mm <sup>2</sup><br>AWG: 16...6   | 2 x 1.5 to 2.5 mm <sup>2</sup><br>AWG: 16...14   | 1.5 to 16 mm <sup>2</sup><br>AWG: 16...6   | 2 x 1.5 to 2.5 mm <sup>2</sup><br>AWG: 16...14   | 1.5 to 16 mm <sup>2</sup><br>AWG: 16...6   | 2 x 1.5 to 2.5 mm <sup>2</sup><br>AWG: 16...14   |

Stripping length: respect the stripping length stated on the device the PowerTag Energy is associated with.

### PowerTag Energy PhaseNeutral 63 A dimensions (mm)

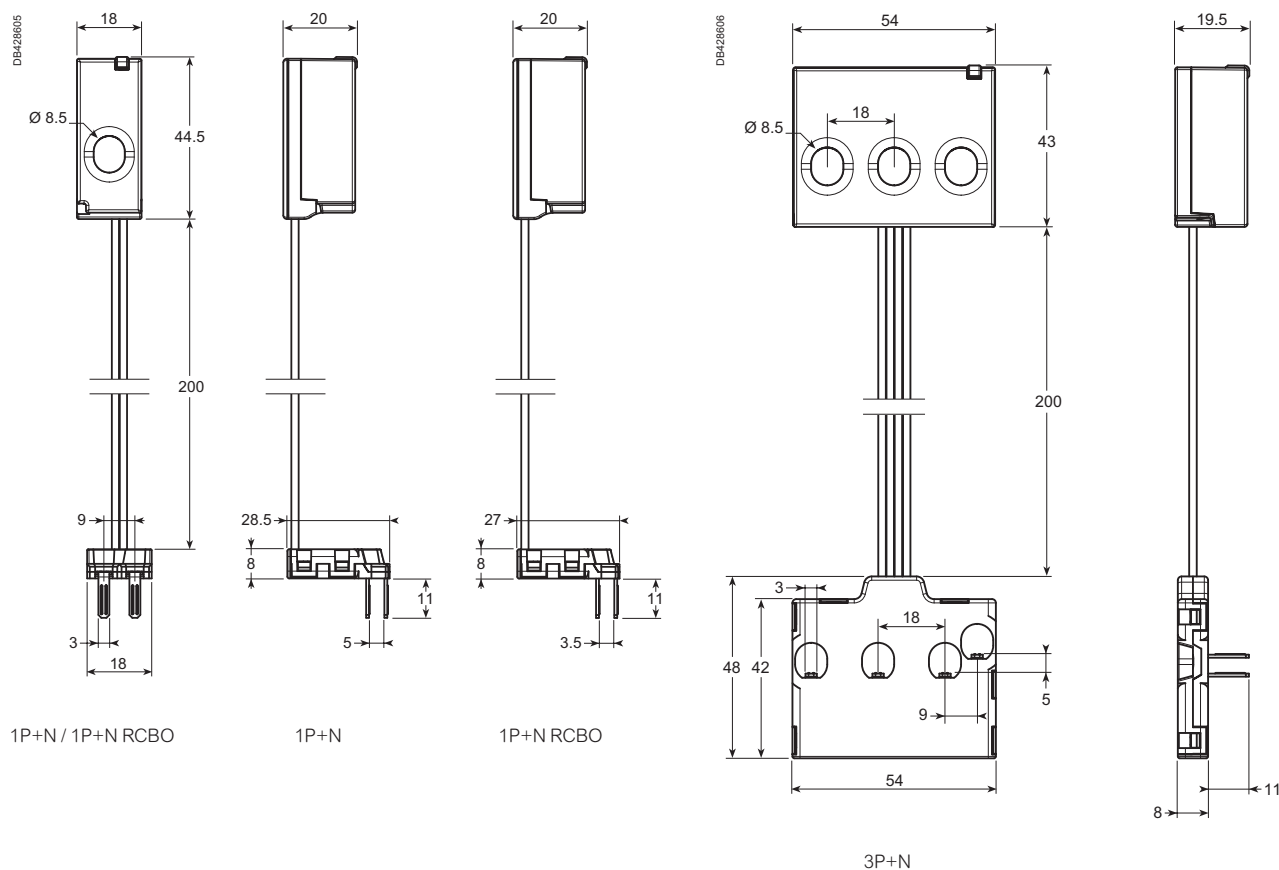


## PowerTag Energy PhaseNeutral 63 A weight







| Type | Weight (g) |
|------|------------|
| 1P+N | 18         |
| 3P+N | 48         |

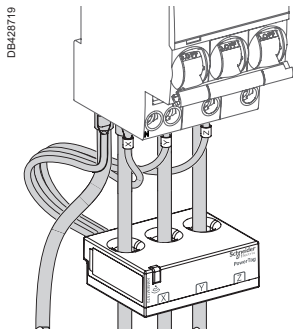Please refer to PowerTag Energy 63 A Installation Sheet for accurate and complete information on the installation of this product.




PowerTag Energy Flex 63 A connection



| Copper cables   |   |   |   |   |   |
|---|---|---|---|---|---|
| Rigid   |   | Flexible  |   | Flexible with ferrule   |   |
|  |  |  |  |  |  |
| 1.5 to 16 mm <sup>2</sup><br>AWG: 16...6  | 2 x 1.5 to 2.5 mm <sup>2</sup><br>AWG: 16...14                                    | 1.5 to 16 mm <sup>2</sup><br>AWG: 16...6  | 2 x 1.5 to 2.5 mm <sup>2</sup><br>AWG: 16...14                                      | 1.5 to 16 mm <sup>2</sup><br>AWG: 16...6  | 2 x 1.5 to 2.5 mm <sup>2</sup><br>AWG: 16...14                                      |

Stripping length: respect the stripping length stated on the device the PowerTag Energy is associated with.

PowerTag Energy Flex 63 A dimensions (mm)

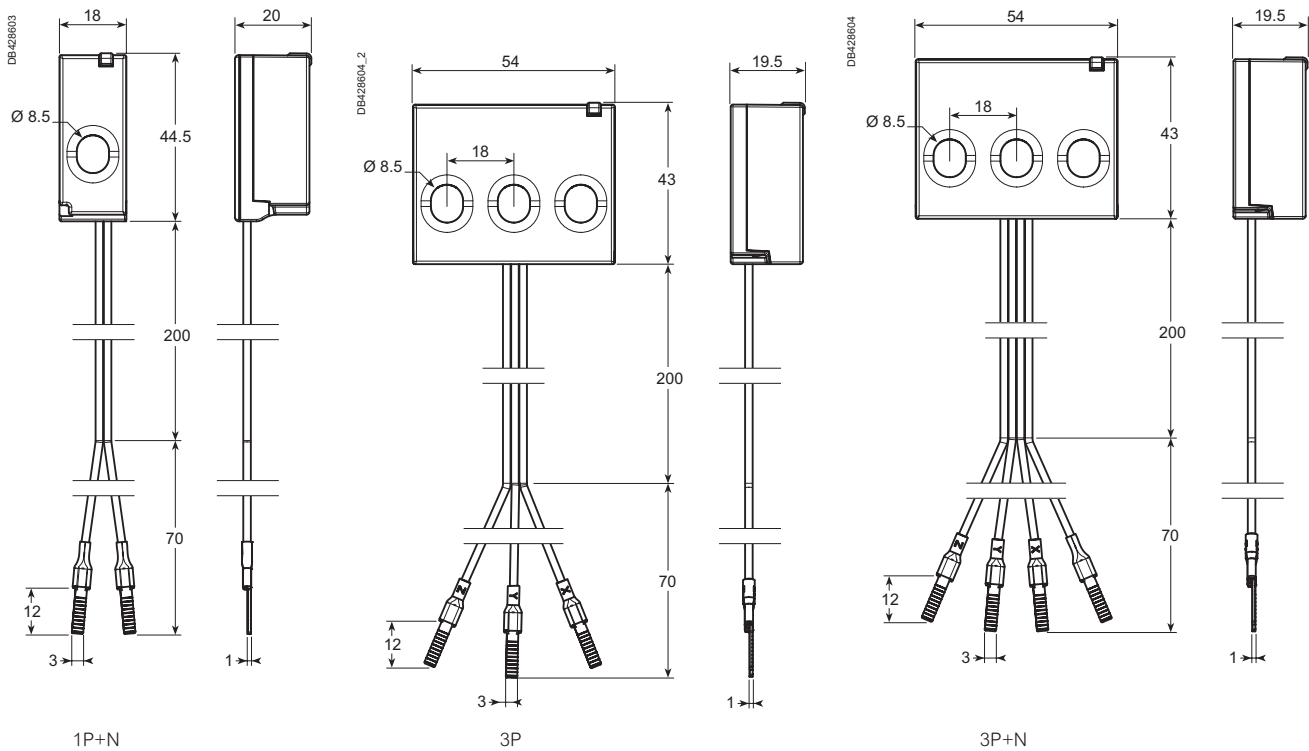

PowerTag Energy Flex 63 A weight

| Type | Weight (g) |
|------|------------|
| 1P+N | 16         |
| 3P   | 38         |
| 3P+N | 40         |

Please refer to PowerTag Energy 63 A Installation Sheet for accurate and complete information on the installation of this product.



# PowerLogic™

## PowerTag Energy 63 A Resi9

### IEC 61557-12 PMD-I/DD/K55/1

As per the above standard:

With its compact design and innovative concept, PowerTag Energy 63 A Resi9 fits directly on the Resi9 protective device and as a result has no impact on DIN rail occupancy and switchboard size.

It is therefore well adapted to be mounted from head of group down to final circuits.


Since voltage and current are measured directly at the same point on the circuit to be monitored, it provides accurate measurement and relevant information such as voltage loss.

PowerTag Energy 63 A Resi9 is dedicated to the Resi9 range of devices and compatible with Wiser concentrators/gateways.

### Main characteristics

PowerTag Energy measures the following values in accordance with the IEC 61557-12 standard PMD-I/DD/K55/1:

- Energy:
  - Active energy (kWh): total and partial, delivered and received.
- Voltage loss alarms:
  - PowerTag Energy sends a “voltage loss” alarm before being de-energized.
  - At “voltage loss”, PowerTag Energy adds an overload alarm if the current is higher than the rated current of the associated protective device.

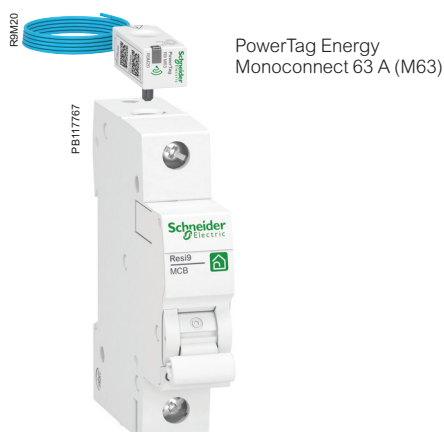




# PowerLogic™ PowerTag Energy 63 A Resi9

## Installation

Some references of PowerTag Energy 63 A Resi9 (Monoconnect) exist in Top or Bottom version. This is linked to the position of the neutral of the PowerTag Energy.

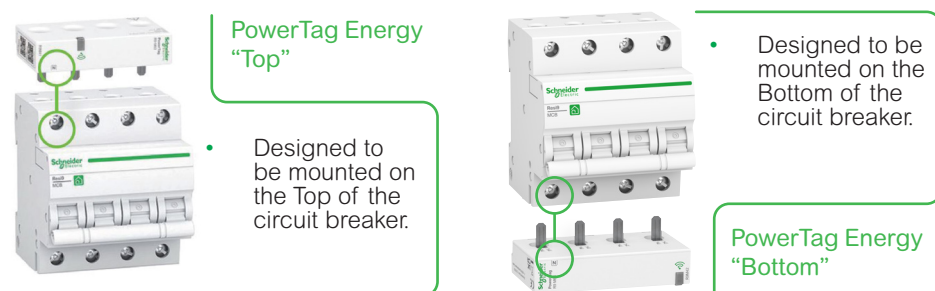

### Note:

- Some PowerTag Energy 63 A Resi9 can be installed either on the TOP or on the BOTTOM of the protective devices.
- Check the possible mounting position as indicated in the “Catalog numbers” chapter.
- In association with a contactor, a Variable Speed Drive or a motor starter: PowerTag Energy can ONLY be installed UPSTREAM these devices.

## Number of poles

Choose the PowerTag Energy according to the number of poles of the protective device: one PowerTag Energy per protective device.

Ex.: 3 pole PowerTag Energy 63 A Resi9 for a 3 pole CB.






# PowerLogic™ PowerTag Energy 63 A Resi9

## Technical specifications

| Main characteristics                   |             |   |                  |                                       |
|--|-------------|---|------------------|---------------------------------------|
| Rated voltage                          | 1P+N / 1P+W | Un  | Phase-to-neutral | 200... 240 V AC ± 20 %                |
|  | 3P          | Un  | Phase-to-phase   | 380... 415 V AC ± 20 %                |
|  | 3P+N        | Un  | Phase-to-neutral | 220... 240 V AC ± 20 %                |
|  |             |   | Phase-to-phase   | 380... 415 V AC ± 20 %                |
|  | R9M43       | Un  | Phase-to-phase   | 200... 240 V AC ± 20 %                |
| Frequency                              |             |   |                  | 50/60 Hz                              |
| Maximum current                        |             | Imax  |                  | 63 A                                  |
| Basic current                          |             | Ib  |                  | 10 A                                  |
| Saturation current                     |             |   |                  | 130 A                                 |
| Maximum consumption                    |             | 1P+N  |                  | ≤ 1 VA                                |
|  |             | 3P/3P+N   |                  | ≤ 2 VA                                |
| Starting current                       |             | Ist   |                  | 40 mA                                 |
| Additional characteristics             |             |   |                  |                                       |
| Operating temperature                  |             |   |                  | -25°C to +60°C                        |
| Storage temperature                    |             |   |                  | -40°C to +85°C                        |
| Overvoltage category                   |             | As per IEC 61010-1  |                  | Cat. III                              |
| Measuring category                     |             | As per IEC 61010-2-030                                    |                  | Cat. III                              |
| Pollution degree                       |             |   |                  | 3                                     |
| Altitude                               |             |   |                  | ≤ 2000 m                              |
| Degree of protection                   |             | Device only   |                  | IP20                                  |
|  |             | IK  |                  | 05                                    |
| Radio-frequency communication          |             |   |                  |                                       |
| ISM band 2.4 GHz                       |             |   |                  | 2.4 GHz to 2.4835 GHz                 |
| Channels                               |             | As per IEEE 802.15.4                                      |                  | 11 to 26                              |
| Isotropic Radiated Power               |             | Equivalent (EIRP)   |                  | 0 dBm                                 |
| Maximum transmission time              |             |   |                  | < 5 ms                                |
| Channel occupancy                      |             | Messages sent every                                       |                  | 5 seconds minimum                     |
| Characteristics of measuring functions |             |   |                  |                                       |
| Function                               | Symbol      | Performance category as per IEC 61557-12 (PMD-I/DD/K55/1) |                  | Device measuring range                |
|  |             | Class   |                  |                                       |
| Active energy (delivered and received) | Ea          | 1   |                  | Total and partial 0 to 99999999.9 kWh |
| Current                                | I           | 1   |                  | 40 mA to 63 A                         |
| Voltage                                | U           | 0.5   |                  | Un ± 20 %                             |



# PowerLogic™ PowerTag Energy 63 A Resi9

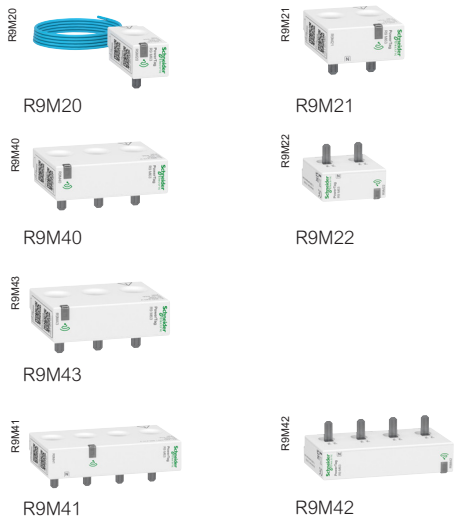


## PowerTag Energy Monoconnect 63 A Resi9 Commercial reference numbers

PowerTag Energy for Resi9 Monoconnect offers: «Single-terminal» circuit breakers, RCDs and switches with 18 mm pitch between phase and neutral, rating less than or equal to 63 A.

| Commercial reference number | Type    | Mounting      | Description                       |
|-----------------------------|---------|---------------|-----------------------------------|
| R9M20                       | 1P+wire | Top or bottom | PowerTag Energy R9 M63 1PW        |
| R9M21                       | 1P+N    | Top           | PowerTag Energy R9 M63 1PN T      |
| R9M22                       |         | Bottom        | PowerTag Energy R9 M63 1PN B      |
| R9M40                       | 3P      | Top or bottom | PowerTag Energy R9 M63 3P         |
| R9M43                       |         |               | PowerTag Energy R9 M63 3P 230V LL |
| R9M41                       | 3P+N    | Top           | PowerTag Energy R9 M63 3PN T      |
| R9M42                       |         | Bottom        | PowerTag Energy R9 M63 3PN B      |

Refer to the Resi9 catalog in your country to select the right PowerTag Energy model to fit on the Resi9 protective device you want to equipped.

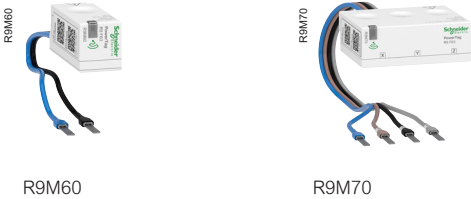

## PowerTag Energy Flex 63 A Resi9 Commercial reference numbers

PowerTag Energy Flex for other Resi9 devices and specific installations, rating less than or equal to 63 A.

| Commercial reference number | Type | Mounting      | Description                |
|-----------------------------|------|---------------|----------------------------|
| R9M60                       | 1P+N | Top or bottom | PowerTag Energy R9 F63 1PN |
| R9M70                       | 3P+N | Top or bottom | PowerTag Energy R9 F63 3PN |


Refer to the Resi9 catalog in your country to select the right PowerTag Energy model to fit on the Resi9 protective device you want to equipped.

To allow PowerTag Energy Resi9 F63 to adapt to different types of terminals, the voltage tap lugs can be replaced with other end-pieces or lugs for AWG22/0.33 mm2 wires.




# PowerLogic™ PowerTag Energy 63 A Resi9

## PowerTag Energy R9 M63 connection

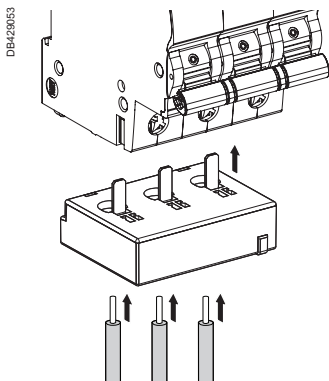

Stripping length : 18 mm

## PowerTag Energy R9 M63 dimensions (mm)

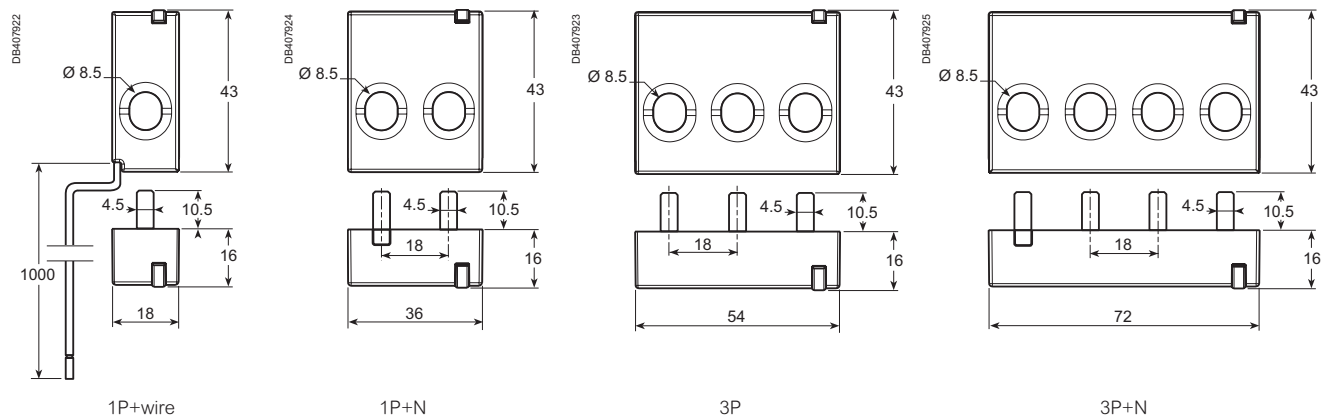


## PowerTag Energy R9 M63 weight

| Type    | Weight (g) |
|---------|------------|
| 1P+wire | 16.4       |
| 1P+N    | 17.5       |
| 3P      | 28         |
| 3P+N    | 35         |




# PowerLogic™ PowerTag Energy 63 A Resi9

## PowerTag Energy R9 F63 connection

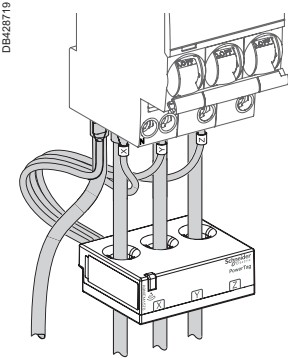


Stripping length: respect the stripping length stated on the device the PowerTag Energy is associated with.

## PowerTag Energy R9 F63 dimensions (mm)

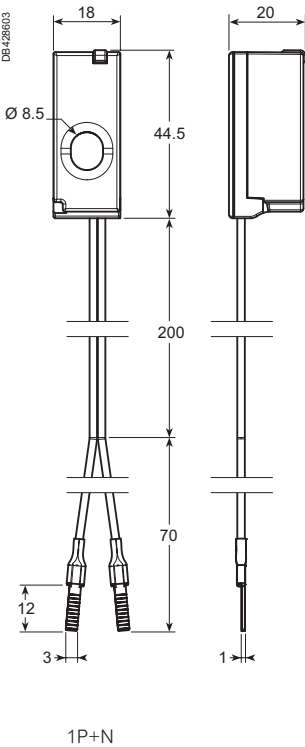

1P+N

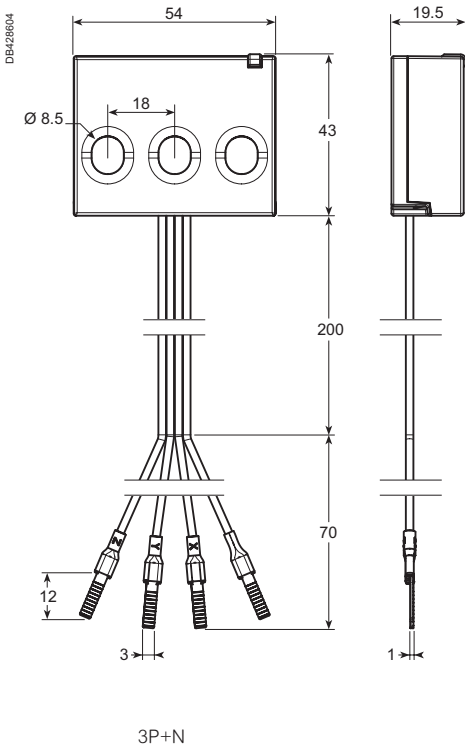

3P+N

## PowerTag Energy R9 F63 weight

| Type | Weight (g) |
|------|------------|
| 1P+N | 16         |
| 3P   | 40         |

Please refer to PowerTag Energy 63 A Resi9 Installation Sheet for accurate and complete information on the installation of this product.



# PowerLogic™

## PowerTag Energy Flex 160 A

IEC 61557-12 PMD-II/DD/K70/1

As per the above standard:

With its flex design this PowerTag Energy can be used on many products or group of loads up to 160 A on 3P or 3P+N networks. Its removable spring connector for voltage picking facilitates its installation, and shapes for brackets allows to mount and maintain it where needed in a panel.

### Main characteristics

PowerTag Energy Flex 160 A measures the following values in accordance with the IEC 61557-12 standard PMD-II/DD/K70/1:

- Energy (4 quadrants):
  - Active energy (kWh): total and partial, delivered and received.
  - Active energy per phase (kWh): total and partial, delivered and received.
  - Reactive energy (kVARh): total and partial, delivered and received.
  - Reactive energy per phase (kVARh): total and partial, delivered and received.
  - Apparent energy (kVAh): total and partial.
  - Apparent energy per phase (kVAh): total and partial.
- Real-time measurement values:
  - Voltages (V): phase-to-phase (U12, U23, U31) and phase-to-neutral (V1N, V2N, V3N).
  - Currents (A): per phase (I1, I2, I3), calculated neutral current when connected (IN) .
  - Power:
    - Active power (W): total and per phase.
    - Reactive power (VAR): total and per phase.
    - Apparent power (VA): total and per phase.
  - Frequency (Hz).
  - Power factor: total and per phase.
- Voltage loss alarms:
  - PowerTag Energy Flex sensor sends a “voltage loss” alarm and the current-per-phase value before being de-energized.
  - At “voltage loss”, PowerTag Energy Flex adds an overload alarm if the current is higher than the rated current of the associated protective device

Note: Functions listed above depends on Concentrator/Gateway.



PowerTag Energy Flex 160 A



# PowerLogic™ PowerTag Energy Flex 160 A

## Installation


PowerTag Energy Flex 160 A can be installed in a panel directly on cables or busbars, associated to a product or not. Voltage pickings removable spring terminal has to be wired by 1 copper wire per phase with following characteristics:

### Wire range

| Solid                     | Stranded                  | Stranded with terminal ends |
|---------------------------|---------------------------|-----------------------------|
| 0.2...1.5 mm <sup>2</sup> | 0.2...2.5 mm <sup>2</sup> | 0.25...1.5 mm <sup>2</sup>  |
| 24...16 AWG               | 24...14 AWG               | 24...16 AWG                 |

Neutral picking shall be connected to have phase-to-neutral voltages, energy per phase and power per phase provided.

PowerTag Energy Flex 160 A is mainly advised for ComPact NSXm, ComPact INS160, Acti9 NG125, Acti9 C120, PowerPact B, TeSys GV4, and all other devices with a rating between 63 A and 160 A.

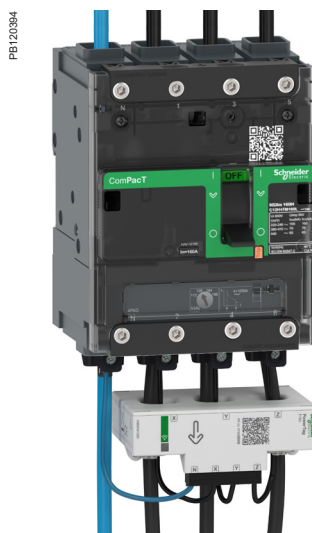



# PowerLogic™ PowerTag Energy Flex 160 A

## Technical specifications

| Main characteristics (as per IEC 61557-12)                         |                  |  |  |
|--|------------------|--|--|
| Rated voltage  | Un               | Phase-to-neutral   | 100...277 V AC ± 20 %                        |
|  |                  | Phase-to-phase   | 173...480 V AC ± 20 %                        |
| Frequency  |                  |  | 50/60 Hz                                     |
| Maximum current  | I <sub>max</sub> |  | 160 A  |
| Maximum operating current  |                  |  | 1.2 x I <sub>max</sub>                       |
| Saturation current   |                  |  | 2 x I <sub>max</sub>                         |
| Maximum consumption  |                  |  | 3 VA   |
| Starting current   | I <sub>st</sub>  |  | 100 mA                                       |
| Basic current  | I <sub>b</sub>   |  | 25 A   |
| Additional characteristic  |                  |  |  |
| Operating temperature  |                  |  | -25 °C to +70 °C                             |
| Storage temperature  |                  |  | -40 °C to +85 °C                             |
| Overvoltage category   |                  | As per IEC 61010-1   | Cat. IV                                      |
| Measuring category   |                  | As per IEC 61010-2-030                                     | Cat. IV                                      |
| Pollution degree   |                  |  | 3  |
| Altitude   |                  |  | Up to 2000 m without derating <sup>(1)</sup> |
| Degree of protection device  |                  |  | IP20<br>IK05                                 |
| Radio-frequency communication                                      |                  |  |  |
| ISM band 2.4 GHz   |                  |  | 2.4 GHz to 2.4835 GHz                        |
| Channels   |                  | As per IEEE 802.15.4                                       | 11 to 26                                     |
| Isotropic Radiated Power   |                  | Equivalent (EIRP)  | 0 dBm  |
| Maximum transmission time  |                  |  | < 5 ms                                       |
| Channel occupancy  |                  | For 1 device   | messages sent every 5 seconds                |
| Characteristics of measuring functions                             |                  |  |  |
| Function   | Symbol           | Performance category as per IEC 61557-12 (PMD-II/DD/K70/1) | Device measuring range                       |
|  |                  | Class  |  |
| Total active power (Active power per phase)                        | P                | 1  | 24 W (8 W) to 192 kW                         |
| Total reactive power (Reactive power per phase)                    | Q <sub>A</sub>   | 2  | 30 VAR (10 VAR) to 192 kVAR                  |
| Total apparent power (Apparent power per phase)                    | S <sub>A</sub>   | 2  | 38 VA (13 VA) to 192 kVA                     |
| Active Energy: per phase, total, partial, delivered and received   | E <sub>a</sub>   | 1  | 0 to 281.10 <sup>9</sup> kWh                 |
| Reactive energy: per phase, total, partial, delivered and received | E <sub>rA</sub>  | 2  | 0 to 281.10 <sup>9</sup> kVARh               |
| Apparent energy: per phase, total, partial                         | E <sub>apA</sub> | 2  | 0 to 281.10 <sup>9</sup> kVAh                |
| Frequency  | f                | 0.5  | 45 to 65 Hz                                  |
| Phase current  | I                | 1  | 100 mA to 320 A                              |
| Neutral current  | I <sub>NC</sub>  | 2  |  |
| Voltages (Line to Line)  | U                | 0.5  | 138 to 576 V AC                              |
| Power factor (per phase, total)                                    | PF <sub>A</sub>  | 1  | -1 to 1                                      |



<sup>(1)</sup> Above 2000 m, please consult Schneider Electric.



Check the Concentrators /Gateways compatibility and the list of Schneider Electric compatible devices with the Selection Guide pages 95 to 105.

Contact your Schneider Electric representative for complete ordering information.

## DB436016

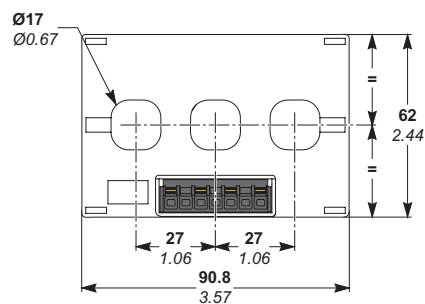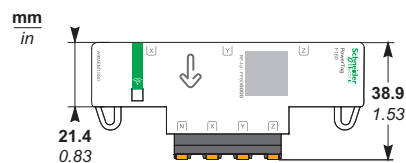

| Type         | Weight (g) |
|--------------|------------|
| F160 3P/3P+N | 100        |

Please refer to PowerTag Energy Flex 160 A Installation Sheet for accurate and complete information on the installation of this product.



# PowerLogic™ PowerTag Energy Monoconnect 250 A & 630 A

IEC 61557-12 PMD-II/DD/K70/1

As per the above standard:

PowerTag Energy M250/M630 is designed for Molded Case Circuit Breakers and Switches (ComPact, EasyPact CVS and TeSys) for 3P and 3P+N electrical networks. This PowerTag Energy is mounted directly on the bottom side of the circuit breaker or the Vigi add-on if any. Thanks to its integrated design, it does not require any specific wiring, and is compatible with the same connection accessories than the device it is mounted on.

## Main characteristics

PowerTag Energy M250/M630 measures the following values in accordance with the IEC 61557-12 standard PMD-II/DD/K70/1:

- Energy (4 quadrants):
  - Active energy (kWh): total and partial, delivered and received.
  - Active energy per phase (kWh): total.
  - Reactive energy (kVARh): partial, delivered and received.
- Real-time measurement values:
  - Voltages (V): phase-to-phase (U12, U23, U31) and phase-to-neutral (V1N, V2N, V3N).
  - Currents (A): per phase (I1, I2, I3).
  - Power:
    - Active power (W): total and per phase.
    - Reactive power (VAR): total.
    - Apparent power (VA): total.
  - Frequency (Hz).
  - Power factor.
- Voltage loss alarms:
  - PowerTag Energy sends a “voltage loss” alarm and the current-per-phase value before being de-energized.
  - At “voltage loss”, PowerTag Energy adds an overload alarm if the current is higher than the rated current of the associated protective device.

Note: Functions listed above depends on Concentrator/Gateway.



PowerTag Energy Monoconnect 250 A




# PowerLogic™ PowerTag Energy Monoconnect 250 A & 630 A

## Installation

The module is self-powered and is installed for fixed devices directly on the bottom side of the circuit breaker or Vigi add-on terminals. For plug-in devices, it has to be installed on the base itself, top or bottom.

PowerTag Energy M250/M630 3P has to be used with 3P devices, and an external neutral voltage tap is provided in case of the installation has a neutral to provide phase-to-neutral voltages, active energy per phase and power per phase.

PowerTag Energy M250/M630 3P+N has to be used with 4P devices and with ComPact INS/INV 3P/4P switches

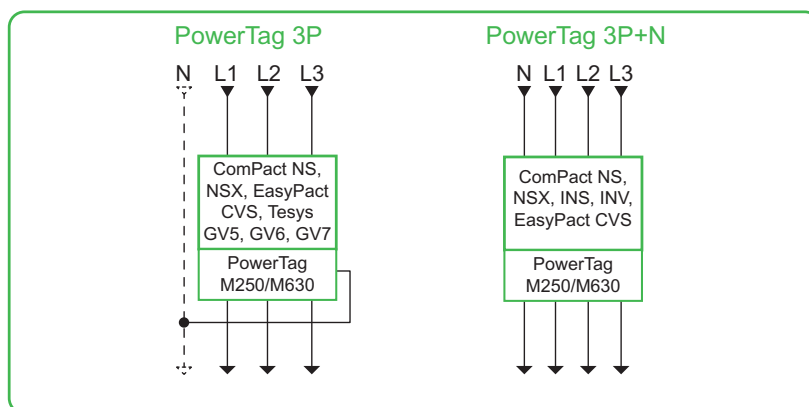

PowerTag M250/M630 modules are compatible with ComPact NSX100/160/250, ComPact NSX400/630, ComPact INS250-100A to 250A, ComPact INS320/400/500/630, ComPact INV100/160/200/250, ComPact INV320/400/500/630, ComPact NS100/160/250, ComPact NS400/630, EasyPact CVS 100-250, EasyPact CVS 400-630, TeSys GV5, TeSys GV6 and TeSys GV7.

**Important notice :** A derating coefficient may apply for the circuit-breaker on which the PowerTag is mounted on. Refer to the circuit breaker catalogue for derating coefficient.

In case of retrofit, following points have to be checked:

- Clearance to be able to add PowerTag Energy module and to respect bending radius of cables.
- Condition of power connectors: to be replaced if damaged.
- Tightening torques depending of the connector used.





# PowerLogic™ PowerTag Energy Monoconnect 250 A & 630 A

## Technical specifications

| Main characteristics                        |                  |  |   |
|---|------------------|--|---|
| Rated voltage                               | Un               | Phase-to-neutral   | 230 VAC ± 20 %                                  |
|   |                  | Phase-to-phase   | 400 VAC ± 20 %                                  |
| Frequency                                   |                  |  | 50/60 Hz  |
| Maximum current                             | I <sub>max</sub> |  | 250 A / 630 A                                   |
| Maximum operating current                   |                  |  | 1.2 x I <sub>max</sub>                          |
| Saturation current                          |                  |  | 2 x I <sub>max</sub>                            |
| Maximum consumption                         |                  |  | 3.7 VA  |
| Starting current                            | I <sub>st</sub>  |  | 160 mA / 400 mA                                 |
| Basic current                               | I <sub>b</sub>   |  | 40 A / 100 A                                    |
| Additional characteristic                   |                  |  |   |
| Operating temperature                       |                  |  | -25 °C to +70 °C                                |
| Storage temperature                         |                  |  | -50 °C to +85 °C                                |
| Overvoltage category                        |                  | As per IEC 61010-1   | Cat. IV   |
| Measuring category                          |                  | As per IEC 61010-2-030                                     | Cat. III  |
| Pollution degree                            |                  |  | 3   |
| Altitude                                    |                  |  | Up to 2000 m without derating <sup>(1)</sup>    |
| Degree of protection device                 |                  |  | IP20  |
|   |                  |  | IK07  |
| Radio-frequency communication               |                  |  |   |
| ISM band 2.4 GHz                            |                  |  | 2.4 GHz to 2.4835 GHz                           |
| Channels                                    |                  | As per IEEE 802.15.4                                       | 11 to 26  |
| Isotropic Radiated Power                    |                  | Equivalent (EIRP)  | 0 dBm   |
| Maximum transmission time                   |                  |  | < 5 ms  |
| Channel occupancy                           |                  | For 1 device   | messages sent every 5 seconds                   |
| Characteristics of measuring functions      |                  |  |   |
| Function                                    | Symbol           | Performance category as per IEC 61557-12 (PMD-II/DD/K70/1) | Device measuring range (250 A / 630 A)          |
|   |                  | Class  |   |
| Total active power (Active power per phase) | P                | 1  | 88 W (29 W) to 416 kW / 222 W (74 W) to 1048 kW |
| Total reactive power                        | Q <sub>A</sub>   | 2  | 88 VAR to 416 kVAR / 221 VAR to 1048 kVAR       |
| Total apparent power                        | S <sub>A</sub>   | 2  | 88 VA to 416 kVA / 221 VA to 1048 kVA           |
| Active Energy: per phase, total, partial    | E <sub>a</sub>   | 1  | 0 to 281.10 <sup>9</sup> kWh                    |
| Partial Reactive Energy                     | E <sub>rA</sub>  | 2  | 0 to 281.10 <sup>9</sup> kVARh                  |
| Phase current                               | I                | 1  | 160 mA to 500 A / 400 mA to 1260 A              |
| Voltages (Line to Line)                     | U                | 0.5  | 320 to 480 VAC                                  |
| Power factor                                | PF <sub>A</sub>  | 1  | -1 to 1   |

<sup>(1)</sup> Above 2000 m, please consult us.



# PowerLogic™ PowerTag Energy Monoconnect 250 A & 630 A



LV434020



LV434021



LV434022



LV434023




## PowerTag Energy Monoconnect 250 A & 630 A Commercial reference numbers

| Commercial reference number | Type      | Description                | Connection adapter for mounting on plug-in base only |
|-----------------------------|-----------|----------------------------|--|
| LV434020                    | M250 3P   | PowerTag Energy 250 A 3P   | LV429306   |
| LV434021                    | M250 3P+N | PowerTag Energy 250 A 3P+N | LV429307   |
| LV434022 <sup>(1)</sup>     | M630 3P   | PowerTag Energy 630 A 3P   | LV432584   |
| LV434023 <sup>(1)</sup>     | M630 3P+N | PowerTag Energy 630 A 3P+N | LV432585   |

Check the Concentrators /Gateways compatibility and the list of Schneider Electric compatible devices with the Selection Guide pages 95 to 105.

Contact your Schneider Electric representative for complete ordering information.





(1) For plug-in devices only: when plate mounted, need to add an intercalary wedging plate under the PowerTag Energy module with following dimensions:

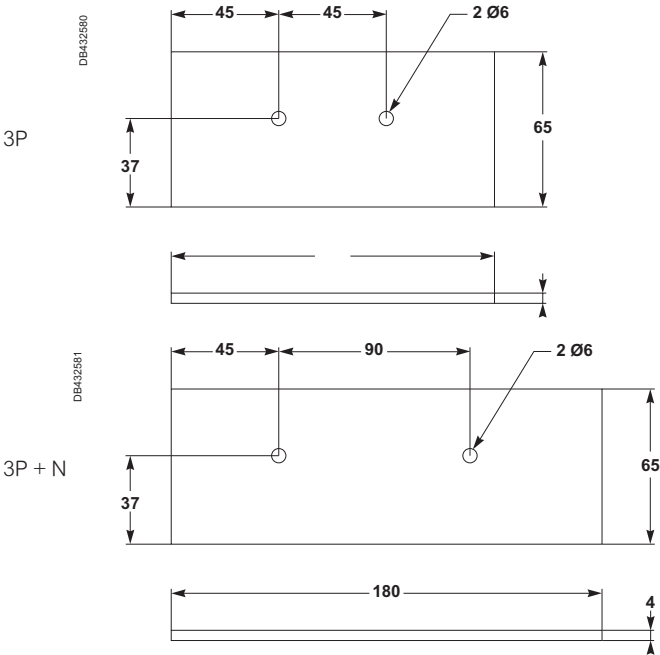



PowerLogic™ PowerTag Energy Monoconnect  
250 A & 630 A

NSX100-250 / NSX400-630 / CVS100-250 / CVS400-630

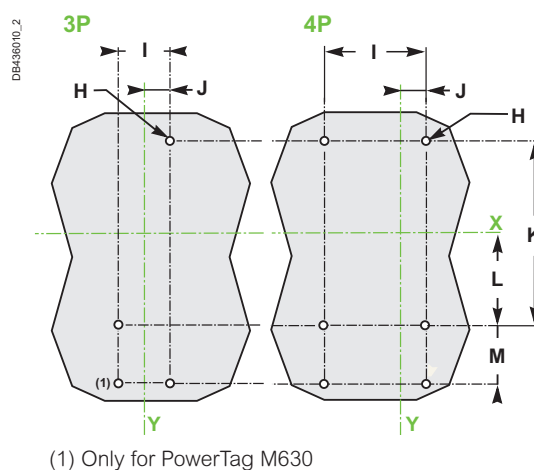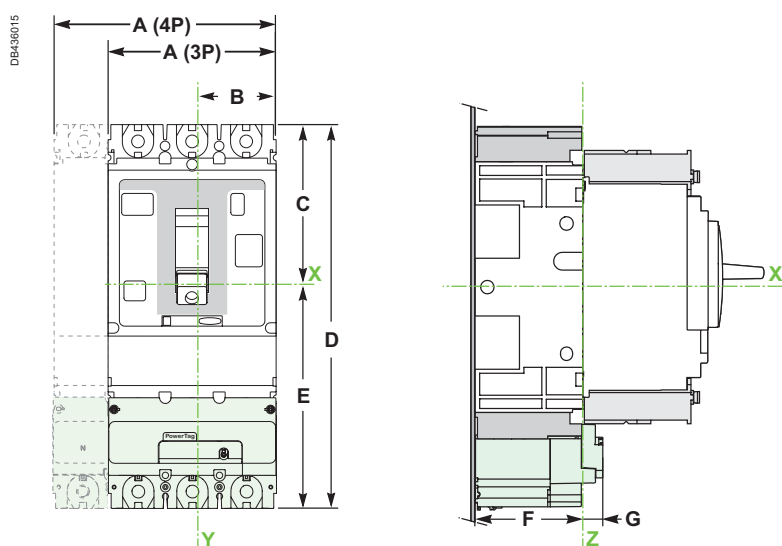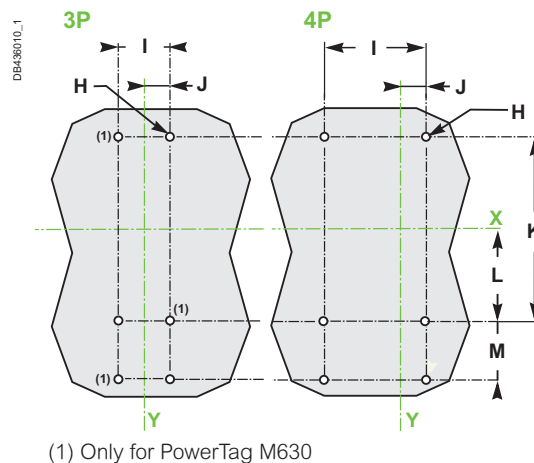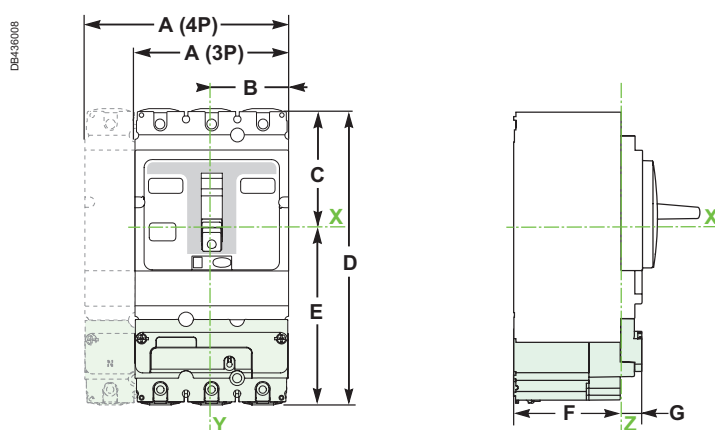

| mm<br>in                        | A           |             | B            | C             | D            | E             | F           | G          | H                |                 | I          |            | J            |              | K           | L            | M          |
|---------------------------------|-------------|-------------|--------------|---------------|--------------|---------------|-------------|------------|------------------|-----------------|------------|------------|--------------|--------------|-------------|--------------|------------|
|                                 | 3P          | 4P          |              |               |              |               |             |            | 3P               | 4P              | 3P         | 4P         | 3P           | 4P           |             |              |            |
| NSX100-250<br>CVS 100-250       | 105<br>4.13 | 140<br>5.51 | 52.5<br>2.06 | 80.5<br>3.17  | 201<br>7.91  | 120.5<br>4.74 | 72<br>2.83  | 14<br>0.55 | 3 Ø6<br>3 Ø0.23  | 6 Ø6<br>6 Ø0.23 | 35<br>1.34 | 70<br>2.75 | 17.5<br>0.68 | 17.5<br>0.68 | 125<br>4.92 | 62.5<br>2.46 | 40<br>1.57 |
| NSX400-630<br>CVS 400-630       | 140<br>5.51 | 185<br>7.28 | 70<br>2.75   | 127.5<br>5.02 | 320<br>12.59 | 192.5<br>7.57 | 96<br>3.78  | 14<br>0.55 | 6 Ø6<br>6 Ø0.23  | 6 Ø6<br>6 Ø0.23 | 45<br>1.77 | 90<br>3.5  | 22.5<br>0.88 | 22.5<br>0.88 | 200<br>7.87 | 100<br>3.93  | 65<br>2.56 |
| NSX100-250<br>with plug-in base | 105<br>4.13 | 140<br>5.51 | 52.5<br>2.06 | 109<br>4.29   | 260<br>10.23 | 151<br>5.94   | 72<br>2.83  | 14<br>0.55 | 3 Ø6<br>3 Ø0.23  | 6 Ø6<br>6 Ø0.23 | 35<br>1.34 | 70<br>2.75 | 17.5<br>0.68 | 17.5<br>0.68 | 155<br>6.10 | 77.5<br>3.05 | 55<br>2.16 |
| NSX400-630<br>with plug-in base | 140<br>5.51 | 185<br>7.28 | 70<br>2.75   | 153<br>6.02   | 406<br>15.98 | 253<br>9.96   | 100<br>3.93 | 14<br>0.55 | 4 Ø06<br>4 Ø0.23 | 6 Ø6<br>6 Ø0.23 | 45<br>1.77 | 90<br>3.5  | 22.5<br>0.88 | 22.5<br>0.88 | 250<br>9.84 | 125<br>4.92  | 83<br>3.26 |




Please refer to PowerTag Energy 250 A & 630 A Installation Sheet for accurate and complete information on the installation of this product.



# PowerLogic™ PowerTag Energy Monoconnect 250 A & 630 A

INS250 / INV100-250

INS320-630 / INV320-630

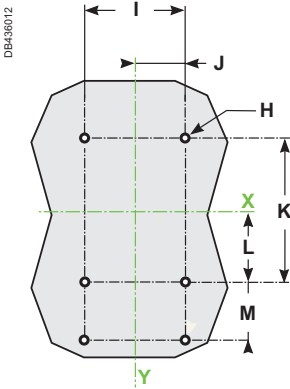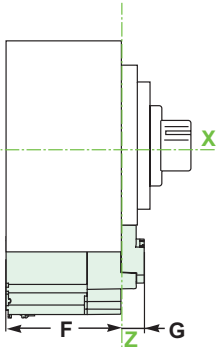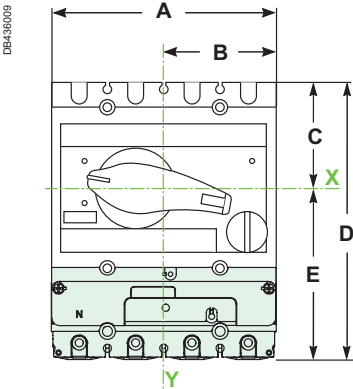

| mm<br>in                 | A           | B            | C             | D            | E             | F          | G          | H               | I          | J          | K           | L          | M          |
|--------------------------|-------------|--------------|---------------|--------------|---------------|------------|------------|-----------------|------------|------------|-------------|------------|------------|
| INS250<br>INV100-250     | 140<br>5.51 | 70<br>2.75   | 68<br>2.67    | 176<br>6.93  | 108<br>4.25   | 72<br>2.83 | 14<br>0.55 | 6 Ø6<br>6 Ø0.23 | 70<br>2.75 | 35<br>1.37 | 100<br>3.93 | 50<br>1.96 | 40<br>1.57 |
| INS320-630<br>INV320-630 | 185<br>7.28 | 92.5<br>3.64 | 102.5<br>4.03 | 270<br>10.62 | 167.5<br>6.59 | 96<br>3.78 | 14<br>0.55 | 6 Ø6<br>6 Ø0.23 | 90<br>3.5  | 45<br>1.77 | 150<br>5.9  | 75<br>2.95 | 65<br>2.56 |

## PowerTag Energy Monoconnect 250 A & 630 A weight

| Type      | Weight (g) |
|-----------|------------|
| M250 3P   | 250        |
| M250 3P+N | 300        |
| M630 3P   | 800        |
| M630 3P+N | 1000       |

Please refer to PowerTag Energy 250 A & 630 A Installation Sheet for accurate and complete information on the installation of this product.



# PowerLogic™ PowerTag Energy Rope 200 A to 2000 A

IEC 61557-12 PMD-II/DD/K70/1

As per the above standard:


With its flexible and openable current sensors, this PowerTag Energy Rope can be installed easily on busbars and cables without having to disconnect the conductors, and is suitable for 3P or 3P+N networks. Its removable spring connector for voltage picking facilitates its installation, and the module can be mounted on a DIN rail or maintained with brackets where needed in a panel.

## Main characteristics

PowerTag Energy Rope measures the following values in accordance with the IEC 61557-12 standard PMD-II/DD/K70/1:

- Energy (4 quadrants):
  - Active energy (kWh): total and partial, delivered and received.
  - Active energy per phase (kWh): total and partial, delivered and received.
  - Reactive energy (kVARh): total and partial, delivered and received.
  - Reactive energy per phase (kVARh): total and partial, delivered and received.
  - Apparent energy (kVAh): total and partial.
  - Apparent energy per phase (kVAh): total and partial.
- Real-time measurement values:
  - Voltages (V): phase-to-phase (U12, U23, U31) and phase-to-neutral (V1N, V2N, V3N).
  - Currents (A): per phase (I1, I2, I3), calculated neutral current when connected (IN).
  - Power:
    - Active power (W): total and per phase.
    - Reactive power (VAR): total and per phase.
    - Apparent power (VA): total and per phase.
  - Frequency (Hz).
  - Power factor: total and per phase.
- Voltage loss alarms:
  - PowerTag Energy Rope sensor sends a “voltage loss” alarm and the current-per-phase value before being de-energized.
  - At “voltage loss”, PowerTag Energy Rope adds an overload alarm if the current is higher than the rated current of the associated protective device.

Note: Functions listed above depends on Concentrator/Gateway.

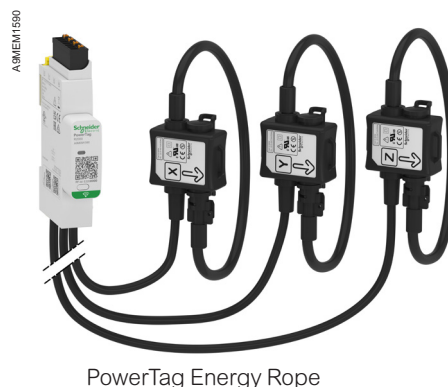

PowerTag Energy Rope



# PowerLogic™ PowerTag Energy Rope

## Installation


PowerTag Energy Rope 18 mm module can be mounted on DIN rail or fastened with brackets anywhere in a panel. Then its openable current sensors have to be installed around conductors, cables or busbars, whatever they are insulated or not. Voltage pickings removable spring terminal has to be wired by 1 copper wire per phase with following characteristics:

### Wire range

| Solid                     | Stranded                  | Stranded with terminal ends |
|---------------------------|---------------------------|-----------------------------|
| 0.2...1.5 mm <sup>2</sup> | 0.2...2.5 mm <sup>2</sup> | 0.25...1.5 mm <sup>2</sup>  |
| 24...16 AWG               | 24...14 AWG               | 24...16 AWG                 |

Neutral picking shall be connected to have phase-to-neutral voltages, energy per phase and power per phase provided.

PowerTag Energy Rope is mainly advised for ComPact NS, MasterPact NT and NW, MasterPact MTZ NA and HA, for retrofit, for group of loads, and for all other devices with a rating up to 2000 A.

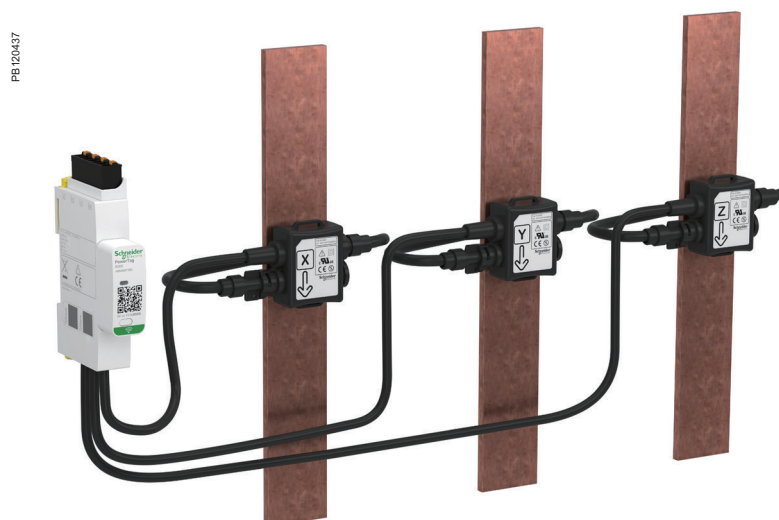



# PowerLogic™ PowerTag Energy Rope 200 A to 2000 A

## Technical specifications

| Main characteristics (as per IEC 61557-12)                         |                  |  |   |
|--|------------------|--|---|
| Rated voltage  | Un               | Phase-to-neutral   | 100...277 VAC ± 20 %  |
|  |                  | Phase-to-phase   | 173...480 VAC ± 20 %  |
| Frequency  |                  |  | 50/60 Hz  |
| Maximum current  | Imax             |  | 200 A / 600 A / 1000 A / 2000 A   |
| Maximum operating current  |                  |  | 1.2 x Imax  |
| Saturation current   |                  |  | 2 x Imax  |
| Maximum consumption  |                  |  | 3 VA  |
| Starting current   | Ist              |  | 120 mA / 400 mA / 600 mA / 1.2 A  |
| Basic current  | Ib               |  | 30 A / 100 A / 150 A / 300 A  |
| Additional characteristic  |                  |  |   |
| Operating temperature  |                  |  | -25 °C to +70 °C  |
| Maximum primary conductor temperature                              |                  |  | 105 °C <sup>(2)</sup>   |
| Storage temperature  |                  |  | -40 °C to +85 °C  |
| Overvoltage category   |                  | As per IEC 61010-1   | Cat. IV   |
| Measuring category   |                  | As per IEC 61010-2-030                                     | Cat. IV   |
| Pollution degree   |                  |  | 3   |
| Altitude   |                  |  | Up to 2000 m without derating <sup>(1)</sup>  |
| Degree of protection device  |                  |  | IP20 (IP40 front face)  |
|  |                  |  | IK05  |
| Radio-frequency communication                                      |                  |  |   |
| ISM band 2.4 GHz   |                  |  | 2.4 GHz to 2.4835 GHz   |
| Channels   |                  | As per IEEE 802.15.4                                       | 11 to 26  |
| Isotropic Radiated Power   |                  | Equivalent (EIRP)  | 0 dBm   |
| Maximum transmission time  |                  |  | < 5 ms  |
| Channel occupancy  |                  | For 1 device   | messages sent every 5 seconds   |
| Characteristics of measuring functions                             |                  |  |   |
| Function   | Symbol           | Performance category as per IEC 61557-12 (PMD-II/DD/K70/1) | Device measuring range (200 A / 600 A / 1000 A / 2000 A)  |
|  |                  | Class  |   |
| Total active power (Active power per phase)                        | P                | 1  | 29 W (10 W) to 240 kW / 96 W (32 W) to 720 kW / 144 W (48 W) to 1200 kW / 288 W (96 W) to 2400 kW                           |
| Total reactive power (Reactive power per phase)                    | Q <sub>A</sub>   | 2  | 36 VAR (12 VAR) to 240 kVAR / 120 VAR (40 VAR) to 720 kVAR / 180 VAR (60 VAR) to 1200 kVAR / 360 VAR (120 VAR) to 2400 kVAR |
| Total apparent power (Apparent power per phase)                    | S <sub>A</sub>   | 2  | 46 VA (15 VA) to 240 kVA / 154 VA (51 VA) to 720 kVA / 231 VA (77 VA) to 1200 kVA / 461 VA (154 VA) to 2400 kVA             |
| Active Energy: per phase, total, partial, delivered and received   | E <sub>a</sub>   | 1  | 0 to 281.10 <sup>9</sup> kWh  |
| Reactive energy: per phase, total, partial, delivered and received | E <sub>rA</sub>  | 2  | 0 to 281.10 <sup>9</sup> kVARh  |
| Apparent energy: per phase, total, partial                         | E <sub>apA</sub> | 2  | 0 to 281.10 <sup>9</sup> kVAh   |
| Frequency  | f                | 0.5  | 45 to 65 Hz   |
| Phase current  | I                | 1  | 120 mA to 400 A / 400 mA to 1200 A / 600 mA to 2000 A / 1.2 A to 4000 A   |
| Neutral current  | I <sub>NC</sub>  | 2  |   |
| Voltages (Line to Line)  | U                | 0.5  | 138 to 576 VAC  |
| Power factor (per phase, total)                                    | PF <sub>A</sub>  | 1  | -1 to 1   |

<sup>(1)</sup> Above 2000 m, please consult us.

<sup>(2)</sup> For higher value, please consult us.



# PowerLogic™ PowerTag Energy Rope 200 A to 2000 A




A9MEM159●

## PowerTag Energy Rope 200 A to 2000 A Commercial reference numbers

| Commercial reference number | Type          | Description                           |
|-----------------------------|---------------|---------------------------------------|
| A9MEM1590                   | R200 3P/3P+N  | PowerTag Energy Rope 200 A 3P / 3P+N  |
| A9MEM1591                   | R600 3P/3P+N  | PowerTag Energy Rope 600 A 3P / 3P+N  |
| A9MEM1592                   | R1000 3P/3P+N | PowerTag Energy Rope 1000 A 3P / 3P+N |
| A9MEM1593                   | R2000 3P/3P+N | PowerTag Energy Rope 2000 A 3P / 3P+N |

Check the Concentrators /Gateways compatibility and the list of Schneider Electric compatible devices with the Selection Guide pages 95 to 105.  
Contact your Schneider Electric representative for complete ordering information.

## PowerTag Energy Rope 200 A to 2000 A dimensions

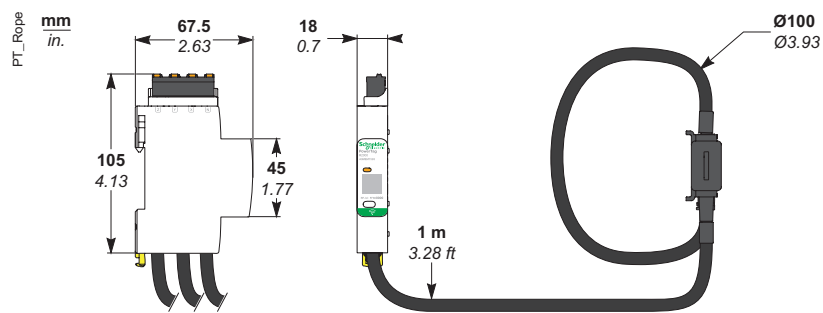

## PowerTag Energy Rope 200 A to 2000 A weight

| Type          | Weight (g) |
|---------------|------------|
| R200 3P/3P+N  | 360        |
| R600 3P/3P+N  |            |
| R1000 3P/3P+N |            |
| R2000 3P/3P+N |            |


Please refer to PowerTag Energy Rope 200 A to 2000 A Installation Sheet for accurate and complete information on the installation of this product.

# PowerLogic™ PowerTag Energy

## Selection guide for product compatibility\*

(Compatibility for terminal not equipped with comb busbar)

### PowerTag Energy 63 A

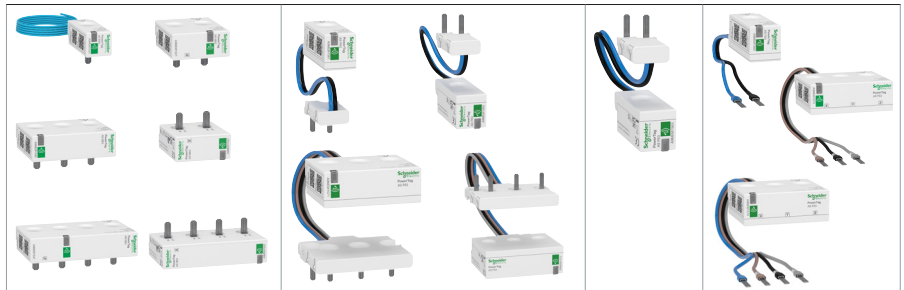

| Products<br>(AC network)                          | Mounting<br>position | A9 M63                | A9 P63            | A9 P63<br>RCBO | A9 F63        |
|---|----------------------|-----------------------|-------------------|----------------|---------------|
| <b>Acti9/Multi9</b>                               |                      |                       |                   |                |               |
| <b>Circuit breakers</b>                           |                      |                       |                   |                |               |
| iC60/iK60/DT60                                    | Top                  | ✓                     | -                 | -              | -             |
|   | Bottom               | ✓                     | -                 | -              | -             |
| iC60 (double terminal)                            | Top                  | -                     | -                 | -              | ✓             |
|   | Bottom               | -                     | -                 | -              | ✓             |
| iC40  | Top                  | -                     | ✓                 | -              | -             |
|   | Bottom               | -                     | ✓                 | -              | -             |
| DT40/iDPN/C40                                     | Top                  | -                     | ✓                 | -              | -             |
|   | Bottom               | -                     | ✓                 | -              | -             |
| C120 ≤ 63 A<br>NG125 ≤ 63 A                       | Top                  | -                     | -                 | -              | ✓ (1)         |
|   | Bottom               | -                     | -                 | -              | ✓ (1)         |
| iC65N-K (China)<br>iC65 (China)                   | Top                  | ✓                     | -                 | -              | -             |
|   | Bottom               | ✓                     | -                 | -              | -             |
| iDPN (China)                                      | Top                  | -                     | ✓                 | -              | -             |
|   | Bottom               | -                     | ✓                 | -              | -             |
| iKQ<br>(1P+W PowerTag on each pole)               | Top                  | NA                    | -                 | -              | -             |
|   | Bottom               | ✓ (1P+W only)         | -                 | -              | -             |
| N40   | Top                  | -                     | ✓                 | -              | -             |
|   | Bottom               | -                     | ✓                 | -              | -             |
| Reflex iC60                                       | Top                  | ✓                     | -                 | -              | -             |
|   | Bottom               | ✓                     | -                 | -              | -             |
| Reflex XC40                                       | Top                  | ✓                     | -                 | -              | -             |
|   | Bottom               | -                     | -                 | -              | ✓ (1)         |
| C32/C45/C60/C65/K60/T60/<br>Multi9 OEM (C60N/H/L) | Top                  | ✓                     | -                 | -              | -             |
|   | Bottom               | ✓                     | -                 | -              | -             |
| <b>Circuit breakers equipped with Vigi module</b> |                      |                       |                   |                |               |
| iC60/iC65/iC60/iC65N-K<br>with Vigi module        | Top                  | ✓ (CB)                | -                 | -              | -             |
|   | Bottom               | -                     | -                 | -              | ✓ (1) (Vigi)  |
| iC40<br>with Vigi iCG40                           | Top CB               | -                     | ✓ (CB)            | -              | -             |
|   | Top (Vigi)           | -                     | ✓ (2) (Vigi 1P+N) | -              | -             |
|   | Bottom (Vigi)        | -                     | -                 | -              | ✓ (Vigi 3P+N) |
| iC40<br>with "outgoer" Vigi module                | Top                  | -                     | ✓ (CB)            | -              | -             |
|   | Bottom               | -                     | -                 | -              | ✓ (Vigi)      |
| DT40/DPN/C40<br>with "group feeder" Vigi module   | Top CB               | -                     | ✓ (CB)            | -              | -             |
|   | Top Vigi             | -                     | ✓ (Vigi 1P+N)     | -              | ✓ (Vigi 3P+N) |
| DT40/DPN/C40<br>with "outgoer" Vigi module        | Top                  | -                     | ✓ (CB)            | -              | -             |
|   | Bottom               | -                     | -                 | -              | ✓ (Vigi)      |
| DT60<br>with Vigi TG60                            | Top CB               | ✓ (CB) only A9MEM1541 | -                 | -              | -             |
|   | Top Vigi             | -                     | -                 | -              | ✓ (1) (Vigi)  |

(1) You may need to change the voltage measurement cable terminals of the PowerTag Energy F63 by other cable ends (wire AWG22/0.33 mm<sup>2</sup>) for a more suitable connection to this product.

(2) Product usually associated with a comb busbar


(\*) Refer to the product catalog for technical characteristics

# PowerLogic™ PowerTag Energy

## Selection guide for product compatibility\*

(Compatibility for terminal not equipped with comb busbar)

### PowerTag Energy 63 A

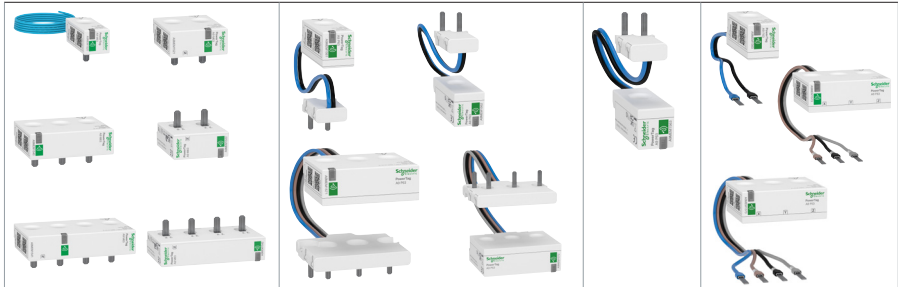

| Products<br>(AC network)                                       | Mounting<br>position | A9 M63        | A9 P63       | A9 P63<br>RCBO | A9 F63           |
|--|----------------------|---------------|--------------|----------------|------------------|
| <b>Acti9/Multi9</b>  |                      |               |              |                |                  |
| <b>Circuit breakers equipped with Vigi module (cont')</b>      |                      |               |              |                |                  |
| C120 ≤ 63 A<br>NG125 ≤ 63 A<br>with Vigi module                | Top                  | -             | -            | -              | ✓ (1) (CB)       |
|  | Bottom               | -             | -            | -              | ✓ (1) (Vigi)     |
| <b>Circuit breakers equipped with Arc fault detection unit</b> |                      |               |              |                |                  |
| iC60 with ARC unit   | Top                  | ✓ (CB)        | -            | -              | -                |
|  | Bottom               | -             | -            | -              | ✓ (add-on block) |
| iC40 with ARC unit   | Top                  | -             | ✓ (CB)       | -              | -                |
|  | Bottom               | -             | -            | -              | ✓ (add-on block) |
| <b>Arc fault detection devices</b>                             |                      |               |              |                |                  |
| iC40N ARC / iCV40N VigiARC                                     | Top                  | ✓             | -            | -              | -                |
|  | Bottom               | ✓             | -            | -              | -                |
| <b>Residual current devices</b>                                |                      |               |              |                |                  |
| iID/iID K  | Top                  | ✓             | -            | -              | -                |
|  | Bottom               | ✓             | -            | -              | -                |
| iID (double terminal)  | Top                  | -             | -            | -              | ✓                |
|  | Bottom               | -             | -            | -              | ✓                |
| iID40  | Top                  | -             | ✗ (2) (1P+N) | -              | ✗ (2) (3P+N)     |
|  | Bottom               | ✓             | -            | -              | -                |
| iDPN Vigi<br>"outgoer" 1P+N                                    | Top                  | -             | ✓            | -              | -                |
|  | Bottom               | -             | ✓            | -              | -                |
| iC60H RCBO/iC60H2 RCBO/<br>IKQE RCBO                           | Top                  | NA (fishbone) | -            | -              | -                |
|  | Bottom               | -             | -            | ✓              | -                |
| iC60 RCBO  | Top                  | ✓             | -            | -              | -                |
|  | Bottom               | ✓             | -            | -              | -                |
| iCV40 "outgoer" 1P+N   | Top                  | -             | ✓            | -              | -                |
|  | Bottom               | -             | ✓            | -              | -                |
| iCV40 "outgoer" 3P+N   | Top                  | -             | ✓            | -              | -                |
|  | Bottom               | -             | -            | -              | ✓                |
| DPN Vigi/DT40 Vigi/C40 Vigi<br>"outgoer" 1P+N                  | Top                  | -             | ✓            | -              | -                |
|  | Bottom               | -             | ✓            | -              | -                |
| DPN Vigi/DT40 Vigi/C40 Vigi/<br>iDPN Vigi "outgoer" 3P+N       | Top                  | -             | ✓            | -              | -                |
|  | Bottom               | -             | -            | -              | ✓                |
| DPN Vigi K   | Top                  | -             | -            | -              | ✓ (1)            |
|  | Bottom               | -             | -            | -              | ✓ (1)            |
| N40 Vigi<br>"outgoer"  | Top                  | -             | ✓            | -              | -                |
|  | Bottom               | -             | ✓            | -              | -                |
| iDc/ITG40/C40  | Top Left             | -             | ✓            | -              | -                |
|  | Top Right            | -             | ✓            | -              | -                |

(1) You may need to change the voltage measurement cable terminals of the PowerTag Energy F63 by other cable ends (wire AWG22/0.33 mm²) for a more suitable connection to this product.

(2) Product usually associated with a comb busbar


(\*) Refer to the product catalog for technical characteristics

# PowerLogic™ PowerTag Energy

## Selection guide for product compatibility\*

(Compatibility for terminal not equipped with comb busbar)

### PowerTag Energy 63 A

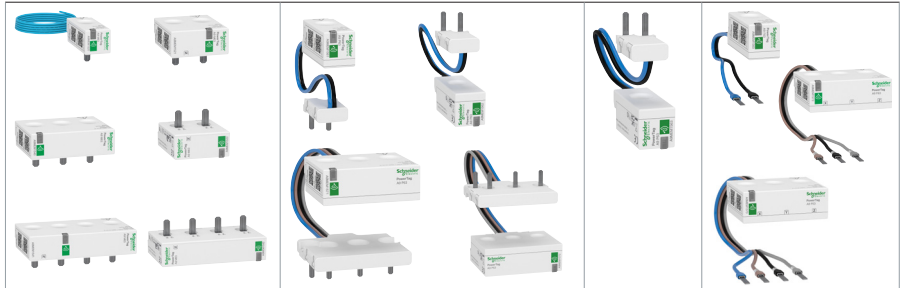

| Products<br>(AC network)                      | Mounting<br>position | A9 M63        | A9 P63 | A9 P63<br>RCBO | A9 F63 |
|---|----------------------|---------------|--------|----------------|--------|
| Acti9/Multi9                                  |                      |               |        |                |        |
| Residual current devices (cont')              |                      |               |        |                |        |
| DCP Vigi                                      | Top                  | ✓             | -      | -              | -      |
|   | Bottom               | ✓             | -      | -              | -      |
| C60H RCBO (Multi9)                            | Top                  | NA (fishbone) | -      | -              | -      |
|   | Bottom               | -             | -      | ✓              | -      |
| ID ≤ 63 A/ID K biconnect/<br>ID Type B ≤ 63 A | Top                  | ✓             | -      | -              | -      |
|   | Bottom               | ✓             | -      | -              | -      |
| RED/REDS/REDTest                              | Top                  | -             | -      | -              | ✓ (1)  |
|   | Bottom               | -             | -      | -              | ✓ (1)  |
| Switches                                      |                      |               |        |                |        |
| iSW ≤ 63 A                                    | Top                  | ✓             | -      | -              | -      |
|   | Bottom               | ✓             | -      | -              | -      |
| iSW-NA ≤ 63 A                                 | Top                  | ✓             | -      | -              | -      |
|   | Bottom               | ✓             | -      | -              | -      |
| iSW 20/32 A                                   | Top                  | -             | -      | -              | ✓      |
|   | Bottom               | -             | -      | -              | ✓      |
| i-NA ≤ 63 A                                   | Top                  | ✓             | -      | -              | -      |
|   | Bottom               | ✓             | -      | -              | -      |
| NG125 NA ≤ 63 A                               | Top                  | -             | -      | -              | ✓ (1)  |
|   | Bottom               | -             | -      | -              | ✓ (1)  |
| Fuse disconnectors                            |                      |               |        |                |        |
| STI   | Top                  | -             | -      | -              | ✓      |
|   | Bottom               | -             | -      | -              | ✓      |
| SBI 14x51/SBI 22x58 ≤ 63 A                    | Top                  | -             | -      | -              | ✓ (1)  |
|   | Bottom               | -             | -      | -              | ✓ (1)  |
| D01/D02                                       | Top                  | -             | -      | -              | ✓ (1)  |
|   | Bottom               | -             | -      | -              | ✓ (1)  |

(1) You may need to change the voltage measurement cable terminals of the PowerTag Energy F63 by other cable ends (wire AWG22/0.33 mm²) for a more suitable connection to this product.


(\*) Refer to the product catalog for technical characteristics

# PowerLogic™ PowerTag Energy

## Selection guide for product compatibility\*

(Compatibility for terminal not equipped with comb busbar)

### PowerTag Energy 63 A

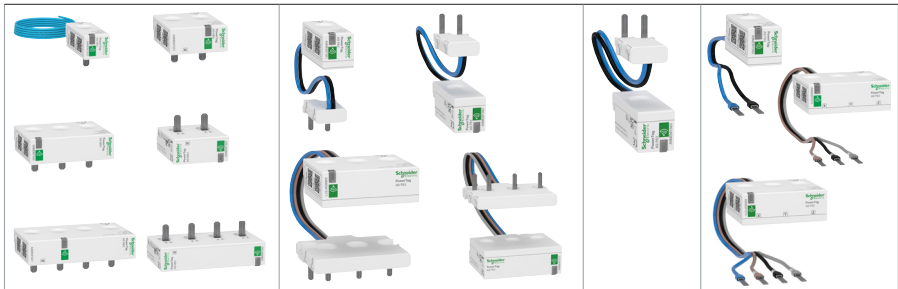

| Products<br>(AC network)      | Mounting<br>position | A9 M63 | A9 P63 | A9 P63<br>RCBO | A9 F63              |
|-------------------------------|----------------------|--------|--------|----------------|---------------------|
| <b>TeSys</b>                  |                      |        |        |                |                     |
| <b>Motor circuit breakers</b> |                      |        |        |                |                     |
| GV2                           | Top                  | -      | -      | -              | ✓ (1) (2)           |
|                               | Bottom               | -      | -      | -              | ✓ (1) (2)           |
| GV3 ≤ 63 A                    | Top                  | -      | -      | -              | ✓ (1) (2)           |
|                               | Bottom               | -      | -      | -              | ✓ (1) (2)           |
| <b>Contactors</b>             |                      |        |        |                |                     |
| TeSys D ≤ 63 A                | Top                  | -      | -      | -              | ✓ Upstream only (1) |
|                               | Bottom               | -      | -      | -              |                     |
| TeSys K                       | Top                  | -      | -      | -              | ✓ Upstream only (1) |
|                               | Bottom               | -      | -      | -              |                     |
| <b>Motor starter</b>          |                      |        |        |                |                     |
| TeSys U                       | Top                  | -      | -      | -              | ✓ Upstream only (1) |
|                               | Bottom               | -      | -      | -              |                     |

(1) You may need to change the voltage measurement cable terminals of the PowerTag Energy F63 by other cable ends (wire AWG22/0.33 mm<sup>2</sup>) for a more suitable connection to this product.

(2) PowerTag Energy sensors withstand motor starting in-rush currents. Environmental mission profile : Buildings as per 60721-3-3.

(\*) Refer to the product catalog for technical characteristics

# PowerLogic™ PowerTag Energy

## Selection guide for product compatibility\*

(Compatibility for terminal not equipped with comb busbar)

### PowerTag Energy 160 A



| Products (AC network)               |           | Mounting position | F160 3P / 3P+N  |
|-------------------------------------|-----------|-------------------|-----------------|
| <b>Acti9</b>                        |           |                   |                 |
| <b>Circuit breakers</b>             |           |                   |                 |
| C120 (with or without Vigi module)  | 3P / 3P+N | Top / Bottom      | ☑               |
| NG125 (with or without Vigi module) | 3P / 3P+N | Top / Bottom      | ☑               |
| <b>Residual current devices</b>     |           |                   |                 |
| iID > 63 A                          | 3P+N      | Top / Bottom      | ☑               |
| RCCB-ID 125 A                       | 3P+N      | Top / Bottom      | ☑               |
| <b>Fuse disconnectors</b>           |           |                   |                 |
| SBI > 63 A                          | 3P / 3P+N | Top / Bottom      | ☑               |
| <b>Switches</b>                     |           |                   |                 |
| NG125 NA                            | 3P / 3P+N | Top / Bottom      | ☑               |
| iSW > 63 A                          | 3P / 3P+N | Top / Bottom      | ☑               |
| iSW NA > 63 A                       | 3P+N      | Top / Bottom      | ☑               |
| <b>ComPact</b>                      |           |                   |                 |
| <b>Circuit breakers</b>             |           |                   |                 |
| NSXm                                | 3P / 3P+N | Top / Bottom      | ☑ (5)           |
| <b>Switches</b>                     |           |                   |                 |
| NSXm NA                             | 3P / 3P+N | Top / Bottom      | ☑ (5)           |
| INS 80/100/125/160                  | 3P / 3P+N | Top / Bottom      | ☑               |
| <b>PowerPact</b>                    |           |                   |                 |
| <b>Circuit breakers</b>             |           |                   |                 |
| B                                   | 3P / 3P+N | Top / Bottom      | ☑ (6)           |
| <b>TeSys</b>                        |           |                   |                 |
| <b>Motor circuit breakers</b>       |           |                   |                 |
| GV3 > 65 A                          | 3P        | Top / Bottom      | ☑               |
| GV4                                 | 3P        | Top / Bottom      | ☑               |
| <b>Contactors</b>                   |           |                   |                 |
| 63 A < TeSys D ≤ 160 A              | 3P / 3P+N | Top               | ☑ Upstream only |
| TeSys F ≤ 160 A                     | 3P / 3P+N | Top               | ☑ Upstream only |

(5) It is advised to use EverLink connectors with control wire terminal (LV426970 for 3P / LV426971 for 4P)

(6) It is advised to use EverLink connectors with control wire terminal (LV426974 for 3P / LV426975 for 4P)

(\*) Refer to the product catalog for technical characteristics

# PowerLogic™ PowerTag Energy

## Selection guide for product compatibility\*

(Compatibility for terminal not equipped with comb busbar)

## PowerTag Energy 250 A

## PowerTag Energy 630 A



| Products<br>(AC network)  | Mounting<br>position |              | M250 3P | M250 3P+N | M630 3P | M630 3P+N |
|---|----------------------|--------------|---------|-----------|---------|-----------|
| ComPact   |                      |              |         |           |         |           |
| Circuit breakers  |                      |              |         |           |         |           |
| NSX100/160/250<br>B/F/N/H/S/L/R/NA Fixed                            | 3P                   | Bottom       | ✔       | -         | -       | -         |
|   | 4P                   | Bottom       | -       | ✔         | -       | -         |
| NSX400/630<br>F/N/H/S/L/R/NA Fixed                                  | 3P                   | Bottom       | -       | -         | ✔       | -         |
|   | 4P                   | Bottom       | -       | -         | -       | ✔         |
| NSX100/160/250<br>B/F/N/H/S/L/R/NA Plug-In<br>(mounted on the base) | 3P                   | Top / Bottom | ✔       | -         | -       | -         |
|   | 4P                   | Top / Bottom | -       | ✔ (3)     | -       | -         |
| NSX400/630<br>F/N/H/S/L/R/NA Plug-In<br>(mounted on the base)       | 3P                   | Top / Bottom | -       | -         | ✔ (4)   | -         |
|   | 4P                   | Top / Bottom | -       | -         | -       | ✔ (3) (4) |
| NS100/160/250<br>N/SX/H/L/NA Fixed                                  | 3P                   | Bottom       | ✔       | -         | -       | -         |
|   | 4P                   | Bottom       | -       | ✔         | -       | -         |
| NS400/630<br>N/H/L/NA Fixed   | 3P                   | Bottom       | -       | -         | ✔       | -         |
|   | 4P                   | Bottom       | -       | -         | -       | ✔         |
| NS100/160/250<br>N/SX/H/L/NA Plug-In<br>(mounted on the base)       | 3P                   | Top / Bottom | ✔       | -         | -       | -         |
|   | 4P                   | Top / Bottom | -       | ✔ (3)     | -       | -         |
| NS400/630<br>N/H/L/NA Plug-In<br>(mounted on the base)              | 3P                   | Top / Bottom | -       | -         | ✔ (4)   | -         |
|   | 4P                   | Top / Bottom | -       | -         | -       | ✔ (3) (4) |
| Circuit breakers equipped with Vigi block                           |                      |              |         |           |         |           |
| NSX100/160/250<br>B/F/N/H/S/L/R/NA Fixed                            | 3P                   | Bottom       | ✔       | -         | -       | -         |
|   | 4P                   | Bottom       | -       | ✔         | -       | -         |
| NSX400/630<br>F/N/H/S/L/R/NA Fixed                                  | 3P                   | Bottom       | -       | -         | ✔       | -         |
|   | 4P                   | Bottom       | -       | -         | -       | ✔         |
| NSX100/160/250<br>B/F/N/H/S/L/R/NA Plug-In<br>(mounted on the base) | 3P                   | Top          | ✔       | -         | -       | -         |
|   | 3P                   | Top          | -       | -         | ✔ (4)   | -         |
| Switches  |                      |              |         |           |         |           |
| INS250/INV -<br>100/160/200/250                                     | 3P                   | Bottom       | -       | ✔         | -       | -         |
|   | 4P                   | Top / Bottom | -       | ✔ (3)     | -       | -         |
| INS/INV -<br>320/400/500/630  | 3P                   | Bottom       | -       | -         | -       | ✔         |
|   | 4P                   | Top / Bottom | -       | -         | -       | ✔ (3)     |
| TeSys   |                      |              |         |           |         |           |
| Motor circuit breakers  |                      |              |         |           |         |           |
| GV5, GV7  | 3P                   | Bottom       | ✔       | -         | -       | -         |
| GV6   | 3P                   | Bottom       | -       | -         | ✔       | -         |
| EasyPact  |                      |              |         |           |         |           |
| Circuit breakers  |                      |              |         |           |         |           |
| CVS 100-250   | 3P                   | Bottom       | ✔       |           |         |           |
|   | 4P                   | Bottom       |         | ✔         |         |           |
| CVS 400-630   | 3P                   | Bottom       |         |           | ✔       |           |
|   | 4P                   | Bottom       |         |           |         | ✔         |

(3) neutral on the right when mounted on top side

(4) when plate mounted, need to add a 4 mm intercalary under the PowerTag module (see ComPact NSX catalog)

(\*) Refer to the product catalog for technical characteristics

# PowerLogic™ PowerTag Energy

## Selection guide for product compatibility\*

(Compatibility for terminal not equipped with comb busbar)

### PowerTag Energy Rope












| Products<br>(AC network)                                    | Mounting<br>position | R200 3P / 3P+N | R600 3P / 3P+N  | R1000 3P / 3P+N | R2000 3P / 3P+N |
|---|----------------------|----------------|-----------------|-----------------|-----------------|
| <b>ComPact</b>  |                      |                |                 |                 |                 |
| <b>Circuit breakers</b>                                     |                      |                |                 |                 |                 |
| NS 630b   | 3P / 3P+N            | Top / Bottom   | -               | ☑               | -               |
| NS 800/1000   | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| NS 1250/1600/1600b/2000                                     | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| <b>Switches</b>   |                      |                |                 |                 |                 |
| INS/INV 630b  | 3P / 3P+N            | Top / Bottom   | -               | ☑               | -               |
| INS/INV 800/1000  | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| INS/INV 1250/1600/2000                                      | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| NS 630b NA  | 3P / 3P+N            | Top / Bottom   | -               | ☑               | -               |
| NS 800/1000 NA  | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| NS 1250/1600/1600b/2000 NA                                  | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| <b>MasterPact</b>   |                      |                |                 |                 |                 |
| <b>Circuit breakers</b>                                     |                      |                |                 |                 |                 |
| NT 06   | 3P / 3P+N            | Top / Bottom   | -               | ☑               | -               |
| NT 08/10  | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| NT 12/16  | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| NW 08/10  | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| NW 12/16/20   | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| <b>Switches</b>   |                      |                |                 |                 |                 |
| NT 06 HA  | 3P / 3P+N            | Top / Bottom   | -               | ☑               | -               |
| NT 08/10 HA   | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| NT 12/16 HA   | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| NW 08/10 NA/HA/HF   | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| NW 12/16/20 NA/HA/HF  | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| MTZ1 06 HA  | 3P / 3P+N            | Top / Bottom   | -               | ☑               | -               |
| MTZ1 08/10 HA   | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| MTZ1 12/16 HA   | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| MTZ2 08/10 NA/HA/HA10                                       | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| MTZ2 12/16/20 NA/HA/HA10                                    | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| <b>TeSys</b>  |                      |                |                 |                 |                 |
| <b>Contactors</b>   |                      |                |                 |                 |                 |
| TeSys D > 160 A   | 3P / 3P+N            | Top            | ☑ Upstream only | -               | -               |
| 160 A < TeSys F ≤ 2000 A                                    | 3P / 3P+N            | Top            | ☑ Upstream only | ☑ Upstream only | ☑ Upstream only |
| <b>Others</b>   |                      |                |                 |                 |                 |
| <b>Circuit breakers / Switches / Motor circuit breakers</b> |                      |                |                 |                 |                 |
| All products below 200 A                                    | 3P / 3P+N            | Top / Bottom   | ☑               | -               | -               |
| All products between 200 A and 600 A                        | 3P / 3P+N            | Top / Bottom   | -               | ☑               | -               |
| All products between 600 A and 1000 A                       | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |
| All products between 1000 A and 2000 A                      | 3P / 3P+N            | Top / Bottom   | -               | -               | ☑               |

(\*) Refer to the product catalog for technical characteristics

# PowerLogic™ PowerTag Energy

## Selection guide for concentrators / gateways compatibility\*

### Concentrators / gateways









|   |           |  |  |  |  |
|---|-----------|---|---|--|---|
|   |           | Wiser IP module<br>Wiser IP module+<br>EER31800                                   | PowerTag Link C<br>PowerTag Link C+<br>A9XELC10                                   | Smartlink SI B<br>A9XMZA08<br>Smartlink SI D<br>A9XMWA20                           | PowerTag Link<br>A9XMWD20<br>PowerTag Link HD<br>A9XMWD100                          |
| <b>PowerTag Energy M63</b>  |           |   |   |  |   |
|   | A9MEM1520 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1521 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1522 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1540 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1541 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1542 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1543 | ✓   | ✓   | -  | ✓   |
| <b>PowerTag Energy M63 Resi9</b>  |           |   |   |  |   |
|  | R9M20     | ✓   | -   | -  | -   |
|   | R9M21     | ✓   | -   | -  | -   |
|   | R9M22     | ✓   | -   | -  | -   |
|   | R9M40     | ✓   | -   | -  | -   |
|   | R9M41     | ✓   | -   | -  | -   |
|   | R9M42     | ✓   | -   | -  | -   |
|   | R9M43     | ✓   | -   | -  | -   |
| <b>PowerTag Energy P63</b>  |           |   |   |  |   |
|  | A9MEM1561 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1562 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1563 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1571 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1572 | ✓   | ✓   | ✓  | ✓   |
| <b>PowerTag Energy F63</b>  |           |   |   |  |   |
|  | A9MEM1560 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1564 | -   | -   | -  | ✓   |
|   | A9MEM1570 | ✓   | ✓   | ✓  | ✓   |
|   | A9MEM1573 | -   | -   | -  | ✓   |
|   | A9MEM1574 | -   | -   | -  | ✓   |
| <b>PowerTag Energy F63 Resi9</b>  |           |   |   |  |   |
|  | R9M60     | ✓   | -   | -  | -   |
|   | R9M70     | ✓   | -   | -  | -   |

(\*) Refer to the product catalog for technical characteristics

# PowerLogic™ PowerTag Energy

## Selection guide for concentrators / gateways compatibility\*

### Concentrators / gateways








|   |           |   |   |
|---|-----------|---|---|
|    |           |  |  |
| Harmony Hub<br>ZBRN1<br>ZBRN2<br>ZBRN32   |           | EcoStruxure™ Panel Server<br>Universal<br>PAS600●                                 | Wireless Panel Server for<br>PrismaSeT Active                                       |
| <b>PowerTag Energy M63</b>  |           |   |   |
|   | A9MEM1520 | -   | ✓   |
|   | A9MEM1521 | -   | ✓   |
|   | A9MEM1522 | -   | ✓   |
|   | A9MEM1540 | -   | ✓   |
|   | A9MEM1541 | -   | ✓   |
|   | A9MEM1542 | -   | ✓   |
|   | A9MEM1543 | -   | -   |
| <b>PowerTag Energy M63 Resi9</b>  |           |   |   |
|  | R9M20     | -   | -   |
|   | R9M21     | -   | -   |
|   | R9M22     | -   | -   |
|   | R9M40     | -   | -   |
|   | R9M41     | -   | -   |
|   | R9M42     | -   | -   |
|   | R9M43     | -   | -   |
| <b>PowerTag Energy P63</b>  |           |   |   |
|  | A9MEM1561 | -   | ✓   |
|   | A9MEM1562 | -   | ✓   |
|   | A9MEM1563 | -   | ✓   |
|   | A9MEM1571 | -   | ✓   |
|   | A9MEM1572 | -   | ✓   |
| <b>PowerTag Energy F63</b>  |           |   |   |
|  | A9MEM1560 | ✓   | ✓   |
|   | A9MEM1564 | -   | -   |
|   | A9MEM1570 | ✓   | ✓   |
|   | A9MEM1573 | ✓   | ✓   |
|   | A9MEM1574 | -   | -   |
| <b>PowerTag Energy F63 Resi9</b>  |           |   |   |
|  | R9M60     | -   | -   |
|   | R9M70     | -   | -   |

(\*) Refer to the product catalog for technical characteristics

# PowerLogic™ PowerTag Energy

## Selection guide for concentrators / gateways compatibility\*

### Concentrators / gateways




|   |           |   |   |  |   |
|---|-----------|---|---|--|---|
|   |           |  |  |  |  |
|   |           | Wiser IP module<br>Wiser IP module+<br>EER31800                                   | PowerTag Link C<br>PowerTag Link C+<br>A9XELC10                                   | Smartlink SI B<br>A9XMZA08<br>Smartlink SI D<br>A9XMTA20                           | PowerTag Link<br>A9XMWD20<br>PowerTag Link HD<br>A9XMWD100                          |
| <b>PowerTag Energy F160</b>   |           |   |   |  |   |
|    | A9MEM1580 | -   | ☑<br>(PowerTag Link C+ only)  | -  | ☑   |
| <b>PowerTag Energy M250-M630</b>  |           |   |   |  |   |
|   | LV434020  | ☑   | ☑   | ☑  | ☑   |
|   | LV434021  | ☑   | ☑   | ☑  | ☑   |
|   | LV434022  | ☑   | ☑   | ☑  | ☑   |
|   | LV434023  | ☑   | ☑   | ☑  | ☑   |
| <b>PowerTag Energy R200-R600-R1000-R2000</b>  |           |   |   |  |   |
|  | A9MEM1590 | -   | ☑<br>(PowerTag Link C+ only)  | -  | ☑   |
|   | A9MEM1591 | -   | ☑<br>(PowerTag Link C+ only)  | -  | ☑   |
|   | A9MEM1592 | -   | ☑<br>(PowerTag Link C+ only)  | -  | ☑   |
|   | A9MEM1593 | -   | ☑<br>(PowerTag Link C+ only)  | -  | ☑   |

(\*) Refer to the product catalog for technical characteristics

# PowerLogic™ PowerTag Energy

## Selection guide for concentrators / gateways compatibility\*

### Concentrators / gateways

|   |           |   |   |   |
|---|-----------|---|---|---|
|   |           |  |  |  |
|   |           | Harmony Hub<br>ZBRN1<br>ZBRN2<br>ZBRN32   | EcoStruxure™ Panel Server<br>Universal<br>PAS600●                                 | Wireless Panel Server for<br>PrismaSeT Active                                       |
| PowerTag Energy F160  |           |   |   |   |
|    | A9MEM1580 | ✓   | ✓   | ✓   |
| PowerTag Energy M250-M630   |           |   |   |   |
|   | LV434020  | ✓   | ✓   | ✓   |
|   | LV434021  | ✓   | ✓   | ✓   |
|   | LV434022  | ✓   | ✓   | ✓   |
|   | LV434023  | ✓   | ✓   | ✓   |
| PowerTag Energy R200-R600-R1000-R2000   |           |   |   |   |
|  | A9MEM1590 | ✓   | ✓   | ✓   |
|   | A9MEM1591 | ✓   | ✓   | ✓   |
|   | A9MEM1592 | ✓   | ✓   | ✓   |
|   | A9MEM1593 | ✓   | ✓   | ✓   |

(\*) Refer to the product catalog for technical characteristics

# Wireless Products

Schneider Electric offers a range of wireless products designed for new builds or retrofit installations. These are reliable, low-cost and easy to use wireless solutions with long battery life that does not compromise performance

- PowerLogic™ PowerTag Control
- PowerLogic™ HeatTag



A9XMC2D3



SMT10020



# PowerLogic™ PowerTag Control

PowerTag Control monitors circuits wirelessly, collecting status of daisy-chained circuit breakers and notifying the data concentrator of information status, such as OF, SD, Contractor or Impulse Relay position indication. These wireless input/output modules allow circuit control and status monitoring. Designed for use in commercial and building applications, they quickly and easily turn your distribution board into a connected panel.

PowerTag Control also connects to pulse relays or contactors for remote control within a building management system for non-critical loads, such as lighting.

## Applications:


- Monitors your electrical installation from main incomer down to load level
- Suitable for various business, buildings, industrial and residential applications with easy integration in upper systems
- Supports and enables Energy efficiency programs and standards such as:
  - European Energy Efficiency Directive (EED)
  - Energy Performance of Buildings Directive (EPBD)
  - IEC 60364-8-1 "Low Voltage Electrical installations - Energy Efficiency"
  - EN 17267 "Energy Measurement and Monitoring plan"
  - ISO 50001 "Energy Management System"

A9XMC2D3 Image2




A9XMC2D3


# PowerTag Control



Clip on DIN rail 35 mm.



Indifferent position of installation.

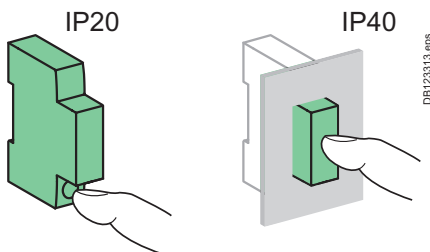


## Technical characteristics

| Main characteristics                            |                      |   |
|---|----------------------|---|
| Power supply                                    |                      | 230 V AC $\pm$ 20%                              |
| Frequency                                       |                      | 50/60 Hz  |
| Maximum consumption                             | IO                   | $\leq$ 2 VA                                     |
|   | 2DI                  | $\leq$ 3 VA                                     |
| Operating temperature                           |                      | -25°C to +60°C                                  |
| Storage temperature                             |                      | -40°C to +85°C                                  |
| Relative humidity (60068-2-78)                  |                      | 93 % at 40°C                                    |
| Overvoltage category                            | As per IEC 61010-1   | Cat. III  |
| Altitude  |                      | $\leq$ 2000 m                                   |
| Pollution degree                                |                      | 3   |
| Degree of protection according to IEC 60529     | Front face           | IP40  |
|   | Casing               | IP20  |
|   | IK                   | 05  |
| Characteristics of inputs and outputs           |                      |   |
| Digital input                                   |                      |   |
| Type  |                      | 230 V AC, dry contact                           |
| Digital output                                  |                      |   |
| Type  |                      | 230 V AC, dry contact                           |
| Relay type                                      |                      | Normally open or normally closed <sup>(3)</sup> |
| Applicable voltage on output                    |                      | 230 V AC $\pm$ 20%                              |
| Minimum/maximum current on output               |                      | 10 mA / 2 A                                     |
| Type of output order                            |                      | Pulse or latch <sup>(3)</sup>                   |
| Pulse length in control mode with impulse relay |                      | Nominal: 300 ms                                 |
| Radio-frequency communication                   |                      |   |
| ISM band 2.4 GHz                                |                      | 2.4 GHz to 2.4835 GHz                           |
| Channels  | As per IEEE 802.15.4 | 11 to 26  |
| Isotropic Radiated Power                        | Equivalent (EIRP)    | 0 dBm   |
| Channel occupancy                               | Messages sent        | ■ On event                                      |
|   |                      | ■ Periodically (5s nominal)                     |

(3) Setting adjustable

## Dimensions (mm)

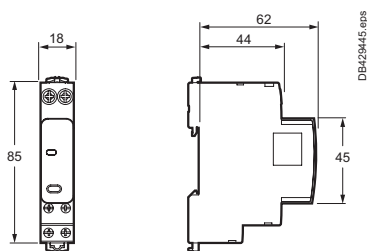

## Weight (g)

| PowerTag C           |    |
|----------------------|----|
| PowerTag C IO 230 V  | 80 |
| PowerTag C 2DI 230 V | 75 |


## Connection

|  | Terminals             | Tightening torque | Copper cables  |  |  |
|--|-----------------------|-------------------|--|--|--|
|  |                       |                   | Rigid  | Flexible   | Flexible with ferrule                                |
|  | Power supply (Top)    | 2 N.m             | 1 to 16 mm <sup>2</sup> (AWG: 18...6)  | 0.5 to 10 mm <sup>2</sup> (AWG: 21...8)  | -  |
|  | Input/Output (Bottom) | 1 N.m             | 1x: 1 to 6 mm <sup>2</sup> (AWG: 18...10)<br>2x: 1.5 to 2.5 mm <sup>2</sup> (AWG: 16...14) | 1x: 0.5 to 4 mm <sup>2</sup> (AWG: 21...12)<br>2x: 1.5 to 2.5 mm <sup>2</sup> (AWG: 16...14) | 1x: 0.5 to 4 mm <sup>2</sup> (AWG: 21...12)<br>2x: - |

# PowerTag Control

## PowerTag C IO module


- Compatible with horizontal comb busbars 9 mm modules
- Automatic cable guiding in the correct position: terminals with guard



- Assembly and disassembly by operating toggle latches at the top and bottom of the products

### Status LED

- Provide information about PowerTag C status



- Insulated terminals IP20




### Logo

- Wireless communication device



### Push button

- Local output control
- Decommissioning



### Monitoring / Back loop circuit

- "I" digital input terminal
- "C" common powered terminal 230 V AC

### Control circuit


- Logical output relay
- "O" output terminals 230 V AC - 2 A max.



# PowerTag Control

## PowerTag C 2DI module

- Compatible with horizontal comb busbars 9 mm modules
- Automatic cable guiding in the correct position: terminals with guard



DB430243.eps

- Assembly and disassembly by operating toggle latches at the top and bottom of the products

### Status LED

- Provide information about PowerTag C status



DB430244.eps

### Logo

- Wireless communication device



A9XMC2D3\_image2.45.eps

- Insulated terminals IP20



DB430245.eps

### Flush mounted push button

- Decommissioning



DB430242.eps

### Monitoring circuits

- "I" digital input terminals
- "C" common powered terminals 230 V AC

# PowerLogic™ HeatTag

## Wireless Sensor for early detection of overheating cables

The PowerLogic™ HeatTag sensor analyzes gas and airborne particles helping facility manager to anticipate and act before smoke appears or an electrical fire starts.

Electrical fires generate huge losses in commercial and industrial buildings, interrupting production and delaying service delivery. These losses can be prevented if early detection of component overheating is accurately detected and alarmed.

PowerLogic™ HeatTag helps prevent electrical cabinets from being damaged by analyzing airborne gas and particles and sending alerts before smoke appears or an electrical fire starts. HeatTag is much more than a fire or smoke detector - it scientifically detects overheating in electrical installations before any damage is done.



SMT10020

PE120568

### The solution for

Markets that can benefit from a solution that includes PowerLogic™ HeatTag smart sensors:

- Buildings
- Industry
- Healthcare
- Data Center and networks
- Infrastructure

### Benefits

#### System integrators' benefit

- Ease of integration
- Ease of setup
- Cost effectiveness
- Seamless integration with EcoStruxure™ solutions

#### Panel builders' benefit

- No settings
- Nominal environment auto-learning to avoid false alerts
- Concentrator auto-discovery
- Alerts generated by a powerful algorithm integrated in HeatTag

#### End users' benefit

- Ease of use
- Prevents fire damage and associated costs
- Comprehensive, consistent and superior performance
- Maximize uptime, eliminate faults, and enhance safety

### Competitive advantages

- Easy to install and operate
- Suitable for non forced ventilated cabinets ≥ IP31
- Immediately detects overheating in cables and connections
- More than a smoke detector or heat sensor
- 3 levels of alert recording
- Monitors air quality index
- Continuous improvements of algorithms

### Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximize electrical network reliability and availability, and optimize electrical asset performance.


### Conformity of standards

- IEC/UL 61010-1
- IEC 61010-2-201
- IEC 61326-1
- IEC61326-2-3
- ETSI EN 301 489-1
- ETSI EN 301 489-17
- ETSI EN 300 328
- EN 62311
- EN IEC 63000
- IEEE 802.15.4 protocol
- FCC and IC certified

# HeatTag sensors




PowerLogic™ HeatTag sensor

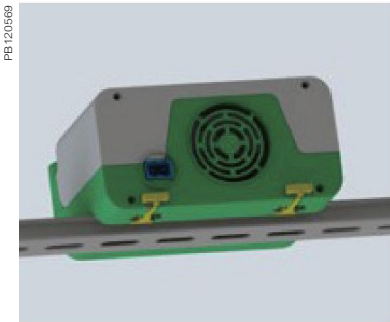

HeatTag rear view showing fan




HeatTag sensor DIN mounted

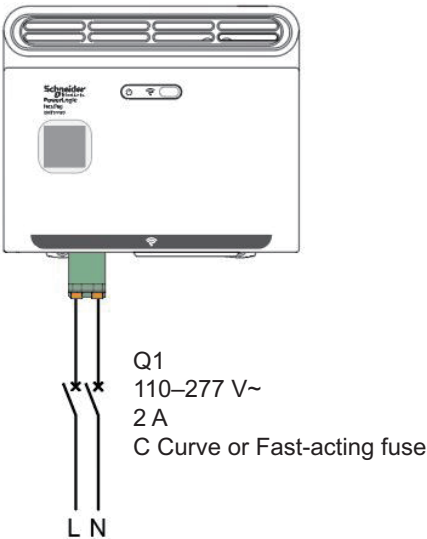


## HeatTag features

| Sensor Characteristics            |  |   |
|-----------------------------------|--|---|
| Temperature measurement           | Measurement range                                | -15 °C / +70 °C (5 °F to 158 °F)                          |
|                                   | Measurement accuracy                             | -1.1 °C / +1.1 °C   |
|                                   | Default transmission period                      | 60 seconds (higher in case of high wireless data traffic) |
| Humidity measurement              | Measurement range                                | 15–90 %   |
|                                   | Measurement accuracy                             | ±9 RH %   |
|                                   | Default transmission period                      | 60 seconds (higher in case of high wireless data traffic) |
| Air quality                       | Index (0 to 10), alert generation when index ≥10 |   |
| Test alert after pairing          | During first 30 minutes                          |   |
| Environment auto-learning phase   | 8 hours after the first 30 minutes               |   |
| Mechanical Characteristics        |  |   |
| Dimensions (W x H x D)            |  | 108 x 107 x 55 mm   |
| Weight                            |  | 270 g   |
| Degree of protection (IEC 60529)  |  | IP 20   |
| Electrical Characteristics        |  |   |
| Supply voltage                    |  | 110–277 V AC, -15 % / +15 %                               |
| Frequency                         |  | 50–60 Hz  |
| Max. consumption                  |  | 0.1 A   |
| Operating temperature             |  | -15 °C / +70 °C (5 °F to 158 °F)                          |
| Storage temperature               |  | -20 °C / +85 °C (-4 °F to 185 °F)                         |
| Relative humidity in operation    |  | 15–90 %   |
| Altitude of use                   |  | 0–2000 m (0–6500 ft)                                      |
| Degree of pollution (IEC 60664-1) |  | 3   |
| Overvoltage category              |  | OVC III   |
| Commercial Reference Number       |  |   |
| PowerLogic™ HeatTag Sensor        |  | SMT10020  |

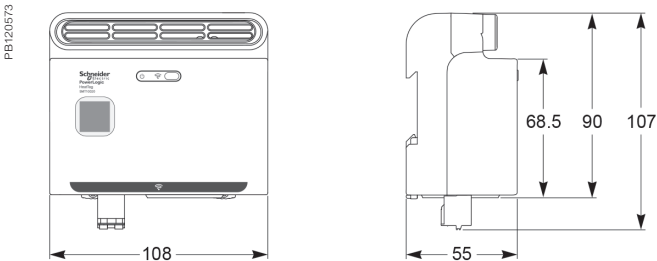

HeatTag sensor dimensions. See the appropriate Installation Guide.

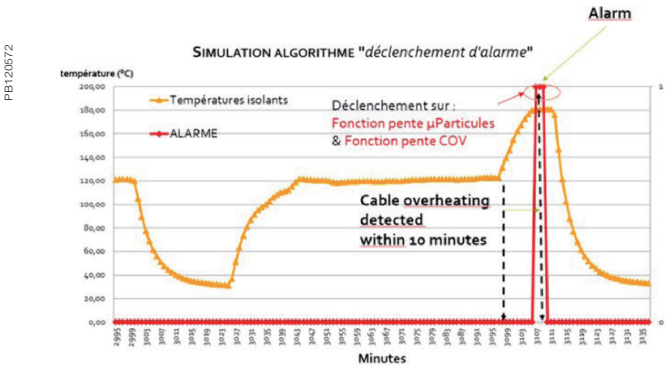

HeatTag simulation algorithm display

NOTE: Do not use HeatTag as a safety device or to replace fire protection devices. Please see the appropriate User Guide for this product.

# Basic Multi-function Metering

A range of meters designed for cost management and simple network management. Affordable to buy and easy to choose, the highly-capable PowerLogic™ PM5000 and PM5350 series meters are designed to provide the best combination of features to match all your energy cost management needs.

As well as pin-point energy savings, optimal equipment efficiency and utilisation, basic multi-function meters perform a high level assessment of the power quality in an electrical network.

- PowerLogic™ PM5000
- PowerLogic™ PM5350
- PowerLogic™ PM5350IB
- PowerLogic™ PM5350PB
- PowerLogic™ PM5350P



METSEPM5110



METSEPM5560

# PowerLogic™ PM5000 series

The PowerLogic™ PM5000 series power meters are the new benchmark in affordable, precision metering.

The value you want, the precision you need. Compact, affordable power meters with high-end cost capabilities and basic mobile energy management.

## Applications

Capable of essential cost management:

- Sub-billing/tenant metering <sup>(+1)</sup>
- Equipment sub-billing
- Energy cost allocation

Also ideal for electrical network management:

- Track real-time power conditions
- Monitor control functions
- Provide basic power quality values
- Detect and capture voltage sag and swell events
- Monitor residual current
- Analyze equipment and network status
- BACnet/IP, EtherNet/IP, and DNP3.0 protocol support



<sup>(+1)</sup> Subjected to local regulations.

### The solution for

Markets that can benefit from a solution that includes PowerLogic™ PM5000 series meters:

- Buildings
- Industry
- Healthcare
- Data Center and networks
- Infrastructure

### Benefits

#### System integrators' benefit

- Ease of integration
- Ease of setup
- Cost effectiveness

#### Panel builders' benefit

- Ease of installation
- Cost effectiveness
- Aesthetically pleasing
- Simplified ordering
- Low Voltage DC control power option
- Analog inputs options

#### End users' benefit

- Ease of use
- Precision metering & sub-billing <sup>(+2)</sup>
- Billing flexibility
- Comprehensive, consistent and superior performance
- Maximize uptime, eliminate faults, and enhance safety
- Cybersecurity features

### Competitive advantages

- Easy to install and operate
- Easy for circuit breaker monitoring and control
- WAGES monitoring
- Data logging up to 16 parameters
- Power quality analysis up to 63<sup>rd</sup> harmonics
- Load management combined with alarm and timestamping
- High performance and accuracy
- Residual Current Monitoring (RCM) in PM56xx<sup>(+4)</sup> and PM57xx<sup>(+4)</sup>
- Voltage sag and swell detection with waveform capture
- MID ready compliance for legal billing application
- Onboard BACnet/IP, EtherNet/IP, and DNP3.0 protocol support
- PM5310R <sup>(+3)</sup> and PM5320R <sup>(+3)</sup> are enabled to connect with LVCT for faster installations

<sup>(+2)</sup> Subjected to local regulations.

<sup>(+3)</sup> PM5310R and PM5320R must be used with Schneider Electric's "Quick Click" 3-in-1 LVCTs.

<sup>(+4)</sup> PM5660, PM5661, PM5760, PM5761 must be used with Toroids.

### Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximize electrical network reliability and availability, and optimize electrical asset performance.

### Conformity of standards

- BS/EN/IEC 61557-12:2018/AMD1:2021
- BS/EN/IEC 62052-11:2020 edition 2
- IEC 62052-31:2015
- BS/EN/IEC 62053-22:2020 edition 2
- BS/EN/IEC 62053-23:2020 edition 2
- IEEE 802.3
- EN 50470-1:2006
- EN 50470-3:2006
- CE and UKCA as per IEC/BS 61010-1 edition 3
- cULus as per UL 61010-1 edition 3
- BS/EN/IEC 61010-2-30:2017
- BS/EN/IEC 61326-1: edition 3
- FCC part 15 Class B
- EN 55022 Class B
- BACnet/IP - BTL listed (B-ASC)
- EtherNet/IP - ODVA certified
- ANSI C12.1-2008 (PM55xx)
- ANSI C12.20 Class 0.2 & 0.5
- Align with cyber security guidelines as per IEC 62443
- Type A as per IEC 62020 for RCM

Meets IEC 61557-12 PMD/[SD|SS]/K70/0.5 for PM5100 and PM5300

Meets IEC 61557-12 PMD/[SD|SS]/K70/0.2 for PM5500, PM5600, PM5700

- Legal billing compliance
  - MID compliance is compulsory for billing applications across Europe
  - In addition to billing applications, for facility managers responsible for energy cost
  - MID means same level of quality as a billing meter

**MID** Certified according to MID Directive, Annex "B" + Annex "D" for legal metrology relevant to active electrical energy meters (see Annex MI-003 of MID). Can be used for fiscal (legal) metrology.

MID ready compliance, EN 50470-1/3 – Class C

# PM5000 series

## PowerLogic™ PM5100, PM5300 and PM5500 series


The PowerLogic™ PM5000 power meter is the ideal fit for cost management applications. Designed for use in both energy management systems and building management systems, it provides the measurement capabilities needed to allocate energy usage, perform tenant metering and sub-billing, pin-point energy savings, optimize equipment efficiency and utilization, and perform a high level assessment of the power quality of the electrical network.

In a single 96 x 96 mm unit, with a graphical display, (plus optional remote display) all three phases, neutral and ground can be monitored simultaneously. The bright, anti-glare display features large characters and powerful backlighting for easy reading even in extreme lighting conditions and viewing angles. Easy to understand menus, text in 8 selectable languages, icons and graphics create a friendly environment to learn about your electrical network. Ethernet gateway and enhanced cyber security. These are highly accurate devices with global billing certifications.

### Applications

- **Cost management:** Cost saving opportunities become clear once you understand how and when your facility uses electricity. The PowerLogic™ PM5000 series meters are ideal for:
  - Sub-billing / tenant metering: Allows a landlord, property management firm, condominium association, homeowners association, or other multi-tenant property to bill tenants for individual measured utility (electricity) usage depending on the local regulations. MID approved meters for billing applications across Europe.
  - Cost allocation: Allocate energy costs between different departments (HVAC, indoor and outdoor lighting, refrigeration, etc.), different parts of an industrial process or different cost centres. Cost allocation systems can help you save money by making changes to your operation, better maintaining your equipment, taking advantage of pricing fluctuations, and managing your demand.
- **Network management:** Improving reliability of the electrical network is key for success in any business. Monitoring values such as voltage levels, harmonics distortions, voltage unbalance, residual current, voltage sag and swell will help you to ensure proper operation and maintenance of your electrical network and equipment. PowerLogic™ PM5000 series meters are the perfect tool for:
  - Basic Power Quality monitoring: Power quality phenomena can cause undesirable effects such as heating in transformers, capacitors, motors, generators and misoperation of electronic equipment and protection devices.
  - Min/ Max monitoring (with timestamp): Understanding when electrical parameters, such as voltage, current and power demand, reach maximum and minimum values will give you the insight to correctly maintain your electrical network and assure equipment will not be damaged.
  - Alarming: alarms help you to be aware of any abnormal behaviour on the electrical network in the moment it happens.
  - WAGES monitoring: take advantage of the input metering on PM5000 meters to integrate measurements from third party devices such as water, air, gas, electricity or steam meters.
  - Residual current monitoring: measures leakage current flowing in TN & TT network system.
  - Voltage sags and swells: measures and captures wave form in the event of voltage sags and swells in the network.
- **Main characteristics**
  - Easy to install
    - Mounts using two clips, in standard cut out for DIN 96 x 96 mm, no tools required. Compact meter with 72 mm (77 mm for PM5500) depth connectable up to 690 V L-L without voltage transformers for installations compliant with category III. Optional remote display (PM5563). Ethernet gateway functionality via RS-485 port.
  - Easy to operate
    - Intuitive navigation with self-guided, language selectable menus, six lines, four concurrent values. Two LEDs on the meter face help the user confirm normal operation with a green LED - heartbeat/communications indicator, and the amber LED - customizable either for alarms or energy pulse outputs. Onboard web pages (PM5500) show real-time and logged information, and verify communications.
  - Easy circuit breaker monitoring and control
    - The PM5300 provides two relay outputs (high performance Form A type) with capability to command most of the circuit breaker coils directly. For Digital Inputs, monitored switches can be wired directly to the meter without external power supply by using wetting output voltage.
    - PM5500 series have 4 status inputs (digital) and 2 digital output (solid state) to use for WAGES monitoring, control and alarm annunciation.

PB118062

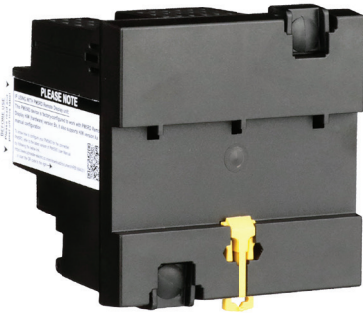

PowerLogic™ PM5563 meter

PB118063



PowerLogic™ PM5563 remote display front ISO

PB118064



PowerLogic™ PM5563 remote display rear ISO

Accurate energy measurement for precise cost allocation:

|                                | PM5100     | PM5300     | PM5500     | PM5600     | PM5700     |
|--------------------------------|------------|------------|------------|------------|------------|
| IEC 62053-22 (Active Energy)   | Class 0.5S | Class 0.5S | Class 0.2S | Class 0.2S | Class 0.2S |
| IEC 62053-23 (Reactive Energy) | Class 1.0  | Class 1.0  | Class 1.0  | Class 1.0  | Class 1.0  |

# PM5000 series

PB111777



PowerLogic™ PM5500 meter

PB111772



PowerLogic™ PM5300 meter

PB11768



PowerLogic™ PM5100 meter

## Native multi-protocol support

The PM55/PM56/PM5700 is now easier than ever to integrate into new and existing BMS systems. With native BACnet/IP protocol support, meters can simultaneously communicate via BACnet and Modbus in applications where multiple software systems are used (building management and energy management systems).

The PM55/PM56/PM5700 series has been tested and certified in accordance with BACnet Testing Laboratories (BTL) requirements and Ethernet IP protocol as per ODVA requirements.

- PM55/PM56/PM5700 Direct metering of neutral current
  - The PM55/PM56/PM5700 has a fourth CT for measuring neutral current. In demanding IT applications, where loads are non-linear (i.e. switching power supplies on computers/servers), measuring neutral current is essential to avoid overload and resulting outage.
  - Power Quality analysis
  - The PM5000 offers Total Harmonic Distortion (THD/thd), Total Demand Distortion (TDD) measurements and individual harmonics (odd) magnitudes and angles for voltage and current:

|                      | PM5100                            | PM5300                            | PM55/56/5700                               |
|----------------------|-----------------------------------|-----------------------------------|--|
| Individual Harmonics | magnitudes up to 15 <sup>th</sup> | magnitudes up to 31 <sup>st</sup> | magnitudes & angles up to 63 <sup>rd</sup> |

- These types of power quality parameters help to identify the source of harmonics that can harm transformers, capacitors, generators, motors and electronic equipment.
- Load management
  - Peak demands with time stamping are provided. Predicted demand values can be used in combination with alarms for basic load shedding applications.
- Alarming with time stamping
  - A different combination of set point driven alarms and digital alarms with 1s time stamping are available in the PM5000 family:

|                         | PM5100 | PM5300 | PM55/56/5700 |
|-------------------------|--------|--------|--------------|
| Set point driven alarms | 29     | 29     | 29 or 33*    |
| Unary                   | 4      | 4      | 4            |
| Digital                 | –      | 2      | 4 or 2       |
| Boolean / Logic         | –      | –      | 10           |
| Custom defined          | –      | –      | 5            |

\*Applicable in specific meter models. 2 alarms for disturbance (Sag/ Swell).

- Alarms can be visualized as Active (the ones that have picked up and did not drop out yet) or Historical (the ones that happened in the past). Alarms can be programmed and combined to trigger digital outputs and mechanical relays (PM5300).
- The PM5000 series keeps an alarm log with the active and historical alarms with date and time stamping. SMTP protocol for receiving alarm conditions via email and text. SNTP protocol for date/time network synchronization.
- Load timer
  - A load timer can be set to count load running hours based on a minimum current withdraw, adjustable to monitor and advise maintenance requirements on the load.
- High Performance and accuracy
  - IEC 61557-12 Performance measuring and monitoring devices (PMD). Defines the performance expectation based on classes. It defines the allowable error in the class for real and reactive power and energy, frequency, current, voltage, power factor, voltage unbalance, voltage and current harmonics (odds), voltage THD, current THD, as well as ratings for temperature, relative humidity, altitude, start-up current and safety. It makes compliant meters readings comparable - they will measure the same values when connected to the same load.

# PM5000 series

## PM5000 series feature selection

|   | PM5100  |         | PM5300  |                         |         |                         |         |         |
|---|---------|---------|---------|-------------------------|---------|-------------------------|---------|---------|
|   | PM5100  | PM5110  | PM5310  | PM5310R <sup>(+5)</sup> | PM5320  | PM5320R <sup>(+5)</sup> | PM5330  | PM5340  |
| Installation  |         |         |         |                         |         |                         |         |         |
| Fast installation, panel mount with integrated display                | ■       | ■       | ■       | ■                       | ■       | ■                       | ■       | ■       |
| Fast installation, DIN rail mountable                                 | –       | –       | –       | –                       | –       | –                       | –       | –       |
| Accuracy  |         |         |         |                         |         |                         |         |         |
| Class   | CL 0.5S | CL 0.5S | CL 0.5S | CL 0.5S                 | CL 0.5S | CL 0.5S                 | CL 0.5S | CL 0.5S |
| Display   |         |         |         |                         |         |                         |         |         |
| Backlit LCD, multilingual, bar graphs, 6 lines, 4 concurrent values   | ■       | ■       | ■       | ■                       | ■       | ■                       | ■       | ■       |
| Power and energy metering   |         |         |         |                         |         |                         |         |         |
| 3-ph voltage, current, power, demand, energy, frequency, power factor | ■       | ■       | ■       | ■                       | ■       | ■                       | ■       | ■       |
| Multi-tariff  | –       | –       | 4       | 4                       | 4       | 4                       | 4       | 4       |
| MID ready compliance, EN50470-1/3, Annex B & Annex D Class C          | –       | PM5111  | –       | –                       | –       | –                       | PM5331  | PM5341  |
| Power quality analysis  |         |         |         |                         |         |                         |         |         |
| THD, thd, TDD   | ■       | ■       | ■       | ■                       | ■       | ■                       | ■       | ■       |
| Harmonics, individual (odd) up to                                     | 15th    | 15th    | 31st    | 31st                    | 31st    | 31st                    | 31st    | 31st    |
| Waveform capture & sag/swell detection                                | –       | –       | –       | –                       | –       | –                       | –       | –       |
| I/Os and relays   |         |         |         |                         |         |                         |         |         |
| Digital inputs/ Digital output  | 1DO     | 1DO     | 2DI/2DO | 2DI/2DO                 | 2DI/2DO | 2DI/2DO                 | 2DI/2DO | 2DI/2DO |
| Relays  | –       | –       | –       | –                       | –       | –                       | 2       | 2       |
| Analog inputs   | –       | –       | –       | –                       | –       | –                       | –       | –       |
| Residual Current inputs   | –       | –       | –       | –                       | –       | –                       | –       | –       |
| Alarms and control  |         |         |         |                         |         |                         |         |         |
| Alarms  | 33      | 33      | 35      | 35                      | 35      | 35                      | 35      | 35      |
| Set point response time, seconds                                      | 1       | 1       | 1       | 1                       | 1       | 1                       | 1       | 1       |
| Single and multi-condition alarms                                     | –       | –       | ■       | ■                       | ■       | ■                       | ■       | ■       |
| Boolean alarm logic   | –       | –       | –       | –                       | –       | –                       | –       | –       |
| Memory for data logging   | –       | –       | 256KB   | 256KB                   | 256KB   | 256KB                   | 256KB   | 256KB   |
| Communications  |         |         |         |                         |         |                         |         |         |
| Serial ports with modbus protocol                                     | –       | 1       | 1       | 1                       | –       | –                       | 1       | –       |
| Ethernet port with Modbus TCP protocol                                | –       | –       | –       | –                       | 1       | 1                       | –       | 1       |
| BACnet/IP protocol  | –       | –       | –       | –                       | ■       | ■                       | –       | ■       |
| EtherNet/IP protocol  | –       | –       | –       | –                       | –       | –                       | –       | –       |
| DNP3.0 over Ethernet  | –       | –       | –       | –                       | –       | –                       | –       | –       |
| Onboard web server with web pages                                     | –       | –       | –       | –                       | –       | –                       | –       | –       |
| Serial to Ethernet gateway  | –       | –       | –       | –                       | –       | –                       | –       | –       |
| Ref. number followed with METSE*                                      | PM5100  | PM5110  | PM5310  | PM5310R <sup>(+5)</sup> | PM5320  | PM5320R <sup>(+5)</sup> | PM5330  | PM5340  |

\*See table below for complete commercial reference numbers

<sup>(+5)</sup> PM5310R and PM5320R must be used with Schneider Electric's "Quick Click" 3-in-1 LVCTs

# PM5000 series

## PM5000 series feature selection

|   | PM5500            |                   |                   |                   |                   | PM5600                       |                   | PM5700                       |
|---|-------------------|-------------------|-------------------|-------------------|-------------------|------------------------------|-------------------|------------------------------|
|   | PM5560            | PM5563            | PM5563RD          | PM5570            | PM5580            | PM5650                       | PM5660            | PM5760                       |
| <b>Installation</b>   |                   |                   |                   |                   |                   |                              |                   |                              |
| Fast installation, panel mount with integrated display                | ■                 | —                 | —                 | ■                 | ■                 | ■                            | ■                 | ■                            |
| Fast installation, DIN rail mountable                                 | —                 | ■                 | ■                 | —                 | —                 | —                            | —                 | —                            |
| <b>Accuracy</b>   |                   |                   |                   |                   |                   |                              |                   |                              |
| Class   | CL 0.2S           | CL 0.2S           | CL 0.2S           | CL 0.2S           | CL 0.2S           | CL 0.2S                      | CL 0.2S           | CL 0.2S                      |
| <b>Display</b>  |                   |                   |                   |                   |                   |                              |                   |                              |
| Backlit LCD, multilingual, bar graphs, 6 lines, 4 concurrent values   | ■                 | —                 | ■                 | ■                 | ■                 | ■                            | ■                 | ■                            |
| <b>Power and energy metering</b>                                      |                   |                   |                   |                   |                   |                              |                   |                              |
| 3-ph voltage, current, power, demand, energy, frequency, power factor | ■                 | ■                 | ■                 | ■                 | ■                 | ■                            | ■                 | ■                            |
| Multi-tariff  | 8                 | 8                 | 8                 | 8                 | 8                 | 8                            | 8                 | 8                            |
| MID ready compliance, EN50470-1/3, Annex B & Annex D Class C          | PM5561            | —                 | —                 | —                 | —                 | —                            | PM5661            | PM5761                       |
| <b>Power quality analysis</b>   |                   |                   |                   |                   |                   |                              |                   |                              |
| THD, thd, TDD   | ■                 | ■                 | ■                 | ■                 | ■                 | ■                            | ■                 | ■                            |
| Harmonics, individual (odd) up to                                     | 63 <sup>rd</sup>  | 63 <sup>rd</sup>  | 63 <sup>rd</sup>  | 63 <sup>rd</sup>  | 63 <sup>rd</sup>  | 63 <sup>rd</sup>             | 63 <sup>rd</sup>  | 63 <sup>rd</sup>             |
| Waveform capture & sag/swell detection                                | —                 | —                 | —                 | —                 | —                 | 8 cycles @ 128 samples/cycle | —                 | 8 cycles @ 128 samples/cycle |
| <b>I/Os and relays</b>  |                   |                   |                   |                   |                   |                              |                   |                              |
| Digital inputs/ solid state Digital output                            | 4DI/2DO           | 4DI/2DO           | 4DI/2DO           | 2DI/2DO           | 4DI/2DO           | 4DI/2DO                      | 2DI/2DO           | 2DI/2DO                      |
| Relays  | —                 | —                 | —                 | —                 | —                 | —                            | —                 | —                            |
| Analog inputs   | —                 | —                 | —                 | 2                 | —                 | —                            | —                 | —                            |
| Residual Current inputs   | —                 | —                 | —                 | —                 | —                 | —                            | 2                 | 2                            |
| <b>Alarms and control</b>   |                   |                   |                   |                   |                   |                              |                   |                              |
| Alarms  | 52                | 52                | 52                | 50                | 52                | 54                           | 54                | 56                           |
| Set point response time, seconds                                      | 1                 | 1                 | 1                 | 1                 | 1                 | 1                            | 1                 | 1                            |
| Single and multi-condition alarms                                     | ■                 | ■                 | ■                 | ■                 | ■                 | ■                            | ■                 | ■                            |
| Boolean alarm logic   | ■                 | ■                 | ■                 | ■                 | ■                 | ■                            | ■                 | ■                            |
| Memory for data logging   | 1.1 MB            | 1.1 MB            | 1.1 MB            | 1.1 MB            | 1.1 MB            | 1.1 MB                       | 1.1 MB            | 1.1 MB                       |
| <b>Communications</b>   |                   |                   |                   |                   |                   |                              |                   |                              |
| Serial ports with modbus protocol                                     | 1                 | 1                 | 1                 | 1                 | 1                 | 1                            | 1                 | 1                            |
| Ethernet port with Modbus TCP protocol                                | 2 <sup>(+6)</sup> | 2 <sup>(+6)</sup> | 2 <sup>(+6)</sup> | 2 <sup>(+6)</sup> | 2 <sup>(+6)</sup> | 2 <sup>(+6)</sup>            | 2 <sup>(+6)</sup> | 2 <sup>(+6)</sup>            |
| BACnet/IP protocol  | ■                 | ■                 | ■                 | ■                 | ■                 | ■                            | ■                 | ■                            |
| EtherNet/IP protocol  | ■                 | ■                 | ■                 | ■                 | ■                 | ■                            | ■                 | ■                            |
| DNP3.0 over Ethernet  | ■                 | ■                 | ■                 | ■                 | ■                 | ■                            | ■                 | ■                            |
| Onboard web server with web pages                                     | ■                 | ■                 | ■                 | ■                 | ■                 | ■                            | ■                 | ■                            |
| Serial to Ethernet gateway  | ■                 | ■                 | ■                 | ■                 | ■                 | ■                            | ■                 | ■                            |
| Ref. numbers with METSE*  | PM5560            | PM5563            | PM5563RD          | PM5570            | PM5580            | PM5650                       | PM5660            | PM5760                       |
| *See table below for complete commercial reference numbers            |                   |                   |                   |                   |                   |                              |                   |                              |

(+6) 2 Ethernet ports for daisy chain, one IP address.

# PM5000 series

## PM5000 technical specifications

|   |   | PM5100   | PM5300   | PM5500  | PM5600                       | PM5700 |
|---|---|--|--|---|------------------------------|--------|
| Use on LV and MV systems  |   | ■  |  |   |                              |        |
| Basic metering with THD and min/max readings  |   | ■  |  |   |                              |        |
| Instantaneous rms values  |   |  |  |   |                              |        |
| Current   | Average, per phase, neutral and ground (PM5500)   | ■  |  |   |                              |        |
| Voltage   | Average, per phase L-L and L-N                    | ■  |  |   |                              |        |
| Frequency   | Any available phase                               | ■  |  |   |                              |        |
| Real, reactive, and apparent power  | Total and per phase                               | Signed, Four Quadrant                                      |  |   |                              |        |
| True Power Factor   | Average and per phase                             | Signed, Four Quadrant                                      |  |   |                              |        |
| Displacement PF   | Average and per phase                             | Signed, Four Quadrant                                      |  |   |                              |        |
| % Unbalanced I, V L-N, V L-L  |   | ■  |  |   |                              |        |
| Direct monitoring of neutral current  |   | –  | ■  | ■   | ■                            |        |
| Energy values   |   |  |  |   |                              |        |
| Accumulated Active, Reactive and Apparent Energy  |   | Received/Delivered; Net and absolute; Time Counters        |  |   |                              |        |
| Demand value  |   |  |  |   |                              |        |
| Current average   |   | Present, Last, Predicted, Peak, and Peak Date Time         |  |   |                              |        |
| Active power  |   | Present, Last, Predicted, Peak, and Peak Date Time         |  |   |                              |        |
| Reactive power  |   | Present, Last, Predicted, Peak, and Peak Date Time         |  |   |                              |        |
| Apparent power  |   | Present, Last, Predicted, Peak, and Peak Date Time         |  |   |                              |        |
| Peak demand with timestamping D/T for current and three powers                              |   | ■  |  |   |                              |        |
| Demand calculation  | Sliding, fixed and rolling block, thermal methods | ■  |  |   |                              |        |
| Synchronisation of the measurement window to input, communication command or internal clock |   | ■  |  |   |                              |        |
| Settable Demand intervals   |   | ■  |  |   |                              |        |
| Demand synchronization with pulse input   |   | –  | ■  |   |                              |        |
| Other measurements  |   |  |  |   |                              |        |
| I/O timer   |   | ■  |  |   |                              |        |
| Operating timer   |   | ■  |  |   |                              |        |
| Load timer  |   | ■  |  |   |                              |        |
| Alarm counters and alarm logs   |   | ■  |  |   |                              |        |
| Power quality measurements  |   |  |  |   |                              |        |
| THD, thd (Total Harmonic Distortion) I, V L-N, V L-L  |   | I, V L-N, V L-L  |  |   |                              |        |
| TDD (Total Demand Distortion)   |   | ■  |  |   |                              |        |
| Individual harmonics (odds)   |   | 15 <sup>th</sup> (PM5110)                                  | 31 <sup>st</sup>   | 63 <sup>rd</sup>  |                              |        |
| Neutral Current metering with ground current calculation                                    |   | –  | –  | ■   |                              |        |
| Waveform capture and sag/swell detection  |   | –  | –  | –   | 8 cycles @ 128 samples/cycle |        |
| Data recording  |   |  |  |   |                              |        |
| Min/max of instantaneous values, plus phase identification <sup>(+7)</sup>                  |   | ■  |  |   |                              |        |
| Alarms with 1s timestamping <sup>(+7)</sup>   |   | ■  |  |   |                              |        |
| Data logging  |   |  | 2 fixed parameters kWh and kVAh with configurable interval & duration (e.g. 2 parameters for minimum 60 days at 15-minute intervals) | Up to 14 selectable parameters with configurable interval and duration (e.g. 6 parameters for minimum 90 days at 15-minute intervals) |                              |        |
| Min/max log   |   | ■  | ■  | ■   |                              |        |
| Maintenance, alarm and event logs   |   |  | ■  | ■   |                              |        |
| Customisable data logs  |   | –  |  |   | ■                            |        |
| RTC with battery back up  |   | 3 years (when meter is in Power OFF condition)             |  |   |                              |        |
| Display resolution  |   | 5 digits for Energy and other parameters with auto scaling |  |   |                              |        |
| Preset Energy and Energy scaling  |   | Available in selected references                           |  |   |                              |        |

<sup>(+7)</sup> Stored in non-volatile memory

# PM5000 series

## PM5000 technical specifications

|   |  | PM5100   | PM5300  | PM5500   | PM5600       | PM5700       |
|---|--|--|---|--|--------------|--------------|
| Inputs / Outputs / Mechanical Relays                          |  |  |   |  |              |              |
| Digital inputs  |  | –  | 2   | 4 in PM5560, PM5561, PM5562, PM5563, PM5580, PM5650<br>2 in PM5570, PM5660, PM5661, PM5760, PM5761 |              |              |
| Digital outputs   |  | 1 (kWh only)   | 2   | 2 (Solid state)  |              |              |
| Form A Relay outputs  |  | –  | 2   | –  |              |              |
| Analog inputs   |  | –  | –   | 2 for PM5570   | –            | –            |
| Residual Current inputs                                       |  | –  | –   |  | 2 for PM5660 | 2 for PM5760 |
| Timestamp resolution in seconds                               |  | 1  | 1   | 1  | 1            | 1            |
| Whetting source   |  | –  | 24 V DC, 8 mA   | –  | –            | –            |
| Type of measurement: True rms on three-phase (3P, 3P + N)     |  | 64 samples per cycle   |   | 128 samples per cycle  |              |              |
| Measurement accuracy  | IEC 61557-12                                     | PMD/[SD]SS/K70/0.5   |   | PMD/[SD]SS/K70/0.2   |              |              |
|   | Active Energy                                    | Class 0.5S as per IEC 62053-22/ Class 0.5 as per IEC 61557-12/ ± 0.5%                |   | Class 0.2S as per IEC 62053-22/ Class 0.2 as per IEC 61557-12/ ± 0.2%                              |              |              |
|   | Reactive Energy                                  | Class 2 as per IEC 62053-23/ Class 1.0 as per IEC 61557-12/ ± 1.0%                   |   | Class 2 as per IEC 62053-23/ Class 1.0 as per IEC 61557-12/ ± 1.0%                                 |              |              |
|   | Active Power                                     | Class 0.5 as per IEC 61557-12/ ± 0.5%  |   | Class 0.2 as per IEC 61557-12/ ± 0.2%  |              |              |
|   | Apparent Power                                   | Class 0.5 as per IEC 61557-12/ ± 0.5%  |   | Class 0.5 as per IEC 61557-12/ ± 0.5%  |              |              |
|   | Reactive Power                                   | Class 1.0 as per IEC 61557-12/ ± 1.0%  |   | Class 1.0 as per IEC 61557-12/ ± 1.0%  |              |              |
|   | Current, Phase                                   | Class 0.5 as per IEC 61557-12/ ±0.5 %  |   | Class 0.2 as per IEC 61557-12/ ±0.15 %   |              |              |
|   | Voltage, L-N                                     | Class 0.5 as per IEC 61557-12/ ± 0.5 %   |   | Class 0.2 as per IEC 61557-12/ ± 0.1 %   |              |              |
|   | Frequency  | Class 0.05 as per IEC 61557-12/ ±0.05 %  |   | Class 0.05 as per IEC 61557-12/ ±0.05 %  |              |              |
|   | Power Factor                                     | Class 0.5 as per IEC 61557-12/ ±0.005 count  |   | Class 0.5 as per IEC 61557-12/ ±0.005 count  |              |              |
|   | Voltage unbalance                                | Class 5/ ±5%   |   | Class 2/ ±2%   |              |              |
|   | Voltage harmonics                                | Class 5/ ±5%   |   | Class 2/ ±2%   |              |              |
|   | Voltage THD Class                                | Class 5/ ±5%   |   | Class 2/ ±2%   |              |              |
|   | Current harmonics                                | Class 5/ ±5%   |   | Class 2/ ±2%   |              |              |
|   | Current THD Class                                | Class 5/ ±5%   |   | Class 2/ ±2%   |              |              |
|   | MID Directive EN50470-1, EN50470-3               |  | Annex B and Annex D (Optional model references) Class C |  |              |              |
| Input-voltage (up to 1.0 MV AC max, with voltage transformer) | Nominal Measured Voltage range                   | 20 V L-N / 35 V L-L to 400 V L-N /690 V L-L<br>absolute range 35 V L-L to 760 V L-L  |   | 20 V L-N / 20 V L-L to 400 V L-N /690 V L-L<br>absolute range 20 V L-L to 828 V L-L                |              |              |
|   | Impedance  | 5 MΩ   |   |  |              |              |
|   | Frequency nominal                                | 50 or 60 Hz ±5 %   |   | 50 or 60 Hz ±10 %  |              |              |
| Input-current (configurable for 1 or 5 A secondary CTs)       | I nominal  | 5 A  |   |  |              | –            |
|   | Measured Amps with over range                    | Starting current: 5 mA<br>Operating range: 50 mA to 8.5 A                            |   | Starting current: 5 mA<br>Operating range: 50 mA to 10 A (with Crest Factor)                       |              |              |
|   | Withstand  | Continuous 20 A, 10 s/hr 50 A, 1 s/hr 500 A  |   |  |              |              |
|   | Impedance  | < 0.3 mΩ   |   |  |              |              |
|   | Frequency nominal                                | 50 or 60 Hz ±5 %   |   | 50 or 60 Hz ±10 %  |              |              |
|   | Burden   | <0.026 VA at 8.5 A   |   |  |              |              |
| AC control power  | Operating range                                  | 100 - 277 V AC L-N / 415 V L-L +/-10 %<br>CAT III 300V class per IEC 61010           |   | 100-480 V AC ±10 %<br>CAT III 600V class per IEC 61010   |              |              |
|   | Burden   | <5 W,11 VA at 415V L-L   |   | <5W/16.0 VA at 480 V AC  |              |              |
|   | Frequency  | 45 to 65 Hz  |   |  |              |              |
|   | Ride through time at maximum burden              | 80 mS typical at 120V AC<br>100 mS typical at 230 V AC<br>100 mS typical at 415 V AC |   | 35 ms typical at 120 V L-N<br>129 ms typical at 230 V L-N  |              |              |
| DC control power  | Operating range                                  | 125–250 V DC ±20 % (100 to 300 V DC)   |   |  |              |              |
|   | Burden   | <4 W at 250 V DC   |   | typical 3.1 W at 125 V DC, max. 5 W  |              |              |
|   | Ride-through time                                | 50 mS typical at 125 V DC and maximum burden   |   |  |              |              |
| LV DC control power   | 20-60 V DC ±10 %<br>CAT III<br>Burden 4.1 W max. | –  | –   | ■ PM5580   | –            | –            |

# PM5000 series

## PM5000 technical specifications

|  |                   |                                      | PM5100  | PM5300  | PM5500                                   | PM5600   | PM5700 |  |
|--|-------------------|--------------------------------------|---|---|--|--|--------|--|
| Outputs  | Relay outputs     | Max output frequency                 | –   | 0.5 Hz maximum<br>(1 s ON / 1 s OFF - min times)  | –  | –  | –      |  |
|  |                   | Switching current, at resistive load | –   | 250 V AC at 8.0 Amps, 25 k cycles<br><br>30 V DC at 2.0 Amps, 75 k cycles<br><br>30 V DC at 5.0 Amps, 12.5 k cycles   | –  | –  | –      |  |
|  |                   | Isolation                            | –   | 2.5 kV rms  | –  | –  | –      |  |
|  | Digital outputs   | Max load voltage                     | 40 V DC   |   |  | 40 V AC / 60 V DC (PM5500 and PM 5650)<br>30 V AC / 40 V DC (PM5660, PM5661, PM5760, PM5761)   |        |  |
|  |                   | Max load current                     | 20 mA   |   |  | 125 mA (Solid state)   |        |  |
|  |                   | On Resistance                        | 50 Ω max  |   |  | 8 Ω  |        |  |
|  |                   | Meter constant                       | from 1 to 9,999,999 pulses per k_h (kWh, kVAh, kVARh)   |   |  |  |        |  |
|  |                   | Pulse width for Digital Output       | 50 % duty cycle   |   |  |  |        |  |
|  |                   | Pulse frequency for Digital Output   | 25 Hz max.  |   |  |  |        |  |
|  |                   | Leakage current                      | 0.3 micro Amps  |   |  | 1 micro Amps   |        |  |
|  |                   | Isolation                            | 5 kV rms  |   |  | 2.5 kV rms for 60 s  |        |  |
|  | Optical outputs   | Pulse width (LED)                    | 200 ms  |   |  |  |        |  |
|  |                   | Pulse frequency                      | 2.5 kHz. max  |   |  | 2.5 kHz. max   |        |  |
|  |                   | Meter constant                       | from 1 to 9,999,999 pulses per k_h (kWh, kVAh, kVARh)   |   |  |  |        |  |
| Status Inputs  | ON Voltage        |                                      | –   | 18.5 to 36 V DC   | 15 to 30 V AC / 15 to 60 V DC max        |  |        |  |
|  | OFF Voltage       |                                      | –   | 0 to 4 V DC   | 0 to 6 V AC / 0 to 6 V DC                |  |        |  |
|  | Input Resistance  |                                      | –   | 110 k Ω   | 100 k Ω                                  |  |        |  |
|  | Maximum Frequency |                                      | –   | 2 Hz (T ON min = T OFF min = 250 ms)  | 25 Hz (T ON min = T OFF min = 20 ms)     |  |        |  |
|  | Response Time     |                                      | –   | 20 ms   | 10 ms                                    |  |        |  |
|  | Opto Isolation    |                                      | –   | 5 kV rms  | 2.5 kV rms for 60 s                      |  |        |  |
|  | Whetting output   |                                      | –   | 24 V DC/ 8 mA max   | -  |  |        |  |
|  | Input Burden      |                                      | –   | 2 mA @24V DC  | 2 mA @ 24 V AC/DC<br>2.5 mA @ 60 V AC/DC |  |        |  |
| Analog inputs (PM5570)   |                   |                                      | –   | 4 - 20 mA DC (nominal),<br>Accuracy: 1% of full-scale reading,<br>Impedance < 20 Ω,<br>Operating voltage: 24 V DC max | –  |  |        |  |
| Residual Current inputs<br>(PM5660, PM5661, PM5760, PM5761)<br>Type A as per IEC 62020 |                   |                                      | –   |   |  | 5 uA to 1200 uA (nominal),<br>1500 uA max (continuous),<br>Input type: AC 45 to 65 Hz,<br>Burden: 150 Ω,<br>Default toroid: 1000 turns |        |  |
| Mechanical characteristics   |                   |                                      |   |   |  |  |        |  |
| Product weight   |                   |                                      | 380 g   | 430 g   | 450 g                                    | 450 g  | 450 g  |  |
| IP degree of protection (IEC 60529)  |                   |                                      | IP54 front display, IP30 rear side (IP65 front side with Optional accessory kit METSEIP65OP96X96FF) |   |  |  |        |  |
| Dimensions W x H x D [protrusion from cabinet]   |                   |                                      | 96 x 96 x 72 mm (77 mm for PM5500) (depth of meter from housing mounting flange) [13 mm]            |   |  |  |        |  |
| Mounting position  |                   |                                      | Vertical  |   |  |  |        |  |
| Panel thickness  |                   |                                      | 6 mm maximum  |   |  |  |        |  |
| LVCT <sup>(+8)</sup> inputs for PM5310R and PM5320R - Nominal voltage of 0.333V        |                   |                                      |   |   |  |  |        |  |
| Measurement range  |                   |                                      | -   | 0.00333V - 0.4V   | -  | -  | -      |  |

(\*) PM5310R and PM5320R must be used with Schneider Electric's "Quick Click" 3-in-1 LVCTs

# PM5000 series

## PM5000 technical specifications

|   |   | PM5100   | PM5300     | PM5500                             | PM5600 | PM5700 |
|---|---|--|------------|------------------------------------|--------|--------|
| Environmental characteristics                           |   |  |            |                                    |        |        |
| Operating temperature                                   | Operating temperature                           | -25 °C to 70 °C  |            |                                    |        |        |
|   | Display (reduced display performance at -25 °C) | -25 °C to 70 °C  |            |                                    |        |        |
| Storage temperature                                     |   | -40 °C to 85 °C  |            |                                    |        |        |
| Humidity range  |   | 5 to 95 % RH at 50 °C (non-condensing)   |            |                                    |        |        |
| Pollution degree  |   | 2  |            |                                    |        |        |
| Altitude  |   | 2000 m CAT III / 3000 m CAT II   |            | 3000 m max. CAT III                |        |        |
| Mission profile / Life span                             |   | >15 years  |            |                                    |        |        |
| Protective treatment                                    |   | Conformal coating  |            |                                    |        |        |
| Electromagnetic compatibility                           |   |  |            |                                    |        |        |
| Harmonic current emissions                              |   | –  | –          | IEC 61000-3-2                      |        |        |
| Flicker emissions                                       |   | –  | –          | IEC 61000-3-3                      |        |        |
| Electrostatic discharge                                 |   | IEC 61000-4-2  |            |                                    |        |        |
| Immunity to radiated fields                             |   | IEC 61000-4-3  |            |                                    |        |        |
| Immunity to fast transients                             |   | IEC 61000-4-4  |            |                                    |        |        |
| Immunity to surge                                       |   | IEC 61000-4-5  |            |                                    |        |        |
| Conducted immunity 150 kHz to 80 MHz                    |   | IEC 61000-4-6  |            |                                    |        |        |
| Immunity to magnetic fields                             |   | IEC 61000-4-8  |            |                                    |        |        |
| Immunity to voltage dips                                |   | IEC 61000-4-11   |            |                                    |        |        |
| Immunity to damped oscillatory waves                    |   | –  | –          | IEC 61000-4-12                     |        |        |
| Radiated and conducted emissions                        |   | FCC part 15, EN 55022 Class B  |            |                                    |        |        |
| Safety  |   |  |            |                                    |        |        |
| Europe  |   | CE, as per IEC 61010-1 Ed. 3, IEC 62052-11 & IEC 61557-12  |            |                                    |        |        |
| U.S. and Canada   |   | cULus as per UL 61010-1 (Edition 3)  |            |                                    |        |        |
| Measurement category (Voltage & Current inputs)         |   | CAT III up to 400 V L-N / 690 V L-L  |            |                                    |        |        |
| Dielectric  |   | As per IEC/UL 61010-1 (Edition 3)  |            |                                    |        |        |
| Protective Class  |   | II, Double insulated for user accessible parts   |            |                                    |        |        |
| Communication   |   |  |            |                                    |        |        |
| RS-485 port Modbus RTU, Modbus ASCII (7 or 8 bit), JBUS |   | 2-Wire, 9600,19200 or 38400 baud, Parity - Even, Odd, None, 1 stop bit if parity Odd or Even, 2 stop bits if None; (Optional in PM51x and PM53x) |            |                                    |        |        |
| Ethernet port: 10/100 Mbps; Modbus TCP/IP               |   | –  | 1 Optional | 2 (daisy chain only, 1 IP address) |        |        |
| Native Ethernet/IP & DNP3.0 over Ethernet               |   | –  | –          | Yes                                | Yes    | Yes    |
| FTP / FTPS  |   | –  | –          | Yes                                | Yes    | Yes    |
| SNMP, SNTp, SMTP  |   | –  | –          | Yes                                | Yes    | Yes    |
| HTTPS   |   | –  | –          | Yes                                | Yes    | Yes    |
| Firmware and language file update                       |   | Meter firmware update via the communication ports  |            |                                    |        |        |
| Isolation   |   | 2.5 kVrms, double insulated  |            |                                    |        |        |
| Human machine interface                                 |   |  |            |                                    |        |        |
| Display type  |   | Monochrome Graphics LCD  |            |                                    |        |        |
| Resolution  |   | 128 x 128 pixels   |            |                                    |        |        |
| Backlight   |   | White LED  |            |                                    |        |        |
| Viewable area (W x H)                                   |   | 67 x 62.5 mm   |            |                                    |        |        |
| Keypad  |   | 4-button   |            |                                    |        |        |
| Indicator Heartbeat / Communication activity            |   | Green LED  |            |                                    |        |        |
| Energy pulse output / Active alarm (configurable)       |   | Optical, amber LED   |            |                                    |        |        |
| Wavelength  |   | 590 to 635 nm  |            |                                    |        |        |
| Maximum pulse rate                                      |   | 2.5 kHz  |            |                                    |        |        |

# PM5000 series

| Comm. ref numbers | Description  |
|-------------------|--|
| METSEPM5100       | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 15th harmonic, 1DO  |
| METSEPM5110       | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 15th harmonic, 1DO, RS-485  |
| METSEPM5111       | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 15th harmonic, 1DO, RS-485, MID   |
| METSEPM5310       | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO, RS-485  |
| METSEPM5310R      | Power Meter, 600V AC L-L/ RJ45 LVCT input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO, RS-485   |
| METSEPM5320       | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO, Ethernet  |
| METSEPM5320R      | Power Meter, 600V AC L-L/ RJ45 LVCT input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO, Ethernet   |
| METSEPM5330       | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO/2-Relay, RS-485  |
| METSEPM5331       | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO/2-Relay, RS-485, MID   |
| METSEPM5340       | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO/2-Relay, Ethernet  |
| METSEPM5341       | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO/2-Relay, Ethernet, MID   |
| METSEPM5560       | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet   |
| METSEPM5561       | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, MID  |
| METSEPM5562       | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, RMI CAN approved, Hardware lockable                            |
| METSEPM5562MC     | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, RMI CAN approved, Factory sealed                               |
| METSEPM5563       | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, DIN mount, No display  |
| METSEPM5563RD     | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, DIN mount, Remote display                                      |
| METSEPM5570       | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 2DI/2AI/2-DO, RS-485, Ethernet   |
| METSEPM5580       | Power Meter, 690V AC L-L/ 5A or 1A input, 24 to 64V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet   |
| METSEPM5650       | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, Wave Form Capture and Sag/swell                                |
| METSEPM5660       | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 2DI/2-DO, RS-485, Ethernet, Residual Current Monitor                                       |
| METSEPM5661       | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 2DI/2-DO, RS-485, Ethernet, Residual Current Monitor, MID                                  |
| METSEPM5760       | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 2DI/2-DO, RS-485, Ethernet, Wave Form Capture and Sag/swell, Residual current monitor      |
| METSEPM5761       | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 2DI/2-DO, RS-485, Ethernet, Wave Form Capture and Sag/swell, Residual current monitor, MID |

For selection of compatible current transformers with 5 A output in Schneider range: Refer **PLSED310169EN** in solid core and split core IEC type

For Residual Current Monitoring Toroids (Vigirex) - Closed Toroids, A Type (applicable for PM5660, PM5661, PM5760, PM5761)

|       |   |
|-------|---|
| 50437 | TA30 - closed toroid A type, for RCM enabled power meters, 30 mm inner diameter, rated current 65 Amps, 1000 turns    |
| 50438 | PA50 - closed toroid A type, for RCM enabled power meters, 50 mm inner diameter, rated current 85 Amps, 1000 turns    |
| 50439 | IA80 - closed toroid A type, for RCM enabled power meters, 80 mm inner diameter, rated current 160 Amps, 1000 turns   |
| 50440 | MA120 - closed toroid A type, for RCM enabled power meters, 120 mm inner diameter, rated current 250 Amps, 1000 turns |
| 50441 | SA200 - closed toroid A type, for RCM enabled power meters, 200 mm inner diameter, rated current 400 Amps, 1000 turns |
| 50442 | GA300 - closed toroid A type, for RCM enabled power meters, 300 mm inner diameter, rated current 630 Amps, 1000 turns |

Accessories for Closed Toroids (applicable for PM5660, PM5661, PM5760, PM5761)

|       |  |
|-------|--|
| 56055 | Magnetic ring/ Iron screen accessory for TA30 toroid sensor  |
| 56056 | Magnetic ring/ Iron screen accessory for PA50 toroid sensor  |
| 56057 | Magnetic ring/ Iron screen accessory for IA80 toroid sensor  |
| 56058 | Magnetic ring/ Iron screen accessory for MA120 toroid sensor |

Residual Current Monitoring Toroids (Vigirex) - Split Toroids, OA Type (applicable for PM5660, PM5661, PM5760, PM5761)

|       |  |
|-------|--|
| 50420 | TOA80 - split toroid OA type, 80 mm inner diameter, rated current 160 Amps, 1000 turns       |
| 50421 | TOA120 - split toroid OA type, 120 mm inner diameter, rated current 250 Amps, 1000 turns     |
| 56053 | L1 type - rectangular sensor, width 280 x height 115 mm, rated current 1600 Amps, 1000 turns |
| 56054 | L2 type - rectangular sensor, width 470 x height 160 mm, rated current 3200 Amps, 1000 turns |


## Current Transformer commercial reference numbers for PM53xxR

| Comm. ref numbers  | Description  |
|--|--|
| 0.333V (1/3 Volts), 3-in-1 CTs with RJ45 connectors for PM53x0R LVCT enabled power meter |  |
| METSECTV25006  | LVCT Solid core 3 in 1 with RJ45 cable, 25 mm phase center, 60 Amps, 0.333V output   |
| METSECTV25010  | LVCT Solid core 3 in 1 with RJ45 cable, 25 mm phase center, 100 Amps, 0.333V output  |
| METSECTV25013  | LVCT Solid core 3 in 1 with RJ45 cable, 25 mm phase center, 125 Amps, 0.333V output  |
| METSECTV25016  | LVCT Solid core 3 in 1 with RJ45 cable, 25 mm phase center, 160 Amps, 0.333V output  |
| METSECTV35006  | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 60 Amps, 0.333V output   |
| METSECTV35010  | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 100 Amps, 0.333V output  |
| METSECTV35012  | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 120 Amps, 0.333V output  |
| METSECTV35013  | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 125 Amps, 0.333V output  |
| METSECTV35015  | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 150 Amps, 0.333V output  |
| METSECTV35016  | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 160 Amps, 0.333V output  |
| METSECTV35020  | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 200 Amps, 0.333V output  |
| METSECTV35025  | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 250 Amps, 0.333V output  |
| METSECTV45025  | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 250 Amps, 0.333V output  |
| METSECTV45030  | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 300 Amps, 0.333V output  |
| METSECTV45040  | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 400 Amps, 0.333V output  |
| METSECTV45050  | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 500 Amps, 0.333V output  |
| METSECTV45060  | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 600 Amps, 0.333V output  |
| METSECTV45063  | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 630 Amps, 0.333V output  |
| METSECTV29006  | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 60 Amps, 0.333V output   |
| METSECTV29010  | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 100 Amps, 0.333V output  |
| METSECTV29012  | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 120 Amps, 0.333V output  |
| METSECTV29013  | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 125 Amps, 0.333V output  |
| METSECTV29015  | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 150 Amps, 0.333V output  |
| METSECTV29016  | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 160 Amps, 0.333V output  |
| METSECTV29020  | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 200 Amps, 0.333V output  |
| METSECTV70080  | LVCT Solid core 3 in 1 with RJ45 cable, 70 mm phase center, 800 Amps, 0.333V output  |
| METSECTV70100  | LVCT Solid core 3 in 1 with RJ45 cable, 70 mm phase center, 1000 Amps, 0.333V output   |
| METSECTV70125  | LVCT Solid core 3 in 1 with RJ45 cable, 70 mm phase center, 1250 Amps, 0.333V output   |
| Cables for PM5563 and PM5563RD   |  |
| METSEPM5CAB03  | RJ25 cable assembly for interfacing PM5563 meter and PM5RD remote display with 0.3 meter cable length                                  |
| METSEPM5CAB1   | RJ25 cable assembly for interfacing PM5563 meter and PM5RD remote display with 1.0 meter cable length                                  |
| METSEPM5CAB10  | RJ25 cable assembly for interfacing PM5563 meter and PM5RD remote display with 10 meter cable length                                   |
| METSEPM5CAB3   | RJ25 cable assembly for interfacing PM5563 meter and PM5RD remote display with 3 meter cable length                                    |
| METSEPM5CAB4   | RJ25 cable assembly for interfacing PM5563 meter and PM5RD remote display with 4 meter cable length                                    |
| Other related products or accessories  |  |
| METSEPM5RD   | Remote display unit for PM5563 power meter supplied with mounting bracket, gasket, anti-rotation pin and RJ25 cable METSEPM5CABxy      |
| METSEPM51HK  | Hardware kit for PM51xx comprises 2 retainer clips and spare connectors for - Voltage in, Control power in, Digital IO & RS-485        |
| METSEPM53HK  | Hardware kit for PM51xx comprises 2 retainer clips and spare connectors for - Voltage in, Control power in, Digital IO, Relay & RS-485 |
| METSEPM51_3RSK   | Revenue sealing kit for PM51XX & PM53XX  |
| METSEPM55RSK   | Revenue sealing kit for PM55XX   |
| METSEPM55HK  | Hardware kit for PM55xx  |


Please contact your Schneider Electric representative for complete ordering information.

# PM5000 series


## PM5100/PM5300 Series meter mounting

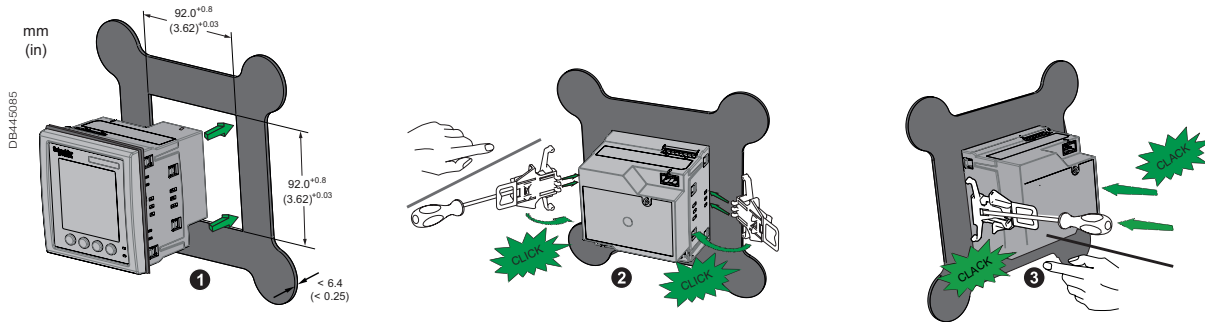


## PM5500/PM5600/PM5700 series meter mounting

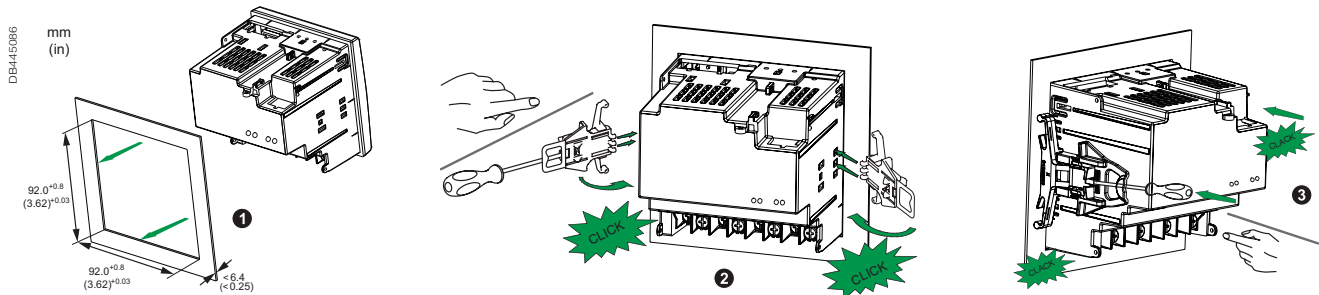

## PM5000 series meter dimensions

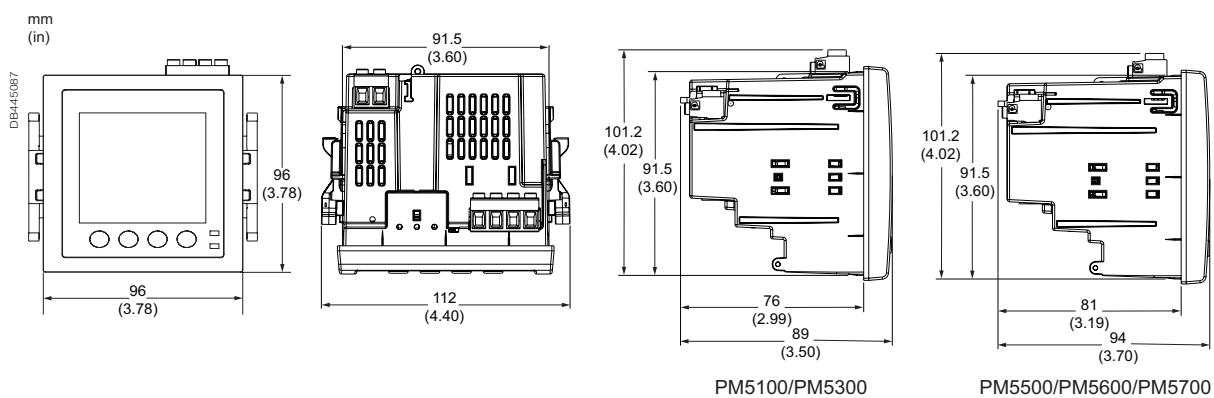


## PM5000 series overview

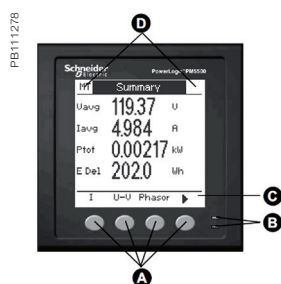


PM5000 meter parts

- A** Menu selection buttons
- B** LED indicators
- C** Navigation or menu selections
- D** Maintenance and alarm notification area

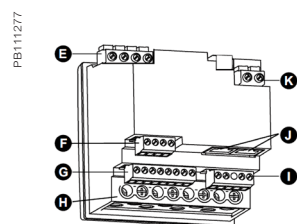

PM5500/PM5600/PM5700 meter parts

- E** Voltage inputs
- F** RS-485 comms
- G** Digital inputs
- H** Current inputs
- I** Digital outputs
- J** Ethernet ports
- K** Control power

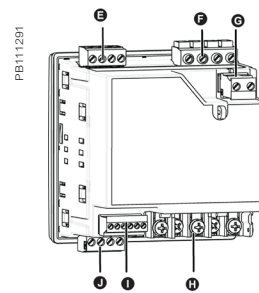

PM5100/PM5300 meter parts

- E** Relay output (PM5300 only)
- F** Voltage inputs
- G** Control power
- H** Current inputs
- I** Status inputs/digital outputs
- J** Communications port: Ethernet (PM5300 only) or RS-485

Please see the appropriate **Installation Guide** for accurate and complete information on the installation of this product.

# PowerLogic™ PM5350 series

The PowerLogic™ PM5350 series power meters are the new benchmark in affordable, precision metering.

The PowerLogic™ PM5350, PM5350IB, PM5350PB, and PM5350P power meters offer all the measurement capabilities required to monitor an electrical installation in a space-efficient, single 96 x 96 mm unit with small depth. DNC certifies for marine applications.

## Applications

- Panel instrumentation.
- Cost allocation or energy management
- Electrical installation remote monitoring
- Sophisticated alarming
- Circuit breaker monitoring and control



METSEPM5350P

### The solution for

Markets that can benefit from a solution that includes PowerLogic™ PM5350 series meters:

- Buildings
- Industry
- Healthcare
- Data Centre and networks
- Infrastructure

### Benefits

#### System integrators' benefit

- Ease of integration
- Ease of setup
- Cost effectiveness

#### Panel builders' benefit

- Ease of installation
- Cost effectiveness
- Aesthetically pleasing
- Simplified ordering

#### End users' benefit

- Ease of use
- Precision metering & sub-billing
- Billing flexibility
- Comprehensive, consistent and superior performance

### Competitive advantages

- Easy to install and operate
- Easy for circuit breaker monitoring and control
- Power quality analysis
- Load management combined with alarm and timestamping
- High performance and accuracy
- Multi-tariff capabilities
- Individual harmonics up to 31<sup>st</sup>


### Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximise electrical network reliability and availability, and optimise electrical asset performance.

### Conformity of standards

- IEC 62053-22
- IEC 61557-12
- IEC 62053-23
- IEC/UL 61010-1
- IEC 61326-1
- UL 61010-1
- IEC 61000-3-3
- FCC part 15 Class A
- DNV GL certified

# PM5350 series

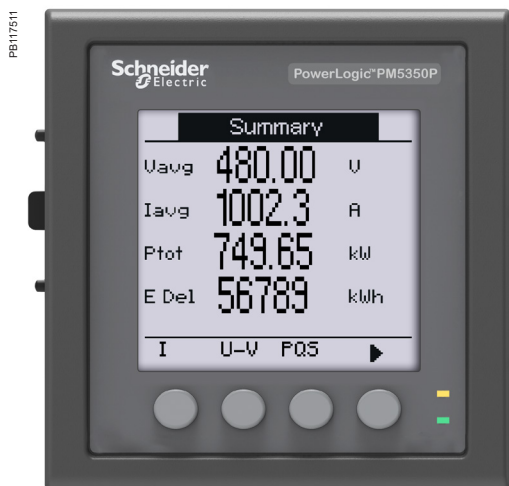

Front display of PowerLogic™ PM5350P front display



Rear view of PowerLogic™ PM5350P

The PowerLogic™ PM5350 series power meters offer electrical installation measurement capabilities in a single 96 x 96 mm unit. Three-phases and neutral can be monitored simultaneously using a bright, anti-glare display with large characters and backlighting. Menus are intuitive and the meter supports English, Chinese, Hebrew, and Spanish languages. Its compact size and high performance make the PowerLogic™ PM5350 series suitable for many applications.

## Applications

- Panel instrumentation.
- Cost allocation or energy management.
- Electrical installation remote monitoring.
- Alarming with under/over, digital status, control power interruption, meter reset, self diagnostic issue.
- Circuit Breaker monitoring and control with relay outputs and whetted digital inputs.

## Main characteristics

- Easy to install
  - Mounts using two clips, no tools required. Ultra compact meter with 44 mm depth connectable up to 480 V L-L without voltage transformers for installations compliant with category III, as per IEC 61010-1. See specification table for UL voltage limits.
- Easy to operate
  - Intuitive navigation with self-guided, language selectable menus, six lines, four concurrent values. Two LEDs help confirm normal operation.
- Easy circuit breaker monitoring and control
  - Two relay outputs (high performance) to command most circuit breaker coils directly. Monitored switches can be wired directly without external power supply.
- System status at a glance
  - Bright, anti-glare, backlit display plus two LEDs; orange for energy pulse or alarm and green for heartbeat/communications indication.
- IEC 62053-22 class 0.5S accuracy for active energy
  - Accurate energy measurement for cost allocation.
- Power Quality analysis
  - The PM5350P offers THD and TDD measurements as standard. Total Demand Distortion is based on a point of common coupling (PCC), which is a common point that each user receives power from the power source. The TDD compares the contribution of harmonics versus the maximum demand load. In addition, it has individual harmonics (odd) measurement up to 31st harmonics. These types of power quality parameters help to identify the source of harmonics that can harm transformers, capacitors, generators, motors and electronic equipment.

## Load management

- Peak demands with Timestamping are provided. Predicted demand values can be used in basic load shedding applications. Alarming with timestamping
- Over 30 alarm conditions, such as under/over conditions, digital input changes, and phase unbalance inform you of events. A time-stamped log maintains a record of the last 40 alarm events.
- Load timer setpoint adjustable to monitor and advise maintenance requirements.
- Performance Standard Meets IEC 61557-12 PMD/Sx/K70/0.5.

| Commercial reference number | Description   |
|-----------------------------|---|
| METSEPM5350                 | RS-485 Modbus, THD, 4DI, 2Relay   |
| METSEPM5350IB               | RS-485, 4DI/2Relay, Multi-level alarm, UL480V, 4DI/2Relay               |
| METSEPM5350PB               | RS-485, 4DI/2Relay, Multi-level alarm, UL300V, 4DI/2Relay               |
| METSEPM5350P                | RS-485 Modbus, THD, 31st Individual harmonics, Multi-tariff, 4DI/2Relay |

# PM5350 series

| Feature guide   |  | PM5350P                               | PM5350 | PM5350IB | PM5350PB |
|---|--|---------------------------------------|--------|----------|----------|
| General   |  |                                       |        |          |          |
| Use on LV and MV systems  |  | ■                                     |        |          |          |
| Basic metering with THD and min/max readings  |  | ■                                     |        |          |          |
| Instantaneous rms values  |  |                                       |        |          |          |
| Current   | Total, Phases and neutral                        | ■                                     |        |          |          |
| Voltage   | Total, Ph-Ph and Ph-N                            | ■                                     |        |          |          |
| Frequency   |  | ■                                     |        |          |          |
| Real, reactive, and apparent power  | Total and per phase                              | Signed                                |        |          |          |
| True Power Factor   | Total and per phase                              | Signed, Four Quadrant                 |        |          |          |
| Displacement PF   | Total and per phase                              | Signed, Four Quadrant                 |        |          |          |
| Unbalanced I, VL-N, VL-L  |  | ■                                     |        |          |          |
| Accumulated Active, Reactive and Apparent Energy Stored in non-volatile memory                  |  | Received/Delivered; Net and absolute; |        |          |          |
| Demand values   |  |                                       |        |          |          |
| Current average   | Present, Last, Predicted, Peak, & Peak Date Time | ■                                     |        |          |          |
| Active power  | Present, Last, Predicted, Peak, & Peak Date Time | ■                                     |        |          |          |
| Reactive power  | Present, Last, Predicted, Peak, & Peak Date Time | ■                                     |        |          |          |
| Apparent power  | Present, Last, Predicted, Peak, & Peak Date Time | ■                                     |        |          |          |
| Multi-tariff  |  | 16 tariffs                            |        |          |          |
| Peak demand with timestamping D/T for current & powers  |  | ■                                     |        |          |          |
| Demand calculation  | Sliding, fixed and rolling block, thermal        | ■                                     |        |          |          |
| Synchronization of the measurement window   |  | ■                                     |        |          |          |
| Other measurements  |  |                                       |        |          |          |
| I/O timer   |  | ■                                     |        |          |          |
| Operating timer   |  | ■                                     |        |          |          |
| Active load timer   |  | ■                                     |        |          |          |
| Alarm counters  |  | ■                                     |        |          |          |
| Power quality measurements  |  |                                       |        |          |          |
| THD, thd (Total Harmonic Distortion)  |  | I, V L-N, V L-L                       |        |          |          |
| TDD, thd (Total Demand Distortion)  |  | ■                                     |        |          |          |
| Harmonics Individual (Odd)  |  | 31st                                  |        |          |          |
| Data recording  |  |                                       |        |          |          |
| Min/max of instantaneous values, plus phase identification                                      |  | ■                                     |        |          |          |
| Alarms with 1s timestamping   |  | Standard 29; Unary 4; Digital 4       |        |          |          |
| Alarms stored in non-volatile memory  |  | 40 events                             |        |          |          |
| Inputs/Outputs  |  |                                       |        |          |          |
| Digital inputs  |  | 4 (DI1, DI2, DI3, DI4)                |        |          |          |
| Digital outputs   |  | 2 relay outputs (DO1, DO2)            |        |          |          |
| Display   |  |                                       |        |          |          |
| White backlit LCD display, 6 lines, 4 concurrent values   |  | ■                                     |        |          |          |
| IEC or IEEE visualization mode  |  | ■                                     |        |          |          |
| Communication   |  |                                       |        |          |          |
| Modbus RTU, Modbus ASCII, Jbus Protocol   |  | ■                                     |        |          |          |
| Firmware update via RS-485 serial port (DLF3000 via the Schneider Electric website: www.se.com) |  | ■                                     |        |          |          |

# PM5350 series

| Electrical characteristics |  |  | PM5350  | PM5350P                                   | PM5350PB/IB   |
|----------------------------|--|--|---|---|---|
| Type of measurement        |  | True rms measurement in 1P, 2P, 3P network, supports 13 wiring schemes. 32 samples per cycle, zero blind                                       | ■   | 31 <sup>st</sup>                          | ■   |
| Measurement accuracy       | Current, Phase <sup>(1)</sup>                  | ±0.30 %  | ■   | 0.2% (Avg A)                              | ■   |
|                            | Voltage, L-N <sup>(1)</sup>                    | ±0.30 %  | ■   | 0.2% (Avg A)                              | ■   |
|                            | Power Factor <sup>(1)</sup>                    | ±0.005   |   | ■   |   |
|                            | Power, Phase <sup>(2)</sup>                    | IEC 61557-12 Class 0.5; For 5 A nominal CT   |   | ■   |   |
|                            | Frequency <sup>(1)</sup>                       | ±0.05 %  |   | ■   |   |
|                            | Real Energy <sup>(3)</sup>                     | IEC 62053-22 Class 0.5S<br>IEC 61557-12 Class 0.5  |   | ■   |   |
|                            | Reactive Energy <sup>(4)</sup>                 | IEC 62053-23 Class 2<br>IEC 61557-12 Class 2   |   | ■   |   |
| Data update rate           |  | 1 second nominal (50/60 cycles)  |   | ■   |   |
| Input-voltage              | VT primary                                     | 1.0 MV AC max, starting voltage depends on VT ratio  |   | ■   |   |
|                            | U <sub>nom</sub>                               | 277 V L-N  |   | ■   |   |
|                            | Measured voltage with overrange & Crest Factor | IEC: 20 to 480 V AC L-L; 20 to 277 V AC L-N, CAT III<br>IEC: 20 to 690 V AC L-L; 20 to 400 V AC L-N, CAT II<br>UL: 20 to 300 V AC L-L, CAT III | ■   |   | ■ and<br>UL: 20 to 480 V<br>AC L-L                  |
|                            | Permanent overload                             | 700 V AC L-L, 404 V AC L-N   |   | ■   |   |
|                            | Impedance                                      | 10 MΩ  |   | ■   |   |
|                            | Burden   | 0.2 VA at 240 V AC L-N   |   | ■   |   |
|                            | Frequency range                                | 45 to 70 Hz  | ■   | 45 to 65 Hz                               | ■   |
| Input-current              | CT ratings Secondary                           | 1 A, 5 A nominal   |   | ■   |   |
|                            | Measured voltage with overrange & crest factor | 5 mA to 9 A  |   | ■   |   |
|                            | Withstand                                      | Continuous 20 A, 10 sec/hr 50 A, 1 sec/hr 500 A  |   | ■   |   |
|                            | Impedance                                      | < 0.3 mΩ   |   | ■   |   |
|                            | Frequency range                                | 45 to 70 Hz  |   | ■   |   |
|                            | Burden   | < 0.024 VA at 9 A  |   | ■   |   |
| AC control power           | Operating range                                | 85 - 265 V AC  |   | ■   |   |
|                            | Burden   | At 120 V AC, 4.1 VA/ 1.5 W typical<br>At 230 V AC, 6.3 VA/ 2.0 W typical<br>At 265 V AC, 9.6 VA/ 3.5 W typical                                 | 6.7 VA / 2.7 W<br>8.6 VA / 2.9 W<br>11.9 VA / 3.5 W | 7 VA / 4 W<br>9 VA / 5 W<br>11.9 VA / 5 W | 6.7 VA / 2.7 W<br>8.6 VA / 2.9 W<br>11.9 VA / 3.5 W |
|                            | Frequency                                      | 45 to 65 Hz  |   | ■   |   |
|                            | Ride-through time                              | Typical at 120 V AC and with maximum burden<br>Typical at 230 V AC and with maximum burden   | 100 mS<br>400 mS                                    | 40 mS<br>250 mS                           | 100 mS<br>400 mS                                    |
| DC control power           | Operating range                                | 100 to 300 V DC  |   | ■   |   |
|                            | Burden   | Typical/ Maximum at 125 V DC<br>Typical/ Maximum at 250 V DC<br>Typical Maximum at 300 V DC  | 1.4 W / 2.6 W<br>1.8 W / 2.7 W<br>3.8 W max         | 4 W max<br>5 W max<br>5 W max             | 1.4 W / 2.6 W<br>1.8 W / 2.7 W<br>3.8 W max         |
|                            | Ride-through time                              | Typical at 125 V DC and with maximum burden  | 50 mS   | 30 mS                                     | 50 mS   |
| Real time clock            | Battery backup                                 | 30 seconds ride-through  | ■   | 3 years backup without control power      | ■   |
| Digital output             | Number/Type                                    | 2 - Mechanical Relays  |   | ■   |   |
|                            | Output frequency                               | 0.5 Hz maximum<br>(1 second ON / 1 second OFF - minimum times)   |   | ■   |   |
|                            | Switching Current                              | 30 V DC, 5 A<br>250 V AC, 8 A Cos φ = 1<br>250 V AC, 6 A Cos φ = 0.4   |   | ■   |   |
|                            | Isolation                                      | 2.5 kVrms  |   | ■   |   |
| Status Digital Inputs      | Voltage ratings                                | ON 18.5 to 36 V DC,<br>OFF 0 to 4 V DC   |   | ■   |   |
|                            | Input Resistance                               | 110 k Ω  |   | ■   |   |
|                            | Maximum Frequency                              | 2 Hz (T ON min = T OFF min = 250 ms)   |   | ■   |   |
|                            | Response Time                                  | 10 ms  |   | ■   |   |
|                            | Isolation                                      | 2.5 kVrms  |   | ■   |   |
| Whetting output            | Nominal voltage                                | 24 V DC  |   | ■   |   |
|                            | Allowable load                                 | 4 mA   |   | ■   |   |
|                            | Isolation                                      | 2.5 kVrms  |   | ■   |   |

<sup>(1)</sup> Measurements taken from 45 Hz to 65 Hz, 0.5 A to 9 A, 57 V to 347 V & 0.5 ind to 0.5 cap power factor with a sinusoidal wave.


<sup>(2)</sup> Active power: ±0.5 % from 0.25 A to 9.0 A at Cos φ = 1, ±0.6 % from 0.50 A to 9.0 A at Cos φ = 0.5 (ind or cap)

<sup>(3)</sup> Real/active Energy: ±0.5 % from 0.25 A to 9.0 A at Cos φ = 1, ±0.6 % from 0.50 A to 9.0 A at Cos φ = 0.5 (ind or cap) IEC 61557-12 Class 0.5


<sup>(4)</sup> Reactive energy: ±2.0 % from 0.25 A to 9.0 A at Sin φ = 1 ±2.5 % from 0

# PM5350 / PM5350P series


Rear of meter - open

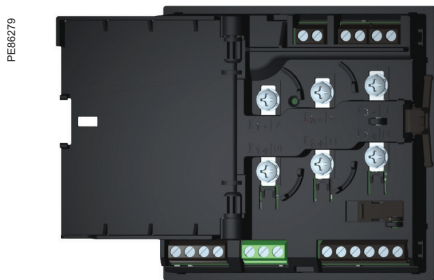



Rear view retainers - users

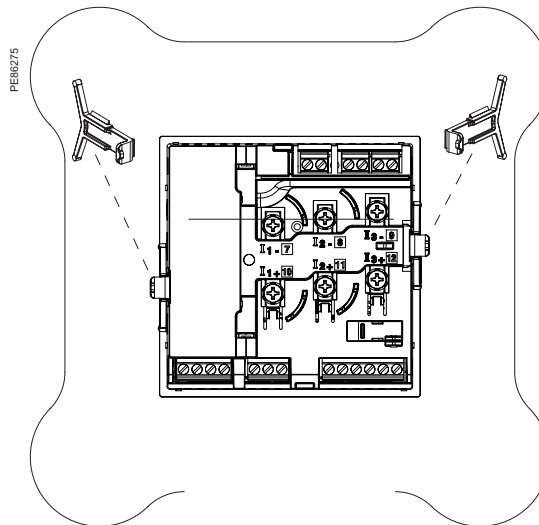

Rear view retainers - installation

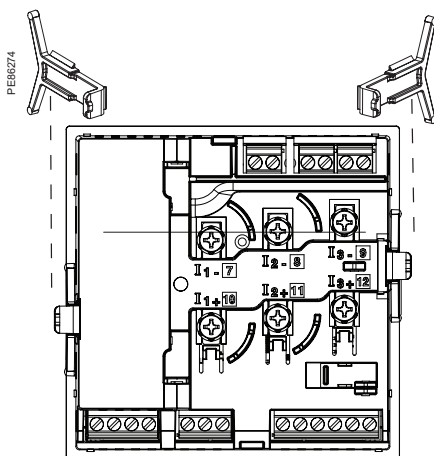

For detailed installation instructions see the product's Installation Guide.

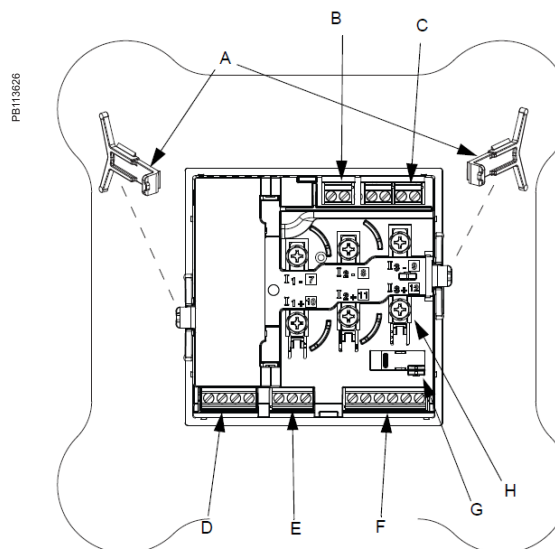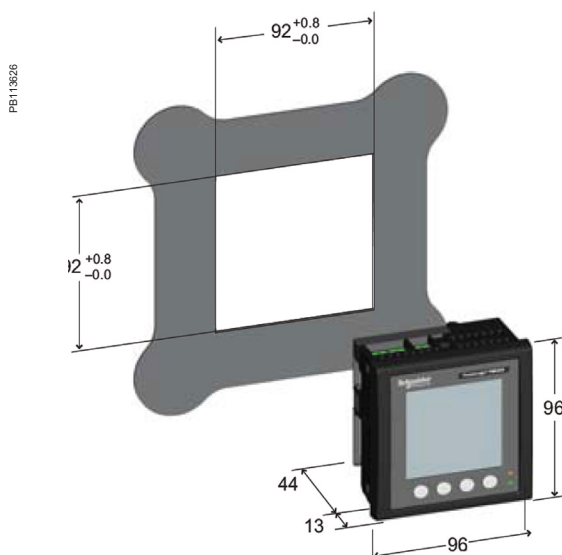


PM5350 / PM5350P meter parts


- A Retainer clips.
- B Control power supply connector.
- C Voltage inputs.
- D Digital outputs.
- E RS-485 port (COM1).
- F Digital input.
- G Optical revenue switch.
- H Current inputs.

For detailed installation instructions see the product's Installation Guide.

# PM5350IB/PB series

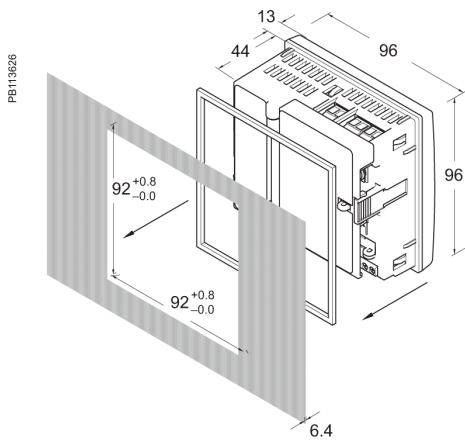


Dimensions PM5350IB

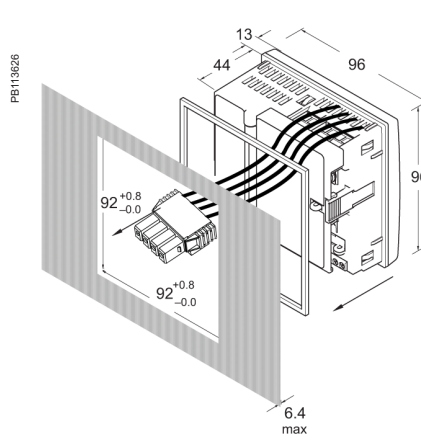


Dimensions PM5350PB

## Parts of PM5350IB and PM5350PB (rear panel door removed)

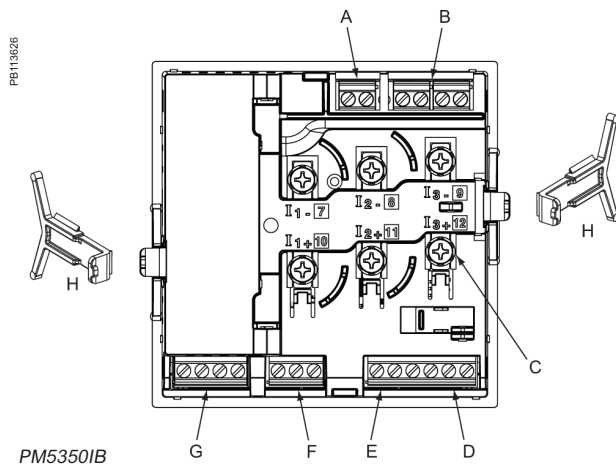


PM5350IB


- A Control power
- B Voltage inputs
- C Current inputs
- D Digital inputs
- E Whetting voltage source (for digital inputs)
- F RS-485 communications
- G Digital outputs
- H Retainer clips

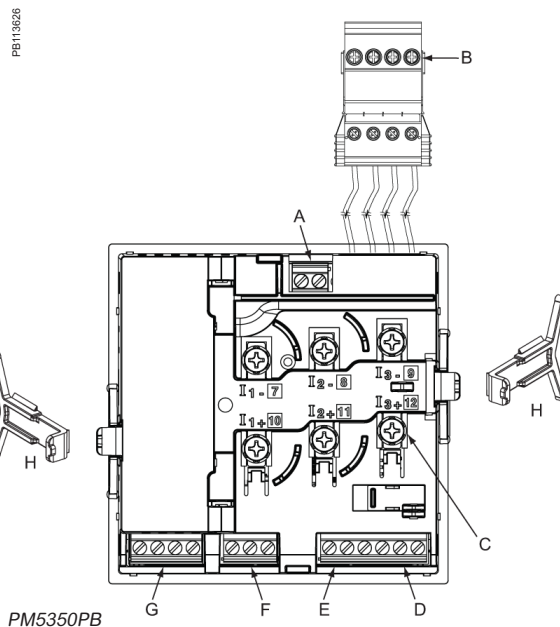

PM5350PB

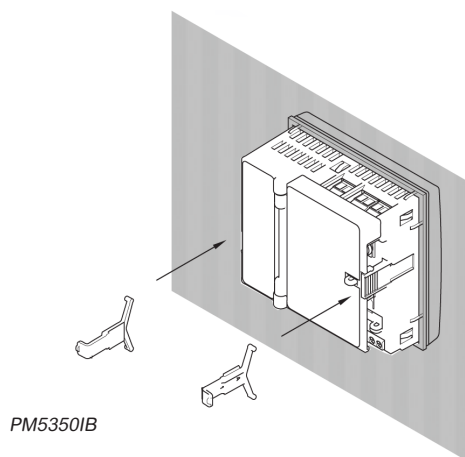

PM5350IB

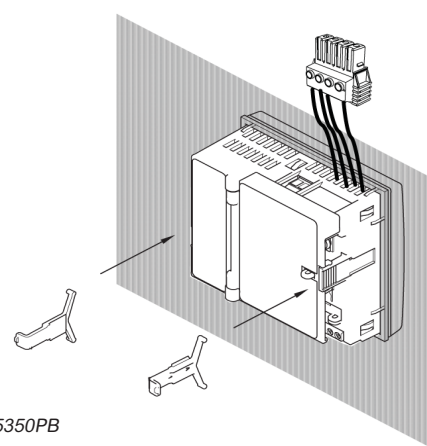

PM5350PB

For detailed installation instructions see the product's Installation Guide.

# Advanced Metering

Advanced high performance meters are designed for mains or critical loads on MV/LV networks. They provide analysis of efficiency, losses and capacity, bill verification, power quality compliance monitoring, problem notification and diagnosis and control of loads, etc. Power quality meters are classified as advanced meters designed to monitor service entrances and critical network locations to maximize power availability and reliability by providing a comprehensive system load profile, power quality and root cause analyses.

- PowerLogic™ PM8000
- PowerLogic™ ION9000

PB113687



PM8000

PB115917



ION9000

# PowerLogic™ PM8000 series

The PowerLogic™ PM8000 series meters are compact, cost-effective multifunction power meters that will help you ensure reliability and efficiency of your power-critical facility.

Reveal and understand complex power quality conditions. Measure, understand and act on insightful data gathered from your entire power system. Designed for key metering points throughout your energy infrastructure, the PowerLogic™ PM8000 series meter has the versatility to perform nearly any job you need a meter to do, wherever you need it!

## Applications

Ideal for low to high voltage applications in industrial facilities, data centers, infrastructure and other critical power environments.

PB113667



METSEPM8240

# PM8000 series

## The solution for

Markets that can benefit from a solution that includes PowerLogic™ PM8000 series meters:

- Industry
- Data centers
- Infrastructure
- Healthcare
- Buildings

## Benefits

- Makes understanding power quality simple to help operations personnel avoid downtime and helps ensure increased productivity and equipment life.
- Makes energy and power quality immediately relevant and actionable to support your operational and sustainability goals.

## Competitive advantages

- Modular, flexible patented ION technology architecture enables a simple building block approach.
- Disturbance Direction Detection, modularity and compliance with latest power quality standards.
- Color screen.
- Multiple communication options.
- Excellent accuracy.

## Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximize electrical network reliability and availability, and optimise electrical asset performance.

## Conformity of standards


- |                  |                |
|------------------|----------------|
| • EN 50160       | • IEC 62053-22 |
| • EN 50470       | • IEC 62053-23 |
| • IEC 61000-4-30 | • IEC 62053-24 |
| • IEC 61010-1    | • IEC 62586-2  |
| • IEC 61326-1    | • IEEE 519     |
| • IEC 61557-12   | • UL 61010-1   |
| • IEC 62052-11   |                |
| • IEC 62053-11   |                |



PowerLogic™ PM8000 DIN rail meter- underside




PowerLogic™ PM8000 series meter - rear view

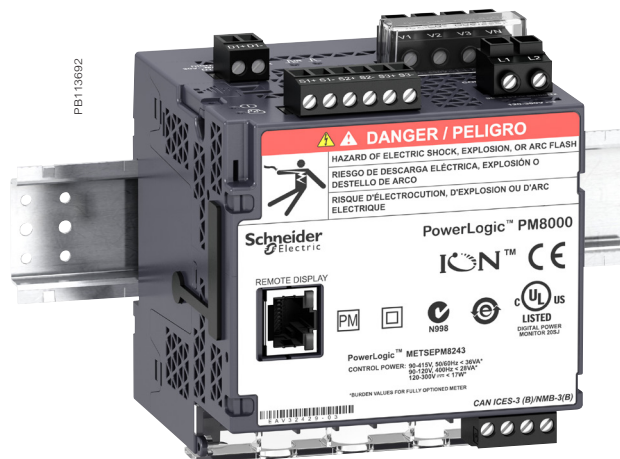


PowerLogic™ PM8000 DIN rail mounted meter


# PM8000 series

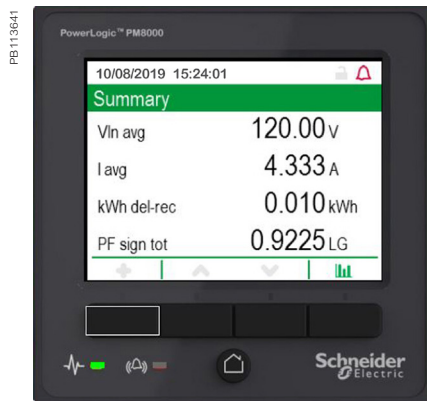


PowerLogic™ PM8000 series meter

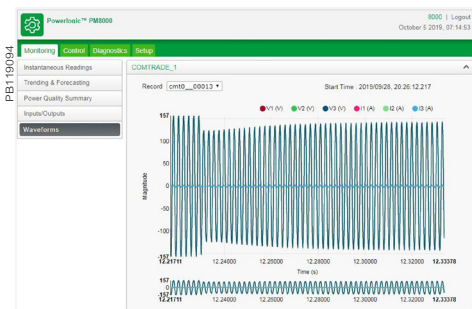

PowerLogic™ PM8000 series waveform web page sample

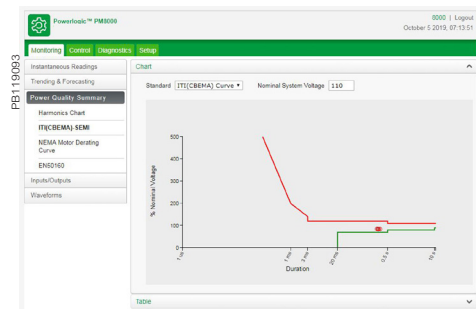

PowerLogic™ PM8000 series CBEMA web page sample

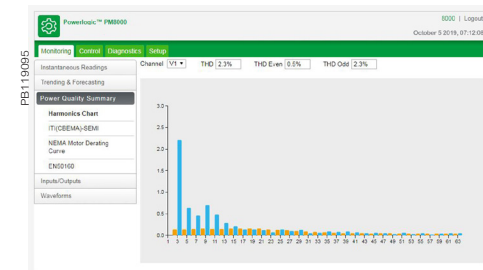

PowerLogic™ PM8000 series PQ harmonics web page sample

## Feature selection

| Commercial reference number | PM8000 meters         |
|-----------------------------|-----------------------|
| PM81XX                      | Essential Feature Set |
| PM82XX                      | Standard Feature Set  |
| PM83XX                      | Advanced Feature Set  |


## Main characteristics

- Precision metering:
  - IEC 61557-12 PMD/SD/K70/0.2 and PMD/SS/K70/0.2 3000m (performance measuring and monitoring functions).
  - Class 0.2S accuracy IEC 62053-22, ANSI C12.20 Class 0.2 (active energy).
  - Industry leading Class 0.5S accuracy for reactive energy (IEC 62053-24).
  - Cycle-by-cycle RMS measurements updated every ½ cycle.
  - Full 'multi-utility' WAGES metering support.
  - Net metering.
  - Anti-tamper protection seals and hardware metrology lock.
- PQ compliance reporting and basic PQ analysis:
  - Monitors and logs parameters in support of international PQ standards,
    - IEC 61000-4-30 Class A/S (test methods as per IEC 62586-2).
  - Generates onboard PQ compliance reports accessible via onboard web pages:
    - Basic event summary and pass/fail reports, for EN 50160 for power frequency, supply voltage indication, supply voltage dips, short and long interruptions, temporary over voltages, voltage unbalance and harmonic voltage.
    - ITIC (CBEMA) and SEMI curves, with alarm categorization to support further analyses.
    - NEMA Motor Derating curve.
    - Pass/fail report for IEEE 519 for voltage and current harmonic limits.
  - Harmonic analysis:
    - THD on voltage and current, per phase, min/max, custom alarming.
    - Individual harmonic magnitudes and angles on voltage and current, up to the 63rd harmonic.
  - High resolution waveform capture: triggered manually or by alarm, captured waveforms available directly from the meter via SFTP in a COMTRADE format.
  - Disturbance detection and capture: sag/swell on any current and voltage channel, alarm on disturbance event, waveform capture with pre-event information.
  - Patented Disturbance Direction Detection: provides indication of the captured disturbance occurring upstream or downstream of the meter; timestamped results provided in the event log, with degree of certainty of disturbance direction.
- Used with Schneider Electric's sophisticated software tools, provides detailed PQ reporting across entire network:
  - EN 50160 report.
  - IEC 61000-4-30 report.
  - IEEE 519 harmonic compliance report.
  - PQ compliance summary.
  - Display of waveforms and PQ data from all connected meters.
  - Onboard web-based waveform viewer.
  - Energy reports for consumption analysis and cost management.
  - WAGES dashboards and reports.
  - EcoStruxure™ Power Events Analysis, including alarm management, sequence of events, and root cause analysis.
- Cybersecurity:
  - Security events logging with Syslog protocol support.
  - HTTPS secure protocol.
  - Ability to enable or disable any communication port and any protocol per port.
  - Anti-tamper protection seals and hardware metrology lock.
  - User accounts with strong passwords.
- Data and event logging:
  - Onboard data and event logging.
  - 512 MB storage.


# PM8000 series




PowerLogic™ PM8000 series meter with remote display

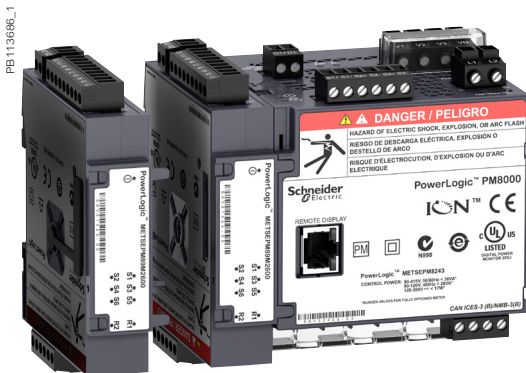

PowerLogic™ PM8000 series meter with option modules

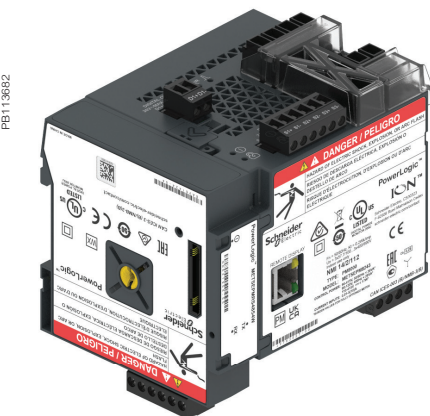

PowerLogic™ PM8000 series with RS-485 4-Wire module

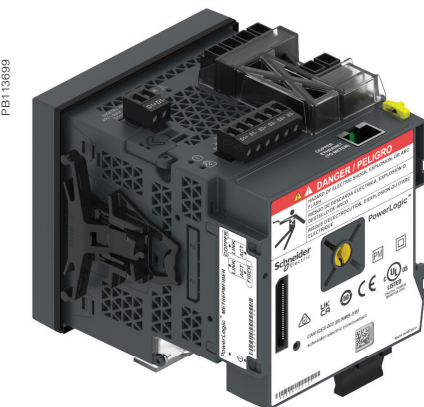

PowerLogic™ PM8000 series with Fiber-Ethernet Module

## Main characteristics (contd.)

- No data gaps due to network outages or server downtime.
- Min/Max log for standard values.
- Up to 64 user definable data logs, recording up to 16 parameters on a cycle-by-cycle or other user definable interval.
- Continuous logging or 'snapshot' triggered by setpoint and stopped after defined duration.
- Trend energy, demand and other measured parameters.
- Forecasting via web pages: average, minimum and maximum for the next four hours and next four days.
- Advanced time-of-use capability.
- Security / event log: alarm conditions, metering configuration changes, power outages, firmware download, and user login/logout all timestamped to  $\pm 1$  millisecond.
- Alarming and control:
  - 50+ definable alarms to log critical event data, trigger waveform recording, or perform control function.
  - Trigger on any condition, with 1/2-cycle and 1-second response time.
  - Combine alarms using Boolean logic and to create alarm levels.
  - Alarm notification via email.
  - In conjunction with Schneider Electric's EcoStruxure™ software, alarms, software alarms, and alarm frequency are categorized and trended enabling sequence of events and root cause analyses.


## Usability

- Easy installation and setup:
  - Panel and DIN rail mounting options, remote display option.
  - Pluggable connectors.
  - Free setup application simplifies meter configuration.
  - Auto-discovery using DPWS (Device Profile Web Services).
  - DHCP for automatic IP address configuration.
- Front panel:
  - Easy to read color graphic display.
  - Simple, intuitive menu navigation with multi-language (8) support.
- Flexible remote communications:
  - Multiple simultaneously operating communication ports and protocols allow interfacing with other automation systems; (e.g. waveforms, alarms, billing data, etc.) can be uploaded for viewing/analysis while other systems access real-time information.
  - Supports Modbus, ION, DNP3, IEC 61850.
  - Dual port Ethernet: 10/100BASE-TX; supports IPV4 and IPV6; daisy-chaining capability removes need for additional switches.
  - Fiber-Ethernet option module: Multi-mode 100Base-FX with SC duplex connector
  - Secure web interface with HTTPS and TLS 1.2 with support for user-provided certificates.
  - Create redundant network loop using Rapid Spanning Tree Protocol (RSTP) and managed Ethernet switches.
  - Customize TCP/IP port numbers and enable/disable individual ports.
  - RS-485 2-wire connection, up to 115,200 baud, Modbus RTU, ION and DNP3 protocols.
  - 4-Wire RS-485 option module: Up to 115,200 baud, Modbus RTU, ION and DNP3 protocols.
  - Ethernet to serial gateway with Modbus Master functionality, connecting to 31 downstream serial Modbus devices. Also supports Modbus Mastering over TCP/IP (Ethernet) network.
  - Full function web server with factory and customizable pages to access real-time and PQ compliance data.


# PM8000 series



PowerLogic™ I/O module

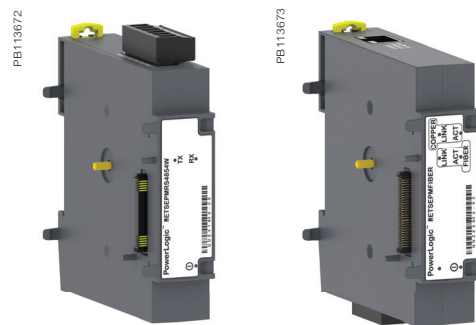

4-Wire RS-485 Option Module    Fiber-Ethernet Option Module

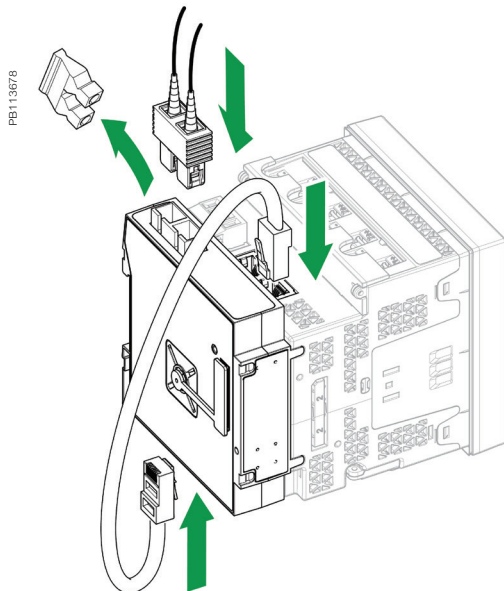

PowerLogic™ PM8000 connection with Fiber-Ethernet module

- Time synchronization via:
  - GPS clock (RS-485) or IRIG-B (digital input) to  $\pm 1$  millisecond.
  - Network Time Protocol (NTP/SNTP).
  - Precision Time Protocol (PTP - IEEE 1588 / IEC 61588).
  - Time set function from Schneider Electric software server.

## Adaptability

- ION™ frameworks are customizable, scalable applications with object-oriented programming that compartmentalizes functions, and increases flexibility and adaptability.
- Applications include: accessing and aggregating data from downstream Modbus devices over serial or across the network (Modbus TCP/IP), logging and/or processing data through totalization, unit conversion or other calculations, applying complex logic for alarming or control operations, and visualization via webpages.

## Standard meter I/O

- 3 digital status/counter inputs.
- 1 KY (form A) energy pulse output for interfacing with other systems.

## Advanced Metering Option Modules

- Expanding meter's flexibility with communication and I/O option modules
- Powered from meter base

### I/O Expansion Option Modules

Option modules include:

- Digital module:
  - 6 digital status/counter inputs.
  - 2 Form C relay outputs, 250 V, 8 A.
- Analog module:
  - 4 analog inputs (4-20 mA; 0-20 mA; 0-30 V).
  - 2 analog outputs (4-20 mA; 0-20 mA; 0-10 V) for interfacing with building management sensors and systems.

### Communication Option Modules

Option modules include:

- 4-Wire RS-485 Module <sup>(+1)</sup>:
  - Adds 4-wire support to the meter i.e. eliminating the cost and efforts of rewiring while replacing/retrofitting legacy 4-Wire RS-485 systems
  - Pluggable screw terminal connector
- Fiber-Ethernet Module <sup>(+2)</sup>:
  - Provides isolated data transmission through fiber optics up to 2000 m length
  - Supports multi-mode 100Base-FX type
  - SC duplex connector

<sup>(+1)</sup> Onboard 2-Wire RS-485 port is disabled with the optional module.

<sup>(+2)</sup> Connected to the meter base using Ethernet patch cable (included with the module)

Maximum of 4 optional modules in total (Fiber-Ethernet, 4-Wires RS-485, I/O modules) can be connected to the meter. Only 1 Fiber-Ethernet and 1 4-Wire RS-485 option module is supported per meter.

Please refer to the option module **Installation Guides** for more details.

# PM8000 series

## Feature guide

|  |                              | PM8000<br>Essential | PM8000<br>Standard | PM8000<br>Advanced |
|--|------------------------------|---------------------|--------------------|--------------------|
| General  |                              |                     |                    |                    |
| Use on LV, MV, and HV systems                              |                              | ■                   | ■                  | ■                  |
| Current accuracy   |                              | 0.1 % reading       | 0.1 % reading      | 0.1 % reading      |
| Voltage accuracy   |                              | 0.1 % reading       | 0.1 % reading      | 0.1 % reading      |
| Active energy accuracy                                     |                              | 0.2 Class           | 0.2 Class          | 0.2 Class          |
| Number of samples/cycle or sample frequency                |                              | 256 <sup>(+3)</sup> | 256                | 512                |
| ION programability   |                              | ■                   | ■                  | ■                  |
| Instantaneous rms values                                   |                              |                     |                    |                    |
| Current, voltage, frequency                                |                              | ■                   | ■                  | ■                  |
| Active, reactive, apparent power                           | Total and per phase          | ■                   | ■                  | ■                  |
| Power factor   | Total and per phase          | ■                   | ■                  | ■                  |
| Current measurement range (autoranging)                    |                              | 0.05 - 10 A         | 0.05 - 10 A        | 0.05 - 10 A        |
| Energy values  |                              |                     |                    |                    |
| Active, reactive, apparent energy                          |                              | ■                   | ■                  | ■                  |
| Settable accumulation modes                                |                              | ■                   | ■                  | ■                  |
| Demand values  |                              |                     |                    |                    |
| Current  | Present and max.values       | ■                   | ■                  | ■                  |
| Active, reactive, apparent power                           | Present and max.values       | ■                   | ■                  | ■                  |
| Predicted active, reactive, apparent power                 |                              | ■                   | ■                  | ■                  |
| Synchronization of the measurement window                  |                              | ■                   | ■                  | ■                  |
| Setting of calculation mode                                | Block, sliding               | ■                   | ■                  | ■                  |
| Power quality measurements                                 |                              |                     |                    |                    |
| Harmonic distortion  | Current and voltage          | ■                   | ■                  | ■                  |
| Individual harmonics                                       | Via front panel and web page | 31                  | 63                 | 63                 |
|  | Via EcoStruxure™ software    | -                   | 127                | 127                |
| Waveform capture   |                              | ■ <sup>(+3)</sup>   | ■                  | ■                  |
| Detection of voltage swells and sags                       |                              | ■                   | ■                  | ■                  |
| Fast acquisition   | 1/2 cycle data               | ■                   | ■                  | ■                  |
| IEC 61000-4-30 Class A/S                                   |                              | -                   | S                  | A                  |
| EN 50160 Interharmonic                                     |                              | -                   | -                  | ■                  |
| IEC 61000-4-15   |                              | -                   | -                  | ■                  |
| EN 50160 compliance checking                               |                              | -                   | ■                  | ■                  |
| IEEE 519 compliance checking                               |                              | -                   | ■                  | ■                  |
| Disturbance Direction Detection                            |                              | -                   | ■                  | ■                  |
| Rapid Voltage Change                                       |                              | -                   | ■                  | ■                  |
| Customizable data outputs (using logic and math functions) |                              | ■                   | ■                  | ■                  |
| Data recording   |                              |                     |                    |                    |
| Min/max of instantaneous values                            |                              | ■                   | ■                  | ■                  |
| Event logs   |                              | ■                   | ■                  | ■                  |
| Trending/forecasting                                       |                              | -                   | ■                  | ■                  |
| SER (Sequence of event recording)                          |                              | ■                   | ■                  | ■                  |
| Time stamping  |                              | ■                   | ■                  | ■                  |
| GPS synchronization ( $\pm 1$ ms)                          |                              | ■                   | ■                  | ■                  |
| Data Recorder  |                              | 10                  | 50                 | 64                 |
| Memory Channels  |                              | 160                 | 800                | 1024               |
| Storage (in Mbytes)  |                              | 64                  | 512                | 512                |

<sup>(+3)</sup> Waveform capture is limited to 128 Samples/cycle recording.

# PM8000 series

## Feature guide (Contd.)

|   | PM8000<br>Essential              | PM8000<br>Standard               | PM8000<br>Advanced               |
|---|----------------------------------|----------------------------------|----------------------------------|
| Display and I/O   |                                  |                                  |                                  |
| Front panel display   | ■                                | ■                                | ■                                |
| Wiring self-test  | ■                                | ■                                | ■                                |
| Pulse output  | 1                                | 1                                | 1                                |
| Digital or analog inputs (max)  | 27 digital<br>16 analog          | 27 digital<br>16 analog          | 27 digital<br>16 analog          |
| Digital or analog outputs (max, including pulse output)                         | 1 digital<br>8 relay<br>8 analog | 1 digital<br>8 relay<br>8 analog | 1 digital<br>8 relay<br>8 analog |
| Communication   |                                  |                                  |                                  |
| 2-Wire RS-485 port  | 1                                | 1                                | 1                                |
| Ethernet port   | 2                                | 2                                | 2                                |
| Serial port (Modbus, ION, DNP3)   | ■                                | ■                                | ■                                |
| Ethernet port (Modbus/TCP, ION TCP, DNP3 TCP, DHCP, DNS, IPv4, IPv6, IEC 61850) | ■                                | ■                                | ■                                |
| Ethernet gateway  | ■                                | ■                                | ■                                |
| Alarm notification via email  | ■                                | ■                                | ■                                |
| HTTP/HTTPs web server with waveform viewer                                      | ■                                | ■                                | ■                                |
| SNMP with custom MIB and traps for alarms                                       | ■                                | ■                                | ■                                |
| SMTP email  | ■                                | ■                                | ■                                |
| PTP and NTP time synchronization  | ■                                | ■                                | ■                                |
| FTP file transfer   | ■                                | ■                                | ■                                |
| Option module with 4-Wire RS-485 port   | ■                                | ■                                | ■                                |
| Option module with Fiber-Ethernet port  | ■                                | ■                                | ■                                |

## Commercial references

| Essential      | Standard   | Advanced     | Description   |
|----------------|--|--------------|---|
| METSEPM8140    | METSEPM8240  | METSEPM8340  | 96 x 96 panel mount meter, AC/DC power                |
| METSEPM8110    | METSEPM8210  | METSEPM8310  | 96 x 96 panel mount meter, LV DC power                |
| METSEPM8143    | METSEPM8243  | METSEPM8343  | DIN rail mount meter, AC/DC power                     |
| METSEPM8113    | METSEPM8213  | METSEPM8313  | DIN rail mount meter, LV DC power                     |
| METSEPM8144    | METSEPM8244  | METSEPM8344  | DIN rail mount meter with remote display, AC/DC power |
| METSEPM8114    | METSEPM8214  | METSEPM8314  | DIN rail mount meter with remote display, LV DC power |
| METSEPM81401   | METSEPM82401   | METSEPM83401 | MID approved panel mount meter <sup>(+4)</sup>        |
| -              | METSEPM82403   | -            | RMICAN approved panel mount meter <sup>(+5)</sup>     |
| METSEPM81404   | METSEPM82404   | METSEPM83404 | RMICAN sealed panel mount meter <sup>(+5)</sup>       |
| Accessories    |  |              |   |
| METSEPM89RD96  | Remote display, 3 metre cable, mounting hardware for 30 mm hole (nut & centering pin), mounting hardware for DIN96 cutout (92 x 92 mm) adapter plate |              |   |
| METSEPM89M2600 | Digital I/O module (6 digital inputs & 2 relay outputs)  |              |   |
| METSEPM89M0024 | Analog I/O module (4 analog inputs & 2 analog outputs)   |              |   |
| METSECAB10     | Display Cable, 10 m  |              |   |
| METSEPM8HWK    | Replacement hardware kit (connectors, screws, retainer clips, mounting template)   |              |   |
| METSEPMRS4854W | 4-Wire RS 485 option module  |              |   |
| METSEPMFIBER   | Fiber-Ethernet option module   |              |   |
| METSEPM8000SK  | Sealing kit  |              |   |

<sup>(+4)</sup> For UK + EU only.

<sup>(+5)</sup> For Canada only.

# PM8000 series

## Technical Specifications

| Electrical characteristics                   |  |   |
|--|--|---|
| Type of measurement                          |  | True rms to 512 samples per cycle   |
| Measurement accuracy                         | Current & voltage                        | Class 0.2 as per IEC 61557-12   |
|  | Active Power                             | Class 0.2 as per IEC 61557-12   |
|  | Power factor                             | Class 0.5 as per IEC 61557-12   |
|  | Frequency                                | Class 0.02 as per IEC 61557-12  |
|  | Active energy                            | Class 0.2S IEC 62053-22<br>Class 0.2 IEC 61557-12, ANSI C12.20 Class 0.2  |
|  | Reactive Energy                          | Class 0.5S IEC 62053-24*  |
|  | MID Directive                            | EN 50470-1, EN 50470-1, AnnexB & AnnexD (optional model)  |
| Display refresh rate                         |  | 1/2 cycle or 1 second   |
| Input-voltage characteristics                | Specified accuracy voltage               | 57 - 400 V L-N / 100 - 690 V L-L  |
|  | Impedance                                | 5 M $\Omega$ per phase  |
|  | Specified accuracy frequency - Frequency | 42 to 69 Hz<br>(50/60 Hz nominal)   |
|  | Limit range of operation - frequency     | 20 to 450 Hz  |
| Input-current characteristics                | Rated nominal current                    | 1 A (0.2S), 5 A (0.2S) , 10 A (0.2 ANSI)  |
|  | Specified accuracy current range         | Starting Current: 5 mA<br>Accurate Range: 50 mA - 10 A  |
|  | Permissible overload                     | 200 A rms for 0.5 s, non-recurring  |
|  | Impedance                                | 0.0003 $\Omega$ per phase   |
|  | Burden                                   | 0.01 VA max at 5 A  |
| Power supply AC/DC                           | AC                                       | 90-415 V AC $\pm 10\%$ (50/60 Hz $\pm 10\%$ ) 90-120 V AC $\pm 10\%$ (400 Hz)   |
|  | DC                                       | 110-415 V DC $\pm 15\%$ (20-60 V DC $\pm 10\%$ for PM8210)  |
|  | Ride-through time                        | 100 ms (6 cycles at 60 Hz) min., any condition<br>200 ms (12 cycles at 60 Hz) typ., 120 V AC<br>500 ms (30 cycles at 60 Hz) typ., 415 V AC  |
|  | Burden                                   | Typical: 7.7 W / 16 VA at 230 V (50/60 Hz)<br>Fully optioned: max. 18 W / 40 VA at 415 V (50/60 Hz)   |
| Power supply LV DC                           | DC                                       | 20 to 60 V DC $\pm 10\%$  |
|  | Burden                                   | Fully optioned: max. 18 W at 18 to 60 V DC  |
| Input/outputs                                | Meter Base Only                          | 3 digital inputs (30 V AC/60 V DC)<br>1 form A (KY) solid state digital output (30 V AC/60 V DC, 75 mA)   |
|  | Optional                                 | Digital - 6 digital inputs (30 V AC / 60 V DC) wetted + 2 form C relay outputs (250 V AC, 8 A)<br>Analog - 4 analog inputs (4-20 mA, 0-30 V DC) + 2 analog outputs (4-20 mA, 0-10 V DC) |
| Mechanical characteristics                   |  |   |
| Weight                                       |  | Integrated Display Model 0.581 kg<br>DIN rail mounted Model 0.528 kg<br>IO modules 0.140 kg<br>Remote display 0.300 kg  |
| IP degree of protection                      |  | IP 54, UL type 12: Panel mount and Remote display, front<br>IP 30: Panel mount rear, DIN rail mount, I/O modules  |
| Excellent quality                            |  | ISO 9001 and ISO 14000 certified manufacturing  |
| Dimensions                                   | Panel mount model                        | 96 x 96 x 77.5 mm   |
|  | DIN model                                | 90.5 x 90.5 x 90.8 mm   |
|  | Remote display                           | 96 x 96 x 27 mm   |
|  | IO modules                               | 90.5 x 90.5 x 22 mm   |
| Environmental conditions                     |  |   |
| Operating temperature                        |  | -25 °C to 70 °C   |
| Remote Display Unit                          |  | -25 °C to 60 °C   |
| Storage temperature                          |  | -40 °C to 85 °C   |
| Humidity rating                              |  | 5 % to 95 % non-condensing  |
| Installation category                        |  | III   |
| Operating altitude (maximum)                 |  | 3000 m above sea-level  |
| Electromagnetic compatibility                |  |   |
| EMC standards                                |  | IEC 62052-11 and IEC 61326-1  |
| Immunity to electrostatic discharge          |  | IEC 61000-4-2   |
| Immunity to radiated fields                  |  | IEC 61000-4-3   |
| Immunity to fast transients                  |  | IEC 61000-4-4   |
| Immunity to surges                           |  | IEC 61000-4-5   |
| Immunity to conducted disturbances           |  | IEC 61000-4-6   |
| Immunity to power frequency magnetic fields  |  | IEC 61000-4-8   |
| Immunity to conducted disturbances, 2-150kHz |  | CLC/TR 50579  |
| Immunity to voltage dips & interruptions     |  | IEC 61000-4-11  |
| Immunity to ring waves                       |  | IEC 61000-4-12  |
| Conducted and radiated emissions             |  | EN 55022, EN 55011, FCC part 15 Class B, EN55011, EN55022 Class B, ICES-003 Class B   |
| Surge withstand Capability (SWC)             |  | IEEE / ANSI C37.90.1  |


# PM8000 series

## Technical Specifications(Contd.)


| Safety                             |  |
|------------------------------------|--|
| Safety Construction                | IEC/EN 61010-1 ed.3, CAT III, 400 V L-N / 690 V L-L<br>UL 61010-1 ed.3 and CSA-C22.2 No. 61010-1 ed.3, CAT III, 347 V L-N / 600 V L-L<br>IEC/EN 62052-11, protective class II  |
| Communication                      |  |
| Ethernet to serial line gateway    | Communicates directly with up to 31 unit load devices  |
| Web server                         | Customisable pages, new page creation capabilities, HTML/XML compatible  |
| Serial port RS-485                 | Baud rates of 2400 to 115200, pluggable screw terminal connector   |
| Ethernet port(s)                   | 2x 10/100BASE-TX, RJ45 connector (UTP)   |
| Protocol                           | Modbus, ION, DNP3, IEC 61850, HTTPS, FTP, SNMP, SMTP, DPWS, RSTP, NTR, PTR, NTP/SNTP, GPS, IPv4 /IPv6, DHCP, Syslog protocols  |
| Communication Option Modules       |  |
| Optional 4-Wire RS-485 serial port | Baud rates of 2400 to 115200, pluggable screw terminal connector   |
| Optional Fiber-Ethernet port       | Ethernet patch cable from base meter, multi-mode 100Base-FX, SC duplex connector   |
| Firmware characteristics           |  |
| High-speed data recording          | Down to 1/2 cycle interval burst recording, stores detailed characteristics of disturbances or outages. Trigger recording by a user-defined setpoint, or from external equipment   |
| Harmonic distortion                | Up to 63rd harmonic (127 <sup>th</sup> via Schneider Electric software) for all voltage and current inputs   |
| Sag/swell detection                | Analyse severity/potential impact of sags and swells: magnitude and duration data suitable for plotting on voltage tolerance curves per phase triggers for waveform recording, control   |
| Disturbance direction detection    | Determine the location of a disturbance more quickly and accurately by determining the direction of the disturbance relative to the meter. Analysis results are captured in the event log, along with a timestamp and confidence level indicating level of certainty   |
| Instantaneous                      | High accuracy of standard speed (1s) and high-speed (1/2 cycle) measurements, including true rms per phase and total for: voltage, current, active power (kW), reactive power (kvar), apparent power (kVA), power factor, frequency, voltage and current unbalance, phase reversal   |
| Load profiling                     | Channel assignments (Up to 1024 Channels via 64 data recorders) configurable for any measurable parameter, including historical trend recording of energy, demand, voltage, current, power quality, or any measured parameter. Trigger recorders based on time interval, calendar schedule, alarm/event condition, or manually |
| Trend curves                       | Historical trends and future forecasts to better manage demand, circuit loading, and other parameters. Provides average, min, max and standard deviation every hour for last 24 hours, every day for last month, every week for last 8 weeks and every month for last 12 months  |
| Waveform captures                  | Simultaneous capture of all voltage and current channels, sub-cycle disturbance capture, ability to record from 320 cycles at 512 sample per cycle to over 2880 cycles at 16 points per cycle with user selectable sampling speed as well as pre- and post-trigger length  |
| Alarms                             | Threshold alarms: adjustable pickup and dropout setpoints and time delays, numerous activation levels possible for a given type of alarm, user-defined or automatic alarm threshold settings, user-defined priority levels (optional automatic alarm setting)  |
| Advanced Time of Use (TOU)         | 6 seasons; 3 different day types: weekend, weekday, and holiday; up to 8 tariffs per day type  |
| Advanced security                  | Up to 50 users with unique access rights. Perform resets, time sync, or meter configurations based on user privileges  |
| Storage                            | 512 MB   |
| Firmware update                    | Update via the communication ports   |
| Display characteristics            |  |
| Integrated or Remote display       | 320 x 240 (1/4 VGA) Color LCD, configurable screens, 5 buttons and 2 LED indicators (alarm and meter status)   |
| Languages                          | English, French, Spanish, Russian, Portugese, German, Italian, Chinese   |
| Notations                          | IEC, IEEE  |
| The HMI menu includes              |  |
| Alarms                             | Active alarms, historic alarms (50+ alarms)  |
| Basic Reading                      | Voltage, current, frequency, power summary   |
| Power                              | Power summary, demand, power factor  |
| Energy                             | Energy total, delivered, received  |
| Events                             | Timestamped verbose event log  |
| Power Quality                      | EN 50160, IEEE 519, harmonics, phasor diagrams   |
| Inputs/Outputs                     | Digital inputs, digital outputs, analog inputs, analog outputs   |
| Nameplate                          | Model, serial and FW version   |
| Custom Screens                     | Build your own metrics   |
| Setup Menu                         | Meter setup, communications setup, display setup, date/time/clock setup, alarm setup, language setup, time of use setup, resets, password setup  |

# PM8000 series


## PM8000 panel mount meter dimensions

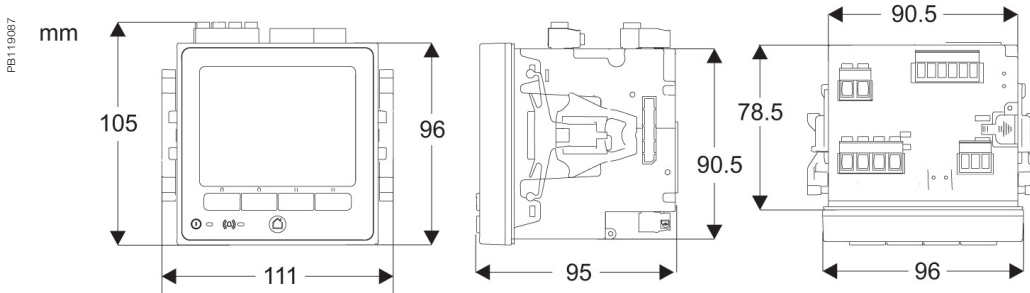


## PM8000 DIN rail mount meter dimensions

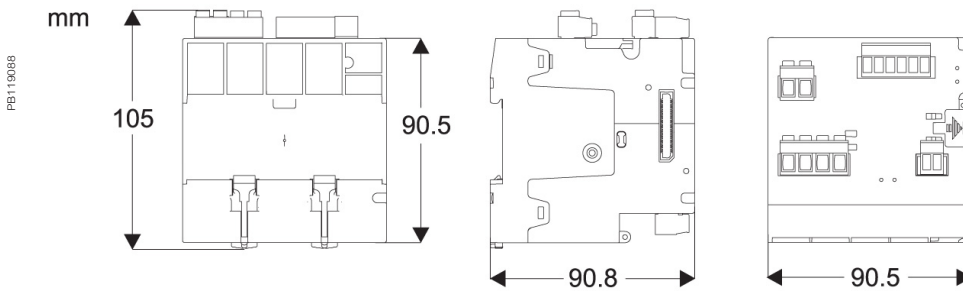


## PM8000 remote display dimensions

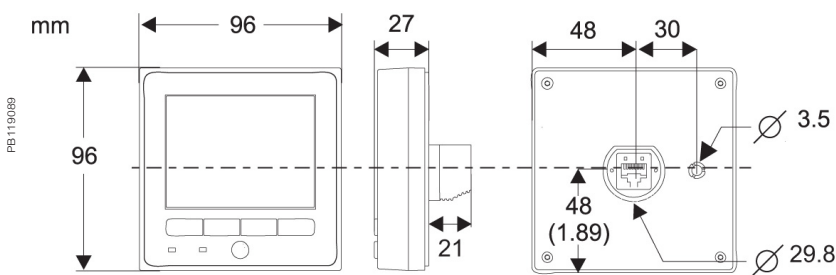

## PM8000 with communication option modules

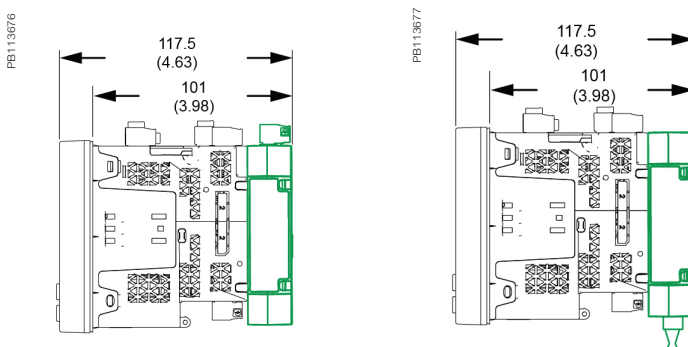




## PM8000 with I/O modules dimensions

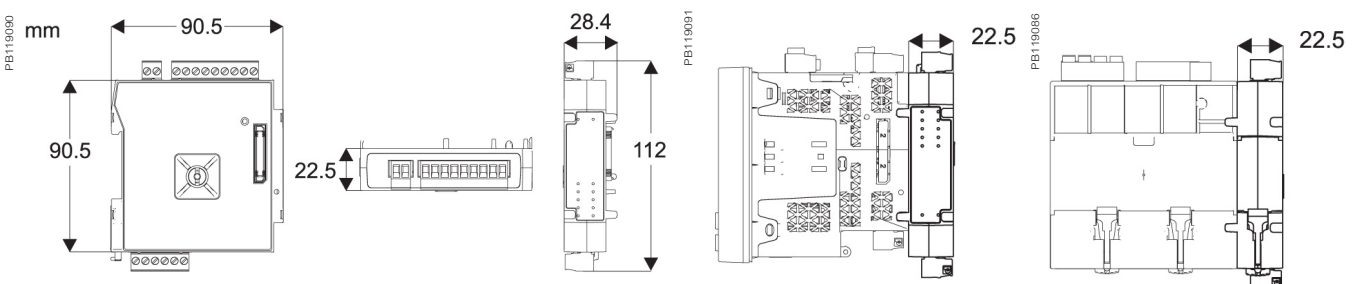

Please see the appropriate **Installation Guide** for accurate and complete information on the installation of this product.

# PM8000 series

## PM8000 series parts

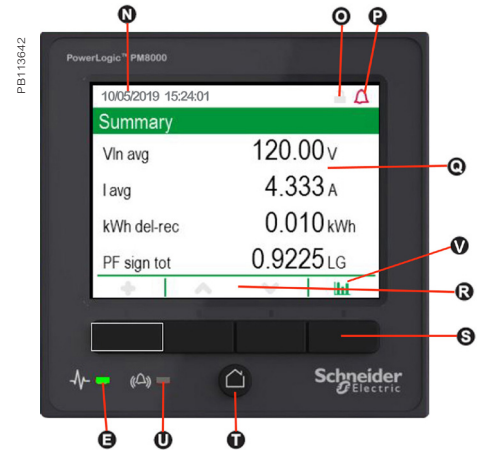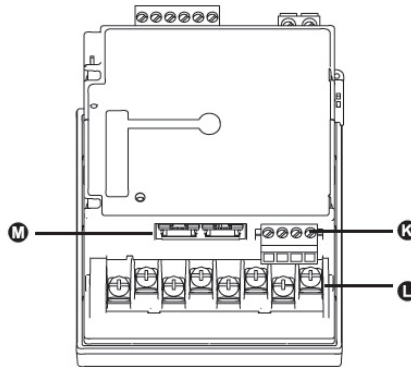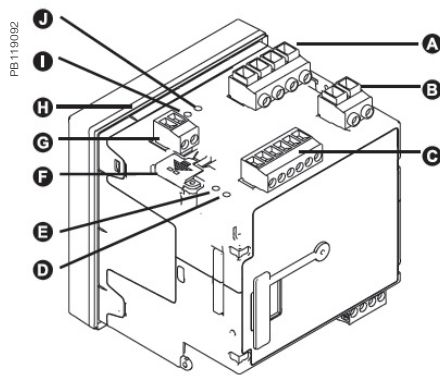

- A Voltage inputs
- B Control power
- C Digital inputs
- D Revenue lock LED (green)
- E Status LED (green/red)
- F Revenue lock switch
- G Digital output
- H Sealing gasket
- I Infrared energy pulsing LED
- J Energy pulsing LED
- K RS-485
- L Current inputs
- M Ethernet (2)
- N Date/time
- O Revenue lock icon

- P Alarm icon
- Q Display
- R Navigation icons
  - ▲ Up
  - ▼ Down
  - ✓ Select
  - ✗ Cancel
  - ⚙ Edit
  - ⊕ More
- S Navigation buttons
- T Home button
- U Alarm LED (red)
- V Bar graph

# PowerLogic™ ION9000 series

The PowerLogic™ ION9000 is your 24/7 power quality expert, providing information, not just data.

With a comprehensive, industry-leading Power Quality Instrument (PQI) performance designation according to IEC 62586-1/-2, the PowerLogic™ ION9000 is third-party certified ANSI C12.20 Class 0.1 and IEC 62053-22 Class 0.1S accurate, the most accurate power meter available today. Lab-verified power quality and safety ensure reliable, precision performance that is perfect for supply- or demand-side applications. Its patented Disturbance Direction Detection also helps you pinpoint the source of power quality issues faster. Capable of sampling at 10 MHz, the ION9000T captures extremely fast voltage events that are missed by most other power meters, enabling advanced diagnostics and high-resolution event associations for fast, conclusive diagnosis and resolution to transient voltages.

Highly customizable and modular, the ION9000's field programmability can adapt to satisfy any solution, protecting your investment now and in the future. All designed to align with your comprehensive grid cybersecurity policies and backed by Schneider Electric's global services and support.

## Applications

Ideal for critical power and large energy users who cannot afford to be shut down, the ION9000T has High-Speed Transient Capture (HSTC) to detect and record transient events that exceed the voltage withstand of sensitive equipment.

PB115917



METSEION92040

# ION9000 series

## The market solution for

Markets that benefit from a solution that includes PowerLogic™ ION9000 series meters:

- Data centers
- Healthcare facilities
- Semiconductor
- Pharmaceutical & chemical
- Energy industries
- Mining, Minerals, & Metals
- Renewable energy interconnects
- Medium voltage distribution & energy automation

## Benefits

- Makes understanding power quality simple which helps operations personnel avoid downtime and increase productivity and equipment life
- Makes energy and power quality data immediately actionable and relevant to operational and sustainability goals

## Competitive advantages

- Modular, flexible, patented ION™ programmable technology
- Utility grade energy accuracy
- Patented Disturbance Direction Detection
- Third-party, lab-verified compliance to the latest PQ standards
- Onboard pass/fail PQ characterization and assessment according to EN50160 and IEEE519
- Cybersecurity event logging, Syslog protocol, HTTPS, SFTP, and full control of each communication port
- High-speed impulsive and oscillatory transient detection

## Power management solutions


Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings. Maximize electrical network reliability and availability, and optimize electrical asset performance.

## Conformity of standards

- |                  |                |
|------------------|----------------|
| • ANSI C12.20    | • IEC 61850    |
| • ANSI C37.90.1  | • IEC 62052-11 |
| • IEC 61000-4-7  | • IEC 62052-31 |
| • IEC 61000-4-15 | • IEC 62053-22 |
| • IEC 61000-4-30 | • IEC 62053-23 |
| • IEC 61010-1    | • IEC 62053-24 |
| • IEC 61326-1    | • IEC 62586    |
| • IEC 61557-12   | • UL 61010-1   |



PowerLogic™ ION9000 front view

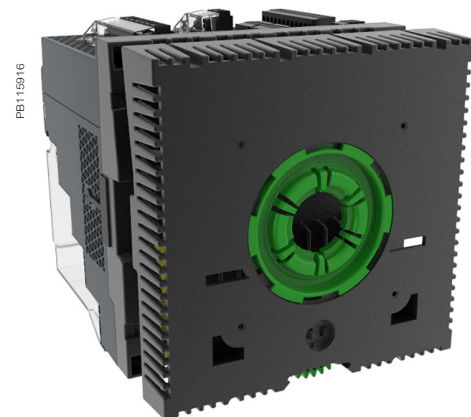

PowerLogic™ ION9000 with panel mounting adapter

# ION9000 series



PowerLogic™ ION9000 series meter with RD192 display



PowerLogic™ ION9000 RD192 remote display



PowerLogic™ ION9000 Harmonics display


## Main characteristics

- PQ compliance reporting and basic PQ analysis:
  - Recognized as a Power Quality Instrument Class A to IEC62586-1 and IEC62586-2
  - Monitors and logs parameters according to IEC 61000-4-30 Class A international PQ standards (test methods as per IEC 62586-2).
  - High resolution waveform capture: triggered manually or by event. Captured waveforms available directly from the meter via SFTP in a COMTRADE format, and viewable in the meter's web interface.
  - Generates onboard PQ compliance reports accessible via onboard web pages:
    - Pass/fail report for IEEE 519 for voltage and current harmonic limits.
    - ITIC (CBEMA) and SEMI curves, with alarm categorization to support further analyses.
    - NEMA Motor Derating curve.
  - Harmonic analysis:
    - THD and TDD per phase, min/max, custom alarming.
    - Individual harmonic magnitudes and angles on voltage and current, up to the 63rd harmonic.
  - Disturbance detection and capture: sag/swell on any current and voltage channel, alarm on disturbance event, and waveform capture.
  - Patented Disturbance Direction Detection: provides indication of the captured disturbance occurring upstream or downstream of the meter; timestamped results provided in the event log, with degree of certainty of disturbance direction.
- Transient detection and capture: events 20 microseconds or longer in duration on any voltage channel with alarm, event log, and waveform capture.
- PowerLogic™ ION9000T also provides High-Speed Transient Capture (HSTC) of voltage events 100 nanoseconds or longer in duration and up to 10,000 V in magnitude with high-speed and disturbance waveform captures, as well as per-event statistics on each transient.
- Metering precision:
  - IEC 61557-12 PMD/SD/K70/0.2 and PMD/SS/K70/0.2 3000m (Performance Measuring and Monitoring devices (PMD)).
  - Industry leading Class 0.1S accuracy IEC 62052-11 ed.2, ANSI C12.20 Class 0.1 (active energy).
  - Class 0.5S accuracy for reactive energy (IEC 62053-24).
  - Cycle-by-cycle RMS measurements updated every ½ cycle.
  - Full 'multi-utility' WAGES metering support.
  - Net metering.
  - Anti-tamper protection seals and hardware metrology lock.
- Cybersecurity:
  - Security events logging with Syslog protocol support.
  - HTTPS and SFTP secure protocols.
  - Ability to enable or disable any communication port and any protocol per port.
  - Anti-tamper protection seals and hardware metrology lock.
  - User accounts with strong passwords.
- Used with Schneider Electric's advanced software tools, provides detailed PQ reporting across entire network:
  - EN 50160 compliance report.
  - IEEE 519 harmonic compliance report.
  - IEC 61000-4-30 report.
  - Power quality compliance summary.
  - Energy reports for consumption analysis and cost management.
  - WAGES dashboards and reports.
  - Display of waveforms and PQ data from all connected meters.
  - Onboard web-based waveform viewer.
  - EcoStruxure™ Power Events Analysis, including alarm management, sequence of events, and root cause analysis.

# ION9000 series




PowerLogic™ ION9000 front with two option modules

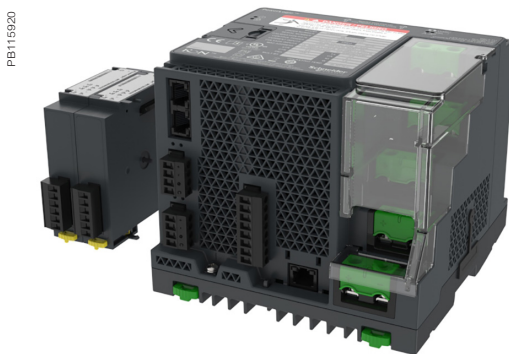

PowerLogic™ ION9000 bottom with two option modules



PowerLogic™ ION9000 iso with two communication option modules

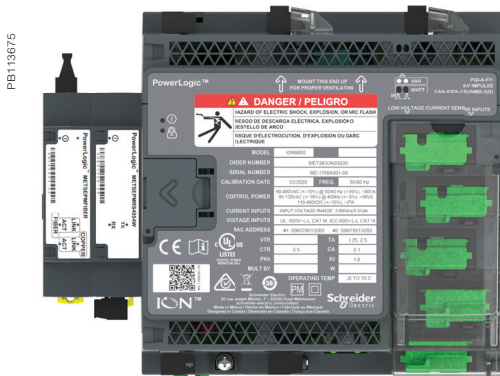


PowerLogic™ ION9000 with two communication option modules

- Data and event logging:
  - Onboard data and event logging.
  - 2 GB of standard non-volatile memory.
  - No data gaps due to network outages or server downtime.
  - Min/max log for standard values.
  - 100 user-definable data logs, recording up to 16 parameters at a 1/2 cycle or other user definable interval.
  - Continuous logging or snapshot, triggered by setpoint and stopped after defined duration.
  - Trend energy, demand and other measured parameters.
  - Forecasting via web pages: average, minimum and maximum for the next four hours and next four days.
  - Advanced time-of-use capability.
  - Security/event log: alarm conditions, metering configuration changes, power outages, firmware download, and user login/logout with timestamp.
- Alarming and control:
  - 50+ definable alarms to log critical event data, trigger waveform recording, or perform control function.
  - Trigger on any condition, with 1/2-cycle and 1-second response time.
  - Combine alarms using Boolean logic enabling customization of alarms.
  - Alarm notification via email.
  - In conjunction with Schneider Electric's EcoStruxure™ software, alarms, software alarms, and alarm frequency are categorized and trended enabling sequence of events and root cause analyses.


## Usability

- Auto-discovery using DPWS (Device Profile Web Services).
- DHCP for automatic IP address configuration.
- Full function web server enables simple web commissioning.
- Free setup wizard simplifies meter configuration.
- Front panel:
  - Easy to read color graphic display.
  - Simple and intuitive menu navigation with multiple language interface and support.
- DIN rail mounting options.
- Remote display option.
- Pluggable connectors.
- Low Voltage Current Sensors Input option.
- Flexible remote communications:
  - Multiple simultaneously operating communication ports and protocols allow interfacing with other automation systems, e.g. waveforms, alarms, billing data, etc. Data can be uploaded for viewing/analysis while other systems access real-time information.
  - Supports: Modbus, ION, DNP3, DLMS/COSEM, SNMP, and IEC 61850.
  - Dual port Ethernet: 2x 10/100BASE-TX; supports IPV4 and IPV6; daisy-chaining capability removes need for additional switches.
  - Fiber-Ethernet option module: Multi-mode 100Base-FX with SC duplex connector
  - Create redundant network loop using Rapid Spanning Tree Protocol (RSTP) and managed Ethernet switches.
  - Secure web interface with HTTPS and TLS 1.2 with support for user-provided certificates.
  - Customize TCP/IP port numbers and enable/disable individual ports.
  - RS-485 2-wire connection, up to 115,200 baud, Modbus RTU, ION and DNP3 protocols.
  - 4-Wire RS-485 option module: up to 115,200 baud, Modbus RTU, ION and DNP3 protocols
  - Ethernet to serial gateway with Modbus Master functionality, connecting to 31 unit loads of downstream serial Modbus devices. Also supports Modbus Mastering over TCP/IP (Ethernet) network.


# ION9000 series

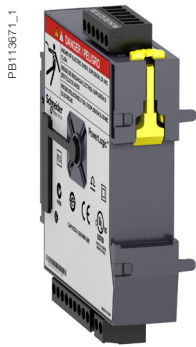


PowerLogic™ I/O module

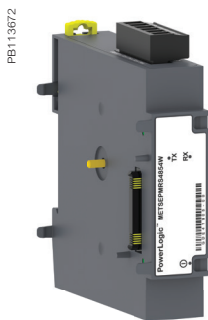

4-Wire RS-485 Option Module

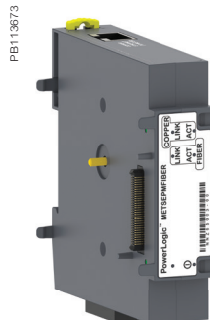

Fiber-Ethernet Option Module

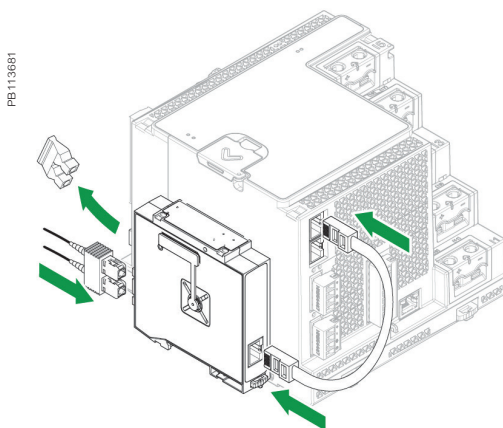

PowerLogic™ ION9000 connected with Fiber-Ethernet

- Full function web server with factory and customizable pages to access real-time and PQ compliance data.
- Time synchronization via:
  - Precision network time protocol (PTP) based on IEEE 1588 / IEC 61588.
  - GPS clock (RS-485) or IRIG-B (digital input) to  $\pm 1$  millisecond.
  - Network Time Protocol (NTP/SNTP).
  - Automatic time synchronization available through Schneider Electric software server.

## Adaptability

- ION™ frameworks are customizable, scalable applications with object-oriented programming that compartmentalizes functions, and increases flexibility and adaptability.
- Applications include: accessing and aggregating data from downstream Modbus devices over serial or across the network (Modbus TCP/IP), logging and/or processing data through totalization, unit conversion or other calculations, applying complex logic for alarming or control operations, and visualization via webpages.

## Standard meter I/O

- 8 digital status/counter inputs with  $\pm 1$  millisecond timestamp.
- 4 solid state digital outputs (Form A) for energy pulsing, interfacing with other systems or control.
- 2 Form C relay outputs for control applications.

## Advanced Metering Option Modules

- Expanding meter's flexibility with communication and I/O option modules
- Powered from meter base

## I/O Expansion Option Modules

Option modules include:

- Digital module:
  - 6 digital status/counter inputs.
  - 2 Form C relay outputs, 250 V AC, 8 A.
- Analog module:
  - 4 analog inputs (0-20 mA, 4-20 mA; 0-30 V).
  - 2 analog outputs (0-20 mA, 4-20 mA; 0-10 V) for interfacing with building management sensors and systems.

## Communication Option Modules

Option modules include:

- 4-Wire RS-485 Module <sup>(+1)</sup>:
  - It adds 4-wire support to the meter i.e. eliminating the cost and efforts of rewiring while replacing/retrofitting legacy 4-Wire RS-485 systems
  - Pluggable screw terminal connector
- Fiber-Ethernet Module <sup>(+2)</sup>:
  - Provides isolated data transmission through fiber optics up to 2000 m length
  - Supports multi-mode 100Base-FX type
  - SC duplex connector

<sup>(+1)</sup> One of the onboard 2-Wire RS-485 port is disabled with the optional module

<sup>(+2)</sup> Connected to the meter base using Ethernet patch cable (included with the module)

Maximum of 4 optional modules in total (Fiber-Ethernet, 4-Wires RS-485, I/O modules) can be connected to the meter. Only 1 Fiber-Ethernet and 1 4-Wire RS-485 option module is supported per meter.

Please refer to the option module **Installation Guides** for more details.

# ION9000 series

## Feature guide

| General  | ION9000 | ION9000T |
|--|---------|----------|
| Use on LV, MV, and HV systems  | ■       | ■        |
| Current accuracy: 0.1 % reading  | ■       | ■        |
| Voltage accuracy: 0.1 % reading  | ■       | ■        |
| Active energy accuracy: 0.1 Class  | ■       | ■        |
| Number of samples/cycle or sample frequency: 1024  | ■       | ■        |
| High-Speed Transient Capture: 10 MHz<br>(200 k for 50 Hz, 167 k for 60 Hz)               | -       | ■        |
| <b>Instantaneous rms values</b>  |         |          |
| Current, voltage, frequency  | ■       | ■        |
| Active, reactive, apparent power: Total and per phase                                    | ■       | ■        |
| Power factor: Total and per phase  | ■       | ■        |
| <b>Energy values</b>   |         |          |
| Active, reactive, apparent energy  | ■       | ■        |
| Settable accumulation modes  | ■       | ■        |
| <b>Demand values</b>   |         |          |
| Current: Present and max. values   | ■       | ■        |
| Active, reactive, apparent power: Present and max. values                                | ■       | ■        |
| Predicted active, reactive, apparent power   | ■       | ■        |
| Synchronization of the measurement window  | ■       | ■        |
| Setting of calculation mode: Block, sliding  | ■       | ■        |
| <b>Power Quality measurements</b>  |         |          |
| Harmonic distortion: Current and voltage   | ■       | ■        |
| Individual harmonics: via front panel and web page: 63<br>via EcoStruxure™ software: 511 | ■       | ■        |
| Waveform capture   | ■       | ■        |
| Detection of voltage swells and sags   | ■       | ■        |
| Fast acquisition: 1/2 cycle data   | ■       | ■        |
| EN 50160 compliance checking   | ■       | ■        |
| Customizable data outputs (using logic and math functions)                               | ■       | ■        |
| IEEE 519 compliance checking   | ■       | ■        |
| <b>Data recording</b>  |         |          |
| Min/max of instantaneous values  | ■       | ■        |
| Data logs  | ■       | ■        |
| Event logs   | ■       | ■        |
| Trending/forecasting   | ■       | ■        |
| SER (Sequence of event recording)  | ■       | ■        |
| Time stamping  | ■       | ■        |
| GPS synchronization (± 1ms)  | ■       | ■        |
| Memory: 2000 MB  | ■       | ■        |
| <b>Display and I/O</b>   |         |          |
| Front panel display, 2 options: 96 mm & 192 mm   | ■       | ■        |
| Pulse output: 2  | ■       | ■        |
| Digital or analog inputs(max): 32 digital, 16 analog                                     | ■       | ■        |
| Digital or analog outputs (max, including pulse output): 4 digital, 10 relay, 8 analog   | ■       | ■        |
| <b>Communication</b>   |         |          |
| 2-Wire RS-485 port   | ■       | ■        |
| Ethernet port(s): 2x 10/100BASE-TX, RJ45 connector,<br>CAT5/5e/6/6a cable                | ■       | ■        |
| Serial port protocols (Modbus, ION, DNP3, DLMS/COSEM)                                    | ■       | ■        |
| Ethernet port protocols (Modbus, ION, DNP3, DLMS/COSEM,<br>IEC 61850)                    | ■       | ■        |
| Ethernet gateway   | ■       | ■        |
| Alarm notification via email   | ■       | ■        |
| HTTP/HTTPS web server with waveform viewer   | ■       | ■        |
| SNMP with custom MIB and traps for alarms  | ■       | ■        |
| SMTP email   | ■       | ■        |
| PTP and NTP time synchronization   | ■       | ■        |
| SFTP file transfer   | ■       | ■        |
| Option module with 4-Wire RS-485 port  | ■       | ■        |
| Option module with Fiber-Ethernet port   | ■       | ■        |

# ION9000 series

## Technical specifications

| Electrical characteristics       |  |  | ION9000 | ION9000T |
|----------------------------------|--|--|---------|----------|
| Type of measurement              | True rms to 1,024 samples per cycle                                |  | ■       | ■        |
|                                  | High-speed transient detection, 10 MHz, 10 kV                      |  | -       | ■        |
| Measurement accuracy             | Current & voltage  | Class 0.1 as per IEC 61557-12  | ■       | ■        |
|                                  | Active Power   | Class 0.1 as per IEC 61557-12  | ■       | ■        |
|                                  | Power factor   | Class 0.5 as per IEC 61557-12  | ■       | ■        |
|                                  | Frequency  | Class 0.02 as per IEC 61557-12   | ■       | ■        |
|                                  | Active energy  | Class 0.1S IEC 62053-22<br>Class 0.1 IEC 61557-12<br>Class 0.1 ANSI C12.20   | ■       | ■        |
|                                  | Reactive Energy  | Class 0.5S IEC 62053-24  | ■       | ■        |
| Display refresh rate             |  | HMI display updated once per second; data refresh rate 1/2 cycle or 1 second   | ■       | ■        |
| Input-voltage characteristics    | Specified accuracy voltage   | 57 - 400 V L-N / 100 - 690 V L-L   | ■       | ■        |
|                                  | Impedance  | 5 MΩ per phase   | ■       | ■        |
|                                  | Specified accuracy frequency                                       | 42 to 69 Hz (50/60 Hz nominal)   | ■       | ■        |
|                                  | Limit range of operation - frequency                               | 20 to 450 Hz   | ■       | ■        |
| Input-current characteristics    | Rated nominal current  | 1 A (0.1S), 5 A (0.1S); current class 2, 10, 20 A (0.1 ANSI)   | ■       | ■        |
|                                  | Specified accuracy current range                                   | Starting Current: 1 mA (no accuracy)<br>Accurate Range: 10 mA - 20 A   | ■       | ■        |
|                                  | Permissible overload   | 500 A rms for 1.0s   | ■       | ■        |
|                                  | Impedance  | 0.0003 Ω per phase   | ■       | ■        |
|                                  | Burden   | 0.01 VA max at 5 A   | ■       | ■        |
| LV Input-current characteristics | Input voltage range  | ±5.5 V pk  | ■ (+3)  | -        |
|                                  | Minimum signal   | 1 mV   | ■ (+3)  | -        |
|                                  | Withstand  | 30 V pk continuous   | ■ (+3)  | -        |
|                                  | Input impedance  | 200 k Ω  | ■ (+3)  | -        |
|                                  | Safety   | For use with listed Energy Monitoring current transformers   | ■ (+3)  | -        |
| Power supply AC/DC               | AC   | 90-480 V AC ±10 % (50/60 Hz ±10 %) 90-120 V AC ±10% (400 Hz)   | ■       | ■        |
|                                  | DC   | 110-480 V DC ±10 %   | ■       | ■        |
|                                  | Ride-through time (Values for meters with no optional accessories) | 100 ms (5 cycles at 50/60 Hz) typ., 120 V AC<br>400 ms (20 cycles at 50/60 Hz) typ., 240 V AC<br>1,200 ms (60 cycles at 50/60 Hz) typ., 480 V AC             | ■       | ■        |
|                                  | Burden   | Typical: 16.5 W / 38 VA at 480 V (50/60 Hz)<br>Fully optioned: max. 40 W / 80 VA at 480 V (50/60 Hz).  | ■       | ■        |
| Power supply LV DC               | DC   | 20 to 60 V DC ±10 %  | ■       | -        |
|                                  | Burden   | Typical: 15 W at 20 to 60 V DC<br>Fully optioned: 38 W at 20 to 60 V DC  | ■       | -        |
| Input/outputs                    | Meter base Only  | 8 digital inputs (30 V AC/60 V DC)<br>4 Form A (KY) solid state digital output (30 V AC/60 V DC, 75 mA)<br>2 Form C relays (8 A at 250 V AC, 5 A at 24 V DC) | ■       | ■        |
|                                  | Optional   | Digital - 6 digital inputs (30 V AC / 60 V DC) wetted + 2 Form C relay outputs (250 V AC, 8 A)   | ■       | ■        |
|                                  |  | Analog - 4 analog inputs (0-20 mA, 4-20 mA, 0-30 V DC) + 2 analog outputs (0-20 mA, 4-20 mA, 0-10 V DC).   | ■       | ■        |

(+3) The LV Input-current option replaces standard CT inputs

# ION9000 series

| Mechanical characteristics                   |  |                                 | ION9000 | ION9000T |
|--|--|---------------------------------|---------|----------|
| Weight                                       | DIN rail mount meter 1.5 kg<br>IO modules 0.140 kg<br>Touchscreen display 0.300 kg   |                                 | ■       | ■        |
| IP degree of protection                      | IP 65, UL type 12: Panel mount and touchscreen display, front.<br>IP 30: Panel mount rear, DIN rail mount, I/O modules.  |                                 | ■       | ■        |
| Excellent quality                            | ISO 9001 and ISO 14000 certified manufacturing.  |                                 | ■       | ■        |
| Dimensions                                   | Panel mount  | 160 x 160 x 135.3 mm            | ■       | ■        |
|  | DIN rail mount meter   | 160 x 160 x 135.3 mm            | ■       | ■        |
|  | Color remote display (2 options)   | 197 x 175 x 27.5 mm touchscreen | ■       | ■        |
|  | I/O modules  | 90.5 x 90.5 x 22 mm             | ■       | ■        |
|  | Touchscreen display(s)   | 192 mm and 96 mm                | ■       | ■        |
| Environmental conditions                     |  |                                 |         |          |
| Operating temperature                        | -25 to 70 °C   |                                 | ■       | ■        |
| Remote Display Unit                          | -25 to 60 °C   |                                 | ■       | ■        |
| Storage temperature                          | -40 to 85 °C   |                                 | ■       | ■        |
| Humidity rating                              | 5 to 95 % non-condensing   |                                 | ■       | ■        |
| Installation category                        | III  |                                 | ■       | ■        |
| Operating altitude (maximum)                 | 3,000 m above sea-level  |                                 | ■       | ■        |
| Electromagnetic compatibility                |  |                                 |         |          |
| EMC standards                                | IEC 62052-11, IEC 61326-1, IEC 61000-6-5   |                                 | ■       | ■        |
| Immunity to electrostatic discharge          | IEC 61000-4-2  |                                 | ■       | ■        |
| Immunity to radiated fields                  | IEC 61000-4-3  |                                 | ■       | ■        |
| Immunity to fast transients                  | IEC 61000-4-4  |                                 | ■       | ■        |
| Immunity to surges                           | IEC 61000-4-5  |                                 | ■       | ■        |
| Immunity to conducted disturbances           | IEC 61000-4-6  |                                 | ■       | ■        |
| Immunity to power frequency magnetic fields  | IEC 61000-4-8  |                                 | ■       | ■        |
| Immunity to conducted disturbances, 2-150kHz | CLC/TR 50579   |                                 | ■       | ■        |
| Immunity to voltage dips & interruptions     | IEC 61000-4-11   |                                 | ■       | ■        |
| Immunity to ring waves                       | IEC 61000-4-12   |                                 | ■       | ■        |
| Conducted and radiated emissions             | EN 55011 and EN 55032 Class B, FCC part 15 Class B, ICES-003 Class B   |                                 | ■       | ■        |
| Surge withstand Capability (SWC)             | IEEE/ANSI C37.90.1   |                                 | ■       | ■        |
| Safety                                       |  |                                 |         |          |
| Safety Construction                          | IEC/EN 61010-1 ed.3, CAT III, 400 V L-N / 690 V L-L, UL 61010-1 ed.3 and CSA-C22.2 No 61010-1 ed.3, CAT III, 347 V L-N / 600 V L-L, IEC/EN 62052-31, protective class II |                                 | ■       | ■        |
| Communication                                |  |                                 |         |          |
| Ethernet to serial line gateway              | Communicates directly with up to 31 serial devices   |                                 | ■       | ■        |
| Web server                                   | Customizable pages, new page creation capabilities, HTML/XML compatible  |                                 | ■       | ■        |
| Serial port RS-485                           | 2x, Baud rates of 2,400 to 115,200, pluggable screw terminal connector   |                                 | ■       | ■        |
| Ethernet port(s)                             | 2x 10/100BASE-TX, RJ45 connector, CAT5/5e/6/6a cable   |                                 | ■       | ■        |
| Protocol                                     | HTTPS, SFTP, SNMP, SMTP, DPWS, RSTP, PTR, NTP/SNTP, GPS, Syslog, DHCP, IPv4, IPv6  |                                 | ■       | ■        |
| Communication option module                  |  |                                 |         |          |
| Optional port 4-Wire RS-485                  | Baud rates of 2400 to 115200, pluggable screw terminal connector   |                                 | ■       | ■        |
| Optional Fiber-Ethernet port                 | Ethernet patch cable from base meter, multi-mode 100Base-FX, SC duplex connector   |                                 | ■       | ■        |

# ION9000 series

| Firmware characteristics               |  | ION9000 | ION9000T |
|--|--|---------|----------|
| High-speed data recording              | Down to 1/2 cycle interval recording, stores detailed characteristics of disturbances or outages. Trigger recording by a user-defined setpoint, or from external equipment   | ■       | ■        |
| Harmonic distortion                    | Up to 63rd harmonic (511th via Schneider Electric EcoStruxure™ software) for all voltage and current inputs  | ■       | ■        |
| Sag/swell detection                    | Analyze severity/potential impact of sags and swells: magnitude and duration data suitable for plotting on voltage tolerance curves per phase triggers for waveform recording  | ■       | ■        |
| Disturbance direction detection        | Determine the location of a disturbance more quickly and accurately by determining the direction of the disturbance relative to the meter. Results are captured in the event log, along with a timestamp and confidence level indicating level of certainty  | ■       | ■        |
| Detection & capture of transients      | As short as 20 µs at 50 Hz (17 µs at 60 Hz)  | ■       | ■        |
| High-speed transient capture           | Detection and capture of high-speed impulsive and oscillatory transients as short as 100 ns in duration and up to 10 kV in magnitude   | -       | ■        |
| Instantaneous                          | High accuracy of standard speed (1s) and high-speed (1/2 cycle) measurements, including true rms per phase and total for: voltage, current, active power (kW), reactive power (kvar), apparent power (kVA), power factor, frequency, voltage and current unbalance, phase reversal                                   | ■       | ■        |
| Load profiling                         | Channel assignments (1600 channels via 100 recorders) configurable for any measurable parameter, including historical trend recording of energy, demand, voltage, current, power quality, or any measured parameter. Trigger recorders based on time interval, calendar schedule, alarm/event condition, or manually | ■       | ■        |
| Trend curves                           | Historical trends and future forecasts to better manage demand, circuit loading, and other parameters. Provides average, min, max, and standard deviation every hour for last 24 hours, every day for last month, every week for last 8 weeks and every month for last 12 months                                     | ■       | ■        |
| Waveform captures                      | Simultaneous capture of voltage and current channels, sub-cycle disturbance captures of 180-cycles @ 1,024 samples/cycle to 7,200-cycles @ 16 sample/cycle, retriggerable  | ■       | ■        |
| High-speed transient waveform captures | Simultaneous capture of voltage channels, impulsive and oscillatory transient capture of up to 1-cycle @ 200 k samples per cycle (50 Hz) along with coincidence disturbance waveform capture   | -       | ■        |
| Alarms                                 | Threshold alarms: adjustable pickup and dropout setpoints and time delays, numerous activation levels possible for a given type of alarm, user-defined or automatic alarm threshold settings, user-defined priority levels (optional automatic alarm setting)  | ■       | ■        |
| Advanced Time of Use (TOU)             | 4 seasons; 5 different day types: weekend, weekday, and holiday; up to 4 tariffs per day type  | ■       | ■        |
| Advanced network security              | Up to 50 users with unique access rights. Perform resets, time sync, or meter configurations based on user privileges  | ■       | ■        |
| Memory                                 | 2,000 MB   | ■       | ■        |
| Firmware update                        | Update via the communication ports   | ■       | ■        |
| Display characteristics                |  |         |          |
| 96 mm pushbutton display               | 320 x 240 (1/4 VGA) color LCD, configurable screens, 5 buttons and 2 LED indicators (alarm and meter status)   | ■       | ■        |
| 192 mm touchscreen display             | 800 x 480 pixels, 177.8 mm (7") Color LCD, +/- 85 degree view angle, sunlight readable, dual capacitive touch, usable when wet or through Class 0 lineman gloves, impact resistant to 5 joules, IP65 rating  | ■       | ■        |
| Languages                              | English, French, Spanish, Russian, Portuguese, German, Italian, Chinese  | ■       | ■        |
| Notations                              | IEC, IEEE  | ■       | ■        |

# ION9000 series


## ION9000 Commercial reference numbers

| Comm ref number | Description  |
|-----------------|--|
| METSEION92030   | ION9000 meter, DIN mount, no display, hardware kit   |
| METSEION92040   | ION9000 meter, DIN mount, 192 mm display, B2B adapter, hardware kit  |
| METSEION92043   | ION9000 meter, DIN mount, 192 mm display, B2B adapter, hardware kit, Measurement Canada Ready (Canada only)  |
| METSEION92044   | ION9000 meter, DIN mount, 192 mm display, B2B adapter, hardware kit, Measurement Canada Sealed (Canada only) |
| METSEION92130   | ION9000 Meter, 20-60 Vdc control input, DIN mount, no display, hardware kit                                  |
| METSEION92140   | ION9000 Meter, 20-60 Vdc control input, DIN mount, 192 mm display, B2B adapter, hardware kit                 |
| METSEION93030   | ION9000 meter, LVCS, DIN mount, no display, hardware kit   |
| METSEION93040   | ION9000 meter, LVCS, DIN mount, 192 mm display, B2B adapter, hardware kit                                    |
| METSEION93130   | ION9000 Meter, LVCS, 20-60 Vdc control power, DIN mount, no display, hardware kit                            |
| METSEION93140   | ION9000 Meter, LVCS, 20-60 Vdc control power, DIN mount, 192 mm display, B2B adapter, hardware kit           |
| METSEION95030   | ION9000T meter, HSTC, DIN mount, no display, hardware kit  |
| METSEION95040   | ION9000T meter, HSTC, DIN mount, 192 mm display, B2B adapter, hardware kit                                   |
| METSERD192      | Remote display, color touchscreen, 192 x 192 mm  |
| METSEPM89RD96   | Remote display, color LCD, 96 x 96 mm  |
| METSEPM89M2600  | I/O module, 2 relay outputs, 6 digital inputs  |
| METSEPM89M0024  | I/O module, 2 analog outputs, 4 analog inputs  |
| METSE9HWK       | ION9000 meter hardware kit – plugs, terminal guards, spare grounding screw, DIN clips                        |
| METSE9CTHWK     | ION9000 Current Input hardware kit - terminal screws, CT covers  |
| METSERD192HWK   | RD192 remote display hardware kit  |
| METSE9B2BMA     | ION9000 B2B (back to back) mounting adapter  |
| METSE9HWKLVCS   | ION9000 hardware kit for LVCS  |
| METSE9USBK      | ION9000 USB cover hardware kit   |
| METSE7X4MAK     | ION7X50 mounting adapter kit   |
| METSEPMRS4854W  | 4-Wire RS 485 option module  |
| METSEPMFIBER    | Fiber-Ethernet option module   |

Contact your Schneider Electric representative for complete ordering information.


# ION9000 series

## ION9000 meter dimensions

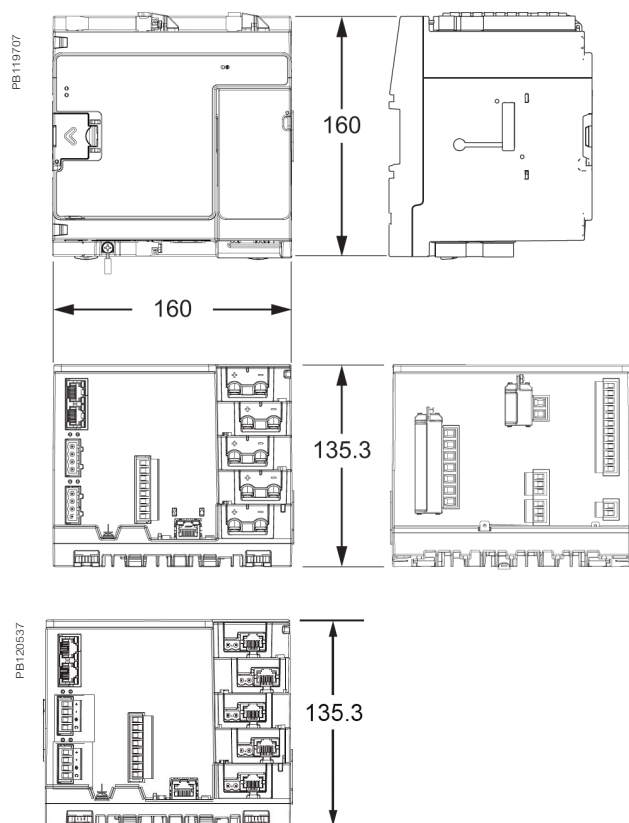


LVCS Input-current option


## ION9000 mounting template

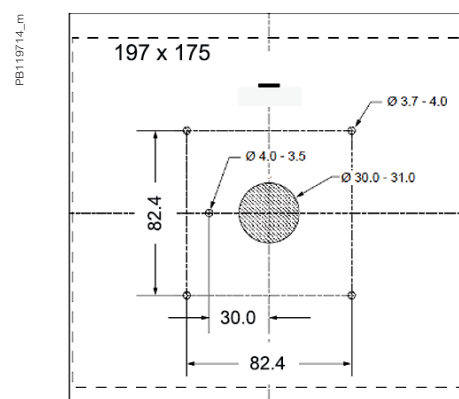


## ION9000 back-to-back (B2B) dimensions

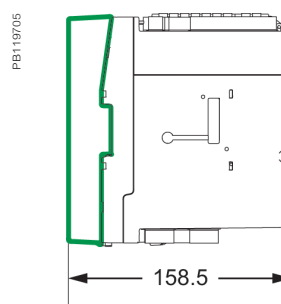

## ION9000 192 mm display dimensions

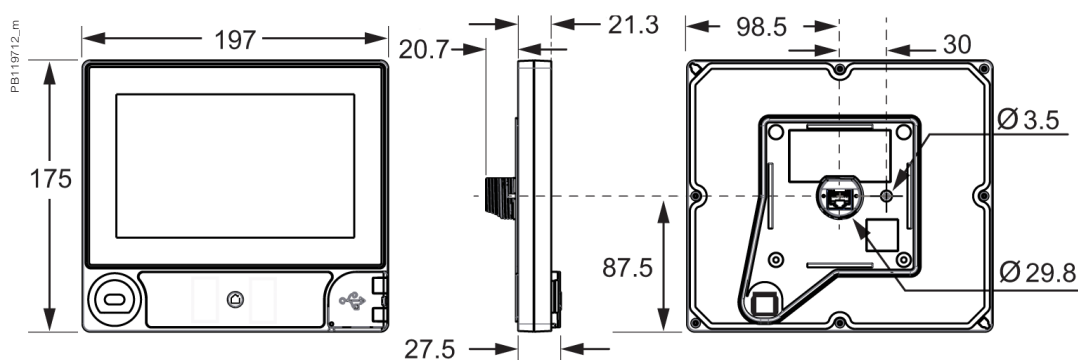


## ION9000 96 mm display dimensions

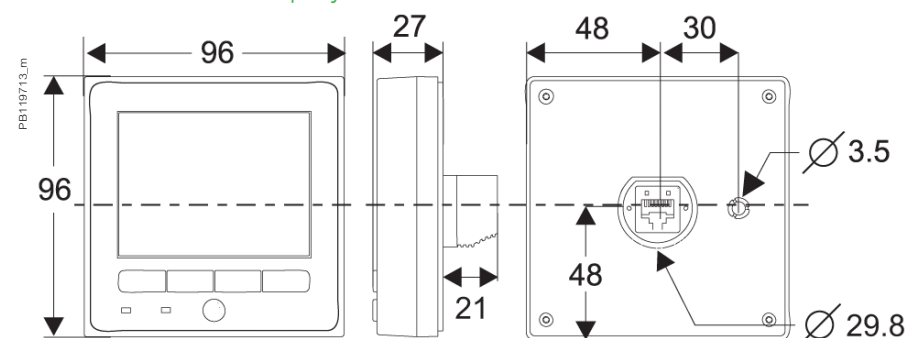


Please refer to ION9000 Series Meter **Installation Sheet** for accurate and complete information on the installation of this product.

# ION9000 series


ION9000 meter DIN rail dimensions

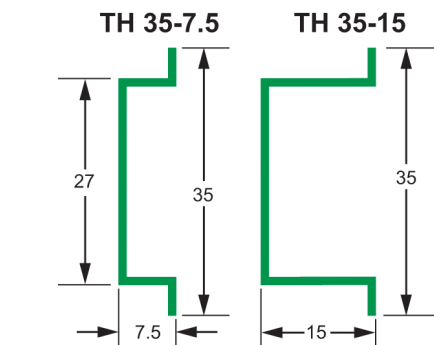


ION7x50 mounting adapter dimensions

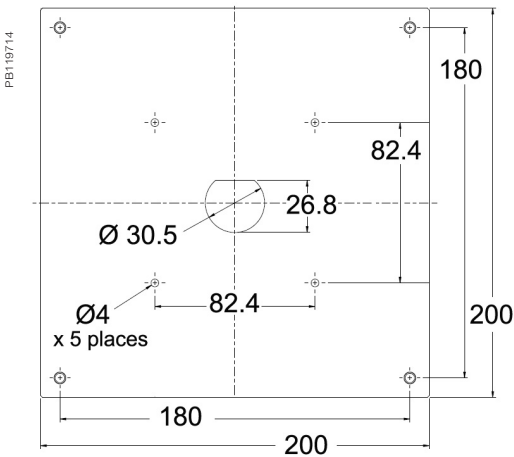

ION9000 LV Current Input wiring options

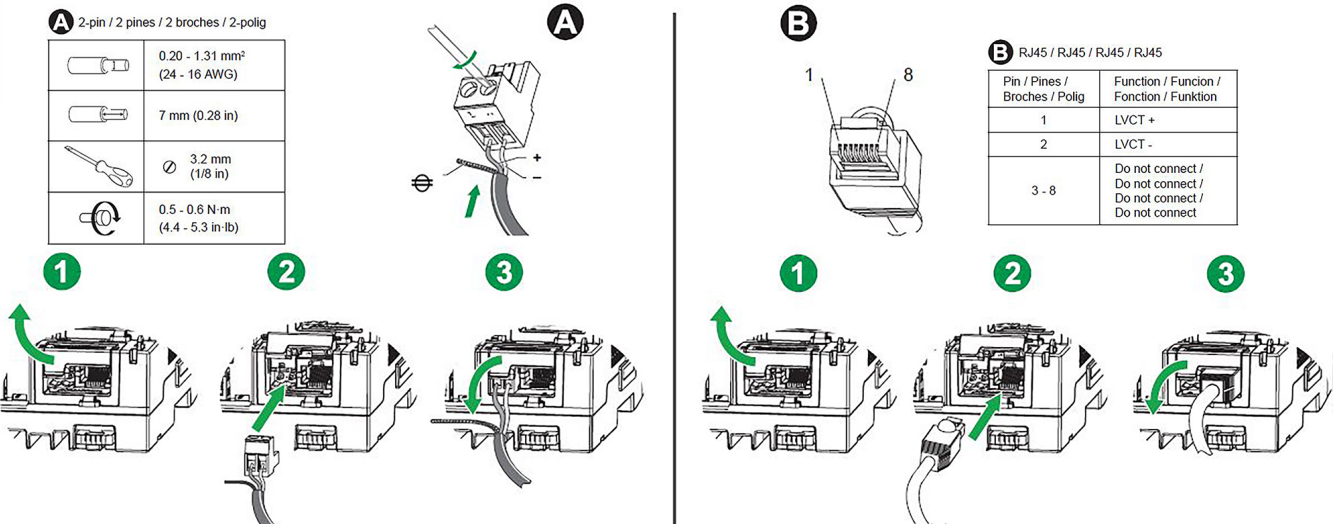

ION9000 with communication option modules

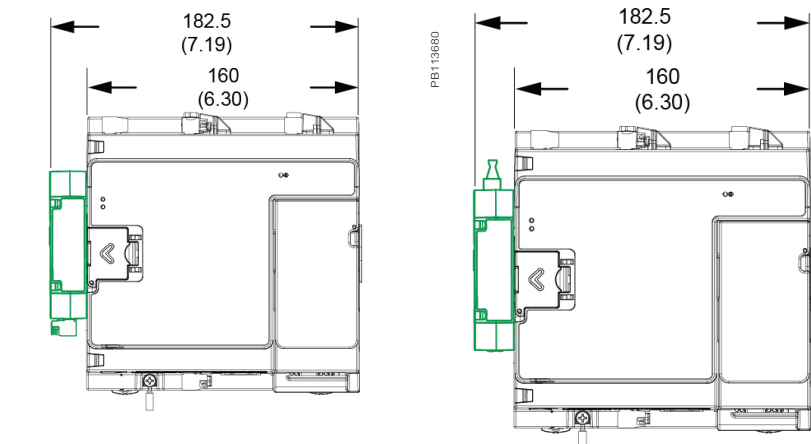

# Advanced Utility Metering

Power quality and revenue meters are designed for utility network monitoring, e.g. transmission and distribution network monitoring.

Revenue and power quality meters designed for precision metering at key transmission network inter-ties, distribution substations and service entrances to optimise power reliability and energy efficiency in utility smart grids.

- PowerLogic™ ION7400
- PowerLogic™ ION8650



ION7400



ION8650

# PowerLogic™ ION7400 series

Providing high accuracy and a wide range of features for transmission and distribution metering, the versatile PowerLogic™ ION7400 series advanced utility meter has the flexibility to change along with your needs.

- Compact 3-phase, multifunction energy and power quality compliance
- Flexible and modular installation with object-oriented intelligence
- Accurate, precise, and highly adaptable metering

## Applications

- Substation feeder metering
- Revenue metering
- Extensive power quality monitoring and cause analysis
- End feeder line monitoring
- Digital fault recording



METSEION7400

# ION7400 series

## The solution for

Markets that can benefit from a solution that includes PowerLogic™ ION7400 series meters:

- Transmission networks
- Distribution network

## Benefits

- Reduce operations costs
- Improve power quality
- Improve continuity of service

## Competitive advantages

- Be able to use Power Monitoring Expert software for data analysis or share operation data with SCADA systems through multiple communication channels and protocols
- Transformer/line loss compensation
- Instrument transformer correction
- Utilize Disturbance Direction Detection to help locate fault

## Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximise electrical network reliability and availability, and optimise electrical asset performance.

## Conformity of standards

- |                  |                |
|------------------|----------------|
| • ANSI C12.20    | • IEC 61557-12 |
| • CLC/TTR50579   | • IEC 61850    |
| • EN 50160       | • IEC 62052-11 |
| • IEC 61000-4-7  | • IEC 62053-22 |
| • IEC 61000-4-15 | • IEC 62053-23 |
| • IEC 61000-4-30 | • IEC 62586    |
| • IEC 61010-1    | • IEEE 519     |
| • IEC 61326      |                |

PB113696




PowerLogic™ ION7400 DIN rail mounted meter- bottom view

PB115161



PowerLogic™ ION7400 meter - rear view

PB115162\_1

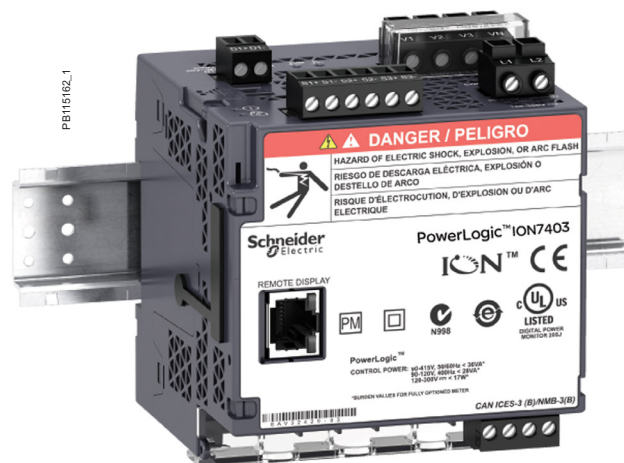

PowerLogic™ ION7400 DIN rail mounted meter

# ION7400 series



PowerLogic™ ION7400 meter showing active alarms.



PowerLogic™ ION7400 with Harmonics display.



PowerLogic™ ION7400 series meter with phasor display.

## Applications and benefits

- Maximize profits by providing the highest output possible with the least amount of risk to availability
- Optimize availability and reliability of electrical systems and equipment
- Monitor power quality (PQ) for compliance and to prevent problems
- Meters fully supported by EcoStruxure™ Power Monitoring Expert and EcoStruxure™ Power Operation software

## Main characteristics

- Precision metering:
  - IEC 61557-12 PMD/Sx/K70/0.2 3000m (performance measuring and monitoring functions)
  - IEC 62053-22 for active energy Class 0.2s accuracy and 0.5s accuracy, ANSI C12.20 Class 0.2 for active energy
  - IEC 62053-23 for reactive energy Class 2 accuracy and Class 3
  - Cycle-by-cycle RMS measurements updated every ½ cycle
  - Full 'multi-utility' WAGES metering support
  - Net metering
  - Anti-tamper protection seals and hardware metrology lock
  - Test mode
- PQ Compliance and basic PQ analysis.
  - Monitors and logs parameters in support of international PQ standards,
    - IEC 61000-4-30 Class S
    - IEC 61000-4-15 Flicker
    - IEC 62586
    - EN 50160
  - Generates onboard PQ compliance reports accessible via onboard web pages:
    - Basic event summary and pass/fail reports, such as EN 50160 for power
    - Frequency, supply voltage magnitude, supply voltage dips, short and long interruptions, temporary over voltages, voltage unbalance and harmonic voltage
    - ITIC (CBEMA) and SEMI curves, with alarm categorization to support further analyses
    - Basic meter provides EN 50160 but can be configured to provide IEEE 519
  - Harmonic analysis:
    - THD on voltage and current, per phase, min/max, custom alarming
    - Individual harmonic magnitudes and angles on voltage and current, up to the 63rd harmonic (up to 127th via EcoStruxure™ software).
  - High resolution waveform capture: triggered manually or by alarm, captured waveforms available directly from the meter via FTP in COMTRADE format or can be viewed via onboard webpages
  - Disturbance detection and capture: sag/swell on any current and voltage channel, alarm on disturbance event, waveform capture with pre-event information
  - Patented Disturbance Direction Detection: provides indication of the captured disturbance occurring upstream or downstream of the meter; timestamped results provided in the event log, with degree of certainty of disturbance direction
- Used with EcoStruxure™ Power Monitoring Expert software, provides detailed PQ reporting across entire network:
  - EN 50160 report
  - IEC 61000-4-30 report
  - PQ compliance summary
  - Display of waveforms and PQ data from all connected meters.
- Onboard data and event logging
  - 512 MB of standard non-volatile memory
  - No data gaps due to network outages or server downtime
  - Min/Max log for standard values


# ION7400 series




PowerLogic™ remote display.



PowerLogic™ ION7400 meter with remote display.

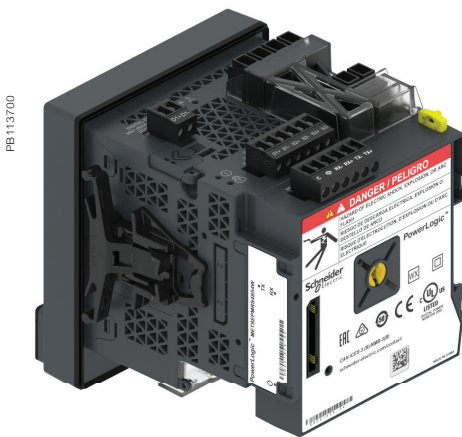

PowerLogic™ ION7400 with RS-485 4-Wire module

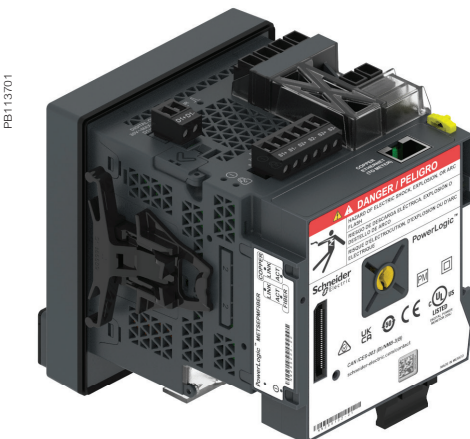


PowerLogic™ ION7400 with Fiber-Ethernet Module

- Up to 64 user definable data logs, recording up to 16 parameters on a cycle-by-cycle or other user definable interval
- Continuous logging or 'snapshot' triggered by setpoint and stopped after defined duration
- Trend energy, demand and other measured parameters
- Forecasting via web pages: average, minimum and maximum for the next four hours and next four days
- Time-of-use in conjunction with EcoStruxure™ software
- Event log: alarm conditions, metering configuration changes, and power outages, timestamped to 1 millisecond
- Alarming and control.
  - 50+ definable alarms to log critical event data, trigger waveform recording, or perform control function
  - Trigger on any condition, with cycle-by-cycle and 1-second response time
  - Combine alarms using Boolean logic and to create alarm levels
  - Alarm notification via email text message
  - In conjunction with EcoStruxure™ Power Monitoring Expert, software alarms and alarm frequency are categorized and trended for easy evaluation of worsening/improving conditions
- Excellent quality: ISO 9001 and ISO 14000 certified manufacturing


## Usability

- Easy installation and setup
    - Panel and DIN rail mounting options, remote display option
    - Pluggable connectors
    - Free setup application simplifies meter configuration
  - Front panel
    - Easy to read color graphic display
    - Simple, intuitive menu navigation with multi-language (8) support
    - Optical port
    - 2 energy pulsing LEDs
    - Alt/Norm screens.
  - Flexible remote communications
    - Multiple simultaneously operating communication ports and protocols allow interfacing with other automation systems; (e.g. waveforms, alarms, billing data, etc.) can be uploaded for viewing/analysis while other systems access real-time information
    - Supports Modbus, ION, DNP3, IEC 61850, MV-90
    - Dual port Ethernet: 10/100BASE-TX; daisy-chaining capability removes need for additional switches
    - Fiber-Ethernet option module: Multi-mode 100Base-FX with SC duplex connector
    - Create redundant network loop using Rapid Spanning Tree Protocol (RSTP) and managed Ethernet switches
    - Customize TCP/IP port numbers enable/disable individual ports
    - RS-485 2-wire connection, up to 115200 baud, Modbus RTU and ION protocols, DNP3 is also supported via RS-485.
    - 4-Wire RS-485 option module: up to 115200 baud, Modbus RTU and ION protocols, DNP3 is also supported via RS-485.
    - Ethernet to serial gateway with Modbus Master functionality, connecting to 31 downstream serial Modbus devices. Also supports Modbus Mastering over TCP/IP (Ethernet) network.
    - Full function web server with factory and customizable pages to access real-time and PQ compliance data.
  - Time synchronization via:
    - GPS clock (RS-485) or IRIG-B (digital input) to +/- 1 millisecond.
- Also supports Network Time Protocol (NTP/SNTP) and time set function from EcoStruxure™ software server.


# ION7400 series

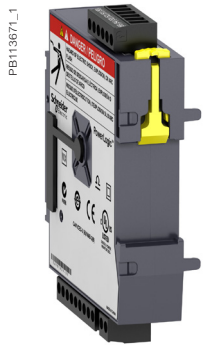


PowerLogic™ I/O module

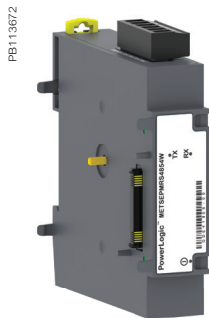

4-Wire RS-485 Option Module

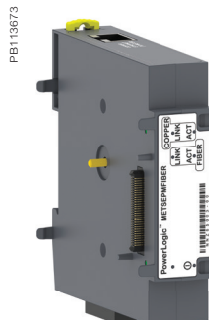

Fiber-Ethernet Option Module

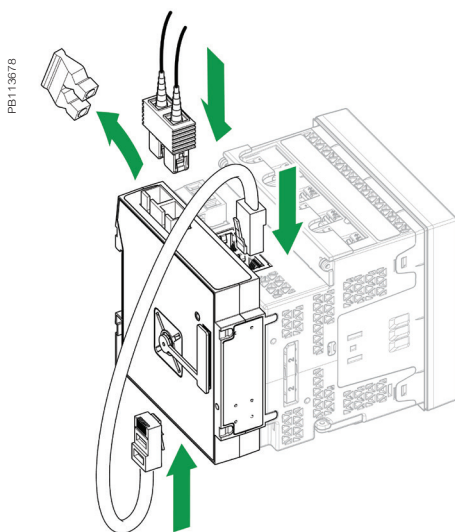

PowerLogic™ ION7400 connection with Fiber-Ethernet

## Adaptability

- ION™ frameworks are customizable, scalable applications with object-oriented programming that compartmentalizes functions, and increases flexibility and adaptability.
- Applications include: accessing and aggregating data from downstream Modbus devices over serial or across the network (Modbus TCP/IP), logging and/or processing data through totalization, unit conversion or other calculations, applying complex logic for alarming or control operations, and visualization via webpages.

## Standard meter I/O

- 3 digital status/counter inputs.
- 1 KY (form A) energy pulse output for interfacing with other systems.

## Advanced Metering Option Modules

- Expanding meter's flexibility with communication and I/O option modules
- Powered from meter base

## I/O Expansion Option Modules

Option modules include:

- Digital module:
  - 6 digital status/counter inputs.
  - 2 Form C relay outputs, 250 V, 8 A.
- Analog module:
  - 4 analog inputs (4-20 mA; 0-20 mA; 0-30 V).
  - 2 analog outputs (4-20 mA; 0-20 mA; 0-10 V) for interfacing with building management sensors and systems.

## Communication Option Modules

Option modules include:

- 4-Wire RS-485 Module <sup>(+1)</sup>:
  - Adds 4-wire support to the meter i.e. eliminating the cost and efforts of rewiring while replacing/retrofitting legacy 4-Wire RS-485 systems
  - Pluggable screw terminal connector
- Fiber-Ethernet Module <sup>(+2)</sup>:
  - Provides isolated data transmission through fiber optics up to 2000 m length
  - Supports multi-mode 100Base-FX type
  - SC duplex connector

## Standards

- IEC 61000-4-30
- IEC 61000-4-7
- IEC 61000-4-15
- IEC 61326-1
- ANSI C12.20
- IEC 62052-11
- IEC 62053-22
- IEC 62053-23
- CLC/TR50579

## Languages supported

- English, French, Spanish, Chinese, Italian, German, Russian, Portuguese

<sup>(+1)</sup> Onboard 2-Wire RS-485 port is disabled with optional module

<sup>(+2)</sup> Connected to the meter base using Ethernet patch cable (included with the module)

Maximum of 4 optional modules in total (Fiber-Ethernet, 4-Wires RS-485, I/O modules) can be connected to the meter. Only 1 Fiber-Ethernet and 1 4-Wire RS-485 option module is supported per meter.

Please refer to the option module **Installation Guides** for more details.

# ION7400 series

## Feature guide

|  |                              | ION7400<br>ESSENTIAL | ION7400<br>STANDARD | ION7400<br>ADVANCED |
|--|------------------------------|----------------------|---------------------|---------------------|
| <b>General</b>   |                              |                      |                     |                     |
| Use on LV and MV systems                                   |                              | ■                    | ■                   | ■                   |
| Current accuracy (5 A Nominal)                             |                              | 0.1 % reading        | 0.1 % reading       | 0.1 % reading       |
| Voltage accuracy (90-690 V AC L-L, 50, 60, 400 Hz)         |                              | 0.1 % reading        | 0.1 % reading       | 0.1 % reading       |
| Active energy accuracy                                     |                              | 0.2 Class            | 0.2 Class           | 0.2 Class           |
| Reactive energy accuracy                                   |                              | 2 %                  | 2 %                 | 2 %                 |
| Number of samples/cycle or sample frequency                |                              | 256 <sup>(+3)</sup>  | 256                 | 512                 |
| ION programability   |                              | ■                    | ■                   | ■                   |
| <b>Instantaneous rms values</b>                            |                              |                      |                     |                     |
| Current, voltage, frequency                                |                              | ■                    | ■                   | ■                   |
| Active, reactive, apparent power                           | Total and per phase          | ■                    | ■                   | ■                   |
| Power factor   | Total and per phase          | ■                    | ■                   | ■                   |
| Current measurement range (autoranging)                    |                              | 0.05 A - 10 A        | 0.05 A - 10 A       | 0.05 A - 10 A       |
| <b>Energy values</b>                                       |                              |                      |                     |                     |
| Active, reactive, apparent energy                          |                              | ■                    | ■                   | ■                   |
| Settable accumulation modes                                |                              | ■                    | ■                   | ■                   |
| <b>Demand values</b>                                       |                              |                      |                     |                     |
| Current  | Present and max. values      | ■                    | ■                   | ■                   |
| Active, reactive, apparent power                           | Present and max. values      | ■                    | ■                   | ■                   |
| Predicted active, reactive, apparent power                 |                              | ■                    | ■                   | ■                   |
| Synchronisation of the measurement window                  |                              | ■                    | ■                   | ■                   |
| Setting of calculation mode                                | Block, sliding               | ■                    | ■                   | ■                   |
| <b>Power quality measurements</b>                          |                              |                      |                     |                     |
| Harmonic distortion  | Current and voltage          | ■                    | ■                   | ■                   |
| Individual harmonics                                       | Via front panel and web page | 31                   | 63                  | 63                  |
|  | Via EcoStruxure™ software    | -                    | 127                 | 127                 |
| Waveform capture   |                              | ■ <sup>(+3)</sup>    | ■                   | ■                   |
| Detection of voltage swells and sags                       |                              | ■                    | ■                   | ■                   |
| Flicker  |                              | -                    | ■                   | ■                   |
| Fast acquisition   | 1/2 cycle data               | ■                    | ■                   | ■                   |
| IEC61000-4-30 Class A/S                                    |                              | -                    | S                   | A                   |
| EN 50160 compliance checking                               |                              | -                    | ■                   | ■                   |
| IEEE 519 compliance checking                               |                              | -                    | ■                   | ■                   |
| Disturbance Direction Detection                            |                              | -                    | ■                   | ■                   |
| Rapid Voltage Change                                       |                              | -                    | ■                   | ■                   |
| Customizable data outputs (using logic and math functions) |                              | ■                    | ■                   | ■                   |
| <b>Data recording</b>                                      |                              |                      |                     |                     |
| Min/max of instantaneous values                            |                              | ■                    | ■                   | ■                   |
| Data logs  |                              | ■                    | ■                   | ■                   |
| Event logs   |                              | ■                    | ■                   | ■                   |
| Trending/forecasting                                       |                              | -                    | ■                   | ■                   |
| SER (Sequence of event recording)                          |                              | ■                    | ■                   | ■                   |
| Time stamping  |                              | ■                    | ■                   | ■                   |
| GPS synchronisation (±1 ms)                                |                              | ■                    | ■                   | ■                   |
| Data Recorder  |                              | 10                   | 50                  | 64                  |
| Memory Channels  |                              | 160                  | 800                 | 1024                |
| Storage (in Mbytes)  |                              | 64                   | 512                 | 512                 |

<sup>(+3)</sup> Waveform capture is limited to 128 Samples/cycle recording.

# ION7400 series

## Feature guide (Contd.)

|  | ION7400<br>ESSENTIAL             | ION7400<br>STANDARD              | ION7400<br>ADVANCED              |
|--|----------------------------------|----------------------------------|----------------------------------|
| <b>Display and I/O</b>   |                                  |                                  |                                  |
| Front panel display 89 mm TFT  | ■                                | ■                                | ■                                |
| Wiring self-test   | ■                                | ■                                | ■                                |
| Pulse output   | 1                                | 1                                | 1                                |
| Digital or analog inputs (max)                                       | 27 digital<br>16 analog          | 27 digital<br>16 analog          | 27 digital<br>16 analog          |
| Digital or analog outputs (max, including pulse output)              | 1 digital<br>8 relay<br>8 analog | 1 digital<br>8 relay<br>8 analog | 1 digital<br>8 relay<br>8 analog |
| <b>Communication</b>   |                                  |                                  |                                  |
| 2-Wire RS-485 port   | 1                                | 1                                | 1                                |
| 10/100BASE-TX  | 2                                | 2                                | 2                                |
| Serial port (Modbus, ION, DNP3, DLMS/COSEM)                          | ■                                | ■                                | ■                                |
| Ethernet port (Modbus/TCP, ION TCP, DNP3 TCP, IEC 61850, DLMS/COSEM) | ■                                | ■                                | ■                                |
| USB port (mini type B)   | ■                                | ■                                | ■                                |
| ANSI C12.19 Optical port   | ■                                | ■                                | ■                                |
| Option module with 4-Wire RS-485 port                                | ■                                | ■                                | ■                                |
| Option module with Fiber-Ethernet port                               | ■                                | ■                                | ■                                |

## Feature selection

|                             |                       |
|-----------------------------|-----------------------|
| Commercial reference number | ION7400 meters        |
| ION74xxE                    | Essential Feature Set |
| ION74xx                     | Standard Feature Set  |
| ION74xxA                    | Advanced Feature Set  |

## Commercial references

| Essential      | Standard   | Advanced       | Description   |
|----------------|--|----------------|---|
| METSEION7400E  | METSEION7400   | METSEION7400A  | ION7400 Panel mount meter (integrated display with optical port and 2 energy pulse LEDs)                          |
| METSEION7410E  | METSEION7410   | METSEION7410A  | ION7400 Panel mount meter (integrated display with optical port and 2 energy pulse LEDs) 20-60 V DC control power |
| METSEION7403E  | METSEION7403   | METSEION7403A  | DIN rail mount - utility meter base   |
| METSEION7404E  | METSEION7404   | METSEION7404A  | DIN rail mount - utility meter base with remote display   |
| METSEION7413E  | METSEION7413   | METSEION7413A  | DIN rail mount - utility meter base 20-60 V DC control power  |
| METSEION74001E | METSEION74001  | METSEION74001A | MID approved panel mount meter <sup>(+4)</sup>  |
| METSEION74003E | METSEION74003  | -              | RMICAN sealed panel mount meter <sup>(+5)</sup>   |
| METSEION74004E | METSEION74004  | -              | RMICAN sealed panel mount meter <sup>(+5)</sup>   |
| Accessories    | Description  |                |   |
| METSEPM89RD96  | Remote display, 3 metre cable, mounting hardware for 30 mm hole (nut & centering pin), mounting hardware for DIN96 cutout (92 x 92 mm) adapter plate |                |   |
| METSEPM89M2600 | Digital I/O module (6 digital inputs & 2 relay outputs)  |                |   |
| METSEPM89M0024 | Analog I/O module (4 analog inputs & 2 analog outputs)   |                |   |
| METSECAB10     | Display Cable, 10 m  |                |   |
| METSEPMRS4854W | 4-Wire RS 485 option module  |                |   |
| METSEPMFIBER   | Fiber-Ethernet option module   |                |   |
| METSEPM8000SK  | Sealing kit  |                |   |

<sup>(+4)</sup> For UK + EU only.

<sup>(+5)</sup> For Canada only.

# ION7400 series

## Technical Specifications

| Electrical characteristics    |  | ION7400   |
|-------------------------------|--|---|
| Type of measurement           |  | True rms to 512 samples per cycle   |
| Measurement accuracy          | Current & voltage                        | Class 0.2 as per IEC 61557-12   |
|                               | Active Power                             | Class 0.2 as per IEC 61557-12   |
|                               | Power factor                             | Class 0.5 as per IEC 61557-12   |
|                               | Frequency                                | Class 0.2 as per IEC 61557-12   |
|                               | Active energy                            | Class 0.2S IEC 62053-22 (In=5A)<br>Class 0.2 IEC 61557-12, ANSI C12.20 Class 0.2  |
|                               | Reactive Energy                          | Class 2 IEC 62053-23  |
| Data update rate              |  | 1/2 cycle or 1 second   |
| Input-voltage characteristics | Specified accuracy voltage               | 57 V L-N/100 V L-L to 400 V L-N/690 V L-L   |
|                               | Impedance                                | 5 M $\Omega$ per phase  |
|                               | Specified accuracy frequency - Frequency | 42 to 69 Hz<br>(50/60 Hz nominal)   |
|                               | Limit range of operation - frequency     | 20 Hz to 450 Hz   |
| Input-current characteristics | Rated nominal current                    | 1 A (0.2S), 5 A (0.2S) , 10 A (0.2 ANSI)  |
|                               | Specified accuracy current range         | Starting Current: 5 mA<br>Accurate Range: 50 mA - 10 A  |
|                               | Permissible overload                     | 200 A rms for 0.5s, non-recurring   |
|                               | Impedance                                | 0.0003 $\Omega$ per phase   |
|                               | Burden                                   | 0.024 VA at 10 A  |
| Power supply                  | AC/DC                                    | 90-415 V AC $\pm 10\%$ 16 VA at 230 V (50/60 Hz $\pm 10\%$ ), 110-300 V DC $\pm 10\%$ 18 W (max)  |
|                               | LV DC                                    | 20-60 V DC, $\pm 10\%$ , 18 W (max)   |
|                               | Ride-through time                        | 100 ms (6 cycles at 60 Hz) min., any condition<br>200 ms (12 cycles at 60 Hz) typ., 120 V AC, 110-415 V DC<br>500 ms (30 cycles at 60 Hz) typ., 415 V AC  |
|                               | Burden                                   | Meter Only: 18 VA max at 415 V AC, 6W at 300 V DC<br>Fully optioned meter: 36 VA max at 415 V AC, 17 W at 300 V DC.   |
| Input/outputs                 | Meter Base Only                          | 3 form A digital inputs (30 V AC/60 V DC)<br>1 form A (KY) solid state digital output (30 V AC/60 V DC, 75 mA).   |
|                               | Optional                                 | Digital - 6 form A digital inputs (30 V AC / 60 V DC) wetted + 2 form C relay outputs (250 V AC / 30 V DC, 8 A at 250 V AC or 5 A at 24 V DC)<br>Analog - 4 analog inputs (4-20 mA, 0-30 V DC) + 2 analog outputs (4-20 mA, 0-10 V DC). |
| Mechanical characteristics    |  |   |
| Weight                        |  | Integrated Display Model 0.710 kg (without option modules)<br>DIN rail mounted Model 0.530 kg (without remote display or option modules)<br>IO modules 0.140 kg<br>Remote display 0.300 kg  |
| IP degree of protection       |  | IP 54, UL type 12: Panel mount and Remote display, front.<br>IP 30: Panel mount rear, DIN rail mount, I/O modules.  |
| Dimensions                    | Panel mount model                        | 98 x 112 x 78.5 mm  |
|                               | DIN model                                | 90.5 x 90.5 x 90.8 mm   |
|                               | Remote display                           | 96 x 96 x 27 mm   |
|                               | IO modules                               | 90.5 x 90.5 x 22 mm   |
| Environmental conditions      |  |   |
| Operating temperature         |  | -25 °C to 70 °C   |
| Remote Display Unit           |  | -25 °C to 60 °C   |
| Storage temperature           |  | -40 °C to 85 °C   |
| Humidity rating               |  | 5 % to 95 % non-condensing  |
| Installation category         |  | III   |
| Operating altitude (maximum)  |  | 3000 m above sea level  |

# ION7400 series




## Technical Specifications (Contd.)

| Electromagnetic compatibility                |   |
|--|---|
| Product standards                            | IEC 62052-11 and IEC 61326-1  |
| Immunity to electrostatic discharge          | IEC 61000-4-2   |
| Immunity to radiated fields                  | IEC 61000-4-3   |
| Immunity to fast transients                  | IEC 61000-4-4   |
| Immunity to surges                           | IEC 61000-4-5   |
| Immunity to conducted disturbances           | IEC 61000-4-6   |
| Immunity to power frequency magnetic fields  | IEC 61000-4-8   |
| Immunity to conducted disturbances, 2-150kHz | CLC/TR 50579  |
| Immunity to voltage dips & interruptions     | IEC 61000-4-11  |
| Immunity to ring waves                       | IEC 61000-4-12  |
| Conducted and radiated emissions             | EN 55022, EN 55011, FCC part 15, ICES-003   |
| Surge withstand Capability (SWC)             | IEEE C37.90.1   |
| Safety                                       |   |
| Safety Construction                          | IEC/EN 61010-1 ed.3, CAT III, 400 V L-N / 690 V L-L<br>UL 61010-1 ed.3 and CSA-C22.2 No. 61010-1 ed.3, CAT III, 347 V L-N / 600 V L-L<br>IEC/EN 62052-11, protective class II   |
| Communication                                |   |
| Ethernet to serial line gateway              | Communicates directly with up to 32 unit load ION client devices.   |
| Web server                                   | Customisable pages, new page creation capabilities, HTML/XML compatible.  |
| Serial port RS 485                           | Baud rates of 2400 to 115200, pluggable screw terminal connector.   |
| Ethernet port(s)                             | 2 x 10/100BASE-TX, RJ45 connector (UTP).  |
| USB port                                     | Virtual serial port supports USB 3.0, 2.0, 1.1 using ION protocol.  |
| Protocol                                     | Modbus, ION, DNP3, IEC 61850, MV-90, DLMS/COSEM, HTTPS, SFTP, SNMP, SMTP, DPWS, RSTP, NTP, SNTP, GPS protocols.   |
| Communication option modules                 |   |
| Optional 4-Wire RS-485 serial port           | Baud rates of 2400 to 115200, pluggable screw terminal connector.   |
| Optional Fiber-Ethernet port                 | Ethernet patch cable from meter base, multi-mode 100Base-FX, SC duplex connector  |
| Firmware characteristics                     |   |
| High-speed data recording                    | Down to 1/2 cycle interval burst recording, stores detailed characteristics of disturbances or outages. Trigger recording by a user-defined setpoint, or from external equipment.   |
| Harmonic distortion                          | Up to 63rd harmonic (via EcoStruxure™ software) for all voltage and current inputs.   |
| Sag/swell detection                          | Analyse severity/potential impact of sags and swells: magnitude and duration data suitable for plotting on voltage tolerance curves per phase triggers for waveform recording, control.   |
| Disturbance direction detection              | Determine the location of a disturbance more quickly and accurately by determining the direction of the disturbance relative to the meter. Analysis results are captured in the event log, along with a timestamp and confidence level indicating level of certainty.   |
| Instantaneous                                | High accuracy of standard speed (1s) and high-speed (1/2 cycle) measurements, including true rms per phase and total for:<br>voltage, current, active power (kW), reactive power (kvar), apparent power (kVA), power factor, frequency, voltage and current unbalance, phase reversal.                                    |
| Load profiling                               | Channel assignments (1024 channels via 64 data recorders) configurable for any measurable parameter, including historical trend recording of energy, demand, voltage, current, power quality, or any measured parameter. Trigger recorders based on time interval, calendar schedule, alarm/event condition, or manually. |
| Trend curves                                 | Historical trends and future forecasts to better manage demand, circuit loading, and other parameters. Provides average, min, max and standard deviation every hour for last 24 hours, every day for last month, every week for last 8 weeks and every month for last 12 months.  |
| Waveform captures                            | Simultaneous capture of all voltage and current channels<br>sub-cycle disturbance capture, maximum cycles is 100,000 (16 samples/cycle x 96 cycles, 10 MB memory), max 512 samples/cycle.   |
| Alarms                                       | Threshold alarms: adjustable pickup and dropout setpoints and time delays, numerous activation levels possible for a given type of alarm, user-defined or automatic alarm threshold settings, user-defined priority levels (optional automatic alarm setting).  |

*All the communication ports may be used simultaneously.*

# ION7400 series


## ION7400 meter parts descriptions

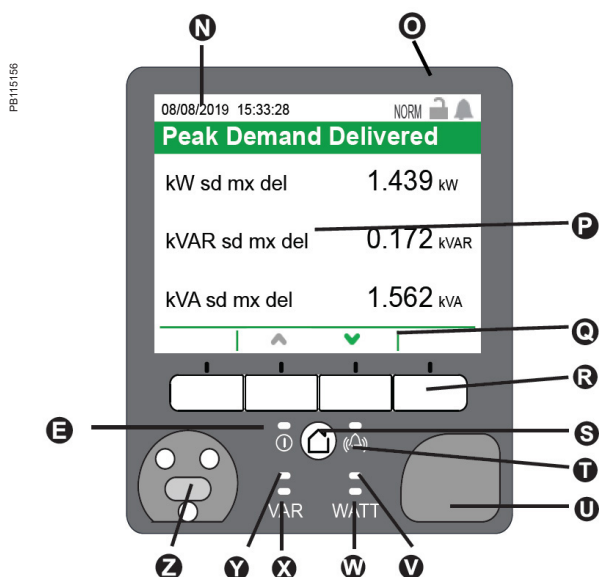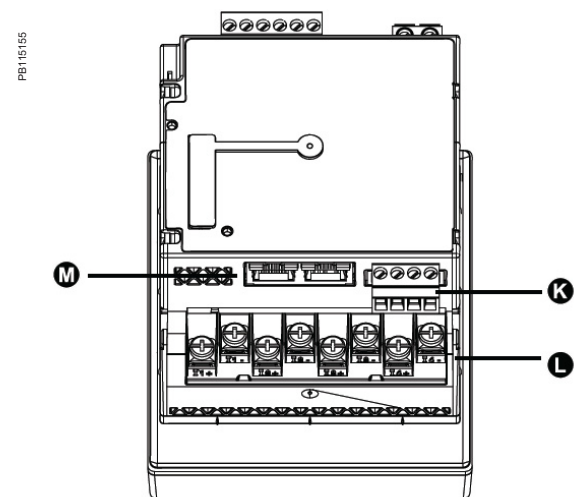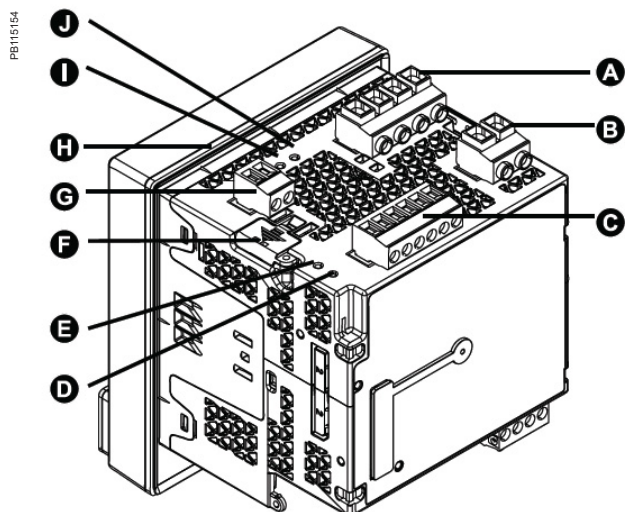


- A Voltage inputs
  - B Control power
  - C Digital inputs
  - D Revenue lock LED
  - E Status LED (2 green/red)
  - F Revenue lock switch
  - G Digital output
  - H Sealing gasket
  - I Infrared energy pulsing LED
  - J Energy pulsing LED
  - K RS-485
  - L Current inputs
  - M Ethernet (2)
  - N Date/time
  - O Indicator icons
  - P Display
  - Q Navigation icons
  - R Navigation buttons
  - S Home button
  - T Alarm LED (red)
  - U USB ports cover
  - V Watt energy pulsing LED
  - W Watt infrared energy pulsing LED
  - X VAR infrared energy pulsing LED
  - Y VAR energy pulsing LED
  - Z Optical port
- NORM/ALT Mode    Revenue    Alarm
- Select    Cancel    Edit    More

# ION7400 series


## ION7400 meter dimensions

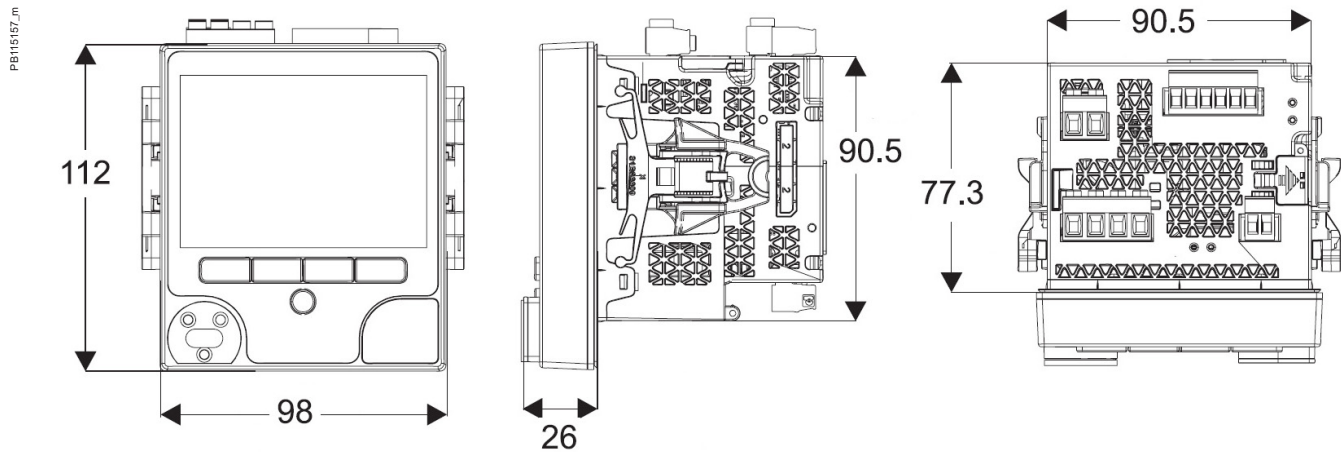

## ION7400 panel cutout dimensions

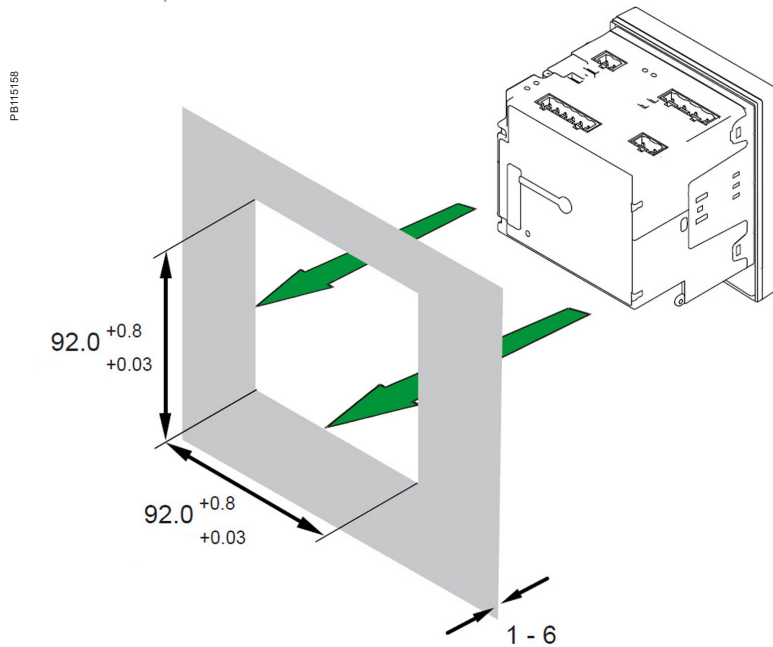

## ION7400 with communication option modules

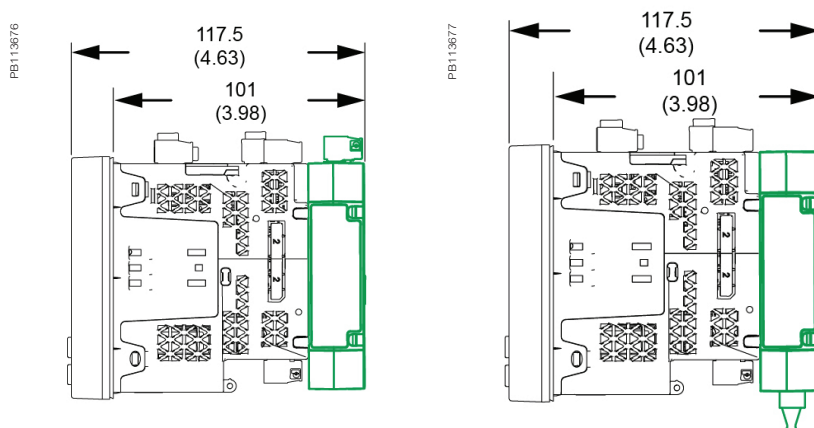

For further details please see appropriate Schneider Electric **Installation Guide** for this product.

# PowerLogic™ ION8650 series

Providing high accuracy and a wide range of features for transmission and distribution metering, the PowerLogic™ ION8650 advanced revenue and power quality meter has the flexibility to change along with your needs. The meter provides the tools necessary to:

- Manage energy procurement and supply contracts
- Perform network capacity planning and stability analysis
- Monitor power quality compliance, supply agreements, and regulatory requirements

## Applications

- Transmission and distribution metering
- Revenue metering
- Extensive power quality monitoring and analysis
- Power quality compliance monitoring
- Digital fault recording
- Instrument transformer correction

PB107500



ION8650

# ION8650 series

## The solution for

Markets that can benefit from a solution that includes PowerLogic™ ION8650 series meters:

- Transmission networks
- Distribution network

## Benefits

- Reduce operations costs
- Improve power quality
- Improve continuity of service

## Competitive advantages

- Be integrated into existing wholesale settlement system
- Be able to use Power Monitoring Expert software for data analysis or share operation data with SCADA systems through multiple communication channels and protocols
- Transformer/line loss compensation
- Instrument transformer correction

## Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximise electrical network reliability and availability, and optimise electrical asset performance.

## Conformity of standards

- |                   |                  |
|-------------------|------------------|
| • IEC 62053-22/23 | • IEC 61000-4-4  |
| • IEC 61000-4-30  | • IEC 61000-4-5  |
| • EN 50160        | • IEC 61000-4-6  |
| • IEC 61000-4-7   | • IEC 61000-4-12 |
| • IEC 61000-4-15  | • CISPR 22       |
| • IEEE 1159       | • IEC 62052-11   |
| • IEEE 519        | • IEC 60950      |
| • IEC 61000-4-2   | • ANSI C12.20    |
| • IEC 61000-4-3   |                  |

# ION8650 series

PS107500



PowerLogic™ ION8650 socket meter

## Main characteristics

Used to monitor electric energy provider networks, service entrances and substations, PowerLogic™ ION8650 meters are ideal for independent power producers and cogeneration applications that need to accurately measure energy bi-directionally in both generation and stand-by modes. These meters give utilities the tools to manage complex energy supply contracts that include commitments to power quality. Integrate them with our EcoStruxure™ Power Monitoring operations software or other energy management and SCADA systems through multiple communication channels and protocols, including Itron MV-90, Modbus, DNP, DLMS, IEC 61850 Ed. 3.

## Applications

- Revenue metering.
- Cogeneration and IPP monitoring.
- Compliance monitoring.
- Power quality analysis.
- Demand and power factor control.
- Load curtailment.
- Equipment monitoring and control.
- Energy pulsing and totalisation.
- Instrument transformer correction.
- Outage Notification

## Main characteristics

- ANSI Class 0.1 and IEC 62053-22/23 Class 0.2 S metering
  - For interconnection points on medium, high, and ultra-high voltage networks; twice as accurate as current IEC and meets ANSI Class standards over all conditions and including single wide range current measurement.
- Power quality compliance monitoring
  - Monitor compliance with international quality-of-supply standards (IEC 61000-4-30 Ed. 3 Class A/S, EN 50160 Ed. 4, IEC 61000-4-7, IEC 61000-4-15, IEEE 1159, IEEE 519). Also detects disturbance direction.
- Digital fault recording
  - Simultaneous capture of voltage and current channels for sub-cycle disturbance.
- Complete communications
  - Multi-port, multi-protocol ports including serial, infrared, modem and ethernet. Simultaneously supports multiple industry standard protocols including: Itron MV-90, Modbus, Modbus Master, DLMS, DNP 3.0 and IEC 61850 Ed. 2. Cell modem option using LTE.
- Multiple tariffs and time-of-use
  - Apply tariffs, seasonal rate schedules to measure energy and demand values for time periods with specific billing requirements.
- Multiple setpoints for alarm and functions
  - Use up to 65 setpoints for single/multi-condition alarms and I/O functions with response times down to 1/2 cycle.
- Multiple setpoints for alarm and functions
  - Use up to 65 setpoints.
- Instrument transformer correction
  - Save money and improve accuracy by correcting for less accurate transformers.
- Alarm notification via email
  - High-priority alarms, data logs sent directly to the user's PC. Instant notification of power quality events by email.
- Cyber security enhancements
  - Assign communication admin rights to selected user; prevention measures ensure no loss of security logs; support syslog for external security.

## Feature selection


| Commercial reference number | ION8650 meters |
|-----------------------------|----------------|
| M8650A                      | ION8650A       |
| M8650B                      | ION8650B       |
| M8650C                      | ION8650C       |

# ION8650 series



PowerLogic™ ION8650 switchboard meter.

- 1 Terminals
- 2 Optical port
- 3 Main display status bar
- 4 Watt LED
- 5 Navigation, ALTI/Enter buttons
- 6 VAR LED
- 7 Nameplate label
- 8 Demand reset switch

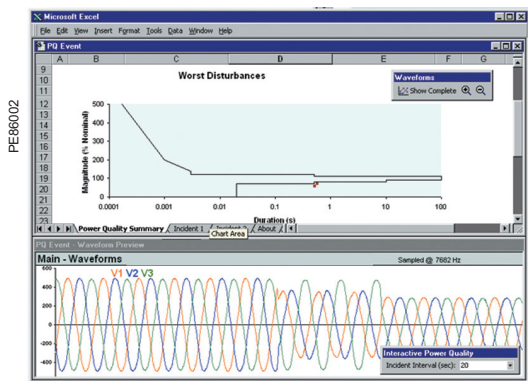

Disturbance waveform capture and power quality report

## Selection guide

|  | ION8650 A            | ION8650 B  | ION8650 C  |
|--|----------------------|------------|------------|
| <b>General</b>   |                      |            |            |
| Use on LV, MV and HV systems   | ■                    | ■          | ■          |
| Current accuracy   | 0.1 %                | 0.1 %      | 0.1 %      |
| Voltage accuracy   | 0.1 %                | 0.1 %      | 0.1 %      |
| Power accuracy   | 0.1 %                | 0.1 %      | 0.1 %      |
| Samples/cycle  | 1024                 | 1024       | 1024       |
| <b>Instantaneous values</b>  |                      |            |            |
| Current, voltage, frequency  | ■                    | ■          | ■          |
| Active, reactive, apparent power                                       | Total & per phase    | ■          | ■          |
| Power factor   | Total & per phase    | ■          | ■          |
| Current measurement range  | 0 A - 20 A           | 0 A - 20 A | 0 A - 20 A |
| <b>Energy values</b>   |                      |            |            |
| Active, reactive, apparent energy                                      | ■                    | ■          | ■          |
| Settable accumulation modes  | ■                    | ■          | ■          |
| <b>Demand values</b>   |                      |            |            |
| Current  | Present & max values | ■          | ■          |
| Active, reactive, apparent power                                       | Present & max values | ■          | ■          |
| Predicted active, reactive, apparent power                             | ■                    | ■          | ■          |
| Synchronisation of the measurement window                              | ■                    | ■          | ■          |
| Demand modes: Block (sliding), thermal (exponential)                   | ■                    | ■          | ■          |
| <b>Power quality measurements</b>                                      |                      |            |            |
| Harmonic distortion  | Current & voltage    | ■          | ■          |
| Individual harmonics   | Via front panel      | 63         | 31         |
| Waveform / transient capture   | ■ / ■                | - / ■      | - / -      |
| Harmonics: magnitude, phase, and interharmonics                        | 50                   | 40         | -          |
| Detection of voltage sags and swells                                   | ■                    | ■          | ■          |
| IEC 61000-4-30 class A / S   | A                    | S          | -          |
| IEC 61000-4-15 (Flicker)   | ■                    | ■          | -          |
| High speed data recording (down to 10 ms)                              | ■                    | ■          | -          |
| EN 50160 compliance reporting  | ■                    | ■          | -          |
| Programmable (logic and math functions)                                | ■                    | ■          | ■          |
| <b>Data recording</b>  |                      |            |            |
| Onboard Memory (in Mbytes)   | 128                  | 64         | 32         |
| Revenue logs   | ■                    | ■          | ■          |
| Event logs   | ■                    | ■          | ■          |
| Historical logs  | ■                    | ■          | ■          |
| Harmonics logs   | ■                    | ■          | ■          |
| Sag/swell logs   | ■                    | ■          | ■          |
| Transient logs   | ■                    | -          | -          |
| Time stamping to 1 ms  | ■                    | ■          | ■          |
| GPS synchronisation (IRIG-B standard)                                  | ■                    | ■          | ■          |
| <b>Display and I/O</b>   |                      |            |            |
| Front panel display  | ■                    | ■          | ■          |
| Wiring self-test (requires PowerLogic™ ION Setup)                      | ■                    | ■          | ■          |
| Pulse output (front panel LED)   | 2                    | 2          | 2          |
| Digital or analog inputs* (max)  | 11                   | 11         | 11         |
| Digital or analog outputs* (max, including pulse output)               | 16                   | 16         | 16         |
| <b>Communication</b>   |                      |            |            |
| Infrared port  | 1                    | 1          | 1          |
| RS-485 / RS-232 port   | 1                    | 1          | 1***       |
| RS-485 port  | 1                    | 1          | 1***       |
| Ethernet port (Modbus/TCP/IP protocol) with gateway                    | 1                    | 1          | 1***       |
| Internal modem with gateway (ModemGate)                                | 1                    | 1          | 1***       |
| HTML web page server   | ■                    | ■          | ■          |
| IRIG-B port (unmodulated IRIG B00x time format)                        | 1                    | 1          | 1          |
| Modbus TCP Master / Slave (Ethernet port)                              | ■ / ■                | ■ / ■      | - / ■      |
| Modbus RTU Master / Slave (Serial ports)                               | ■ / ■                | ■ / ■      | - / ■      |
| DNP 3.0 through serial, modem, and I/R ports                           | ■                    | ■          | ■          |
| Cell modem option (LTE)  | ■                    | ■          | ■          |
| DLMS COSEM through serial, Ethernet and optical ports for all variants | ■                    | ■          | ■          |


\* With optional I/O Expander.

\*\* For 9S, and 36S only. For 35S system up to 480 V L-L.


\*\*\* C model limited to IR + 2 other ports at one time. Ports can be enabled/disabled by user.

## ION8650 series

PE86041

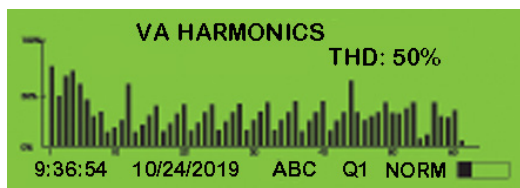

PowerLogic™ ION8650 front panel harmonic display

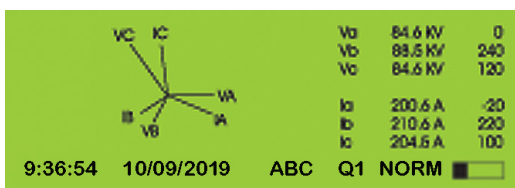


PowerLogic™ ION8650 front panel phasor display and table

| Electrical characteristics        |  |   |
|-----------------------------------|--|---|
| Type of measurement               |  | True rms 1024 samples per cycle   |
| Measurement accuracy              | Current and voltage                        | 0.1 % Reading   |
|                                   | Power                                      | 0.1 %   |
|                                   | Frequency                                  | ±0.001 Hz   |
|                                   | Power factor                               | 0.1 %   |
|                                   | Energy                                     | 0.1 %, twice as accurate as ANSI Class 0.2 and IEC 62053-22/23 (0,2S)   |
| Data update rate                  |  | 0.5 cycle or 1 second (depending on value)  |
| Input-voltage characteristics*    | Nominal voltage                            | 57 V to 277 V L-N rms<br>100 V to 480 V L-L rms (35S)   |
|                                   | Maximum voltage                            | 347 V L-N rms, 600 V L-L rms (9S)   |
|                                   | Impedance                                  | 5 MW /phase (phase-Vref/Ground)   |
|                                   | Inputs                                     | V1, V2, V3, VREF  |
| Input-current characteristics     | Rated nominal/ current class               | 1A, 2 A, 5 A and/or 10 A (Class 1/2/10/20)  |
|                                   | Accuracy range                             | 0.01 - 20 A (standard range)  |
|                                   | Measurement range                          | 0.001 - 24 A  |
|                                   | Permissible overload                       | 500 A rms for 1 second, non-recurring   |
|                                   | Burden per phase                           | Socket Current Class 2/10/20<br>Input-Current burden: 0.05VA per phase at 5 A (2 milliOhms max)<br>Switchboard Current Class 2/10/20<br>Input-Current burden: 0.05VA per phase at 1 A (50 milliOhms max)  |
| Power supply                      | Standard power supply, blade powered       | 120-277 V L-N RMS (-15 %/+20 %) 47-63 Hz or<br>120-480 V L-L RMS (-15 %/+20 %) 47-63 Hz (35S)   |
|                                   | Auxiliary powered low voltage              | AC: 65-120 (+/- 15 %) VLN RMS, 47-63 Hz<br>DC: 80-160 (+/- 20 %) VDC  |
|                                   | Auxiliary powered high voltage             | AC: 160-277 (+/- 20 %) V L-N RMS, 47-63 Hz<br>DC: 200-300 (+/- 20 %) V DC   |
|                                   | Ride-through time, (Standard power supply) | Socket: min guaranteed: 6 cycles at nominal frequency (minimum 50 Hz), at 120 V L-N rms (208 V L-L rms) 3-phase operation<br>Switchboard: min guaranteed: 6 cycles at nominal frequency (minimum 50 Hz), at 120 V L-N rms (208 V L-L rms) 3-phase operation |
|                                   | Burden                                     | Standard Power Supply:<br>Typical: 8 W total, 7 VA/phase<br>Max: 15 W total, 20 VA/phase<br><br>Auxiliary Power Supply:<br>Typical: 7 W, 14 VA<br>Max: 15 W, 20 VA  |
| Input/outputs**                   | Digital outputs                            | 4 (Form C) Solid state relays (130 V AC/ 200 V DC) 50 mA AC/ DC, 1 (Form A) output  |
|                                   | Digital inputs                             | up to 3 Self-excited, dry contact sensing inputs  |
| Mechanical characteristics        |  |   |
| Weight                            |  | 7.0 kg  |
| IP degree of protection           | Socket                                     | Front IP65, back IP51   |
|                                   | Switchboard                                | Front IP50, back IP30   |
| Dimensions                        | Socket                                     | 178 x 237 mm  |
|                                   | Switchboard                                | 285 x 228 x 163 mm  |
| Environmental conditions          |  |   |
| Operating temperature             |  | -40 °C to 85 °C   |
| Display operating range           |  | -40 °C to 70 °C   |
| Storage temperature               |  | -40 °C to 85 °C   |
| Humidity rating                   |  | 5 % to 95 % RH non-condensing   |
| Pollution degree                  |  | 2   |
| Installation category             |  | Cat III   |
| Dielectric withstand              |  | 2.5 kV  |
| Electromagnetic compatibility     |  |   |
| Electrostatic discharge           |  | IEC 61000-4-2   |
| Immunity to radiated fields       |  | IEC 61000-4-3   |
| Immunity to fast transients       |  | IEC 61000-4-4   |
| Immunity to surge                 |  | IEC 61000-4-5   |
| Immunity conducted                |  | IEC 61000-4-6   |
| Damped oscillatory waves immunity |  | IEC 61000-4-12  |
| Conducted and radiated emissions  |  | CISPR 22 (class B)  |
| Safety                            |  |   |
| Europe                            |  | As per IEC 62052-11   |
| North America                     |  | As per ANSI C12.1   |

\* Specifications are limited by the operating range of the power supply if a non-aux power supply is used.

\*\* More input and output selections available via optional I/O expander.

# ION8650 series

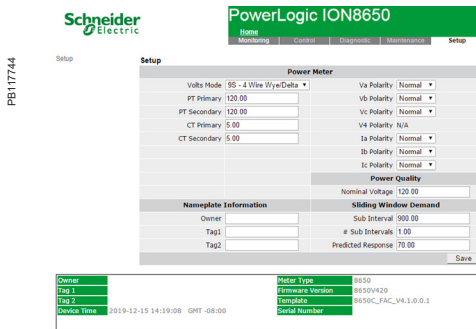

Example embedded webserver page (WebMeter) showing realtime values.

| Communication                          |  |
|--|--|
| RS-232 / RS-485 port (COM1)            | User-selectable RS-232 or RS-485.<br>300 - 115,200 baud (RS-485 limited to 57,600 bps);<br>protocols: ION, Modbus/RTU/Mastering, DLMS, DNP 3.0, GPSTRUETIME/DATUM.   |
| Internal modem port (COM2)             | 300-57,600 bps   |
| Cell modem option (CDMA/LTE)           | CDMA2000 1xRTT / EV-DO Rev A (backwards compatible to EVDO Rev. 0 and CDMA 1x networks) 800/1900 MHz.<br>MTSMC-LVW3 / LTE FDD Cat 1, 3GPP release 9 compliant, 4G: 1900 (B2) / 700 (B13) / AWS 1700 (B4)   |
| ANSI 12.18 Type II optical port (COM3) | Up to 57,600 bps   |
| RS-485 port (COM4)                     | Up to 57,600 baud, Modbus, direct connection to a PC or modem  |
| Ethernet port                          | 10/100BASE-T, RJ45 connector, protocols: DNP, ION, Modbus/TCP/Mastering, IEC 61850 Ed. 2 or 100BASE-FX multimode, male ST connectors, DLMS   |
| EtherGate                              | Up to 31 slave devices via serial ports  |
| ModemGate                              | Up to 31 slave devices   |
| Firmware characteristics               |  |
| High-speed data recording              | Up to 1/2-cycle interval burst recording, stores detailed characteristics of disturbances or outages. Trigger recording by a user-defined setpoint, or from external equipment.  |
| Harmonic distortion                    | Up to 63rd harmonic for all voltage and current inputs   |
| Dip/swell detection                    | Analyse severity/potential impact of sags and swells: <ul style="list-style-type: none"> <li>– magnitude and duration data suitable for plotting on voltage tolerance curves</li> <li>– per phase triggers for waveform recording or control operations</li> </ul>   |
| Instantaneous                          | High accuracy measurements with 1s or 1/2 cycle update rate for: <ul style="list-style-type: none"> <li>– voltage and current</li> <li>– active power (kW) and reactive power (kVAR)</li> <li>– apparent power (kVA)</li> <li>– power factor and frequency</li> <li>– voltage and current unbalance</li> <li>– phase reversal</li> </ul>   |
| Load profiling                         | Channel assignments are user configurable: <ul style="list-style-type: none"> <li>– 800 channels via 50 data recorders (feature set A),</li> <li>– 720 channels via 45 data recorders (feature set B),</li> <li>– 80 channels via 5 data recorders (feature set C).</li> </ul> Configure for historical trend recording of energy, demand, voltage, current, power quality, other measured parameters. Recorders can trigger on time interval basis, calendar schedule, alarm/event condition, manually. |
| Waveform captures                      | Simultaneous capture of all voltage and current channels <ul style="list-style-type: none"> <li>– sub-cycle disturbance capture (16 to 1024 samples/cycle)</li> </ul>  |
| Alarms                                 | Threshold alarms: <ul style="list-style-type: none"> <li>– adjustable pickup and dropout setpoints and time delays, numerous activation levels possible for a given type of alarm</li> <li>– user-defined priority levels</li> <li>– boolean combination of alarms</li> </ul>  |
| Advanced security                      | Up to 50 users with unique access rights. Perform resets, time syncs, or meter configurations based on user privileges.  |
| Transformer correction                 | Correct for phase / magnitude inaccuracies in current transformers (CTs), potential transformers (PTs)   |
| Memory                                 | 128 MB (A), 64 MB (B), 32 MB (C)   |
| Firmware update                        | Update via the communication ports   |
| Display characteristics                |  |
| Type                                   | FSTN transreflective LCD   |
| Backlight                              | LED  |
| Languages                              | English  |

# ION8650 series

PEB8043-C

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
|---|---|---|---|---|---|---|---|---|----|----|
| M | 8 | 6 | 5 | 0 | A | 1 | C | 0 | E  | 5  |
| C | 1 | A | 0 | A |   |   |   |   |    |    |

Example product part number.

- 1 Model.
- 2 Feature set.
- 3 Form factor.
- 4 Current inputs.
- 5 Voltage inputs.
- 6 Power supply.
- 7 System frequency.
- 8 Communications.
- 9 Input/output options.
- 10 Security.
- 11 Special order options.




PowerLogic™ ION8650 meter with switchboard case

## Commercial reference numbers

| Item |                  | Code  | Description  |
|------|------------------|-------|--|
| 1    | Model            | M8650 | Schneider Electric energy and power quality meter.   |
| 2    | Feature Set      | A     | 128 MB Memory Class A power quality analysis, waveforms and transient capture with 1024 samples/cycle.   |
|      |                  | B     | 64 MB memory, energy meter Class S EN 50160 Ed. 4 power quality monitoring.  |
|      |                  | C     | 32 MB memory, basic tariff/energy metering (5 data recorders, 80 channels).  |
| 3    | Form Factor (1)  | 0     | Form 9S/29S/36S Base, 57-277 V L-N (auto ranging) 3-Element, 4-Wire / 2 1/2-Element, 4-Wire  |
|      |                  | 1     | Form 35S Base - 120-480 V L-L (auto ranging) 2-Element, 3-Wire   |
|      |                  | 4     | Form 9/29/35/36S FT21 Switchboard (meter + case) with break out panel  |
|      |                  | 7     | Form 9/29/35/36S FT21 Switchboard (meter + case) with break out cable  |
| 4    | Current Inputs   | C     | 1, 2 or 5 A nominal, 20 A full scale (24 A fault capture, start at 0.001 A)  |
| 5    | Voltage Inputs   | 0     | Standard (see Form Factor above)   |
| 6    | Power Supply*    | E     | Form 9/29/35/36S, (socket) and Form 9, 36 (FT21 switchboard): 120-277 V AC. Form 35S (socket) and Form 35 (FT21 switchboard): 120-480 V AC. Powered from the meter's voltage connections.  |
|      |                  | H     | Auxiliary Power Pigtail: 65-120 V AC or 80-160 V DC (power from external source)   |
|      |                  | J     | Auxiliary Power Pigtail: 160-277 V AC or 200-300 V DC (power from external source)   |
|      |                  | K     | Auxiliary Power Pigtail: 65-120 V AC, 80-160 V DC (power from external source), Universal Socket Style   |
|      |                  | L     | Auxiliary Power Pigtail: 160-277 V AC, 200-350 V DC (power from external source), Universal Socket Style   |
| 7    | System Frequency | 5     | Calibrated for 50 Hz systems.  |
|      |                  | 6     | Calibrated for 60 Hz systems.  |
| 8    | Communications   | C 7   | Infrared optical port, Ethernet (10/100BASE-T), RS-232/485 port, RS-485 port (note: in addition to infrared optical port, Feature Set C can use any two ports (configurable)), 56 k universal internal modem (RJ11)  |
|      |                  | E 1   | Infrared optical port, Ethernet (10/100BASE-T), RS-232/485 port, RS-485 port (note: in addition to infrared optical port, Feature Set C can use any two ports (configurable))  |
|      |                  | F 1   | Infrared Optical port, Ethernet (100BASE-FX multi-mode) with male ST connectors (available on socket meters only, Forms 0 & 1 above. I/O card not available if this option is ordered.) RS-232/485 port, RS-485 port (Note: in addition to Infrared Optical port Feature Set C can use any two ports (configurable)) |
|      |                  | S 1   | Infrared optical port, Ethernet (10 BASE-T), RS-232/485 port, RS-485 port (note: in addition to infrared optical port, Feature Set C can use any two ports (configurable)), Verizon 4G LTE cell modem.   |
| 9    | Onboard I/O      | A     | None.  |
|      |                  | B     | 4 Form C digital outputs, 3 Form A digital inputs.   |
|      |                  | C     | 4 Form C digital outputs, 1 Form A digital output, 1 digital input.  |
| 10   | Security         | 0     | Password protected no security lock.   |
|      |                  | 1     | Password protected with security lock enabled  |
|      |                  | 3     | RMICAN (Measurement Canada approved)   |
|      |                  | 4     | RMICAN-SEAL (Measurement Canada approved, and factory sealed)  |
|      |                  | 7     | Password protected, no security lock (US only)   |
|      |                  | 8     | Password protected with security lock enabled (US only)  |
| 11   | Special Order    | A     | None   |

\*Specifications are limited by the operating range of the power supply if a non-aux power supply is used.

# ION8650 series



Example order code. Use this group of codes when ordering the I/O Expander.


- 1 Digital / Analog I/O.
- 2 I/O option.
- 3 Cable option.



## Commercial reference numbers (cont.)


| I/O Expander                    |       |  |
|---------------------------------|-------|--|
| Digital/Analog I/O              | P850E | Schneider Electric I/O Expander for ION8600 meters: Inputs and Outputs for energy pulsing, control, energy counting, status monitoring, and analog interface to SCADA.                                   |
| I/O option                      | A     | External I/O box with 8 digital inputs and 8 digital outputs (4 Form A, 4 Form C)  |
|                                 | B     | External I/O box with 8 digital inputs and 4 digital outputs (4 Form C) and 4 analog outputs (0 to 20 mA)  |
|                                 | C     | External I/O box with 8 digital inputs and 4 digital outputs (4 Form C) and 4 analog outputs (-1 mA to 1 mA)   |
|                                 | D     | External I/O box with 8 digital inputs and 4 digital outputs (4 Form C) and 4 analog outputs (two -1 to 1 mA, and two 0 to 20 mA outputs)  |
| Cable                           | 0     | No cable - cables for the I/O box are no ordered as a separate part number. Refer to commercial reference numbers: CBL-8X00IOE5FT, CBL-8X00IOE15FT and CBL-8XX0-BOP-IOBOX under Connector cables, below. |
| Comm. ref. no.                  |       | A-base adapters  |
| A-BASE-ADAPTER-9                |       | Form 9S to Form 9A adapter   |
| A-BASE-ADAPTER-35               |       | Form 35S to Form 35A adapter   |
| Optical communication interface |       |  |
| OPTICAL-PROBE                   |       | Optical communication interface  |
| Connector cables                |       |  |
| CBL-8X00BRKOUT                  |       | 5 ft Breakout Cable: 24-pin female Molex connector to one DB9 female connector for RS 232, and 2 sets of twisted pair wires for two RS 485 port connections  |
| CBL-8X00IOE5FT                  |       | 5 ft extension cable, mates with 24-pin male Molex connector from the meter to the 24-pin Molex connector on the I/O Expander box  |
| CBL-8X00IOE15FT                 |       | 15 ft extension cable, mates with 24-pin male Molex connector from the meter to the 24-pin female Molex connector on the I/O Expander box  |
| CBL-8XX0-BOP-IOBOX              |       | 1.8 m connector cable, 24-pin male to 14-pin male Molex connector for connecting an ION8000 Series meter with breakout panel to an I/O Expander Box  |

## ION8650 socket dimensions





# ION8650 series

## ION8650 suggested switchboard mounting dimensions

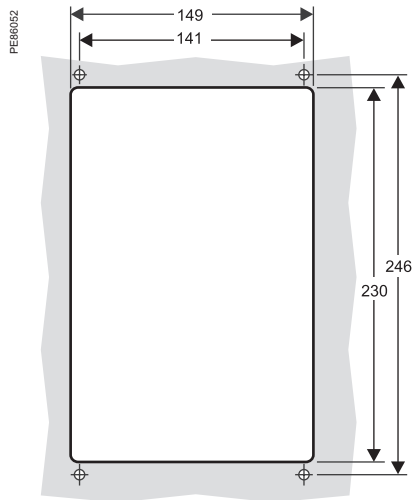

## ION8650 switchboard mounting

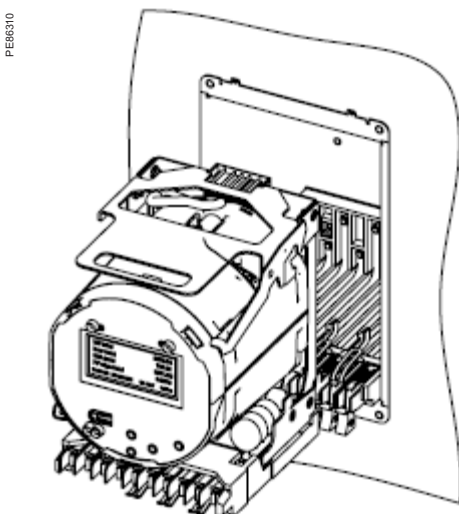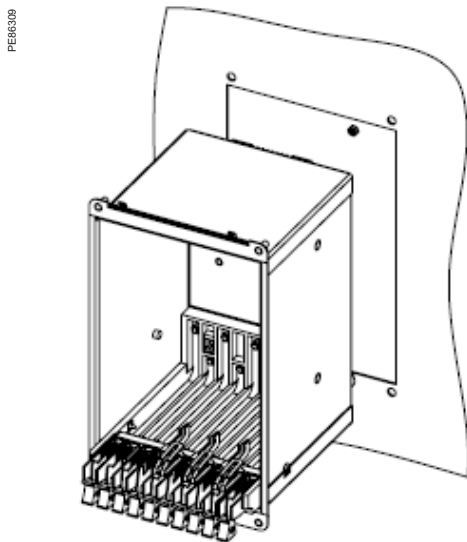

Please see appropriate **Installation Guide** for these products for further details.

# Multi-circuit Metering

This is an integrated solution for monitoring multi-circuits and mains by using a single meter. The meter is designed for use in both new build and retrofit and is used for critical power operations in data centres and energy management in buildings.

The ideal solution for data centre managers, energy or facility managers, engineers and operational executives who are responsible for delivering power to critical applications.

In corporate and hosted data centre facilities, this technology helps you plan and optimise the critical power infrastructure to meet the demands of continuous availability.

- PowerLogic™ HDPM6000
- PowerLogic™ BCPM
- EM4000 series
- EM4800 series
- EM4900 series



# PowerLogic™ HDPM6000

The PowerLogic™ HDPM6000 sets a new standard for Power Quality Meters as both a standalone three-phase PQM and the foundation for an entire suite of devices: HDPM6000R, HDPM6000S, and HDPM6000B

The HDPM6000 is both a standalone 3-phase power quality meter (PQM) and the hub for Schneider Electric's branch circuit accessory modules (HDPM6000R, HDPM6000S, HDPM6000B). It can monitor loads up to 4000 A with utility grade system accuracy, delivers a complete range of power quality metrics (vTHD, iTHD), and provides waveform capture functionality without the need for additional proprietary software. The HDPM6000 can also maintain multiple, concurrent sessions with EPMS, DCIM or BMS applications via the Modbus, SNMP and BACnet IP protocols. Dual Ethernet ports allow multiple HDPM6000 head units to be daisy-chained in a single run.

Thanks to open protocols, the HDPM6000 is easily integrated into any data center or building management information system. Gateways or additional hardware are not required and the platform offers most standard forms of data connectivity. The on-board environmental communications port enables one-wire sensors to detect abnormal temperature and humidity conditions so adjustments can be made before problems occur.

## Applications

Ideal for large building applications such as data centers, industrial facilities, infrastructure and other similar environments.

PB124374



HDPM6000

### Market solutions

Markets that benefit from a solution with PowerLogic™ HDPM6000 include:

- Data centers
- Industrial facilities
- Healthcare facilities
- Manufacturing

### Benefits

- Modular platform approach provides scalability and minimizes integration costs, start up time and operational expenses.
- Provides power quality metrics down to the branch circuit allowing users to effectively monitor circuit loads, manage power consumption, allocate energy costs and maximize uptime across their facilities.
- Makes energy and power quality data immediately actionable and relevant to operational and sustainability goals

### Competitive advantages

- Asset management
  - Identify increased harmonics in the rack servers to detect a potential disruption
  - Total Harmonics Distortion
  - Waveform capture
- Display and web page visualization
  - Optional touchscreen display accesses meter data
  - User-friendly web interface allows configuration of branch circuits and commissioning of meter system
- Data logging and software monitoring
  - Data logging and on-board memory storage
  - EcoStruxure™ PME and Power Operation integration
- Busway solution
  - Modular, distributed architecture meets data center requirements in an all-in-one solution

### Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings. Maximize electrical network reliability and availability, and optimize electrical asset performance.

# HDPM6000



HDPM6000 Head Unit

## Measurements

- Accumulated Real Energy (kWh) per phase and total of all phases
- Accumulated Reactive Energy (kVARh) per phase and totals for all phases
- Accumulated Apparent Energy (kVAh) per phase and total of all phases
- Real (kW), Reactive (kVAR) and Apparent (kVA) Power Demand, per phase and total of all phases
- Instantaneous Real (kW), Reactive (kVAR) and Apparent Power (kVA), by phase and in total
- Current (amps) per phase and total of all phases
- Phase-to-phase voltage per phase and average of all phase pairs
- Phase-to-neutral voltage per phase and average of all phases
- Power factor per phase and average of all phases
- Frequency
- Voltage and current waveform capture
- Voltage and current harmonics
- Voltage and Current THD
- Total Demand Distortion (TDD)
- Voltage and current imbalance

## Features guide

|                         |   |
|-------------------------|---|
| Web interface           | For configuration and live data access  |
| Supported protocols     | Modbus TCP/IP, SNMP, BACnet IP  |
| Data storage            | Min. 8 GB SD card to store log data and waveform captures provided            |
| Alarms                  | On-board user-configurable alarms and alerts                                  |
| Power quality analytics | Waveform capture, voltage and current THD, voltage and current imbalance, TDD |

## Technical specifications


| Electrical Characteristics          |  |
|-------------------------------------|--|
| Input reference voltage             | [120] [208] [380] [400] [415] [480] VAC, single phase 2-wire plus ground, 3-wire plus ground or 4-wire plus ground |
| Input frequencies                   | 50/60 Hz   |
| 24 VDC power supplies input voltage | 100 to 240 VAC or 264 to 575 VAC to 24 VDC output  |
| Measurement category                | 3  |
| CT support                          | UL 2808, 20 to 4000 A with internal burdened resistor and 250 mV signal (no shorting blocks required)              |
| CT options                          | Solid-core or split-core type current transformers with a maximum voltage of 480 V.                                |
| Environmental Characteristics       |  |
| Operating temperature               | -20 to 60 °C (-68 to 140 °F)   |
| Storage temperature                 | -40 to 85 °C (-40 to 185 °F)   |
| Relative humidity                   | 5 to 90% non-condensing  |
| Maximum operating altitude          | 2,000 m (6,562 ft.)  |
| Non-operating altitude              | 15,000 m (49,213 ft.)  |
| Noise level                         | < 65 dba at six ft. (72 in.) from the HDPM6000   |
| Mounting location                   | Not suitable for wet locations. For indoor use only.   |
| Pollution degree                    | 2  |

# HDPM6000

| Technical specifications (cont.)  |  |   |
|-----------------------------------|--|---|
| Standards                         |  |   |
| Description                       | General Standard   | Reference Standard                            |
| Radiated emissions                | IEC/EN 61326-1 :2020 (Industrial Electro-magnetic Environment) | CISPR 11: Conducted emissions, AC port inc A1 |
| Conducted emissions, AC port      |  |   |
| Conducted emissions, telecom port |  |   |
| Radiated RF immunity              |  | IEC/EN 61000-4-3                              |
| Fast transient bursts             |  | IEC/EN 61000-4-4*                             |
| Surge                             |  | IEC/EN 61000-4-5                              |
| Conducted immunity                |  | IEC/EN 61000-4-6                              |
| Power frequency magnetic field    |  | IEC/EN 61000-4-8                              |
| Voltage dips and interruptions    |  | IEC/EN 61000-4-11                             |


\*The device may experience measurement accuracy deviation. Contact Schneider Electric technical support for more information.

## HDPM6000 Dimensions

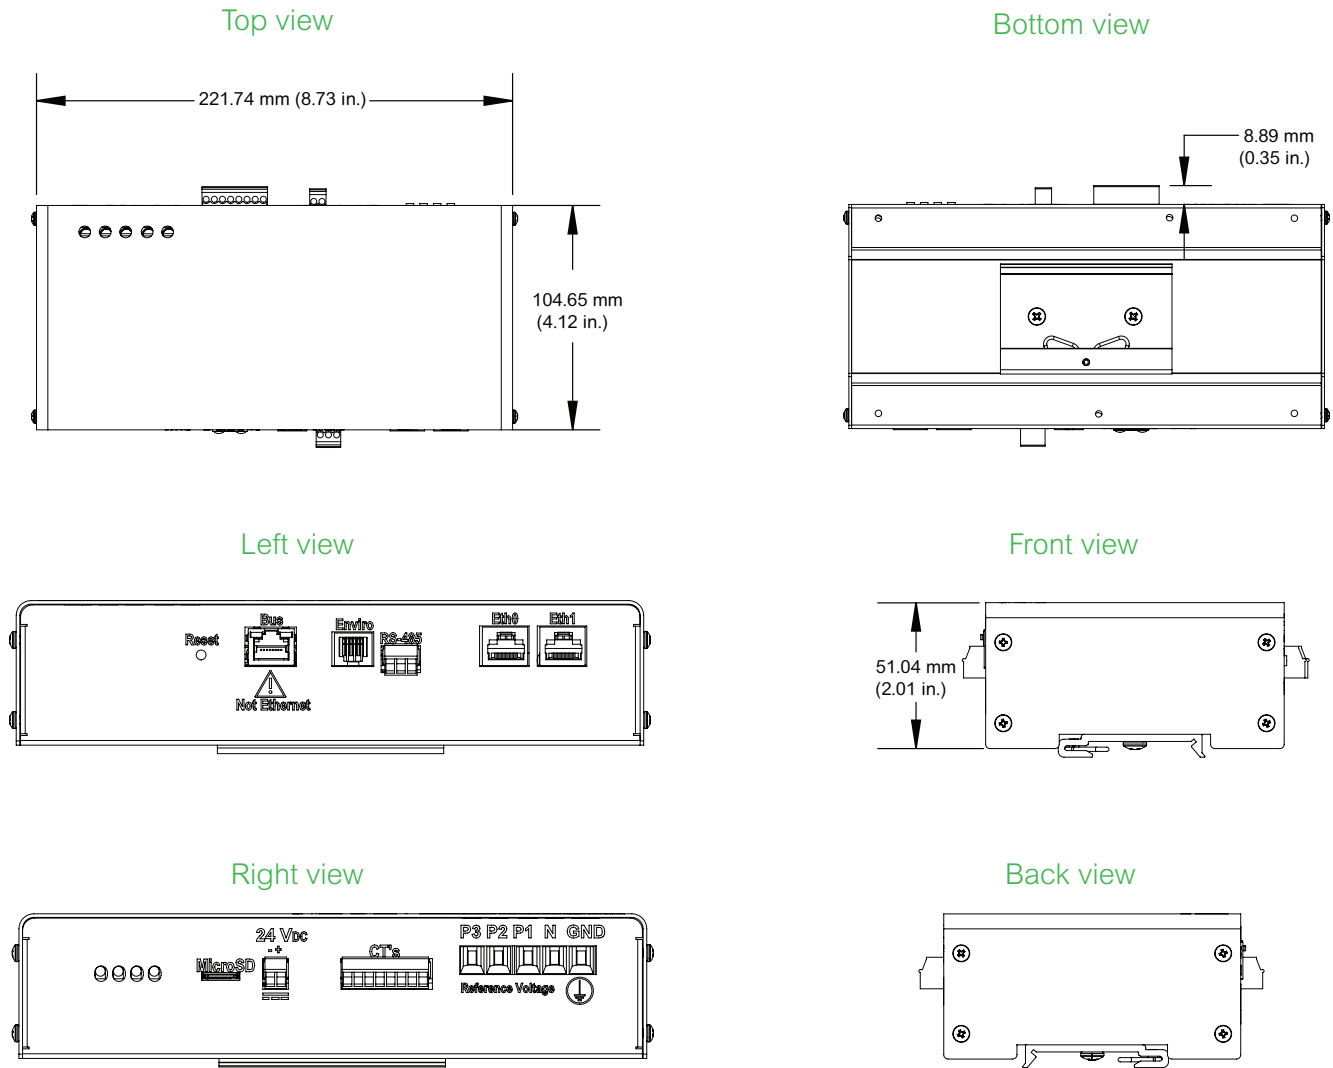

Note: Dimensions shown are within ±3.175 mm (±0.125 in.).

HDPM6000B

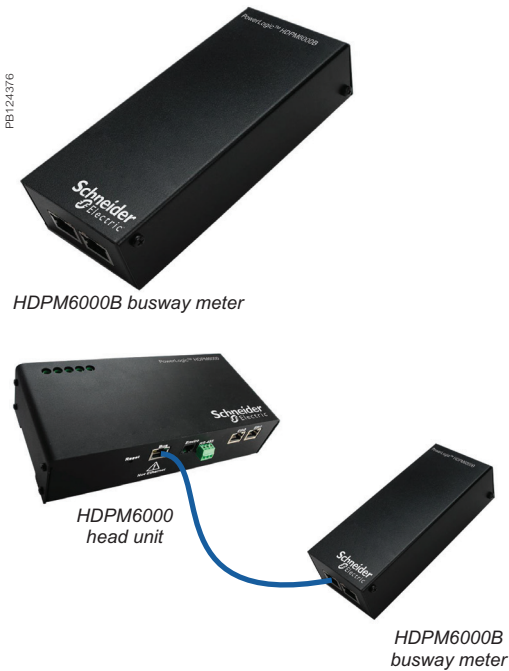

Metering Architecture

Measurements

- Current per branch and sum of all phases
- Energy (kWh) per branch and sum of all phases
- Real Power (kW) per branch and sum of all phases
- Apparent Power (kVA) per branch and sum of all phases
- Reactive Power (kVAR) per branch and sum of all phases
- Real Power (kW) demand per circuit
- Current waveform capture
- Current THD
- Power factor (sign indicates leading or lagging current), per branch and average of all phases for multi-phase circuits

| Features guide          |  |
|-------------------------|--|
| Web interface           | For configuration and live data access                             |
| Supported protocols     | Modbus TCP/IP, SNMP, BACnet  |
| Data storage            | Min. 8 GB SD card to store log data and waveform captures provided |
| Alarms                  | On-board user-configurable alarms and alerts                       |
| Input                   | One-wire temperature and humidity sensor input                     |
| Display                 | Seven-segment display of address or serial number                  |
| Power quality analytics | Waveform capture and current THD                                   |


Technical specifications

| Electrical Characteristics        |  |                         |
|-----------------------------------|--|-------------------------|
| Supply voltage                    | 24 VDC supplied from the HDPM6000 via bus port CAT6 cable  |                         |
| CT support                        | UL 2808, 20-4000 A with internal burdened resistor and 250 mV signal (no shorting blocks required) |                         |
| CT options                        | Solid-core or split-core type current transformers with a maximum voltage of 480 V.                |                         |
| Bus cabling                       | CAT6, maximum of 51.2 m (168 ft.) total cable length   |                         |
| Environmental Characteristics     |  |                         |
| Operating temperature             | -20 to 60 °C (-68 to 140 °F)   |                         |
| Storage temperature               | -40 to 85 °C (-40 to 185 °F)   |                         |
| Relative humidity                 | 5 to 90% non-condensing  |                         |
| Maximum operating altitude        | 2,000 m (6562 ft.)   |                         |
| Non-operating altitude            | 15,000 m (49213 ft.)   |                         |
| Noise level                       | < 65 dba at six ft. (72 in.) from the HDPM6000   |                         |
| Mounting location                 | Not suitable for wet locations. For indoor use only.   |                         |
| Standards                         |  |                         |
| Description                       | General Standard   | Reference Standard      |
| Radiated emissions                | IEC/EN 61326-1 :2020 (Industrial Electromagnetic Environment)                                      | CISPR 11 AC port inc A1 |
| Conducted emissions, AC port (1)  |  |                         |
| Conducted emissions, telecom port |  |                         |
| Radiated RF immunity              |  | IEC/EN 61000-4-3        |
| Fast transient bursts             |  | IEC/EN 61000-4-4*       |
| Conducted immunity                |  | IEC/EN 61000-4-6        |
| Power frequency magnetic field    |  | IEC/EN 61000-4-8        |
| Voltage dips and interruptions    |  | IEC/EN 61000-4-11       |


\*The device may experience measurement accuracy deviation. Contact Schneider Electric technical support for more information.

# HDPM6000B Dimensions


Top view

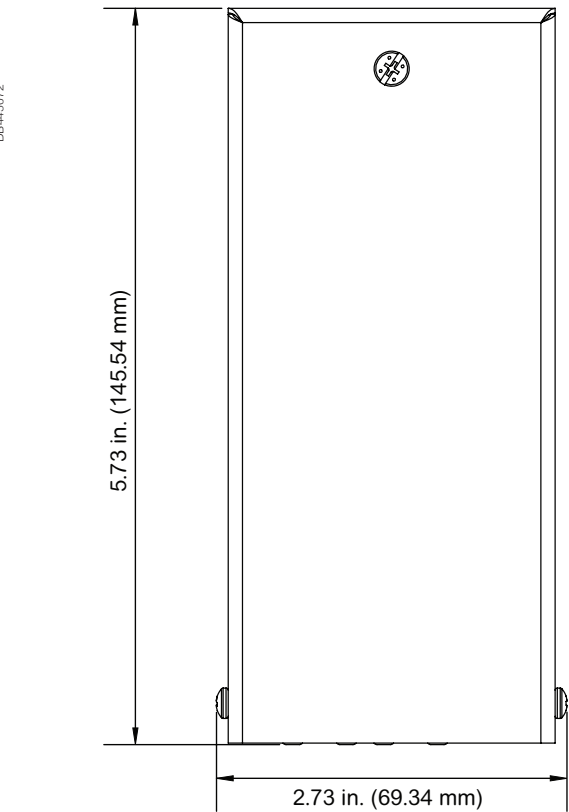


Side view

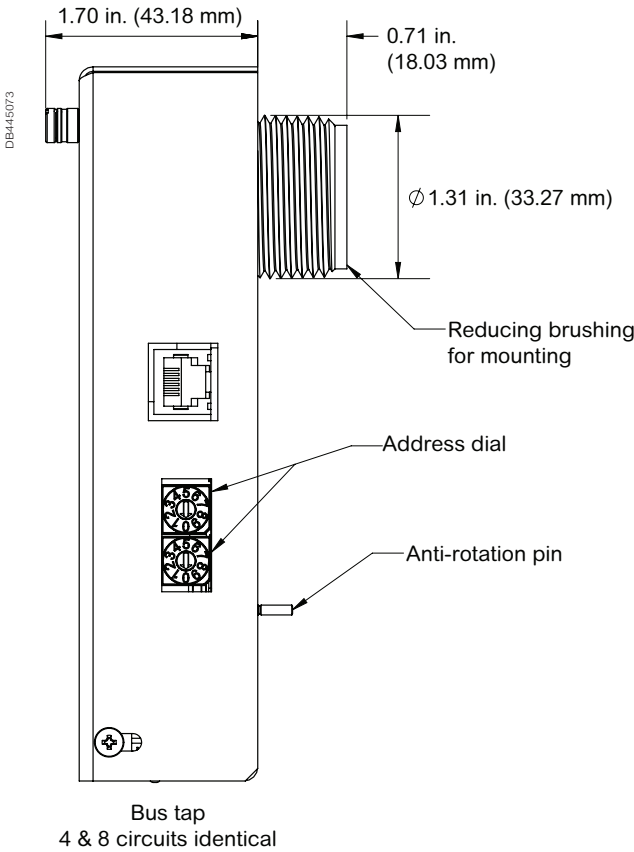


Front view

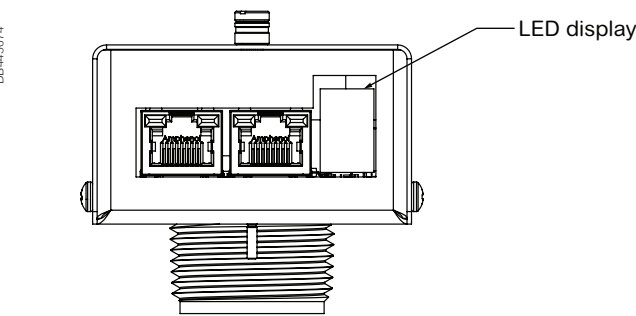

# HDPM6000R

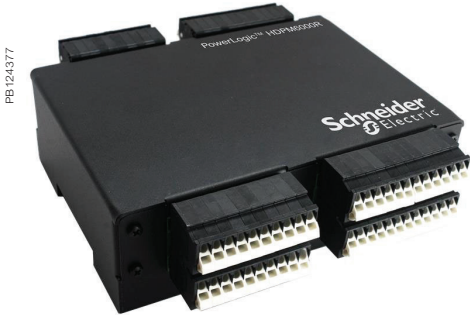

HDPM6000R Retrofit Module

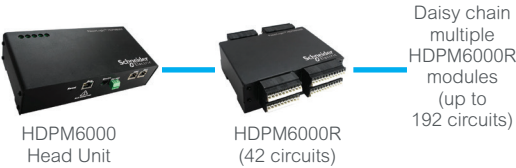

Metering Architecture

## Measurements

- Current per branch and sum of all phases
- Energy (kWh) per branch and sum of all phases
- Real Power (kW) per branch and sum of all phases
- Apparent Power (kVA) per branch and sum of all phases
- Reactive Power (kVAR) per branch and sum of all phases
- Real Power (kW) demand per circuit
- Total Harmonic Distortion (THD)
- Current waveform capture (optional)
- Power factor (sign indicates leading or lagging current), per branch and average of all phases for multi-phase circuits

## Features guide

|                         |  |
|-------------------------|--|
| Web interface           | For configuration and live data access                             |
| Supported protocols     | Modbus TCP/IP, SNMP, BACnet  |
| Data storage            | Min. 8 GB SD card to store log data and waveform captures provided |
| Alarms                  | Onboard user-configurable alarms and alerts                        |
| Power quality analytics | Waveform capture and current THD                                   |

## Technical specifications


| Electrical characteristics    |  |
|-------------------------------|--|
| CT support                    | UL 2808, 20-4000 A with internal burdened resistor and 250 mV signal (no shorting blocks required) |
| CT options                    | Solid-core or split-core type current transformers with a maximum voltage of 480 V.                |
| Environmental characteristics |  |
| Operating temperature         | -20 to 60 °C   |
| Storage temperature           | -40 to 85 °C   |
| Relative humidity             | 5 to 90% non-condensing  |
| Maximum operating altitude    | 2,000 m  |
| Non-operating altitude        | 15,000 m   |
| Noise level                   | < 65 dba at six feet from the PQM  |
| Mounting location             | Not suitable for wet locations. For indoor use only.   |

*Note: For detailed electrical specifications on measurement voltage and power supply input voltage, refer to the HDPM6000 Technical Datasheet.*


# HDPM6000R Dimensions

## 24-Circuit

Top view

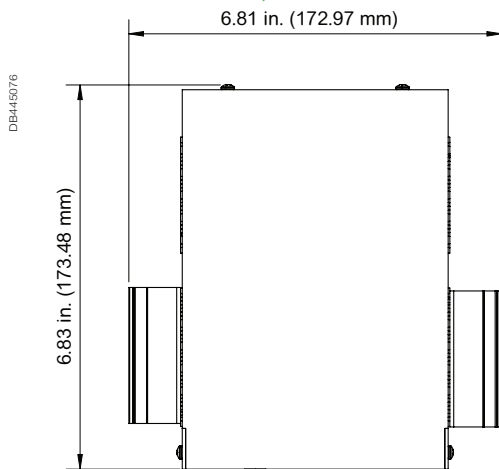


Side view

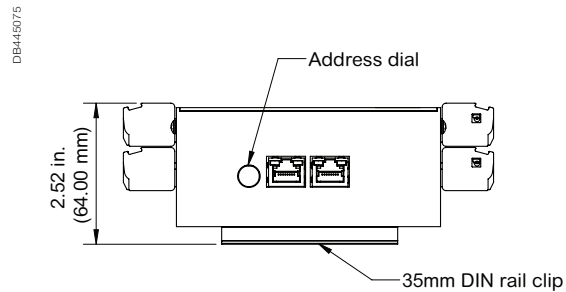


## 42-Circuit

Top view

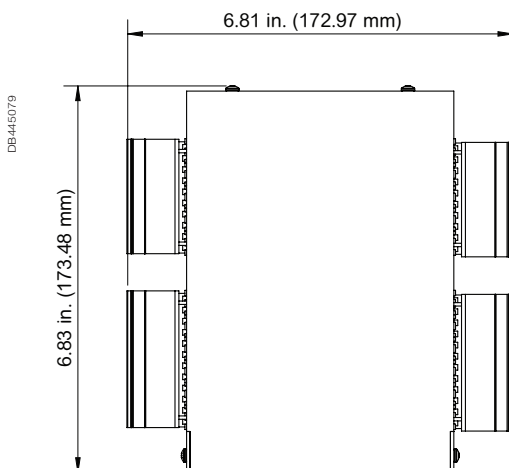


Side view

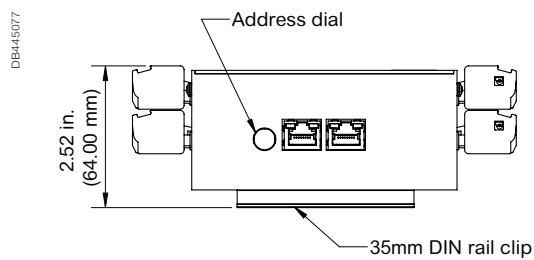


## 84-Circuit

Top view

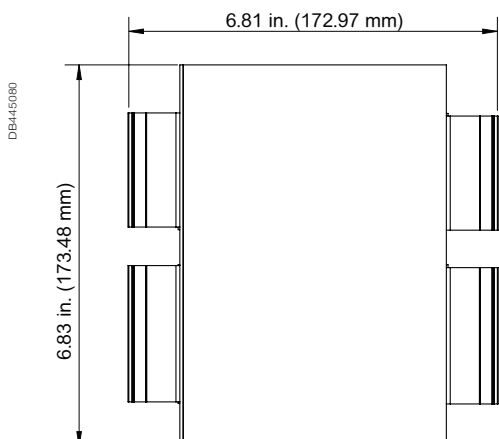


Side view

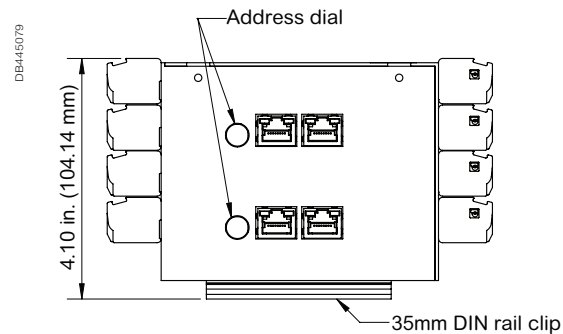


# HDPM6000S

PB124378

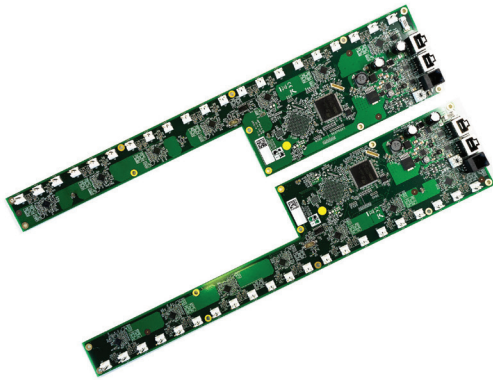

HDPM6000S Strip Module

PB124379

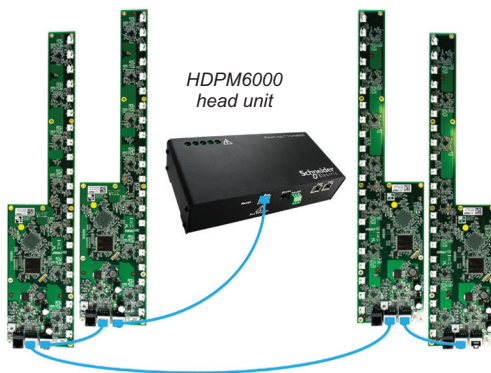

Metering Architecture

## Measurements

- Current per branch and sum of all phases
- Energy (kWh) per branch and sum of all phases
- Real Power (kW) per branch and sum of all phases
- Apparent Power (kVA) per branch and sum of all phases
- Reactive Power (kVAR) per branch and sum of all phases
- Real Power (kW) demand per circuit
- Current waveform capture (optional)
- Total Harmonic Distortion (THD)
- Power factor (sign indicates leading or lagging current), per branch and average of all phases for multi-phase circuits

## Features guide


|                         |  |
|-------------------------|--|
| Power quality analytics | Waveform capture and voltage and current THD                       |
| Web interface           | For configuration and live data access                             |
| Supported protocols     | Modbus TCP/IP, SNMP, BACnet  |
| Data storage            | Min. 8 GB SD card to store log data and waveform captures provided |
| Alarms                  | On-board user-configurable alarms and alerts                       |

## Technical specifications


| Electrical Characteristics        |  |                         |
|-----------------------------------|--|-------------------------|
| Supply voltage                    | 24 VDC supplied from the HDPM6000 head unit via bus port CAT6 cable                                |                         |
| CT support                        | UL 2808, 20-4000 A with internal burdened resistor and 250 mV signal (no shorting blocks required) |                         |
| CT options                        | Solid-core or split-core type current transformers with a maximum voltage of 480 V.                |                         |
| Environmental Characteristics     |  |                         |
| Operating temperature             | -20 to 60 °C (-68 to 140 °F)   |                         |
| Storage temperature               | -40 to 85 °C (-40 to 185 °F)   |                         |
| Relative humidity                 | 5 to 90% non-condensing  |                         |
| Max. operating altitude           | 2,000 m (6562 ft.)   |                         |
| Non-operating altitude            | 15,000 m (49213 ft.)   |                         |
| Noise level                       | < 65 dba at six ft. (72 in.) from the HDPM6000   |                         |
| Mounting location                 | Not suitable for wet locations. For indoor use only.   |                         |
| Standards                         |  |                         |
| Description                       | General Standard   | Reference Standard      |
| Radiated emissions                | IEC/EN 61326-1 :2020 (Industrial Electromagnetic Environment)                                      | CISPR 11 AC port inc A1 |
| Conducted emissions, AC port      |  |                         |
| Conducted emissions, telecom port |  |                         |
| Electrostatic discharge           |  | IEC/EN 61000-4-2        |
| Radiated RF immunity              |  | IEC/EN 61000-4-3        |
| Fast transient bursts             |  | IEC/EN 61000-4-4        |
| Conducted immunity                |  | IEC/EN 61000-4-6        |
| Power frequency magnetic field    |  | IEC/EN 61000-4-8        |
| Voltage dips and interruptions    |  | IEC/EN 61000-4-11       |

# HDPM6000S Dimensions


Left strip - top and side views

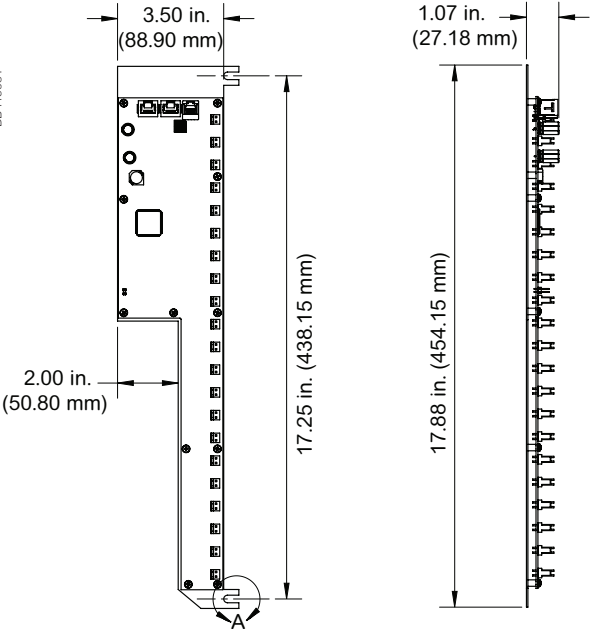


Right strip - top and side views

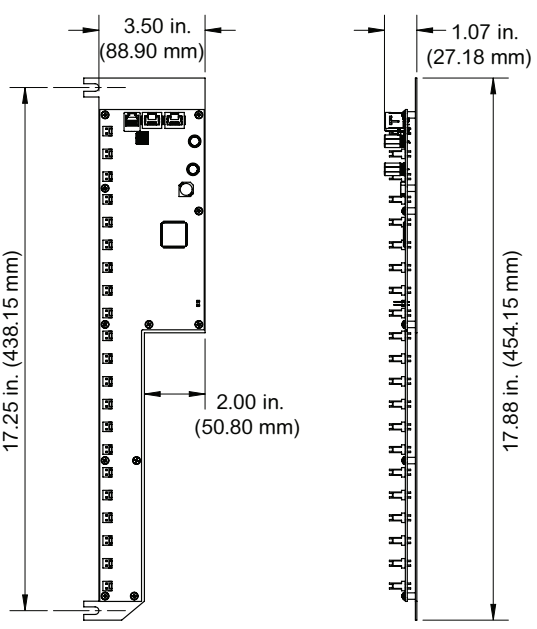

Detail A view, same for all lugs



# HDPM6000 I/O Module

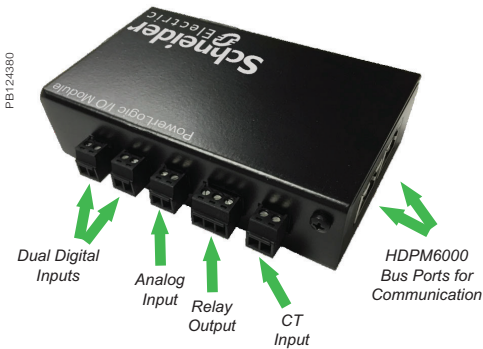

HDPM6000 I/O Module

## Inputs & Outputs


- Digital Input 1: Dry contact to monitor accessory equipment
- Digital Input 2: Dry contact to monitor accessory equipment
- Analog Input 1: 0 to 10 VDC sensor input
- Relay Output: Form-C (NO, NC, Common)
- Current Transformer Input: 0 to 250 mVac (CT output)
- HDPM6000 Bus Ports: Two RJ-45 ports for daisy chaining and connection to the HDPM6000 head unit

## Technical specifications

| Electrical Characteristics        |  |                         |
|-----------------------------------|--|-------------------------|
| Supply voltage                    | 24 VDC supplied from the HDPM6000 head unit via bus port CAT6 cable  |                         |
| Relay Output, Form C contact      | 30 VDC @ 1 A<br>48 VAC @ 0.5 A   |                         |
| Digital inputs                    | 5 VDC, 11 mA max supplied across dry contact input. Dry contact impedance maximum 50 ohms.   |                         |
| Analog input                      | 0 to 10 VDC, 0.05V accuracy, 0.01 V resolution   |                         |
| Power supply                      | For the HDPM6000 head unit, use power supply module specified in HDPM6000 literature. Use <3 m power supply cable. Use <30 m shielded cable. |                         |
| Current Transformer (CT) input    | 0 to 250mV rms signal (no shorting blocks required)  |                         |
| CT options                        | UL 2808, solid-core or split-core type current transformers  |                         |
| Environmental Characteristics     |  |                         |
| Operating temperature             | -20 to 60 °C (-68 to 140 °F)   |                         |
| Storage temperature               | -20 to 70 °C (-68 to 158 °F)   |                         |
| Relative humidity                 | 5 to 90% non-condensing  |                         |
| Maximum operating altitude        | 2,000 m (6562 ft.)   |                         |
| Non-operating altitude            | 15,000 m (49213 ft.)   |                         |
| Noise level                       | < 65 dba at six ft. (72 in.) from the HDPM6000   |                         |
| Mounting location                 | Not suitable for wet locations. For indoor use only.   |                         |
| Standards                         |  |                         |
| Description                       | General Standard   | Reference Standard      |
| Radiated emissions                | IEC/EN 61326-1:2020 (Industrial Electromagnetic Environment)   | CISPR 11 AC port inc A1 |
| Conducted emissions, AC port      |  |                         |
| Conducted emissions, telecom port |  |                         |
| Radiated RF immunity              |  | IEC/EN 61000-4-3        |
| Fast transient bursts             |  | IEC/EN 61000-4-4        |
| Surge                             |  | IEC/EN 61000-4-5        |
| Conducted immunity                |  | IEC/EN 61000-4-6        |
| Power frequency magnetic field    |  | IEC/EN 61000-4-8        |
| Voltage dips and interruptions    |  | IEC/EN 61000-4-11       |

*Note: For detailed electrical specifications on measurement voltage and power supply input voltage, refer to the HDPM6000 Technical Datasheet.*

## HDPM6000 I/O Module Dimensions

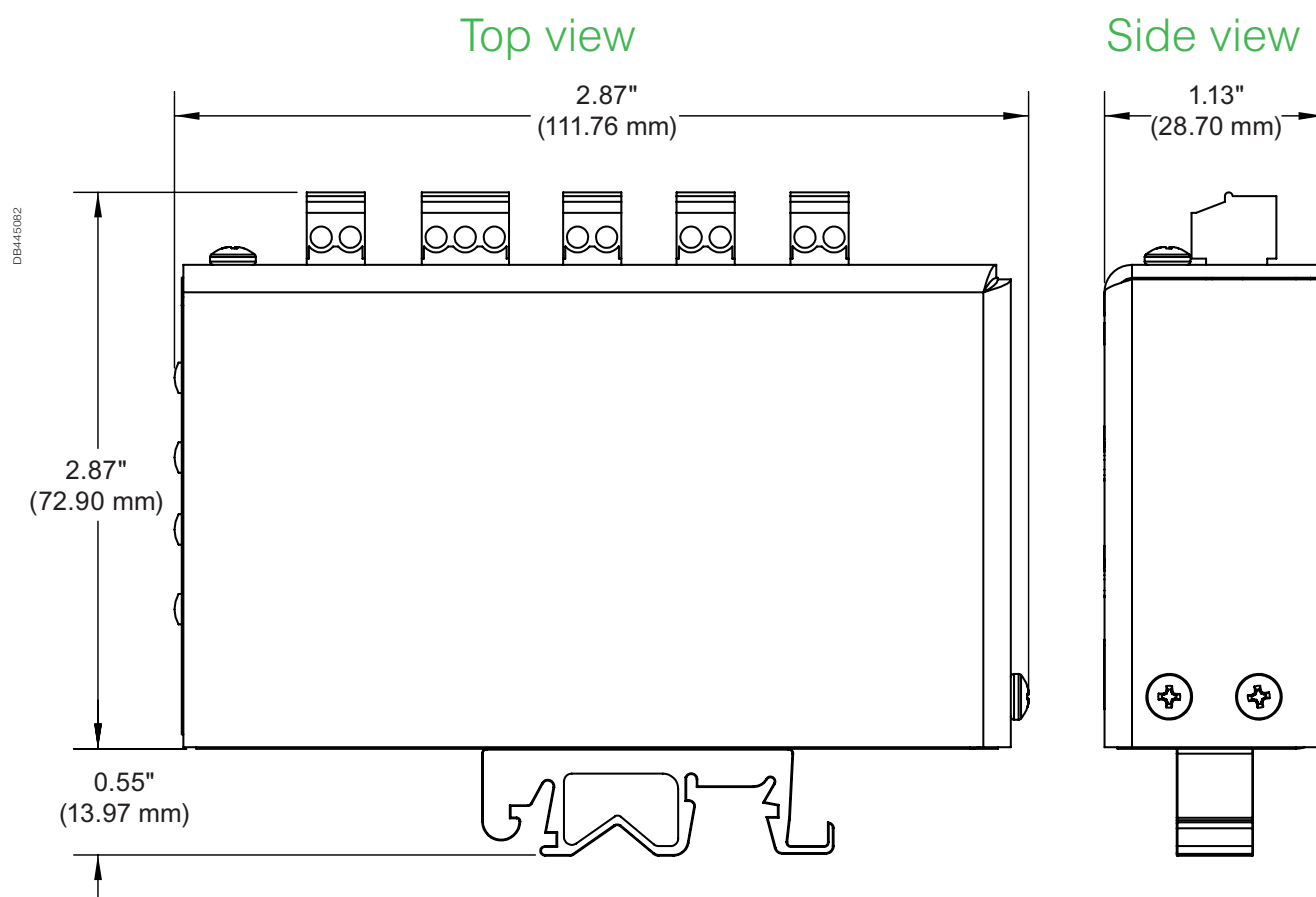

## Commercial Reference Numbers

A complete list of HPDM commercial reference numbers appears in the Commercial Reference Numbers section of the PowerLogic™ Catalog. Contact your Schneider Electric representative for complete ordering information.

# PowerLogic™ BCPM

The PowerLogic™ BCPM is a highly accurate, full-featured metering product designed for the unique, multi-circuit and minimal space requirements of a high performance power distribution unit (PDU) or remote power panel (RPP).

It offers class 1 (1 %) power and energy system accuracy (including 50 A or 100 A CTs) on all branch channels. The BCPM monitors up to 84 branch circuits and the incoming power mains to provide information on a complete PDU. Full alarming capabilities ensure that potential issues are dealt with before they become problems.

## Applications

- Maximise uptime and avoid outages
- Optimise existing infrastructure
- Improve power distribution efficiency
- Track usage and allocate energy costs
- Enable accurate sub-metering

PB 113065



BCPMA084S

### The solution for

Markets that can benefit from a solution that includes PowerLogic™ BCPM series meters:

- Data centres
- Buildings

---

### Benefits

The flexible BCPM fits any PDU or RPP design and supports both new and retrofit installations. It has exceptional dynamic range and accuracy, and optional feature sets to meet the energy challenges of mission critical data centres.

---

### Competitive advantages

- Fit any PDU or RPP design for both new and retrofit projects
- Class 1.0 system accuracy
- Ethernet communication

### Power management solutions




Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximise electrical network reliability and availability, and optimise electrical asset performance.

---

### Conformity of standards

- ANSI C12.1
- IEC 61010-1
- IEC 62053-21 Class 1
- UL508


# BCPM

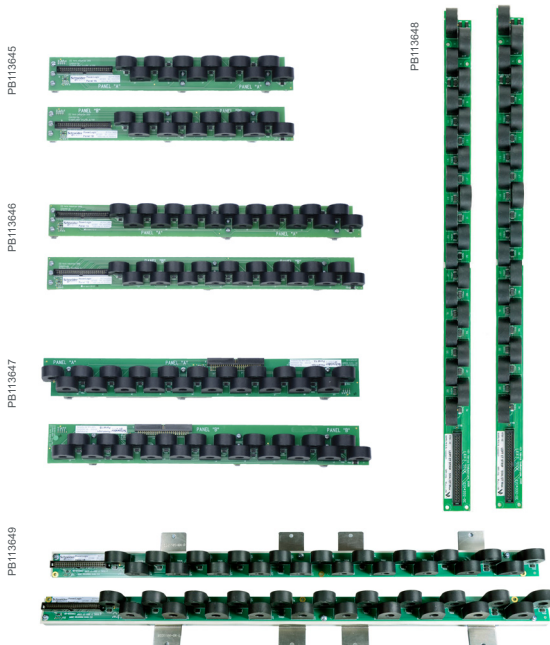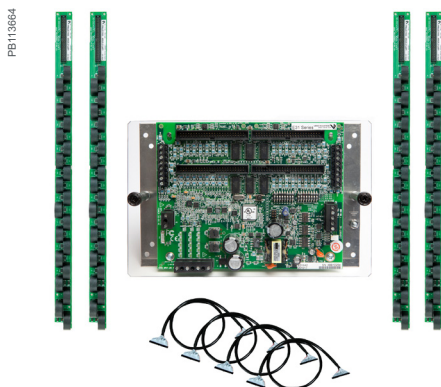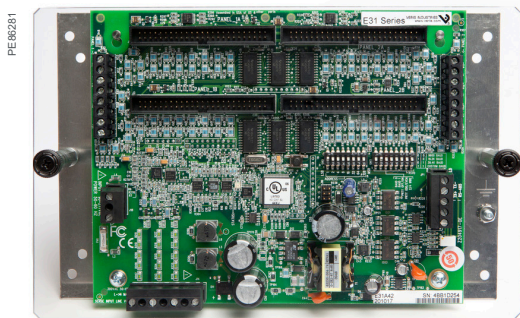

## Main characteristics

- Monitor up to 84 branch circuits with a single BCPM.
- Ideal for installation in both new PDUs and retrofit projects
- New installations:
  - BCPM with solid core CTs monitors up to 84 branch circuits using 2 or 4 CT strips. Solid core CTs are rated to 100 A CTs and are mounted on strips to simplify installation. CT strips are available with 12, 18 or 21 CTs per strip on 18 mm spacings. 21 CT strips with 3/4in or 1in spacings are also available.
- Retrofit projects:
  - BCPMSC with split-core CTs is ideal for retrofits. Any number of split-core CTs, up to 84 maximum, can be installed with a single BCPM. Three sizes of CT are supported (50 A, 100 A, and 200 A) and all three CT sizes can be used on a single BCPM. Adapter boards with terminals for split-core CTs can be mounted using DIN-rail, Snaptrack or on a common mounting plate with the main board (42 ch Y63 models only).
- IEC Class 1 metering accuracy
  - Accurately monitor very low current levels, down to a quarter-Amp.
  - Easily differentiate between the flow of low current and a trip where no current flows.
- Class 1.0 system accuracy for Revenue Grade measurements
  - Branch Power and Energy measurements fully meet ANSI and IEC class 1 accuracy requirements with 50 or 100 A CTs included. No need to de-rate meter branch accuracy to allow for CTs. Voltage and current measurement accuracy is 0.5 % and currents are measured down to 50mA. Easily differentiate between the flow of low current and a trip where no current flows.
  - Class 1.0 system accuracy for Revenue Grade measurements
  - Branch Power and Energy measurements fully meet ANSI and IEC class 1 accuracy require
- Power quality: obtain basic power quality data thanks to the measurement of Total Harmonic Distortion percentages on voltages and current. (V L-L, V L-N, I L-N).
- Designed to fit any PDU or RPP design
  - Lowers your total installation costs as well as the cost per meter point by supporting both new and retrofit installations.
- Communicates with your various systems: BCPMA, and BCPMSCA have a Modbus RTU connection BCPME, and BCPMSCE, have a serial connection for either Modbus RTU or BACnet MS/TP. And there is an ethernet connection for Modbus TCP, BACnet IP and SNMP at the same time. Allowing the concurrent use of an Energy Management System, a Building Management System and an IT system.
- Compatible with PowerLogic™ power monitoring software
  - Easily turn the large amount of data collected by the devices into useful decision-making information.
- Flexible Configuration capability
  - Set the ordering and orientation of CT strips, assign individual CT size and phases, support for 1, 2, and 3-pole breakers in any configuration.

BCPM

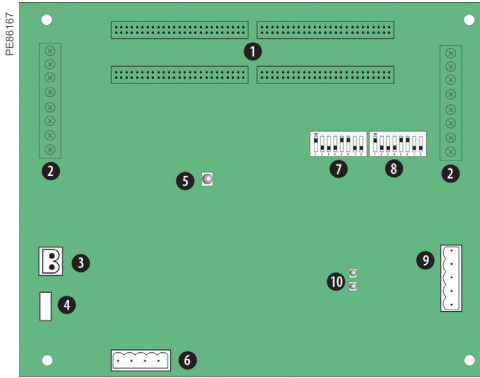


- PowerLogic™ BCPM
- 1 50-pin ribbon cable connectors (data acquisition board).
  - 2 Auxiliary inputs.
  - 3 Control (mains) power connection.
  - 4 Control power fuse.
  - 5 Alive LED.
  - 6 Voltage taps.
  - 7 Communications address DIP switches.
  - 8 Communications settings DIP switch.
  - 9 RS-485 2 connection.
  - 10 RS-485 LEDs.

Feature selection

| General                                 |                         | BCPMA       | BCPME        |
|---|-------------------------|-------------|--------------|
| Use on LV systems                       |                         | ■           | ■            |
| Power and energy measurements           |                         |             |              |
| Mains                                   |                         | ■           | ■            |
| Branch circuits                         |                         | ■           | ■            |
| Instantaneous rms values                |                         |             |              |
| Voltage, frequency                      |                         | ■           | ■            |
| Current                                 |                         | ■           | ■            |
| Active power                            | Total and per phase     | ■           | ■            |
| Power factor                            | Total and per phase     | ■           | ■            |
| Energy values                           |                         |             |              |
| Active energy                           |                         | ■           | ■            |
| Demand values                           |                         |             |              |
| Total active power                      | Present and max. values | ■           | ■            |
| Power quality measurements              |                         |             |              |
| THD % (V L-L, V L-N, I L-N)             |                         | ■           | ■            |
| Detection of over-voltage/under-voltage |                         | ■           | ■            |
| Sampling rate points per cycle          |                         | 2560 Hz     | 2560 Hz      |
| Alarming                                |                         |             |              |
| Alarms                                  |                         | ■           | ■            |
| Power supply                            |                         |             |              |
| AC version                              |                         | 90-277 V AC | 100-277 V AC |
| Communication                           |                         |             |              |
| RS-485 port                             |                         | ■           | ■            |
| Modbus RTU                              |                         | RTU         | ■            |
| Modbus TCP                              |                         | 1★          | ■            |
| BACnet IP                               |                         | 1★          | ■            |
| BACnet MS/TP                            |                         | 1★          | ■            |
| SNMP protocol                           |                         | 1★          | ■            |
| Ethernet Port                           |                         | 1★          | ■            |

★1 Add E8951 Gateway


BCPM

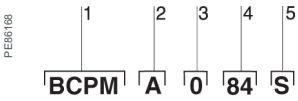

Example BCPM with solid core CTs part number

- 1. Model
- 2. Feature set
- 3. CT spacing (solid core models only)
- 4. Number of circuits
- 5. Brand

The PowerLogic™ BCPM uses .333 V AC output split-core CTs for the auxiliary inputs. These CTs are ordered separately from the BCPM.

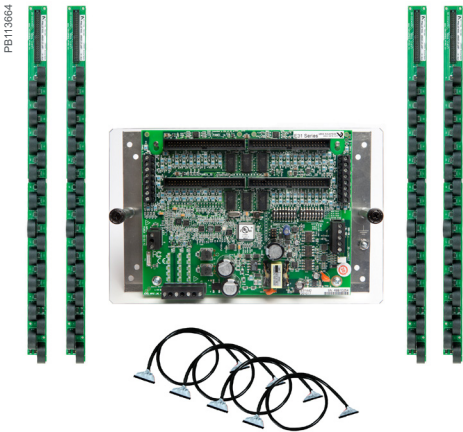


\* Quantity and style of CT strips and cables included varies by model

BCPM part numbers


| BCPM with solid core CTs |                    |      |   |
|--------------------------|--------------------|------|---|
| Item                     |                    | Code | Description   |
| 1                        | Model              | BCPM | BCPM with solid core CTs. Highly accurate meter that monitors branch circuits and the incoming power mains and includes full alarming capabilities            |
| 2                        | Feature set        | A    | Advanced - Monitors power & energy per circuit & mains, Modbus RTU only (add E8951 for other protocols), Meter Main Board comes on an aluminum mounting plate |
|                          |                    | E    | Advanced, with Ethernet - Monitors power & energy per circuit & mains, Meter Main Board is partially enclosed in a metal housing                              |
| 3                        | CT spacing         | 0    | 3/4in (19 mm) CT spacing  |
|                          |                    | 1    | 1in (26 mm) CT spacing  |
|                          |                    | 2    | 18 mm CT spacing  |
| 4                        | Number of circuits | 24   | 24 circuits, (2) 12-CT strips (18 mm spacing only)  |
|                          |                    | 36   | 36 circuits, (2) 18-CT strips (18 mm spacing only)  |
|                          |                    | 42   | 42 circuits, (2) 21-CT strips   |
|                          |                    | 48   | 48 circuits, (4) 12-CT strips (18 mm spacing only)  |
|                          |                    | 72   | 72 circuits, (4) 18-CT strips (18 mm spacing only)  |
|                          |                    | 84   | 84 circuits, (4) 21-CT strips   |
| 5                        | Brand              | S    | Schneider Electric  |

BCPM

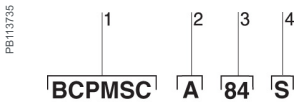

Example BCPMSC with split-core CTs part number.

- 1 Model.
- 2 Feature set.
- 3 Number of circuits.
- 4 Brand.

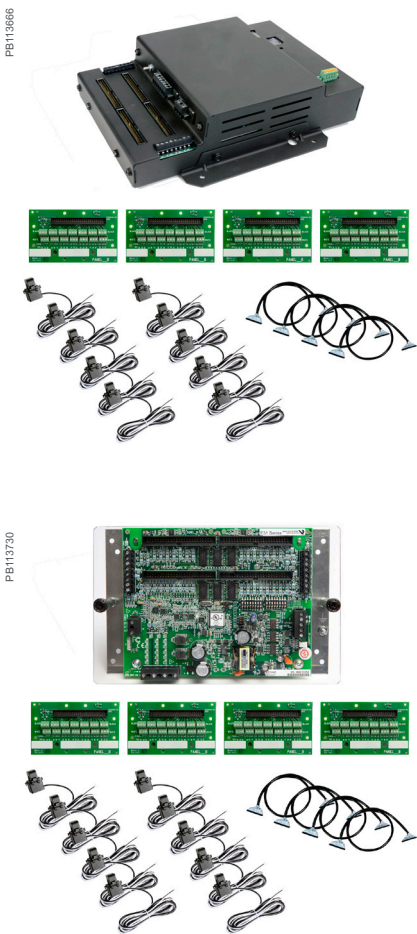


BCPM part numbers (contd.)

| BCPM with split-core CTs |                    |        |  |
|--------------------------|--------------------|--------|--|
| 1                        | Model              | BCPMSC | BCPM with split-core CTs. Highly accurate meter that monitors branch circuits and the incoming power mains and includes full alarming capabilities                             |
| 2                        | Feature set        | A      | Advanced - Monitors power and energy per circuit and mains, Modbus RTU only (add E8951 for other protocols), Meter Main Board comes on an aluminum mounting plate              |
|                          |                    | B      | Intermediate - Monitors current per circuit, power and energy per mains, Modbus RTU only (add E8951 for other protocols), Meter Main Board comes on an aluminum mounting plate |
|                          |                    | C      | Basic - Monitors current only per circuit and mains, Modbus RTU only (add E8951 for other protocols), Meter Main Board comes on an aluminum mounting plate                     |
|                          |                    | E      | Advanced, with Ethernet - Monitors power & energy per circuit & mains, Modbus RTU only (add E8951 for other protocols), Meter Main Board is enclosed in a metal housing        |
| 3                        | Number of circuits | 1      | 42 circuit main and adapter boards (no branch CTs or ribbon cables, order separately)  |
|                          |                    | 2      | 84 circuit main and adapter boards (no branch CTs or ribbon cables, order separately)  |
|                          |                    | 30     | 30 split-core CTs (50 A)   |
|                          |                    | 42     | 42 split-core CTs (50 A)   |
|                          |                    | 60     | 60 split-core CTs (50 A)   |
|                          |                    | 84     | 84 split-core CTs (50 A)   |
|                          |                    | Y63    | 42 circuits – main and adapter boards on single mounting plate (no branch CTs or ribbon, order separately) - Feature set A only  |
| 4                        | Brand              | S      | Schneider Electric   |

\*The BCPMSC models with 1, 2 or Y63 as the number of circuits DO NOT INCLUDE ANY branch CTs or ribbon cables (they include only the Main board and adapter board assemblies). These models are provided to allow users to order a specific combination of CT quantities, CT sizes, CT lead lengths and ribbon cable styles and lengths. The CTs and cables must be ordered separately.

The PowerLogic™ BCPMSC uses .333 V AC output split-core CTs for the auxiliary inputs. These CTs are ordered separately from the BCPMSC.

BCPM

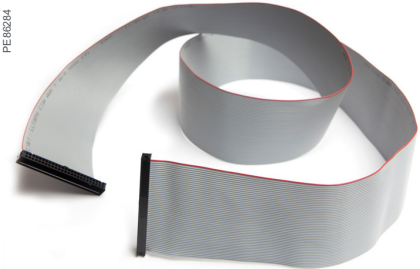

Flat ribbon cable



CBL016



Round ribbon cable



CBL022


Cabling and connection

Flat ribbon cables are recommended for use when the BCPM printed circuit board will be mounted inside of the PDU that is being monitored. Round ribbon cables are the preferred choice when the ribbon cable will be threaded through conduit.

BCPM part numbers for solid and split-core CTs (contd.)

| BCPM with split-core CTs |  |
|--------------------------|--|
| Commercial ref. no.      | Description  |
| BCPMA042S                | 42-circuit solid core power & energy meter, 100 A CTs (2 strips), 19 mm spacing            |
| BCPMA084S                | 84-circuit solid core power & energy meter, 100 A CTs (4 strips), 19 mm spacing            |
| BCPMA142S                | 42-circuit solid core power & energy meter, 100 A CTs (2 strips), 25 mm spacing            |
| BCPMA184S                | 84-circuit solid core power & energy meter, 100 A CTs (4 strips), 25 mm spacing            |
| BCPMA224S                | 24-circuit solid core power & energy meter, 100 A CTs (2 strips), 18 mm spacing            |
| BCPMA236S                | 36-circuit solid core power & energy meter, 100 A CTs (2 strips), 18 mm spacing            |
| BCPMA242S                | 42-circuit solid core power & energy meter, 100 A CTs (2 strips), 18 mm spacing            |
| BCPMA248S                | 48-circuit solid core power & energy meter, 100 A CTs (4 strips), 18 mm spacing            |
| BCPMA272S                | 72-circuit solid core power & energy meter, 100 A CTs (4 strips), 18 mm spacing            |
| BCPMA284S                | 84-circuit solid core power & energy meter, 100 A CTs (4 strips), 18 mm spacing            |
| BCPME042S                | 42-circuit solid core power & energy meter w/Ethernet, 100 A CTs (2 strips), 19 mm spacing |
| BCPME084S                | 84-circuit solid core power & energy meter w/Ethernet, 100 A CTs (4 strips), 19 mm spacing |
| BCPME142S                | 42-circuit solid core power & energy meter w/Ethernet, 100 A CTs (2 strips), 25 mm spacing |
| BCPME184S                | 84-circuit solid core power & energy meter w/Ethernet, 100 A CTs (4 strips), 25 mm spacing |
| BCPME224S                | 24-circuit solid core power & energy meter w/Ethernet, 100 A CTs (2 strips), 18 mm spacing |
| BCPME236S                | 36-circuit solid core power & energy meter w/Ethernet, 100 A CTs (2 strips), 18 mm spacing |
| BCPME242S                | 42-circuit solid core power & energy meter w/Ethernet, 100 A CTs (2 strips), 18 mm spacing |
| BCPME248S                | 48-circuit solid core power & energy meter w/Ethernet, 100 A CTs (4 strips), 18 mm spacing |
| BCPME272S                | 72-circuit solid core power & energy meter w/Ethernet, 100 A CTs (4 strips), 18 mm spacing |
| BCPME284S                | 84-circuit solid core power & energy meter w/Ethernet, 100 A CTs (4 strips), 18 mm spacing |

BCPM

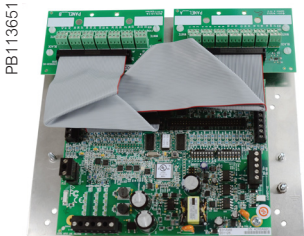

PB113651



BCPMSCA1S

BCPMSCxY63S 42-circuit split-core models come with the main board, (2) adapter boards and ribbon cables all mounted on a backplate, to simplify installation.



PE86183



LVCT00050S

PowerLogic™ LVCT0xxxS Split-core Low-voltage (1/3V) CTs for Aux inputs (Mains) are ideal for retrofit applications



PB113652

PB113657

PB113658



LVCT20050S

PowerLogic™ LVCT2xxxS Low-voltage (1/3V) solid core CTs for Aux inputs (Mains) are ideal for panel builders (small, medium, large)

BCPM part numbers for solid and split-core CTs (contd.)

| BCPM with split-core CTs |   |
|--------------------------|---|
| Commercial ref. no.      | Description   |
| BCPMSCA1S                | 42-circuit split-core power and energy meter, CTs and cables sold separately                          |
| BCPMSCA2S                | 84-circuit split-core power and energy meter, CTs and cables sold separately                          |
| BCPMSCA30S               | 30-circuit split-core power and energy meter, (30) 50 A CTs & (2) 1.2 m cables                        |
| BCPMSCA42S               | 42-circuit split-core power and energy meter, (42) 50 A CTs & (2) 1.2 m cables                        |
| BCPMSCA60S               | 60-circuit split-core power and energy meter, (60) 50 A CTs & (4) 1.2 m cables                        |
| BCPMSCAY63S              | 42-circuit split-core power and energy meter, all boards on backplate, CTs and cables sold separately |
| BCPMSCA84S               | 84-circuit split-core power and energy meter, with (84) 50 A CTs & (4) 1.2 m cables                   |
| BCPMSCE1S                | 42-circuit split-core power and energy meter w/Ethernet, CTs and cables sold separately               |
| BCPMSCE2S                | 84-circuit split-core power and energy meter w/Ethernet, CTs and cables sold separately               |
| BCPMSCE30S               | 30-circuit split-core power and energy meter w/Ethernet, (30) 50 A CTs & (2) 1.2 m cables             |
| BCPMSCE42S               | 42-circuit split-core power and energy meter w/Ethernet, (42) 50 A CTs & (2) 1.2 m cables             |
| BCPMSCE60S               | 60-circuit split-core power and energy meter w/Ethernet, (60) 50 A CTs & (4) 1.2 m cables             |
| BCPMSCE84S               | 84-circuit split-core power and energy meter w/Ethernet, (84) 50 A CTs & (4) 1.2 m cables             |

The PowerLogic™ BCPM uses .333 V AC output split-core CTs for the auxiliary inputs. These CTs are ordered separately from the BCPM.

# BCPM

| Commercial ref. no.                                     |   |                   |
|---|---|-------------------|
| BCPM split-core branch CTs and adapter boards           |   |                   |
| BCPMSCADPBS   | BCPM adapter boards, quantity 2, for split-core BCPM      |                   |
| BCPMSCCT0   | BCPM 50 A split-core CTs, Quantity 6, 1.8 m lead lengths  |                   |
| BCPMSCCT0R20  | BCPM 50 A split-core CTs, quantity 6, 6 m lead lengths    |                   |
| BCPMSCCT1   | BCPM 100 A split-core CTs, Quantity 6, 1.8 m lead lengths |                   |
| BCPMSCCT1R20  | BCPM 100 A split-core CTs, Quantity 6, 6 m lead lengths   |                   |
| BCPMSCCT3   | BCPM 200 A split-core CTs, Quantity 1, 1.8 m lead lengths |                   |
| BCPMSCCT3R20  | BCPM 200 A split-core CTs, Quantity 1, 6 m lead lengths   |                   |
| Commercial ref. no.                                     |   |                   |
| Additional accessories for use with BCPM products       |   |                   |
| BCPMCOVERS  | BCPM circuit board cover                                  |                   |
| BCPMREPAIR  | CT repair kit for solid core BCPM (includes one CT)       |                   |
| CBL016  | Flat Ribbon cable (quantity 1) for BCPM, length = 1.2 m   |                   |
| CBL017  | Flat Ribbon cable (quantity 1) for BCPM, length = 1.5 m   |                   |
| CBL018  | Flat Ribbon cable (quantity 1) for BCPM, length = 1.8 m   |                   |
| CBL020  | Flat Ribbon cable (quantity 1) for BCPM, length = 3.0 m   |                   |
| CBL021  | Flat Ribbon cable (quantity 1) for BCPM, length = 6.1 m   |                   |
| CBL022  | Round Ribbon cable (quantity 1) for BCPM, length = 1.2 m  |                   |
| CBL024  | Round Ribbon cable (quantity 1) for BCPM, length = 6.1 m  |                   |
| 1/3 V low-voltage Split-core CTs for Aux inputs (Mains) |   |                   |
| Commercial ref. no.                                     | Amperage rating   | Inside dimensions |
| LVCT00050S  | 50 A  | 10 mm x 11 mm     |
| LVCT00101S  | 100 A   | 16 mm x 20 mm     |
| LVCT00202S  | 200 A   | 32 mm x 32 mm     |
| LVCT00102S  | 100 A   | 30 mm x 31 mm     |
| LVCT00202S  | 200 A   | 30 mm x 31 mm     |
| LVCT00302S  | 300 A   | 30 mm x 31 mm     |
| LVCT00403S  | 400 A   | 62 mm x 73 mm     |
| LVCT00603S  | 600 A   | 62 mm x 73 mm     |
| LVCT00803S  | 800 A   | 62 mm x 73 mm     |
| LVCT00804S  | 800 A   | 62 mm x 139 mm    |
| LVCT01004S  | 1000 A  | 62 mm x 139 mm    |
| LVCT01204S  | 1200 A  | 62 mm x 139 mm    |
| LVCT01604S  | 1600 A  | 62 mm x 139 mm    |
| LVCT02004S  | 2000 A  | 62 mm x 139 mm    |
| LVCT02404S  | 2400 A  | 62 mm x 139 mm    |
| 1/3 V low-voltage Solid core CTs for Aux inputs (Mains) |   |                   |
| Commercial ref. no.                                     | Amperage rating   | Inside dimensions |
| LVCT20050S  | 50 A  | 10 mm             |
| LVCT20100S  | 100 A   | 10 mm             |
| LVCT20202S  | 200 A   | 25 mm             |
| LVCT20403S  | 400 A   | 31 mm             |

# BCPM

## Technical specifications

| Electrical characteristics                 |                           |  |
|--|---------------------------|--|
| Type of measurement                        |                           |  |
| Accuracy                                   | Power/energy              | 1 % system accuracy (including 50A or 100A branch CTs)   |
|  | Voltage                   | ±0.5 % of reading  |
|  | Current                   | ±0.5 % of reading  |
| Minimum "ON" current                       |                           | 50mA   |
| Sampling rate Points per cycle             |                           | 2560 Hz  |
| Data update rate                           |                           | 1.8 seconds (Modbus), 14 seconds (BACnet) 20 sec (SNMP)  |
| Input-voltage characteristics              | Measured voltage          | 150 – 480 V AC L-L<br>90 – 277 V AC L-N  |
| Power supply                               | AC                        | 100 – 277 V AC (50/60 Hz)  |
| Auxiliary CT Current Input Range           |                           | 0-0.333V; CTs must be rated for use with Class 1 voltage inputs  |
| Mechanical characteristics                 |                           |  |
| Weight                                     |                           | 1.5 kg   |
| Dimensions                                 | A/B/C model Circuit board | 288 x 146 mm   |
| E model housing (w/brackets on long sides) |                           | 253 mm W x 307 mm H x 71 mm D  |
| E model housing (w/brackets on short ends) |                           | 210 mm W x 353 mm H x 71 mm D  |
| Environmental conditions                   |                           |  |
| Operating temperature                      |                           | 0 to 60 °C   |
| Storage temperature                        |                           | -40 °C to 70 °C  |
| Installation category                      |                           | CAT III, pollution degree 2  |
| Safety                                     |                           |  |
| Europe                                     |                           | IEC 61010  |
| U.S. and Canada                            |                           | UL 508 Open type device  |
| Communication                              |                           |  |
| RS-485 (A/B/C models)                      |                           | Baud rate: DIP-switch selectable 9600, 19200, 38400<br>DIP-switch selectable 2-wire or 4-wire RS-485. Parity selectable: Even, Odd or None.  |
| RS-485 (A models)                          |                           | Baud rate: configured via Web-server. Baud selectable: 9600, 19200, 38400. Parity selectable: Even, Odd or None. 2-wire RS-485.  |
| Ethernet (E models)                        |                           | 10/100 Mbit Ethernet. RJ-45 connection. Static IP or DHCP.   |
| Protocols                                  |                           | Modbus RTU on all models, BCPME models also support Modbus TCP, SNMP, BACnet IP & BACnet MS/TP   |
| Firmware characteristics                   |                           |  |
| Detection of over-voltage/under-voltage    |                           | User-defined alarm thresholds for over-voltage and under-voltage detection   |
| Alarms                                     |                           | Four alarm levels: high-high, high, low and low-low (users define the setpoints for each). Each alarm has a latching status to alert the operator that an alarm has previously occurred. High and Low alarms have instantaneous status to let the operator know if the alarm state is still occurring. |
| Firmware update                            |                           | Update via Modbus  |


# BCPM

## 1/3 V low-voltage CT (LVCT) for Mains - Technical specifications




| Electrical characteristics        |  |
|-----------------------------------|--|
| Accuracy                          | 1 % from 10 % to 100 % of rated current(LVCT0xxx0S/1S/2S/3S/4S [split-core])<br>0.5 % from 5 % to 100 % of rated current (LVCT2xxx0S/2S/3S [solid core])                       |
| Frequency range                   | 50/60 Hz   |
| Leads                             | 18 AWG, 600 V AC, 1.8m standard length   |
| Max. voltage L-N sensed conductor | 300 V AC (LVCT0xxx0S)<br>600 V AC (LVCT0xxx1S/2S/3S/4S, LVCT2xxxxS)  |
| Environmental conditions          |  |
| Operating temperature             | 0 °C to 70 °C (LVCT0xxx0S/1S)<br>-15 °C to 60 °C (LVCT0xxx2S/3S/4S less than 2400A)<br>-15 °C to 60 °C (LVCT02404S [2400A])<br>-40 °C to 85 °C (LVCT2xxx0S/2S/3S [solid core]) |
| Storage temperature               | -40 °C to 105 °C (LVCT0xxx0S/1S)<br>-40 °C to 70 °C (LVCT0xxx2S/3S/4S)<br>-50 °C to 105 °C (LVCT2xxx0S/2S/3S [solid core])   |
| Humidity range                    | 0 to 95 % non-condensing   |

# BCPM

## PowerLogic™ BCPM dimensions

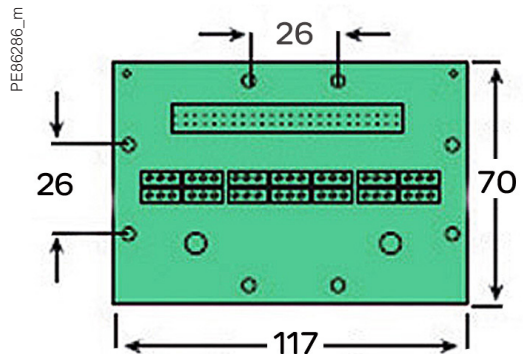


PowerLogic™ BCPM adapter board (one board per 21 split-core branch CTs)

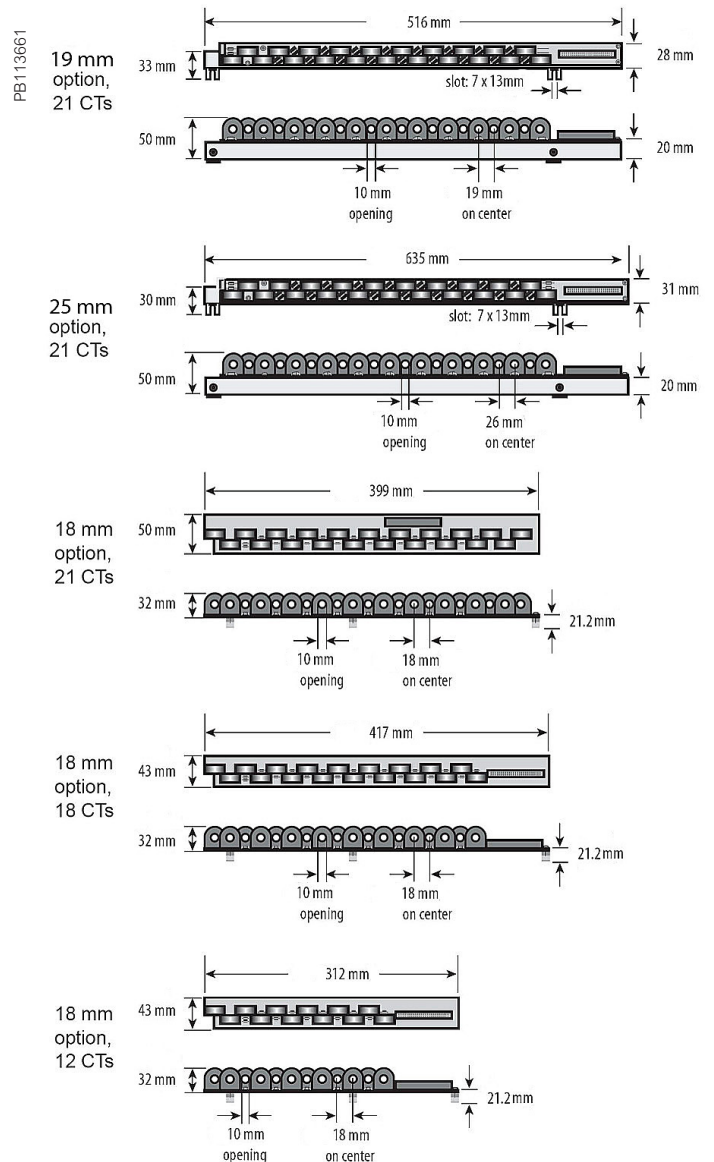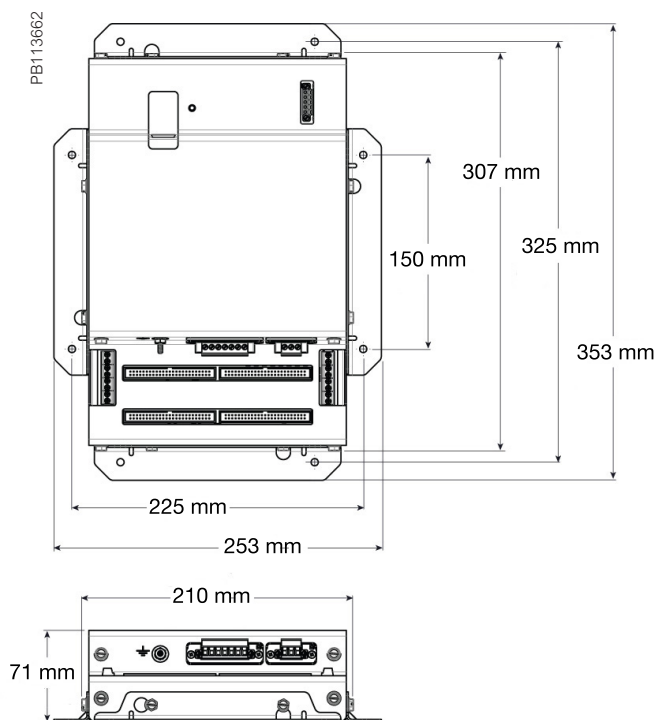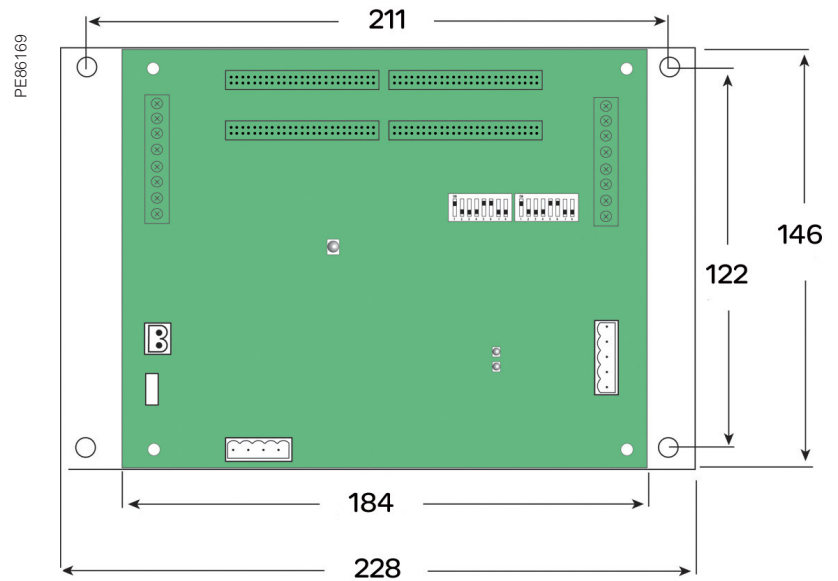


BCPM

50 A-200 A Split-core CT dimensions

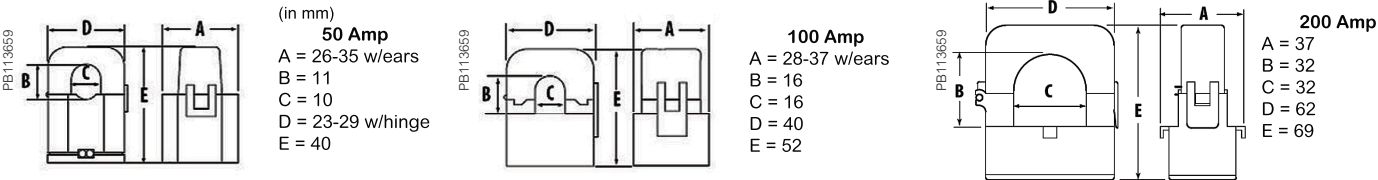


These dimensions apply to both BCPMSCCTxx (branch CTs) and LVCT0xxxx0S/1S (for Mains) 50 A-200 A CT families.

Solid core CT dimensions

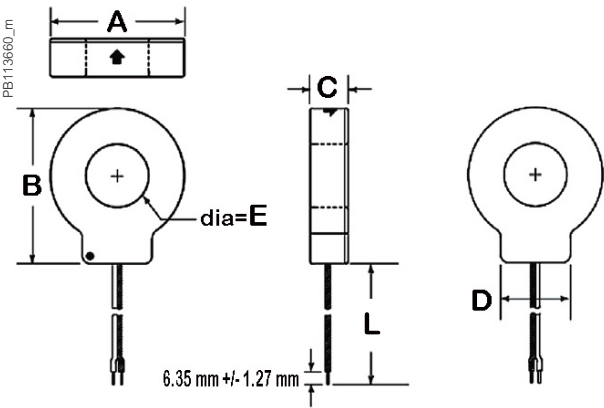

| Model      | L     | A     | B     | C     | D     | E     |
|------------|-------|-------|-------|-------|-------|-------|
| LVCT20050S | 1.8 m | 33 mm | 38 mm | 18 mm | 21 mm | 10 mm |
| LVCT20100S |       |       |       |       |       |       |
| LVCT20202S | 1.8 m | 59 mm | 66 mm | 18 mm | 31 mm | 25 mm |
| LVCT20403S | 1.8 m | 70 mm | 82 mm | 25 mm | 36 mm | 31 mm |


1/3 V low-voltage CT form factor

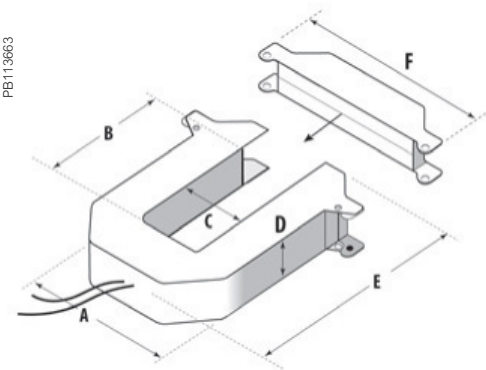


| Small form factor<br>100/200/300 Amp   | Medium form factor<br>400/600/800 Amp   | Large form factor<br>800/1000/1200/<br>1600/2000/2400 Amp                      |
|--|---|--|
| A = 96 mm<br>B = 30 mm<br>C = 31 mm<br>D = 30 mm<br>E = 100 mm<br>F = 121 mm | A = 125 mm<br>B = 73 mm<br>C = 62 mm<br>D = 30 mm<br>E = 132 mm<br>F = 151 mm | A = 125 mm<br>B = 139 mm<br>C = 62 mm<br>D = 30 mm<br>E = 201 mm<br>F = 151 mm |

# BCPM

## PowerLogic™ BCPM with solid core CT strips installation details

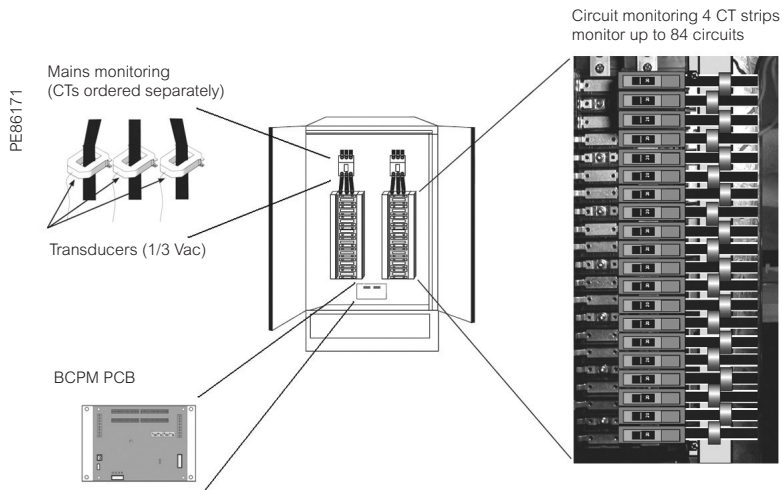

## PowerLogic™ BCPM with split-core CTs installation details

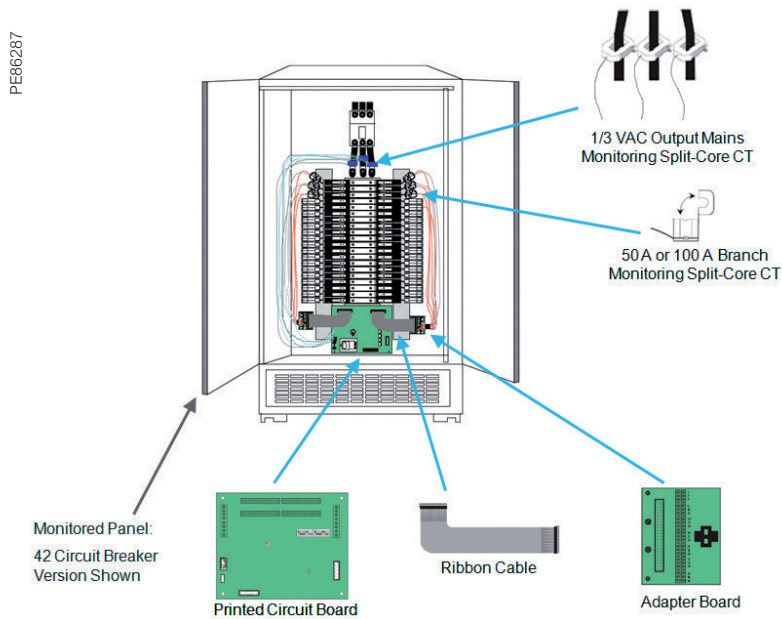


# PowerLogic™ EM4000 series

The compact PowerLogic™ EM4000 series multi-circuit energy meter from Schneider Electric enables the reliable monitoring of building electrical loads with a low installation cost-per-point by combining revenue-accurate electricity sub-metering with advanced communications technology.

## Applications

- Energy management
- Energy cost allocation
- Utility bill verification

PB113714

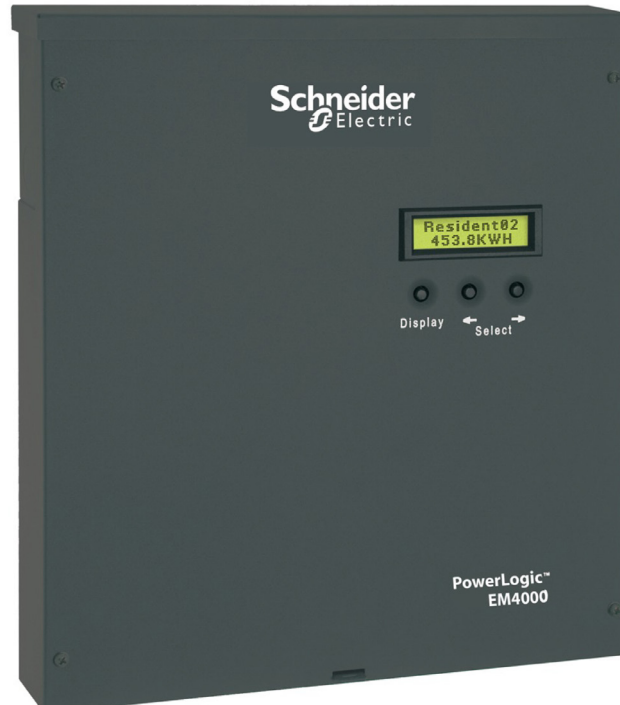

METSEEM403316

### The solution for

Markets that can benefit from a solution that includes PowerLogic™ EM4000 series meters:

- Buildings
- Industry
- Healthcare
- Data Centre and networks
- Infrastructure

### Benefits

System integrators' benefit

- Ease of integration
- Ease of setup
- Cost effectiveness

Panel builders' benefit

- Ease of installation
- Cost effectiveness
- Aesthetically pleasing
- Simplified ordering

End users' benefit

- Ease of use
- Precision metering & sub-billing
- Billing flexibility
- Comprehensive, consistent and superior performance

### Competitive advantages

- Compact, maintenance-free design
- Hi-density, flexible connection
- Direct connection
- Multiple CT types
- No rewiring required
- Integrated communications networks.

### Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximise electrical network reliability and availability, and optimise electrical asset performance.

### Conformity of standards

- |                 |                 |
|-----------------|-----------------|
| • IEC 61557-12  | • IEC 61000-4-3 |
| • IEC 62053-22  | • IEC 61000-4-4 |
| • IEC 62053-24  | • IEC 61000-4-5 |
| • IEC 61010-1   | • IEC 61000-4-6 |
| • IEC 61000-4-2 | • IEC 61000-4-8 |

# EM4000 series



EM4000 series multi-circuit energy meter

The compact PowerLogic™ EM4000 series multi-circuit energy meter from Schneider Electric enables the reliable monitoring of building electrical loads with a low installation cost-per-point by combining revenue-accurate electricity sub-metering with advanced communications technology.

The EM4000 is ideal for departmental metering applications and M&V within office towers, condominiums, apartment buildings, shopping centres and other multi-user environments, or small-footprint retail.

The PowerLogic™ EM4000 series meters monitor up to 24 meter points with a single device. Multiple meters can be combined to support an unlimited number of points.

Two meter models offer a choice of CTs and installation options:

- PowerLogic™ EM4033: 333 mV, split-core CTs
- PowerLogic™ EM4080: 80 mA solid core CTs


## Main characteristics

- Compact, maintenance-free design
  - Requires no floor space
- Hi-density, flexible connection
  - From single-pole to single- or three-phase metering, supports up to 24 circuits.
  - Select the connection type using an intuitive configuration tool.
- Direct connection
  - For 100 - 300 V AC L-N electrical distribution systems: 120/240 V, 120/208 V, 277/480 V
- Multiple CT types
  - Support a variety of needs in both new and retrofit installations.
  - 1/3 V output CT option does not require shorting blocks, making it the ideal choice for retrofit installations.
- No rewiring required
  - Use existing wiring to connect to existing panels.
- Integrated communications networks.
  - Onboard Ethernet or RS-485 allows for easy integration into existing communications networks.

## Feature selection

| Commercial ref. no. | Model  | Description                                   |
|---------------------|--------|---|
| METSEEM403316       | EM4033 | 24 x 333 mV inputs, 120 V control power 60 Hz |
| METSEEM403336       |        | 24 x 333 mV inputs, 277 V control power 60 Hz |
| METSEEM408016       | EM4080 | 24 x 80 mA inputs, 120 V control power 60 Hz  |
| METSEEM408036       |        | 24 x 80 mA inputs, 277 V control power 60 Hz  |


# EM4000 series

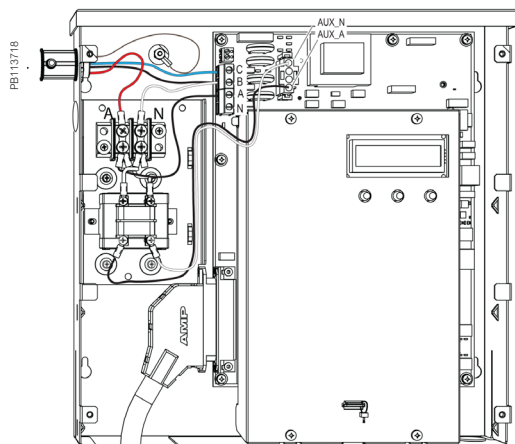

PowerLogic™ EM4000 meter 480Y/277V three-phase wye service connection

## Selection guide

| General  |   | EM4033 | EM4080 |
|--|---|--------|--------|
| Use on LV systems  |   | ■      | ■      |
| Accuracy   | +/- 0.5 %   | ■      | ■      |
| Accuracy compliance  | ANSI C12.1 and C12.20 Class 0.5; IEC 62053-22, Class 0.5S | ■      | ■      |
| Maximum circuits: single-pole / single-phase / three-phase | 24 / 12 / 8   | ■      | ■      |
| Instantaneous rms values                                   |   |        |        |
| Energy   | real, kWh received/delivered                              | ■      | ■      |
|  | reactive, kvarh received/delivered                        | ■      | ■      |
|  | apparent, VAh   | ■      | ■      |
| Voltage  |   | ■      | ■      |
| Pulse counts   |   | ■      | ■      |
| Voltage and current  | V rms, I rms per phase                                    | ■      | ■      |
| Power  | real, reactive, apparent                                  | ■      | ■      |
| Power factor   |   | ■      | ■      |
| Measurements available for data logging                    |   |        |        |
| Energy   | real, kWh received/delivered                              | ■      | ■      |
|  | reactive, kvarh received/delivered                        | ■      | ■      |
|  | apparent, VAh   | ■      | ■      |
| Voltage  |   | ■      | ■      |
| Display  |   |        |        |
| Backlit LCD display  | 2 lines of 16 characters                                  | ■      | ■      |
| Optional remote modular display available                  |   | ■      | ■      |
| Communication  |   |        |        |
| Ethernet port  |   | ■      | ■      |
| MODBUS-RTU over RS-485                                     |   | ■      | ■      |
| Pulse inputs   | 2   | ■      | ■      |
| Protocols: Modbus TCP/IP, HTTP, BACnet/IP, FTP, and SNTP   |   | ■      | ■      |
| Installation options                                       |   |        |        |
| 0.333 V CTs  |   | ■      |        |
| 80 mA CTs  |   |        | ■      |
| Split-core CT  |   | ■      |        |
| Solid core CT  |   | ■      | ■      |

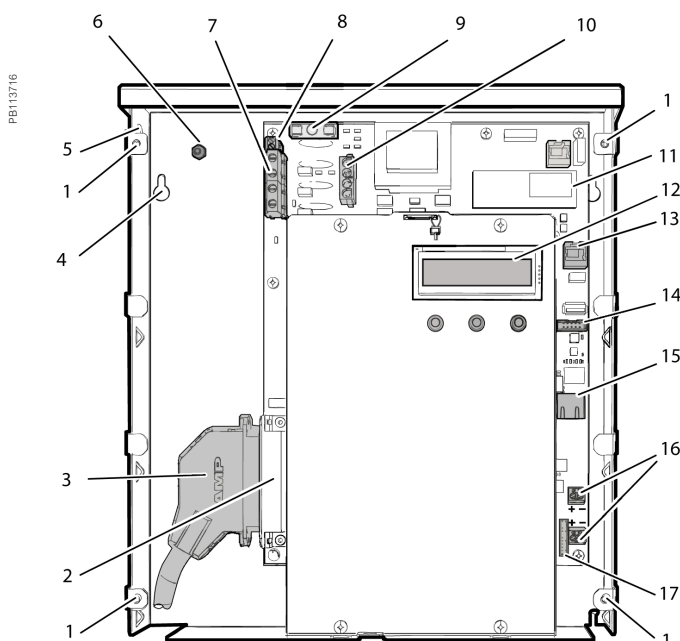

PowerLogic™ EM4033 and PowerLogic™ EM4080 internal view.

### Legend:

- 1 Cover screw location
- 2 Meter point input connector
- 3 Cable connector
- 4 Mounting keyhole
- 5 Ingress punch-outs
- 6 Earth stud
- 6 Sense voltage terminal block
- 8 Control voltage terminal block
- 9 Fuse
- 10 Control voltage jumper
- 11 RTU interface
- 12 Display
- 13 Remote display connector
- 14 Serial RS-232
- 15 Ethernet port
- 16 Pulse in terminal blocks
- 17 Pulse out connector


# EM4000 series

## EM4000 technical specifications


| Electrical characteristics                               |                  |   |
|--|------------------|---|
| Input-voltage characteristics                            | Inputs           | V1, V2, V3, Vn  |
|  | Measured voltage | 80 - 480 V AC L-L without PTs<br>Up to 999 kV with external PTs   |
|  | Frequency range  | 60 Hz   |
| Mechanical characteristics                               |                  |   |
| Weight   | EM4033/EM4080    | approx. 4.0 kg  |
| Dimensions   | EM4033/EM4080    | 335 x 305 x 55 mm   |
| Environmental conditions                                 |                  |   |
| Operating temperature                                    |                  | -40 °C to 70 °C   |
| Storage temperature                                      |                  | -40 °C to 70 °C   |
| Humidity rating  |                  | 0 % to 90 % RH non-condensing   |
| Enclosure  |                  | Type 1 (indoor or enclosed outdoor use)   |
| Altitude   |                  | 3000 m  |
| Pollution degree   |                  | 2   |
| Safety and standards                                     |                  |   |
| UL Certified to IEC/EA/CSA 61010-1                       |                  |   |
| CSA-C22.2 No 61010-1-04                                  |                  |   |
| FCC Part 15 Class B                                      |                  |   |
| ICES-003 EN 55022, IEC 6100-4-5                          |                  |   |
| ANSI/TIA968-A: 2002                                      |                  |   |
| Communication  |                  |   |
| Ports  |                  | Ethernet  |
|  |                  | MODBUS-RTU over RS-485  |
| Pulse inputs   |                  | 2   |
| Protocols: Modbus TCP/IP, HTTP, BACnet/IP, FTP, and SNMP |                  |   |
| Display characteristics                                  |                  |   |
| Integrated backlit LCD display                           |                  | 2 lines, 16 digits per line display;<br>R / L arrow buttons select metering point;<br>Display button cycles through measurements per point. |

# EM4000 series

## EM4X00, CT termination, PT module

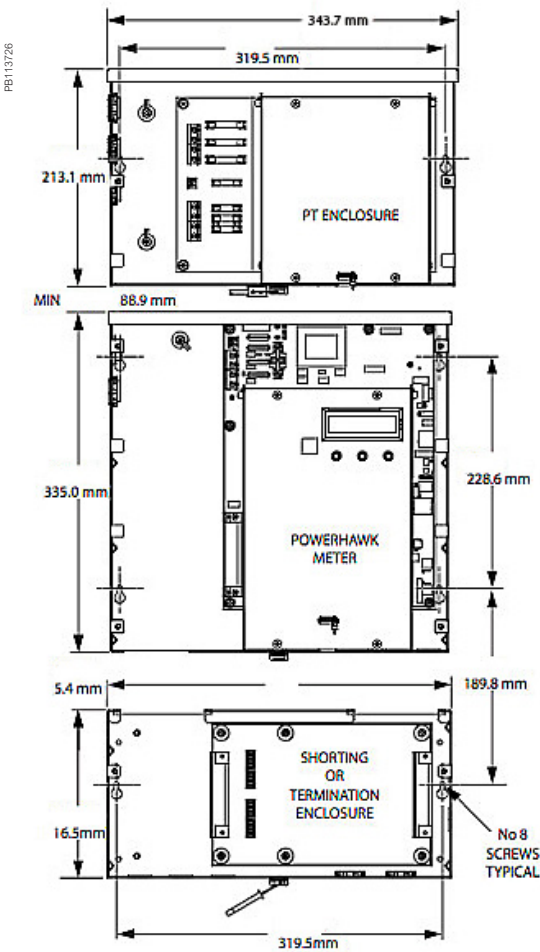

## EM4X00, CT termination, PT module

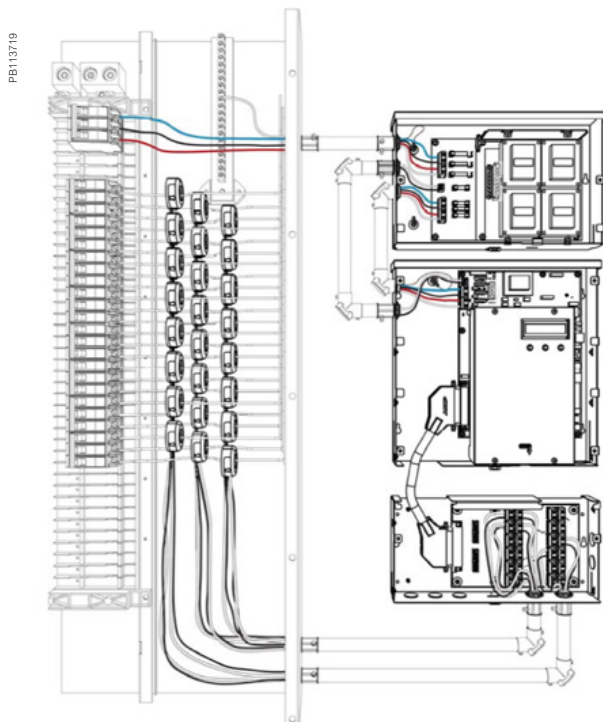

# EM4000 series

PB110724



METSEPTMOD480

## PT Module

The PT module provides step-down voltage connections to Schneider Electric PowerLogic™ meters for metering single-phase to three-phase voltages of 600 V, 347 V, or 400 V, while meeting all regulatory electrical safety and ANSI 0.5 Accuracy Class standards. The PT module provides both the per-phase input metering voltages and the auxiliary input power required by Schneider Electric PowerLogic™ energy meters.

There are two variants of the PT module that support the following source voltages and wiring configurations:

- 347 V Wye / 600 V Delta variant supports:
  - 347 V, three-phase, 4-wire wye
  - 600 V, three-phase, 3-wire delta
- 480V Delta variant supports:
  - 480 V, three-phase, 3-wire delta


The 347 V/600 V PT module variant has three sense voltage potential transformers for metering. The configuration of the transformers (347 V wye or 600 V delta) is selected by using the jumper provided. The 480V PT module has two sense voltage potential transformers for metering. There is a separate auxiliary power transformer in both variants to operate the meter. All voltage inputs are fused.

| PowerHawk PT module specifications |                       |  |                            |
|------------------------------------|-----------------------|--|----------------------------|
| Dimensions                         | Height                | 213.1 mm                               |                            |
|                                    | Width                 | 54 mm                                  |                            |
|                                    | Depth                 | 54 mm                                  |                            |
|                                    | Weight                | 5.67 kg                                |                            |
| Fuse ratings                       | High voltage inputs   | F1                                     | T315 mA, 1000 V            |
|                                    |                       | F2                                     | T315 mA, 1000 V            |
|                                    |                       | F3                                     | T315 mA, 1000 V            |
|                                    | Voltage inputs        | F4                                     | T250 mA, 250 V             |
|                                    |                       | F5                                     | T250 mA, 250 V             |
|                                    |                       | F6                                     | T250 mA, 250 V             |
|                                    |                       | F7                                     | T250 mA, 250 V             |
| Transformer specifications         | Input voltage         | 600 V                                  | Voltage tolerance: +/-10 % |
|                                    |                       | 480 V                                  | Voltage tolerance: +/-10 % |
|                                    |                       | 347 V                                  | Voltage tolerance: +/-10 % |
|                                    | Output voltage        | 120 V                                  | Accuracy: 0.3 %            |
| Environmental                      | Operating temperature | -40 °C to 70 °C                        |                            |
|                                    | Operating humidity    | 5 % to 90 % non-condensing             |                            |
|                                    | Usage environment     | Indoor or enclosed outdoor environment |                            |
|                                    | Maximum altitude      | 3000 m                                 |                            |
|                                    | Pollution degree      | 2                                      |                            |

## Feature selection

| Commercial ref. no. | Description                            |
|---------------------|--|
| METSEPTMOD480       | 480 V PT Module for EM4X00 meter       |
| METSEPTMOD347600    | 347 V/600 V PT Module for EM4X00 meter |

# EM4000 series

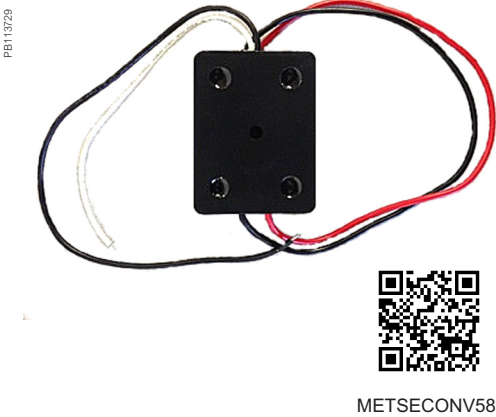

## CT Module

PowerLogic™ 4080 meters have two shorting options that provide a seamless and sealable mechanical package. The CT Shorting Module provides CT connections via the color coded 25 pair cable routed into the breaker panel. All CTs are shorted at the same time for safe removal of the meter for maintenance when the electrical circuits are still live.


The CT Termination Module has the same shorting ability, but provides CT connections via 24 2-position screw-down terminal blocks. Individual pairs are then routed from the CT Termination Module to 1 or more breaker panels via conduit knock outs provided on the module. Thus eliminating the need for a splitter box to route CT cables to multiple panels.

| Commercial ref. no. | Description                            |
|---------------------|--|
| METSECTTERM         | CT Termination Module for EM4X00 meter |
| METSECTSHORT        | CT Shorting Module for EM4X00 meter    |

## Converter

The 5 A:80 mA converter is useful in applications where there are existing 5 A CT's integrated into large motors or switch gear. The 5 A:80 mA converter matches the 5 A secondary of the load to the 80 mA input of the meter. In Billing Grade applications, the 5 A:80 mA converter is also used to connect regulatory grade large aperture, large amperage CT's with 5 A secondaries to the 80 mA of PowerLogic™ 4X80 meters.


| Commercial ref. no. | Description                            |
|---------------------|--|
| METSECONV580        | 5 A : 80 mA converter for EM4X00 meter |

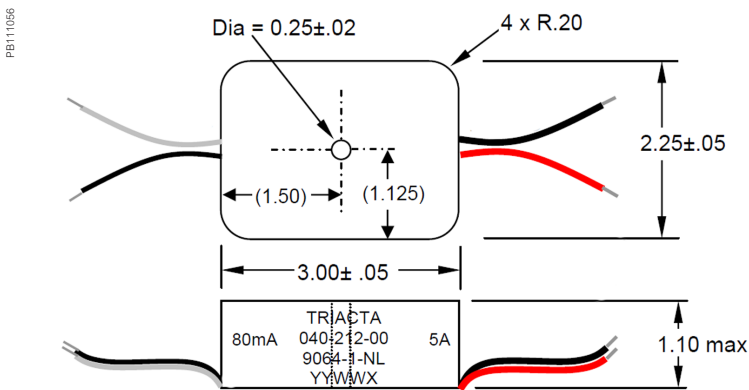

The 5 A to 80 mA converter dimensions

See appropriate **Installation Guide** for this product.

## EM4000 series

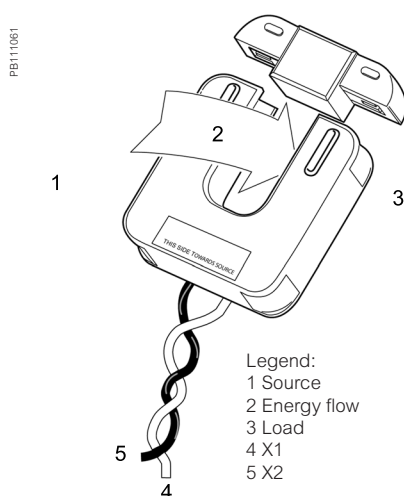


CTs

- Model 8 (80/100 mA Secondary)
- Window Size: 82.5 mm Diameters
- Application: Metering
- Frequency: 50-400 Hz
- Insulation Level: 600 Volts, 10 Kv BIL Full Wave
- Flexible leads available for all case configurations. Flexible leads are UL 1015 105 °C, CSA approved #16 AWG, 609.6 mm long standard length. Non-standard lengths are available upon request.
- Terminals are brass studs No. 8-32 UNC with one flat washer, one lock washer and one nut each. Terminals are only available on the square case configuration.
- Mounting brackets kits for the Model 8SHT are available when required.
- Approximate weight: 1.36 kg




200 A CT

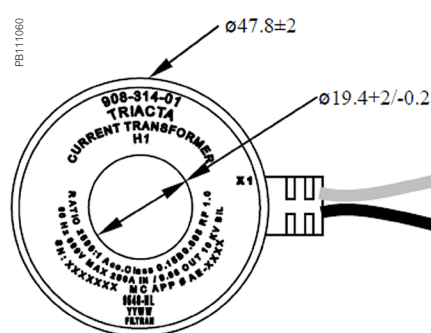

200 A CT dimensions




400 A CT

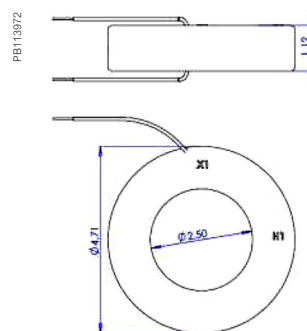


400 A CT dimensions

## Feature selections

| Commercial reference number | Description   |
|-----------------------------|---|
| METSECT80200                | CT, solid core, 200 A primary, 80 mA secondary, for use with EM4X80 multi-circuit meter |
| METSECT80400                | CT, solid core, 400 A primary, 80 mA secondary, for use with EM4X80 multi-circuit meter |
| METSECT80600                | CT, solid core, 600 A primary, 80 mA secondary, for use with EM4X80 multi-circuit meter |

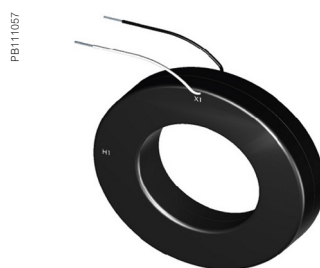

METSECT80600 600 A 80 mA CT

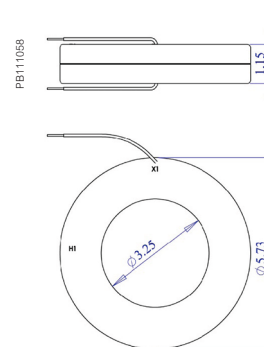

600 A 80 mA CT dimensions

# PowerLogic™ EM4800 series


The compact PowerLogic™ EM4800 series multi-circuit energy meter from Schneider Electric enables reliable metering of individual tenants with a low installation cost-per-point by combining revenue-accurate electricity sub-metering with advanced communications technology. The ideal fit for high-end cost management applications, providing the measurement capabilities needed to allocate energy usage, perform tenant metering and sub-billing, pin-point energy savings, optimise equipment efficiency and utilisation, and perform a high level assessment of the power quality in an electrical network.

## Applications

Capable of essential cost management:

- Multi-tenant metering
- Energy management
- Energy cost allocation
- Utility bill verification

PE66325

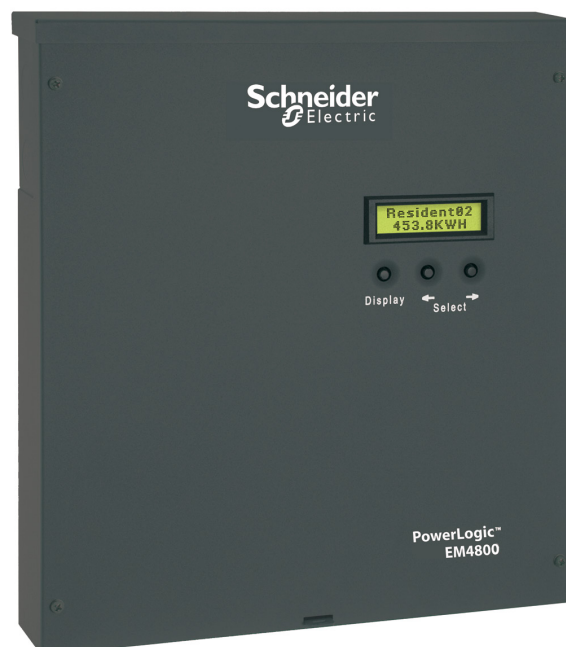

METSEEM480525

### The solution for

Markets that can benefit from a solution that includes PowerLogic™ EM4800 series meters:

- Buildings
- Industry
- Healthcare
- Data Centre and networks
- Infrastructure

### Benefits

System integrators' benefit

- Ease of integration
- Ease of setup
- Cost effectiveness

Panel builders' benefit

- Ease of installation
- Cost effectiveness
- Aesthetically pleasing
- Simplified ordering

End users' benefit

- Ease of use
- Precision metering & sub-billing
- Billing flexibility
- Comprehensive, consistent and superior performance

### Competitive advantages

- Compact, maintenance-free design
- Hi-density, flexible connection
- Direct connection
- Multiple CT types
- No rewiring required
- Integrated communications


### Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximise electrical network reliability and availability, and optimise electrical asset performance.

### Conformity of standards

- |                 |                 |
|-----------------|-----------------|
| • IEC61557-12   | • IEC 61000-4-3 |
| • IEC62053-22   | • IEC 61000-4-4 |
| • IEC62053-24   | • IEC 61000-4-5 |
| • IEC 61010-1   | • IEC 61000-4-6 |
| • IEC 61000-4-2 | • IEC 61000-4-8 |

# EM4800 series

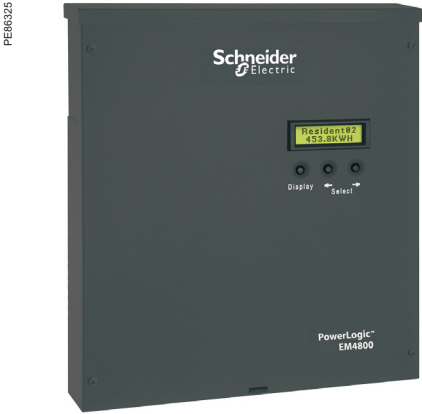

EM4800 series multi-circuit energy meter front (above), installed in panel (below)



The compact PowerLogic™ EM4800 series multi-circuit energy meter from Schneider Electric enables reliable metering of individual tenants with a low installation cost-per-point by combining revenue-accurate electricity sub-metering with advanced communications technology.

The EM4800 is ideal for multi-tenant or departmental metering applications within office towers, condominiums, apartment buildings, shopping centres and other multi-user environments.

The PowerLogic™ EM4800 series meters monitor up to 24 tenants with a single device. Multiple meters can be combined to support an unlimited number of suites.

- Three meter models offer a choice of CT secondary ratings and installation options:
  - PowerLogic™ EM4805: 5 A, split or solid core CTs
  - PowerLogic™ EM4833: 0.333 V, split or solid core CTs
  - PowerLogic™ EM4880: 80 mA, solid core CTs
- Main characteristics
  - Compact, maintenance-free design
    - Requires no floor space.
- Hi-density, flexible connection
  - From single-pole to single- or three-phase metering, supports up to 24 circuits. Select the connection type using an intuitive configuration tool.
- Direct connection
  - For 100 - 300 V AC L-N electrical distribution systems:
    - 120/240 V, 120/208 V, 230/240 V, 220/380 V, 240/415 V, 277/480 V
- Multiple CT types
  - Support a variety of needs in both new and retrofit installations.
    - 1/3 V output CT option does not require shorting blocks, making it the ideal choice for retrofit installations.
- No rewiring required
  - Use existing wiring to connect to existing panels.
- Integrated communications
  - Onboard Ethernet and modem allows for easy integration into existing communications networks.

## Feature selections

| Commercial ref. no. | Model  | Description  |
|---------------------|--------|--|
| METSEEM480525       | EM4805 | 24 x 5 A inputs, 230/240 V control power, 50 Hz    |
| METSEEM480516       |        | 24 x 5 A inputs, 120 V control power, 60 Hz        |
| METSEEM483325       | EM4833 | 24 x 333 mV inputs, 230/240 V control power, 50 Hz |
| METSEEM483316       |        | 24 x 333 mV inputs, 120 V control power, 60 Hz     |
| METSEEM488016       | EM4880 | 24 x 80 mA inputs, 120 V control power, 60 Hz      |
| METSEEM488025       |        | 24 x 80 mA inputs, 230/240 V control power, 50 Hz  |

# EM4800 series

## Selection guide

| General  |  | EM4805 | EM4833 | EM4880 |
|--|--|--------|--------|--------|
| Use on LV systems  |  | ■      | ■      | ■      |
| Accuracy   | +/- 0.5 %  | ■      | ■      | ■      |
| Accuracy compliance  | ANSI C12.1 and C12.20 Class 0.5;<br>IEC 62053-22, Class 0.5S | ■      | ■      | ■      |
| Maximum circuits:<br>single-pole / single phase /<br>three-phase | 24 / 12 / 8  | ■      | ■      | ■      |
| Instantaneous rms values   |  |        |        |        |
| Energy   | Real, kWh received/delivered                                 | ■      | ■      | ■      |
|  | Reactive, kvarh received/<br>delivered                       | ■      | ■      | ■      |
|  | Apparent, VAh  | ■      | ■      | ■      |
| Voltage  |  | ■      | ■      | ■      |
| Pulse counts   |  | ■      | ■      | ■      |
| Voltage and current  | V rms, I rms per phase                                       | ■      | ■      | ■      |
| Power  | Real, reactive, apparent                                     | ■      | ■      | ■      |
| Power factor   |  | ■      | ■      | ■      |
| Measurements available for data logging                          |  |        |        |        |
| Energy   | Real, kWh received/delivered                                 | ■      | ■      | ■      |
|  | Reactive, kvarh received/<br>delivered                       | ■      | ■      | ■      |
|  | Apparent, VAh  | ■      | ■      | ■      |
| Voltage  |  | ■      | ■      | ■      |
| Display  |  |        |        |        |
| Backlit LCD display  | 2 lines of 16 characters                                     | ■      | ■      | ■      |
| Optional remote modular display available                        |  | ■      | ■      | ■      |
| Communication  |  |        |        |        |
| Ethernet port  |  | ■      | ■      | ■      |
| V.90 modem port  |  | ■      | ■      | ■      |
| Pulse inputs   | 2  | ■      | ■      | ■      |
| Protocols: Modbus TCP/IP, HTTP, BACnet/IP, FTP, and Sntp         |  | ■      | ■      | ■      |
| Installation options   |  |        |        |        |
| 5 A CTs  |  | ■      |        |        |
| 0.333 V CTs  |  |        | ■      |        |
| 80 mA CTs  |  |        |        | ■      |
| Split-core CT  |  | ■      | ■      |        |
| Solid core CT  |  | ■      | ■      | ■      |
| Remote modular display   |  | ■      | ■      | ■      |

# EM4800 series

| Electrical characteristics         |  |   |
|------------------------------------|--|---|
| Input-voltage characteristics      | Inputs   | V1, V2, V3, Vn  |
|                                    | Measured voltage   | 80 - 480 V AC L-L without PTs<br>Up to 999 kV with external PTs |
|                                    | Frequency range  | 50/60 Hz  |
| Mechanical characteristics         |  |   |
| Weight                             | EM4805   | approx. 5.4 kg  |
|                                    | EM4833/EM4880  | approx. 4.0 kg  |
| Dimensions                         | EM4805   | 335 x 44 x 55 mm  |
|                                    | EM4833 / EM4880  | 335 x 305 x 55 mm   |
| Environmental conditions           |  |   |
| Operating temperature              |  | -40 °C to 70 °C   |
| Storage temperature                |  | -40 °C to 70 °C   |
| Humidity rating                    |  | 0 % to 90 % RH non-condensing                                   |
| Enclosure                          |  | Type 1 (indoor or enclosed outdoor use)                         |
| Altitude                           |  | 3000 m  |
| Pollution degree                   |  | 2   |
| Safety and standards               |  |   |
| UL Certified to IEC/EA/CSA 61010-1 |  |   |
| CSA-C22.2 No 61010-1-04            |  |   |
| FCC Part 15 Class B                |  |   |
| ICES-003 EN55022, IEC 6100-4-5     |  |   |
| ANSI/TIA968-A: 2002                |  |   |
| Communication                      |  |   |
| Ports                              | Ethernet   |   |
|                                    | V.90 modem   |   |
| Pulse inputs                       | 2  |   |
| Protocols                          | Modbus TCP/IP, HTTP, BACnet/IP, FTP, and SNMP  |   |
| Display characteristics            |  |   |
| Integrated backlit LCD display     | 2 ines, 16 digits per line display;<br>R / L arrow buttons select metering point;<br>Display button cycles through measurements per point. |   |

# PowerLogic™ EM4900 series

The PowerLogic™ EM4900 Series Multi-Circuit Meters make it easy to add many metering points without having to purchase, mount, wire and commission individual energy meters. Simply add a single device with common voltage inputs and communication interface that can measure the current, voltage, power, energy consumption, and Total Harmonic Distortion (THD) of up to (14) 3-phase circuits with a single board or up to (28) 3-phase circuits with a two board configuration. Save on both equipment cost and installation.


## Applications

- Commercial and residential subtenant billing
- Load-based cost allocation
- Measuring for load balancing and demand response
- Overload protection

PB117150



PB117149

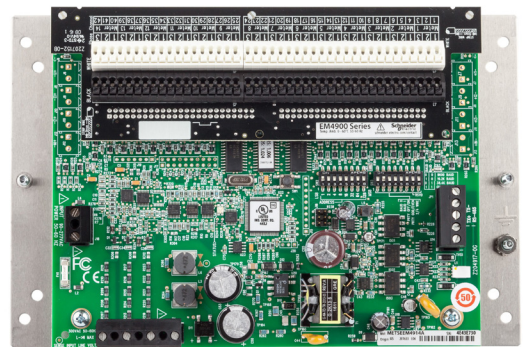

METSEEM4904E



METSEEM4904A

### The solution for

Markets that can benefit from a solution that includes PowerLogic™ EM4900 series meters:

- Buildings
- Industry
- Healthcare
- Hotels, Multi-Dweller Units (condos)

### Benefits

System integrators' benefit

- Ease of integration
- Ease of setup
- Cost effectiveness

Panel builders' benefit

- Ease of installation
- Cost effectiveness
- Aesthetically pleasing
- Simplified ordering

End users' benefit

- Ease of use
- Precision metering & sub-billing
- Billing flexibility
- Comprehensive, consistent and superior performance

### Competitive advantages

- Lower cost and space per metering point
- Adapts to any mix of metering needs (1ph, 2ph, 3ph with or without Neutral wire)
- Class 0.5 accuracy for Revenue Grade measurement
- THD monitoring to help identify problem loads and early wear and tear
- Capable of concurrent communication to software packages, including PowerLogic™ software packages and third party systems


### Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximise electrical network reliability and availability, and optimise electrical asset performance.

### Conformity of standards

- EN 61000-6-3 Class B - Part 6-3
- EN 61000-6-3 Class B - Part 6-3
- EN 61000-6-4 Class A - Part 6
- EN 61010-1 - Part 1
- EN 61326-1 Class A - Part 1
- EN 61326-1 Class B - Part 1
- IEC 62053-22 Class 0.5 - Part 21
- FCC 47 CFR Part 15 Class A & Class B
- UL 508 Open Device Type
- IEC 61010-1 - Part 1


# EM4900 series

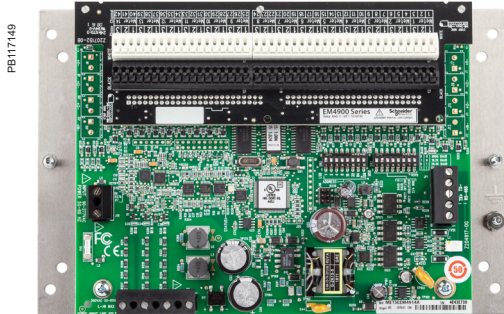

PowerLogic™ EM4914A



PowerLogic™ EM4914E

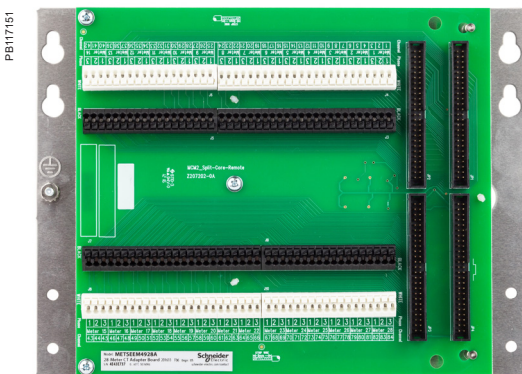

28 Meter adapter board (EM4928A and EM4928E)

To aid in commissioning, a configuration software tool, an Ethernet discovery tool (for the EM49xxE) and a User Guide are available online at [www.se.com](http://www.se.com).

- Main characteristics

- Add lots of metering points without lots of cost
  - Add up to 28 3-phase meters by installing a single product small enough to fit inside many distribution panels. Save on both equipment cost and installation cost. Common voltage and communication connections and color-coded push-in CT connections save installation time and effort.
- Class 0.5 accuracy for Revenue Grade measurements
  - Power and Energy measurements with ANSI and IEC class 0.5 accuracy provide the accuracy needed for tenant billing applications. Voltage and current measurement accuracy is 0.5 % and currents are measured down to 0.1% of the CT range. Easily differentiate between the flow of low current and a trip or load disconnect where no current flows.
- Total Harmonics Distortion measurements
  - Helps assess basic power quality to reduce risks to the load and provide indication of potential early wear and tear of the electrical network and its load.
- Common CTs, 1/3V outputs
  - CTs with low-voltage outputs eliminate the need for shorting blocks that add cost and labor to the installation. They also allow long CT lead extensions without compromising accuracy. Choose from a range of our CT styles and sizes or use any CTs with industry-standard 0.333V outputs.
- Models with integrated Ethernet offer broad protocol support
  - All models integrate easily into existing networks using Modbus RTU communications over an RS-485 serial link. EM49xxE models offer integrated Ethernet and add support for Modbus TCP, BACnet IP, BACnet MS/TP and SNMP. Those Ethernet protocols can be run in parallel allowing multiple software to access the device (Building Management System, Energy Management System, etc.) An optional external gateway can be added to EM49xxA models to offer the same capability.
- Compatible with PowerLogic™ power monitoring software
  - Easily turn the large amount of data collected by the devices into useful decision making information.
- Configure the meters you want
  - Choose 4, 8, 14 or 28 3-phase meters. User-configurable to any combination of 1-, 2-, 3-phase meters. Reconfigure channels as needed to monitor neutral current.

# EM4900 series

## Technical specifications

| Measurements  |  |
|---|--|
| Measurement voltage                                 | 90 to 300 V AC L-N, 50/60 Hz   |
| Total Harmonic Distortion (THD)                     | THD % voltage L-L, L-N and THD % on current  |
| Control power                                       |  |
| EM49xxA   | 90 to 277 V AC L-N, 50/60 Hz   |
| EM49xxE   | 100 to 277 V AC L-N, 50/60 Hz  |
| Accuracy  |  |
| Power/Energy  | IEC 62053-21 Class 0.5, ANSI C12.20 class 0.5  |
| Voltage   | ±0.5% of reading 90 to 277 V L-N   |
| Current   | ±0.5% of reading from 2% to 100% of full-scale   |
| Operation   |  |
| Sampling frequency                                  | 2560 Hz  |
| Update rate   | 1.8 seconds (both panels)  |
| Overload capability                                 | 22 kAIC  |
| EM49xxA serial communication                        |  |
| Type  | Modbus RTU   |
| Connection  | DIP switch-selectable 2-wire or 4-wire, RS-485   |
| Address   | DIP switch-selectable address 1 to 247 (in pairs of 2) (See Installation Guide)                        |
| Baud rate   | DIP switch-selectable 9600, 19200, 38400   |
| Parity  | DIP switch-selectable NONE, ODD, EVEN  |
| Communication format                                | 8 data bits, 1 start bit, 1 stop bit   |
| Termination   | 5-position plug-in connector (TX+ TX- SHIELD TX+/RX+ TX-/RX-)  |
| EM49xxE serial communication                        |  |
| Physical Interface                                  | 2-wire RS-485  |
| Serial protocols supported                          | Modbus RTU or BACnet MS/TP   |
| Address range                                       | 1 to 247 for Modbus RTU; 0 to 127 for BACnet MS/TP   |
| Baud rate   | 9600, 19200, 38400   |
| Parity  | Modbus RTU: NONE, ODD, EVEN BACnet MS/TP: NONE (fixed)   |
| Communication format                                | 8 data bits, 1 start bit, 1 stop bit   |
| Termination   | 2x3 position connector   |
| EM49xxE Ethernet communication                      |  |
| Physical interface                                  | Protocols Supported  |
| Protocols supported                                 | Modbus TCP, BACnet IP, SNMP V2c  |
| Wire size range                                     |  |
| Removable connectors on main board                  | 24 to 12 AWG   |
| CT Terminals and EM49xxE serial connector terminals | 26 to 16 AWG   |
| Terminal block torque                               |  |
| Removable connectors                                | 0.5 to 0.6 N-m   |
| Mechanical  |  |
| Ribbon cable support (28-meter models only)         | 0.9 m round ribbon cable ships standard; up to 6 m flat or round available                             |
| Operating conditions                                |  |
| Operating temperature range                         | 0 to 60 °C (<95% RH non-condensing)  |
| Storage temperature range                           | -40 to 70 °C   |
| Altitude of operation                               | 3000 m   |
| Mounting location                                   | Not suitable for wet locations. For indoor use only.   |
| Compliance information                              |  |
| Agency approvals                                    | UL 508 open type device <sup>(*)</sup> , IEC/EN 61010-1  |
| Installation category                               | Cat III, pollution degree 2 <sup>(*)</sup>   |
| Conducted emissions                                 | EM49xxA Models: FCC part 15 Class B, EN 61000-6-3, EN 61326-1 Class B (residential & light industrial) |
| Radiated emissions                                  | EM49xxE Models: FCC part 15 Class A, EN 61000-6-4, EN 61326-1 Class A                                  |
| Conducted and radiated immunity                     | EN 61000-6-2 and EN 61326-1  |

<sup>(\*)</sup> Install EM49xx in appropriate fire enclosure; if used with circuits higher than product ratings, circuits must be segregated per UL 508A Sec 17.5 (EM49xx internal circuitry are not circuits as defined by UL 508A).

<sup>(\*)</sup> A Pollution Degree 2 environment must control conductive pollution and the possibility of condensation or high humidity. Consideration must be given to the enclosure, the correct use of ventilation, thermal properties of the equipment and the relationship with the environment.

# EM4900 series


## 1/3 V low-voltage CT (LVCT)

| Electrical characteristics        |  |
|-----------------------------------|--|
| Accuracy                          | 1 % from 10 % to 100 % of rated current(LVCT0xxx0S/1S/2S/3S/4S [split-core])<br>0.5 % from 5 % to 100 % of rated current (LVCT2xxx0S/2S/3S [solid core])   |
| Frequency range                   | 50/60 Hz   |
| Leads                             | 18 AWG, 600 V AC, 1.8 m standard length  |
| Max. voltage L-N sensed conductor | 300 V AC (LVCT0xxx0S)<br>600 V AC (LVCT0xxx1S/2S/3S/4S, LVCT2xxxxS)  |
| Measurements                      |  |
| Real time measurements            | Current: multi-phase average and per phase<br>Current phase angle per branch<br>Real power (kW): multi-phase total and per phase<br>Apparent power (kVA): multi-phase total and per phase<br>Power factor: multi-phase average and per phase |
| Demand measurements               | Current present demand: multi-phase average and per phase<br>Real power (kW) present demand: multi-phase average and per phase   |
| Historic maximums                 | Maximum instantaneous current: multi-phase average and per phase<br>Maximum current demand: multi-phase average and per phase<br>Maximum real power demand: multi-phase total and per phase  |
| Accumulate energy                 | Energy (kWh): multi-phase total and per phase  |
| Energy snapshots                  | Energy (kWh): multi-phase total and per phase  |

# EM4900 series




- 1 Model.  
2 Number of 3-phase meters (without neutral current)  
3 Communication interfaces & protocols.

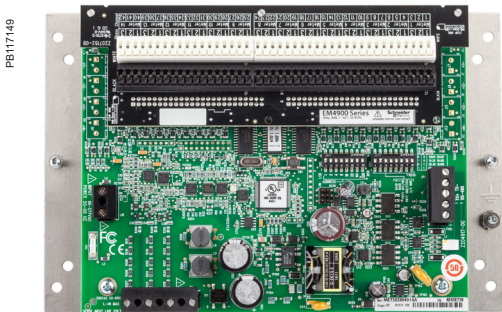

EM49xxA Main Board



EM49xxE Main Unit

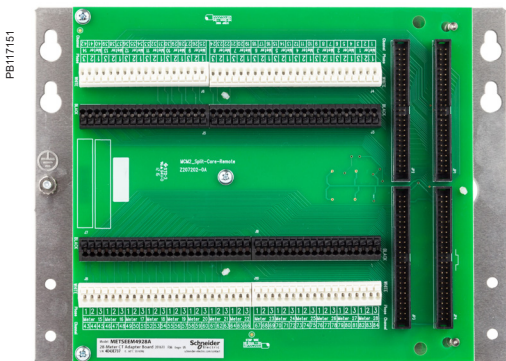

CT Adapter Assembly (28-Meter models only)

## EM4900 series part numbers - BCPM with solid core CTs

| Item |                                      | Code      | Description   |
|------|--------------------------------------|-----------|---|
| 1    | Model                                | METSEEM49 | Multi-Circuit Meter   |
| 2    | Number of 3-phase Meters             | 04        | Up to (4) 3-phase Meters (see table for variations)   |
|      |                                      | 08        | Up to (8) 3-phase Meters (see table for variations)   |
|      |                                      | 14        | Up to (14) 3-phase Meters (see table for variations)  |
|      |                                      | 28        | Up to (28) 3-phase Meters (see table for variations)  |
| 3    | Communication Interfaces & Protocols | A         | RS-485 Serial with Modbus RTU (add E8951 for other protocols)   |
|      |                                      | E         | Ethernet with Modbus TCP, BACnet IP and SNMP protocols and RS-485 Serial with Modbus RTU or BACnet IP |

| Commercial ref. no. | "E" - Integrated Ethernet | Number of meters |         |         |
|---------------------|---------------------------|------------------|---------|---------|
|                     |                           | 3-phase          | 2-phase | 1-phase |
| METSEEM4904A        | METSEEM4904E              | 4                | 6       | 12      |
| METSEEM4908A        | METSEEM4908E              | 8                | 12      | 24      |
| METSEEM4914A        | METSEEM4914E              | 14               | 21      | 42      |
| METSEEM4928A        | METSEEM4928E              | 28               | 42      | 84      |


### Number of meters supported:

EM4900 models are all factory-configured as all 3-phase meters (w/o neutral). They can be easily re-configured to any combination of 1-ph, 2-ph or 3-ph meters (with ION Setup). Any unused channels can be used to measure neutral current. Label overlays (to re-number CT connections) are provided for 1-ph/2-ph applications.

| Commercial ref. no. | EM4900 multi-circuit meters   |
|---------------------|---|
| METSEEM4904A        | Multi-Circuit Meter – (4) 3-phase meters - Modbus RTU only                              |
| METSEEM4908A        | Multi-Circuit Meter – (8) 3-phase meters - Modbus RTU only                              |
| METSEEM4914A        | Multi-Circuit Meter – (14) 3-phase meters - Modbus RTU only                             |
| METSEEM4928A        | Multi-Circuit Meter – (28) 3-phase meters - Modbus RTU only                             |
| METSEEM4904E        | Multi-Circuit Meter – (4) 3-phase meters - Ethernet and Serial (Modbus, BACnet & SNMP)  |
| METSEEM4908E        | Multi-Circuit Meter – (8) 3-phase meters - Ethernet and Serial (Modbus, BACnet & SNMP)  |
| METSEEM4914E        | Multi-Circuit Meter – (14) 3-phase meters - Ethernet and Serial (Modbus, BACnet & SNMP) |
| METSEEM4928E        | Multi-Circuit Meter – (28) 3-phase meters - Ethernet and Serial (Modbus, BACnet & SNMP) |

## EM4900 series

PE60284

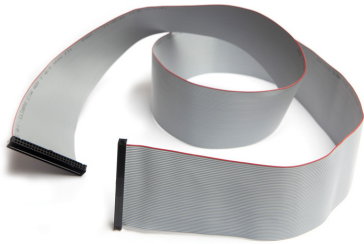

CBL008

Flat ribbon cable

PB117152



CBL022

Round ribbon cable

PE60193



LVCT00050S

PowerLogic™ LVCT0xxxS split-core Low-voltage (1/3V) CTs are ideal for retrofit applications

PB113652



LVCT20050S

PowerLogic™ LVCT2xxxS Low-voltage (1/3V) solid core CTs are ideal for panel builders (small, medium, large)

### EM4900 series accessories

| Commercial reference number                                    | Description  |
|--|--|
| BCPMCOVERS   | EM4900 circuit board cover                               |
| E8951  | Modbus to BACnet protocol converter                      |
| Ribbon cables for 28-meter models                              |  |
| 1.22 m cables are standard – others must be ordered separately |  |
| CBL008   | Flat Ribbon cable (quantity 1) for BCPM, length = 0.45 m |
| CBL016   | Flat Ribbon cable (quantity 1) for BCPM, length = 1.2 m  |
| CBL017   | Flat Ribbon cable (quantity 1) for BCPM, length = 1.5 m  |
| CBL018   | Flat Ribbon cable (quantity 1) for BCPM, length = 1.8 m  |
| CBL019   | Flat Ribbon cable (quantity 1) for BCPM, length = 2.4 m  |
| CBL020   | Flat Ribbon cable (quantity 1) for BCPM, length = 3.0 m  |
| CBL021   | Flat Ribbon cable (quantity 1) for BCPM, length = 6.1 m  |
| CBL022   | Round Ribbon cable (quantity 1) for BCPM, length = 1.2 m |
| CBL023   | Round Ribbon cable (quantity 1) for BCPM, length = 3 m   |
| CBL024   | Round Ribbon cable (quantity 1) for BCPM, length = 6.1 m |
| CBL031   | Round Ribbon cable (quantity 1) for BCPM, length = 0.5 m |
| CBL033   | Round Ribbon cable (quantity 1) for BCPM, length = 0.8 m |

### 1/3 V low-voltage Split-core CTs


| Commercial reference number | Amperage rating | Inside dimensions |
|-----------------------------|-----------------|-------------------|
| LVCT00050S                  | 50 A            | 10 x 11 mm        |
| LVCT00101S                  | 100 A           | 16 x 20 mm        |
| LVCT00201S                  | 200 A           | 32 x 32 mm        |
| LVCT00102S                  | 100 A           | 30 x 31 mm        |
| LVCT00202S                  | 200 A           | 30 x 31 mm        |
| LVCT00302S                  | 300 A           | 30 x 31 mm        |
| LVCT00403S                  | 400 A           | 62 x 73 mm        |
| LVCT00603S                  | 600 A           | 62 x 73 mm        |
| LVCT00803S                  | 800 A           | 62 x 73 mm        |
| LVCT00804S                  | 800 A           | 62 x 139 mm       |
| LVCT01004S                  | 1000 A          | 62 x 139 mm       |
| LVCT01204S                  | 1200 A          | 62 x 139 mm       |
| LVCT01604S                  | 1600 A          | 62 x 139 mm       |
| LVCT02004S                  | 2000 A          | 62 x 139 mm       |
| LVCT02404S                  | 2400 A          | 62 x 139 mm       |

### 1/3 V low-voltage Solid core CTs


| Commercial reference number | Amperage rating | Inside dimensions |
|-----------------------------|-----------------|-------------------|
| LVCT20050S                  | 50 A            | 10 mm             |
| LVCT20100S                  | 100 A           | 10 mm             |
| LVCT20202S                  | 200 A           | 25 mm             |
| LVCT20403S                  | 400 A           | 31 mm             |

# EM4900 series

## EM49xxA main board dimensions

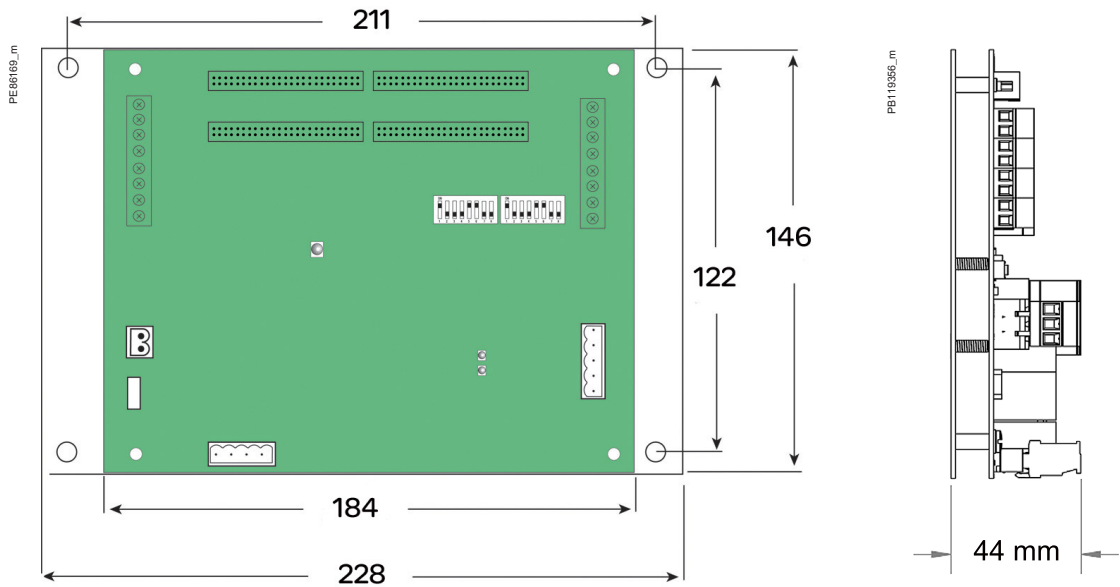


## 28-Meter CT adapter assembly dimensions

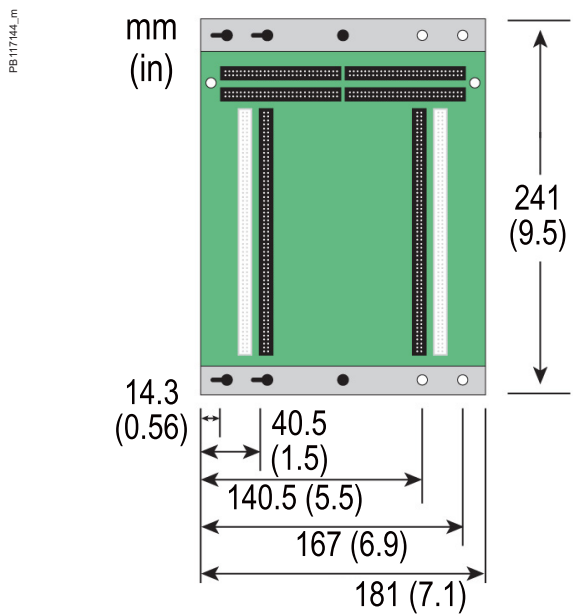


# EM4900 series

## 50 A-200 A Split-core CT dimensions

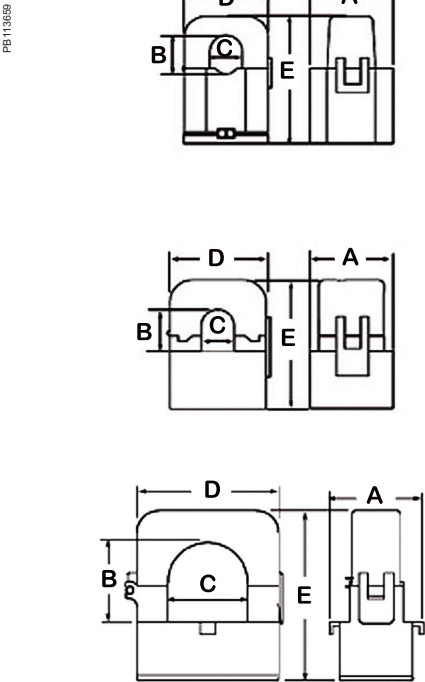

| CT rating | A     | B     | C     | D     | E     |
|-----------|-------|-------|-------|-------|-------|
| 50 A      | 26 mm | 11 mm | 10 mm | 23 mm | 40 mm |
| 100 A     | 28 mm | 16 mm | 16 mm | 40 mm | 52 mm |
| 200 A     | 37 mm | 32 mm | 32 mm | 62 mm | 69 mm |


## Solid core CT dimensions

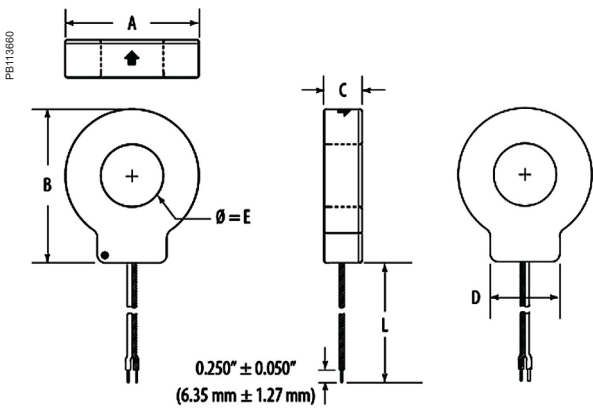

| Model      | L     | A     | B     | C     | D     | E     |
|------------|-------|-------|-------|-------|-------|-------|
| LVCT20050S | 1.8 m | 33 mm | 38 mm | 18 mm | 21 mm | 10 mm |
| LVCT20100S |       |       |       |       |       |       |
| LVCT20202S | 1.8 m | 59 mm | 66 mm | 18 mm | 31 mm | 25 mm |
| LVCT20403S | 1.8 m | 70 mm | 82 mm | 25 mm | 36 mm | 31 mm |

## 1/3 V low-voltage CT form factor

| Small form factor<br>100/200/300 A | Medium form factor<br>400/600/800 A | Large form factor<br>800/1000/1200/<br>1600/2000/2400 A |
|------------------------------------|-------------------------------------|---|
| A = 96 mm                          | A = 125 mm                          | A = 125 mm  |
| B = 30 mm                          | B = 73 mm                           | B = 139 mm  |
| C = 31 mm                          | C = 62 mm                           | C = 62 mm   |
| D = 30 mm                          | D = 30 mm                           | D = 30 mm   |
| E = 100 mm                         | E = 132 mm                          | E = 201 mm  |
| F = 121 mm                         | F = 151 mm                          | F = 151 mm  |

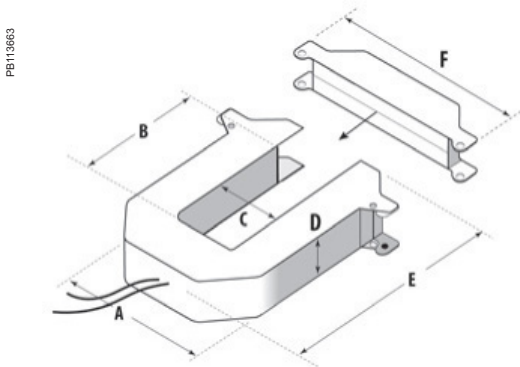

Split-core CT dimensions - see table.

# Retrofit Products

The advantages of using retrofit products throughout your power monitoring system are numerous and proven. Whether you install these products as part of an upgrade or as add-on modules in a new build environment, ease of installation and commissioning will reap huge economic benefits. The PowerLogic™ range is designed to retrofit existing switchboards and enhance the energy efficiency of buildings for many years.

These products are:

- Easy and cost-effective to install
- Able to collect a broad scope of electrical data
- Able to utilize a variety of meters to measure WAGES (Water, Air, Gas, Electricity, Steam) usage
- Transmit all data to a centralized data concentrator for detailed analysis



PB 105431



METSEEM3502



METSEEM4235

# PowerLogic™ EM3500 series

The PowerLogic™ EM3500 Series DIN Rail Meter combines exceptional performance and easy installation to deliver a cost-effective solution for power monitoring applications.

The EM35xx can be installed on standard DIN rail or surface mounted as needed. Pulse output and phase alarms provide additional versatility.

## Applications

Capable of essential cost management:

- Energy monitoring in building automation systems
- Renewable energy monitoring
- Commercial sub-metering
- Energy management
- Industrial monitoring
- Accurate cost allocation



METSEEM3502

PB105431

### The solution for

Markets that can benefit from a solution that includes PowerLogic™ EM3500 series meters:

- Buildings
- Industry
- Healthcare
- Data Centre and networks
- Infrastructure

### Benefits

#### System integrators' benefit

- Ease of integration
- Ease of setup
- Cost effectiveness

#### Panel builders' benefit

- Ease of installation
- Cost effectiveness
- Aesthetically pleasing
- Simplified ordering

#### End users' benefit

- Ease of use
- Precision metering & sub-billing
- Billing flexibility
- Comprehensive, consistent and superior performance

### Competitive advantages

- DIN rail mounting option; easy installation
- Real energy output and phase loss alarm output
- 90-600 V AC; application versatility with fewer models to stock
- Bright backlit LCD; easy visibility in dark enclosures
- Data logging capability safeguard during power failures
- EM35xx models compatible with LVCTs from 5 A to 32000 A
- User-enabled password protection prevents tampering
- Native BACnet MS/TP support (no gateway)

### Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximise electrical network reliability and availability, and optimise electrical asset performance.


### Conformity of standards

- IEC 61557-12
- IEC 61000-4-4
- IEC 62053-22
- IEC 61000-4-5
- IEC 62053-24
- IEC 61000-4-6
- IEC 61010-1
- IEC 61000-4-8
- IEC 61000-4-2
- IEC 61000-4-3


# EM3500 series



PowerLogic™ EM3500

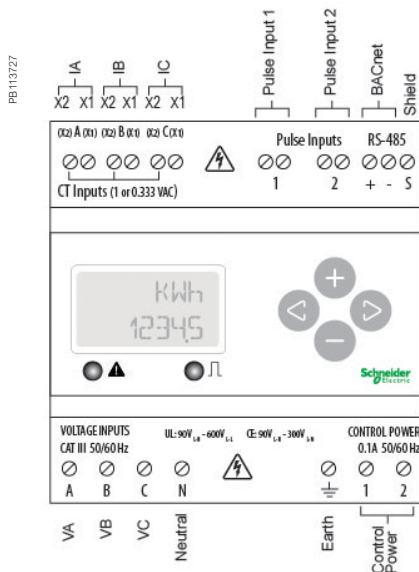

EM3500 parts and connection terminals

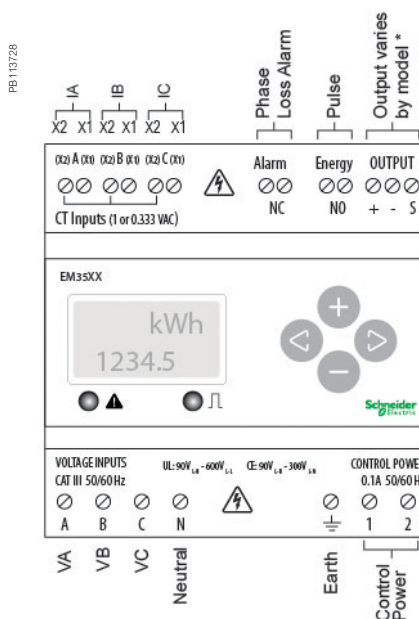

EM3502/EM355x parts and connection terminals

The data logging capability (EM3555 and EM3560) protects data in the event of a power failure. Modbus, pulse output, and phase alarms are all provided to suit a wide variety of applications. Additional pulse inputs on EM3560 provide an easy way to incorporate simple flow sensors to track gas, water, steam, or other energy forms using a BACnet system in addition to full monitoring of electrical energy.

EM35xxA (Pulse, Modbus, BACnet) models designed for use exclusively with Rogowski coil CTs where integrator and power supply for the CTs are built into the meter, resulting in fewer devices to purchase and faster to install. (Not recommended for high harmonic applications.)

The EM3555 models adds a bi-directional monitoring feature designed expressly for renewable energy applications, allowing measurement of power imported from the utility grid as well as power exported from the renewable energy source (e.g. solar panels). In this way, a facility administrator track all energy data, ensuring accuracy in billing and crediting.

## Features

- All Models: A compact solution for panelboard monitoring
  - DIN rail mounting option; easy installation
  - ANSI 12.20 0.2% accuracy, IEC 62053-22 Class 0.2S for all 35xx models; great for cost allocation
  - ANSI C12.20 0.5% accuracy, IEC 62053-22 Class 0.5S for EM35xxA models
  - Real energy output and phase loss alarm output on EM3502(A), EM3550(A), and EM3555 models; one device serves multiple applications
  - 90-600 VAC; application versatility with fewer models to stock
  - Bright backlit LCD; easy visibility in dark enclosures
  - Data logging capability EM3555 & EM3560(A); safeguard during power failures
  - EM35xx models compatible with LVCTs from 5 A to 32000 A; wide range of service types
  - User-enabled password protection; prevents tampering
  - EM35xxA models are designed to work exclusively with Rogowski coil CTs 20-5000 A range. Eliminate site walks, save time and money. (Not recommended in high harmonic applications.)
  - System integration via Modbus EM355xx(A) or BACnet MS/TP EM356xx(A); convenient compatibility with existing systems
  - Native BACnet MS/TP support (no gateway) with serial rates up to 115.2 kbaud EM3560, EM3561, EM3560A, & EM3561A
- EM3555 Models: An essential solution for Solar and other renewable energy applications
  - Bi-directional metering (4-quadrant); allows net metering
  - Data logging capability; ensures long term data retrieval
  - CSI approved

# EM3500 series

PB105437



EM3500 in enclosure with door open

| Selection guide   |  |   |
|---|--|---|
| Electrical characteristics  |  |   |
| Inputs  | Control Power, AC                                    | 50/60 Hz; 5 VA max.; 90 V min.;<br>UL Maximums: 600 V L-L (347V L-N );<br>CE Maximums: 300 V L-N (520V L-L )                              |
|   | Control Power, DC                                    | 3W max.; UL and CE: 125 to 300 V DC<br>(external DC current limiting required)  |
|   | Voltage Input  | UL: 90 V L-N to 600 V L-L ;<br>CE: 90 V L-N to 300 V L  |
|   | Current Input  | Scaling   |
|   |  | Input Range   |
|   |  | 5 A to 32,000 A Non "A" models only<br>20 A to 5000 A for "A" models only   |
|   |  | 1/3V and 1V nominal LVCT (selectable)<br>Non "A" models only<br>Rogowski coil CTs only for "A" models                                     |
|   | Pulse Inputs<br>(EM3560 & EM3560A)                   | Two sets of contact inputs to pulse<br>accumulators   |
| Accuracy  | Real Power and Energy                                | 0.2 % (ANSI C12.20, IEC 62053-22 Class 0.2S)<br>EM35xx models only<br>0.5 % (ANSI C12.20, IEC 62053-22 Class 0.5S)<br>EM35xxA models only |
| Outputs   | All Models (EM3560,<br>EM3560A, EM3561 &<br>EM3561A) | Real Energy Pulse: N.O. static;<br>Alarm contacts: N.C. static  |
|   | EM3502   | Reactive energy pulse 30 VAC/DC   |
|   | EM3550, EM3555,<br>EM3550A                           | RS-485 2-wire Modbus RTU<br>(1200 baud to 38.4 kbaud)   |
|   | EM3560, EM3560A,<br>EM3561, EM3561A                  | RS-485 2-wire BACnet MS/TP<br>(9600 baud to 115.2 kbaud)  |
| Mechanical characteristics  |  |   |
| Mounting  |  | DIN Rail or 3-point screw mount   |
| Environmental conditions  |  |   |
| Operating temperature Range                                       |  | -30 °C to 70 °C   |
| Storage Temperature Range   |  | -40 °C to 85 °C   |
| Humidity Range  |  | <95 % RH non-condensing   |
| Accessories   |  |   |
| NEMA 4x enclosure (EM3500-ENC, pictured)                          |  |   |
| Split-core low voltage CTs (LVCTxx)                               |  |   |
| Fuse kits (EFP1, EFP2, EFP3)                                      |  |   |
| Safety  |  |   |
| US and Canada (cULus) UL508 (open type device)/CSA 22.2 No. 14-05 |  |   |
| Europe (CE) EN61010-1:2001  |  |   |


## Feature selection

| Commercial reference number | Model   | Description                          |
|-----------------------------|---------|--------------------------------------|
| METSEEM3502                 | EM3502  | Pulse out only                       |
| METSEEM3550                 | EM3550  | Modbus - 2 quadrant                  |
| METSEEM3555                 | EM3555  | Modbus - 4 quadrant with logging     |
| METSEEM3560                 | EM3560  | BACnet with logging                  |
| METSEEM3502A                | EM3502A | Pulse Rope CT model                  |
| METSEEM3550A                | EM3550A | Modbus Rope CT Model                 |
| METSEEM3560A                | EM3560A | BACnet w/ logging Rope CT Model      |
| METSEEM3561                 | EM3561  | BACnet without logging               |
| METSEEM3561A                | EM3561A | BACnet without logging Rope CT Model |

## EM3500 series




| EM3500 series  | EM3502 | EM3550 | EM3560 | EM3561 | EM3555 | EM3502A | EM3550A | EM3560A | EM3561A |
|--|--------|--------|--------|--------|--------|---------|---------|---------|---------|
| <b>Measurement Capability, Full Data Set</b>   |        |        |        |        |        |         |         |         |         |
| Bi-directional Energy Measurements   |        |        |        |        | ■      |         |         |         |         |
| Power (3-phase total and per phase): Real (kW) Reactive (kVAR), and Apparent (kVA)             | ■      | ■      | ■      | ■      | ■      | ■       | ■       | ■       | ■       |
| Power Factor: 3-phase average & per phase  | ■      | ■      | ■      | ■      | ■      | ■       | ■       | ■       | ■       |
| Present Power Demand: Real (kW), Reactive (kVAR), and Apparent (kVA)                           | ■      | ■      | ■      | ■      | ■      | ■       | ■       | ■       | ■       |
| Import and Export totals of Present Power Demand: Real (kW), Reactive (kVAR), & Apparent (kVA) |        |        |        |        | ■      |         |         |         |         |
| Peak Power Demand: Real (kW), Reactive (kVAR), and Apparent (kVA)                              | ■      | ■      | ■      | ■      | ■      | ■       | ■       | ■       | ■       |
| Current (3-phase average and per phase)  | ■      | ■      | ■      | ■      | ■      | ■       | ■       | ■       | ■       |
| Voltage: Line-Line and Line-Neutral (3-phase average and per phase)                            | ■      | ■      | ■      | ■      | ■      | ■       | ■       | ■       | ■       |
| Frequency  | ■      | ■      | ■      | ■      | ■      | ■       | ■       | ■       | ■       |
| ANSI C12.20 0.5 % accuracy, IEC 62053-22 Class 0.5S  |        |        |        |        |        | ■       | ■       | ■       | ■       |
| ANSI C12.20 0.2 % accuracy, IEC 62053-22 Class 0.2S  | ■      | ■      | ■      | ■      | ■      |         |         |         |         |
| Accumulated Net Energy: Real (kWh), Reactive (kVARh), and Apparent (kVAh)                      | ■      | ■      | ■      | ■      | ■      | ■       | ■       | ■       | ■       |
| Accumulated Real Energy by phase (kWh)   | ■      | ■      | ■      | ■      | ■      | ■       | ■       | ■       | ■       |
| Import and Export Accumulators of Real and Apparent Energy                                     |        |        |        |        | ■      |         |         |         |         |
| Reactive Energy Accumulators by Quadrant (3-phase total & per phase)                           |        |        |        |        | ■      |         |         |         |         |
| Demand Interval Configuration: Fixed or Rolling Block  | ■      | ■      | ■      | ■      | ■      | ■       | ■       | ■       | ■       |
| Demand Interval Configuration: External Sync to Comms  |        | ■      | ■      | ■      | ■      |         | ■       | ■       | ■       |
| <b>Data Logging (Store up to 60 days at 15-minute interval)</b>                                |        |        |        |        |        |         |         |         |         |
| Data Logging: 10 16-Bit Configurable (can include Date/Time) Data Buffers                      |        |        |        |        | ■      |         |         |         |         |
| Data Logging: 3 Timestamped 32-Bit Configurable Data Buffers                                   |        |        | ■      |        |        |         |         | ■       |         |
| <b>Outputs</b>   |        |        |        |        |        |         |         |         |         |
| Alarm Output (N.C.)  | ■      | ■      | ■      |        | ■      | ■       | ■       | ■       |         |
| 1 Pulse Output (N.O.)  |        | ■      |        |        | ■      |         | ■       |         |         |
| 2 Pulse Outputs (N.O.)   | ■      |        |        |        |        | ■       |         |         |         |
| RS-485 Serial (Modbus RTU Protocol)  |        | ■      |        |        | ■      |         | ■       |         |         |
| RS-485 Serial (BACnet MS/TP Protocol)  |        |        | ■      | ■      |        |         |         | ■       | ■       |
| LON FT Serial (LonTalk Protocol)   |        |        |        |        |        |         |         |         |         |
| <b>Inputs</b>  |        |        |        |        |        |         |         |         |         |
| 2 Pulse Contact Accumulator Inputs   |        |        |        | ■      |        |         |         |         | ■       |
| 1 Pulse Contact Accumulator Input  |        |        | ■      |        |        |         |         | ■       |         |

### Display Screen Diagram

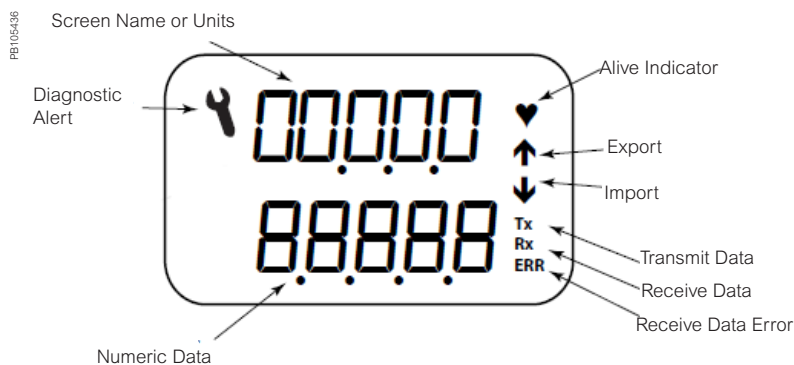


# EM3500 series

## EM3500 dimensions

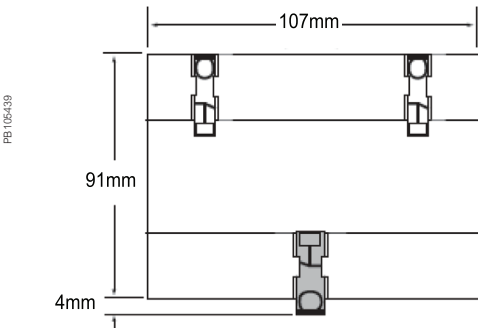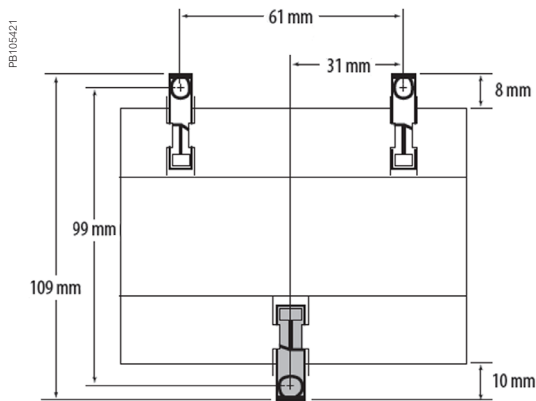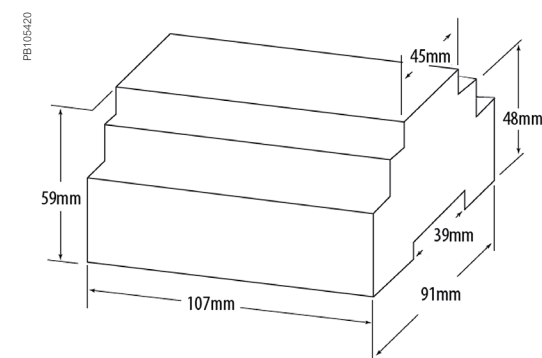

Bottom View (DIN Mount Option)

## EM3500 connections

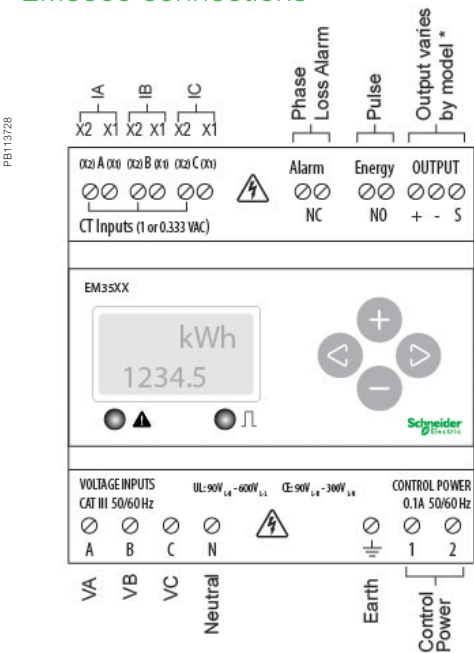

Two 5-character rows of display text.  
Top row alphanumeric;  
Bottom row numeric only

The red Alarm LED lights when any of the 3  
phase voltages drop below the selected  
threshold.

The green Energy LED lights momentarily each  
time the Energy output pulse is active.

Please see EM3500 User Guide and EM3500 Installation Guide for safe and correct wiring  
and connection information.

# PowerLogic™ EM4200 series

The PowerLogic™ EM4200 Series Enercept power and energy meters provide a unique solution for measuring energy data.

Designed for simplicity, the range includes two main offers: System Calibrated and Flex. The EM4200 System Calibrated offers system accuracy, pre-mounted Current Transducers, with a simple to quote and order single part number.

The EM4200 Flex offers the flexibility of a wide range of Current Transducers to match most applications, no matter how varied.

## Applications

Capable of essential cost management:

- Energy monitoring in building automation systems
- Renewable energy monitoring
- Energy management
- Commercial sub-metering
- Industrial monitoring
- Accurate cost allocation



METSEEM4235

### The solution for

Markets that can benefit from a solution that includes PowerLogic™ EM4200 series:

- Buildings
- Industry
- Healthcare
- Data centre and networks
- Infrastructure

### Benefits

#### System integrators' benefit

- Ease of integration
- Ease of setup
- Cost effectiveness

#### Panel builders' benefit

- Ease of installation
- Cost effectiveness
- Aesthetically pleasing
- Simplified ordering

#### End users' benefit

- Ease of use
- Precision metering & sub-billing
- Billing flexibility
- Comprehensive, consistent and superior performance

### Competitive advantages

- High reliability with high system, or meter accuracy.
- Single part to order a metering chain (System Calibrated).
- Supports a large range of Sensor options. Flex can adapt to CTs from 50 to 5000 A, or different Rogowski coil sizes rated for up to 5000 A.
- Modbus and BACnet protocols along with uni-directional and bi-directional feature sets.
- Wide 90 to 480 V AC input range.
- DIN rail or screw-mount options, including mounting bracket for easy installation.
- Seamless integration with EcoStruxure™ Power Management software products.

### Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings, maximise electrical network reliability and availability, and optimise electrical asset performance.

### Conformity of standards

- CAN/CSA C22.2 No. 61010-1-12
- EN 61000-6-2
- EN 61000-6-4 Class A
- EN 61010-1
- EN 61326-1 Class A
- FCC 47 CFR Part 15 Class A
- UL 61010-1

### Accuracy standards

#### Flex models

- ANSI C12.20-2015 Class 0.2
- IEC 62053-24 Class 1S

When used with 1/3 V CT (Meter accuracy)

- IEC 62053-22 Class 0.2S 0.2%

When used with Rogowskil Coils (Meter accuracy)

- IEC 62053-22 Class 0.5S


#### System calibrated

- ANSI C12.1, 1%
- IEC 62053-22 Class 1S 1%

## EM4200 series



EM4200 Flex Power Meter

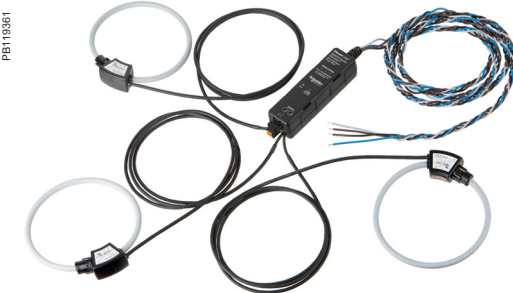

EM4200 System Calibrated with calibrated Rogowski coils

The EM4200 meter series provides a highly flexible retrofit option ideal when adding metering to an existing building, or to integrate in an OEM solution. Designed to simplify the ordering process, the meter is declined in 2 major options:

System Calibrated offers the simplest way to order, deploy and meet requirements. The meter comes with pre-mounted Current Transducers (CT), or Rogowski Coils. A single reference provides a System calibrated accuracy meter with a 100, 200, 400A CT, or 5,000A Rogowski coil.

Flex offers the flexibility required when the CT, or Rogowski coil, rating or size needs to further adapt to the site. CTs can range from 50 to 5,000A and Rogowski coils can be different sizes with a 5,000 A rating.

- General features

- Uni and Bi-Directional metering to support to power generation application.
- Data logging.
- Modbus and BACnet serial communication with auto-protocol and baud rate detection.
- Configurable with or without power.
- DIN rail or screw-mount options, including mounting brackets for easy installation.
- Seamless integration in Power Monitoring Operations and Power SCADA Operations.
- Wide input range of 90 to 480 V AC.
- Approvals: UL 61010-1, IEC/EN 61010-1

- System calibrated features

- Three factory mounted and calibrated Current Transducers (100, 200 or 400 A), or Rogowski coils (5,000 A, 12" or 18" (304.8 mm or 457.2 mm)). Simplifies ordering and commissioning.
- ANSI version only: Fuse packs factory mounted.
- System Accuracy from 1% to 100% load:
  - Real Power and Energy: ANSI C12.1 1%, IEC 62053-22 Class 1S, 1%.
  - Reactive Power and Energy: IEC 62053-24 Class 1, 1%

- Flex features

- Supports generic 1/3 V CTs from 50 to 5,000 A. Or 1/3 V 5,000 A Rogowski coils.
- ANSI: Optional fuse packs available.
- Meter Accuracy from 1% to 100% of load (CT mode):
  - Real Power and Energy: ANSI C12.20 0.2%, IEC 62053-22 Class 0.2S, 0.2%.
  - Reactive Power and Energy: IEC 62053-24 Class 1, 1%.

# EM4200 series

## EM4200 series selection guide

| Advantage                         | EM4200 Flex                              |  | EM4200 System Calibrated              |                                       |                                       |                                       |
|-----------------------------------|--|--|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
|                                   | METSEEM4235                              | METSEEM4236                              | METSEEM4235Axx                        | METSEEM4236Axx                        | METSEEM4235Bxx                        | METSEEM4236Bxx                        |
| General                           |  |  |                                       |                                       |                                       |                                       |
| Market                            | IEC                                      | ANSI                                     | IEC                                   | ANSI                                  | IEC                                   | ANSI                                  |
| Single part to order              |  |  | Yes                                   | Yes                                   | Yes                                   | Yes                                   |
| Factory mounted CTs/Rogowski coil |  |  | Yes                                   | Yes                                   | Yes                                   | Yes                                   |
| CT                                |  |  |                                       |                                       |                                       |                                       |
| Rating                            | 50 to 5000 A user choice                 | 50 to 5000 A user choice                 | Three                                 |                                       | Three 100, 200 or 400 A supplied      | Three 100, 200 or 400 A supplied      |
| Type                              | 1/3 V Solid or Split Core                | 1/3 V Solid or Split Core                |                                       |                                       | Split Core                            | Split Core                            |
| Rogowski Coil                     |  |  |                                       |                                       |                                       |                                       |
| Rating                            | 5000 A                                   | 5000 A                                   | 5000 A supplied                       | Three 5000 A supplied                 |                                       |                                       |
| Type                              |  |  |                                       |                                       |                                       |                                       |
| Size                              | User choice                              | User choice                              | 12" or 18"                            | 12" or 18"                            |                                       |                                       |
| Accuracy                          |  |  |                                       |                                       |                                       |                                       |
| Meter                             | 0.2% with CTs<br>0.5% with Rogowski Coil | 0.2% with CTs<br>0.5% with Rogowski Coil |                                       |                                       |                                       |                                       |
| System                            |  |  | 1%                                    | 1%                                    | 1%                                    | 1%                                    |
| Fuse pack                         |  |  |                                       |                                       |                                       |                                       |
|                                   | Option sold separately                   | Option sold separately                   |                                       | Factory mounted                       |                                       | Factory mounted                       |
| Communication                     |  |  |                                       |                                       |                                       |                                       |
|                                   | BACnet MS/TP<br>Modbus RTU over RS485    | BACnet MS/TP<br>Modbus RTU over RS485    | BACnet MS/TP<br>Modbus RTU over RS485 | BACnet MS/TP<br>Modbus RTU over RS485 | BACnet MS/TP<br>Modbus RTU over RS485 | BACnet MS/TP<br>Modbus RTU over RS485 |

## EM4200 parts descriptions and advantages

### EM4200 Flex meter

PB120811

Push-pin Ct connection



### EM4200 System calibrated

PB120812



# EM4200 series


| Electrical characteristics    |                  | EM4200 Flex  | EM4200 System calibrated   |
|-------------------------------|------------------|--|--|
| Input-voltage characteristics | Inputs           | V1, V2, V3, Vn   | V1, V2, V3, Vn   |
|                               | Measured voltage | 90 - 277 V AC L-N<br>UL max 480 V L-L<br>CE max 300 V L-N  | 90 - 277 V AC L-N<br>UL max 480 V L-L<br>CE max 300 V L-N  |
|                               | Frequency range  | 50/60 Hz   | 50/60 Hz   |
| Mechanical characteristics    |                  |  |  |
| Weight                        |                  | Approx 1/0 kg (2.2 lb)   | 1.4 to 2.2 Kg (3.10 to 4.85 lb)<br>(model dependent)   |
| Dimensions                    |                  | 46.63 x 35.81 x 152.36 mm<br>(1.84 x 1.41 x 6.0 in)  | 46.63 x 35.81 x 152.36 mm (1.84 x 1.41 x 6.0 in) (Meter alone), CT/<br>Rogowski size varies with model       |
| Environmental conditions      |                  |  |  |
| Operating temperature         |                  | -30 °C to 70 °C (-22 to 158 °F)  | 0 to 70 °C (32 to 158 °F)  |
| Storage temperature           |                  | -40 °C to 85 °C (-40 to 185 °F)  | With Split Core CTs: -40 to 85 °C<br>(-40 to 185 °F)<br>With Rogowski Coils: -40 to 70 °C<br>(-40 to 158 °F) |
| Humidity rating               |                  | <95 % RH non-condensing  | <95 % RH non-condensing  |
| Enclosure                     |                  | Indoor use only - not suitable for wet locations   | Indoor use only - not suitable for wet locations   |
| Altitude                      |                  | 3000 m (10,000 ft)   | 3000 m (10,000 ft)   |
| Pollution degree              |                  | 2  | 2  |
| Electromagnetic compatibility |                  |  |  |
| Compliance                    |                  |  |  |
| Certified to IEC/BTL          |                  | CAN/CSA C22.2 No. 61010-1-12   | CAN/CSA C22.2 No. 61010-1-12   |
|                               |                  | EN 61000-6-2   | EN 61000-6-2   |
|                               |                  | EN 61000-6-4 Class A   | EN 61000-6-4 Class A   |
|                               |                  | EN 61010-1   | EN 61010-1   |
|                               |                  | EN 61326-1 Class A   | EN 61326-1 Class A   |
|                               |                  | FCC 47 CFR Part 15 Class A   | FCC 47 CFR Part 15 Class A   |
|                               |                  | UL 61010-1   | UL 61010-1   |
| Accuracy                      |                  |  |  |
| Accuracy standards            |                  | ANSI C12.20-2015 Class 0.2   | ANSI C12.20-2015 Class 0.2   |
|                               |                  | IEC 62053-24 Class 1S  | IEC 62053-24 Class 1S  |
|                               |                  | ANSI C12.20 2015 Class 0.2<br>IEC 62053-24 Class 1S<br>When used with 1/3 V CT (Meter accuracy) IEC 62053-22 Class 0.2S 0.2%<br>When used with Rogowski coils (Meter accuracy) IEC 62053-22 Class 0.5S | ANSI C12.1 1%<br>IEC 62053-21 Class 1S 1%<br>IEC 62053-24 Class 1 1%   |

## Commercial Reference Numbers

| Market | Commercial Reference | Rating                          | CTR type   | CT size        | Fuse pack | CT lead length   | System calibrated |
|--------|----------------------|---------------------------------|------------|----------------|-----------|------------------|-------------------|
| IEC    | METSEEM4235          | User choice                     |            |                |           |                  |                   |
| IEC    | METSEEM4235A12       | Up to 5000 A (3 coils supplied) | Rogowski   | 12" (304.8 mm) |           | 6 ft (1828.8 mm) | Yes               |
| IEC    | METSEEM4235A18       | Up to 5000 A (3 coils supplied) | Rogowski   | 18" (457.2 mm) |           | 6 ft (1828.8 mm) | Yes               |
| IEC    | METSEEM4235B101      | 100 A (3 CTs supplied)          | Split core |                |           | 6 ft (1828.8 mm) | Yes               |
| IEC    | METSEEM4235B201      | 200 A (3 CTs supplied)          | Split core |                |           | 6 ft (1828.8 mm) | Yes               |
| IEC    | METSEEM4235B401      | 400 A (3 CTs supplied)          | Split core |                |           | 6 ft (1828.8 mm) | Yes               |
| ANSI   | METSEEM4236          | User choice                     |            |                | Option    |                  |                   |
| ANSI   | METSEEM4236A12       | Up to 5000 A (3 coils supplied) | Rogowski   | 12" (304.8 mm) | Yes       | 6 ft (1828.8 mm) | Yes               |
| ANSI   | METSEEM4236A18       | Up to 5000 A (3 coils supplied) | Rogowski   | 18" (457.2 mm) | Yes       | 6 ft (1828.8 mm) | Yes               |
| ANSI   | METSEEM4236B101      | 100 A (3 CTs supplied)          | Split core |                | Yes       | 6 ft (1828.8 mm) | Yes               |
| ANSI   | METSEEM4236B201      | 200 A (3 CTs supplied)          | Split core |                | Yes       | 6 ft (1828.8 mm) | Yes               |
| ANSI   | METSEEM4236B401      | 400 A (3 CTs supplied)          | Split core |                | Yes       | 6 ft (1828.8 mm) | Yes               |

# EM4200 series

## EM4200 dimensions

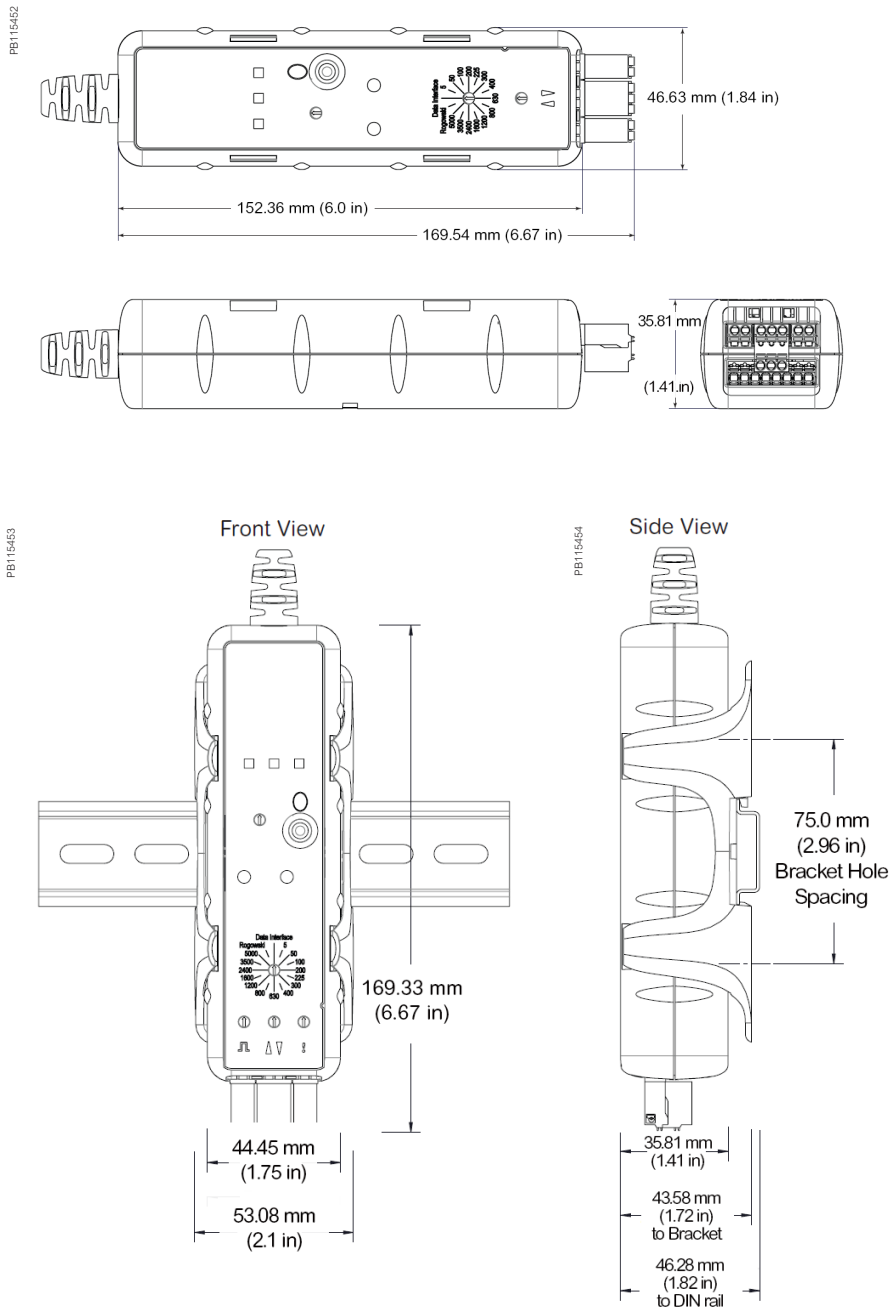

# Insulation Monitoring Devices


An IT earthing system allows your electrical distribution system to continually operate, even in the presence of an insulation fault, without endangering people or property. Required as part of an IT earthing system, an insulation monitoring device (IMD) detects the initial fault so you can make repairs before a second fault occurs, which could trigger protective devices and halt operations.



# Insulation Monitoring of IT / Ungrounded Networks

Unlike the TT or TN earthing systems, the neutral of the transformer is isolated from the ground for an IT earthing system (also called Ungrounded system).


This is applicable to both Low Voltage systems ( up to 1000VAC, 1500VDC) and medium Voltage ( up to 63 kV on IMDs only)

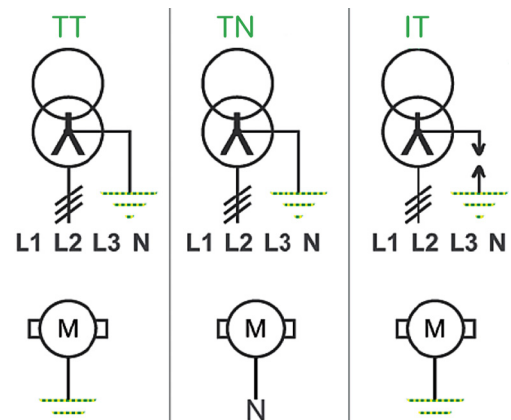

PB118029


The main interest of IT systems is that in case of one insulation fault.

- Enhanced continuity of service of the network (no trip if there is one insulation fault on the network).
- Reduced risk of electric shock.
- Reduced risk of fire or explosion (low faulty current in case of insulation fault).
- Reduced stress on the network and increased equipment life (low faulty current in case of insulation fault).

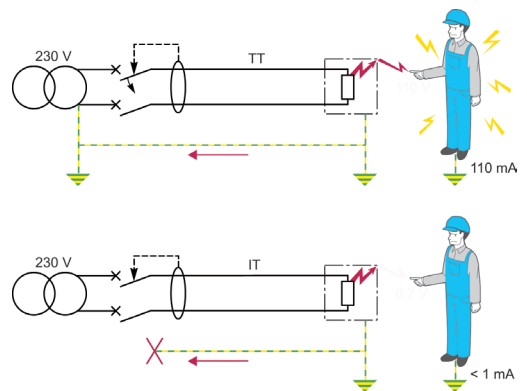

PB118030

- In TT or TN systems, in a situation with an insulation fault, the faulty current will not be negligible and will cause trip of the protections.
- For this reason, Insulation Monitoring Devices are used on IT networks in order to detect a first insulation fault so that the fault can be repaired; hence avoiding situations with several insulation faults and maintaining the continuity of service on the network.
- Using an Insulation Fault Locator (IFL) allows the operator to locate the fault in multiple feeders installations.

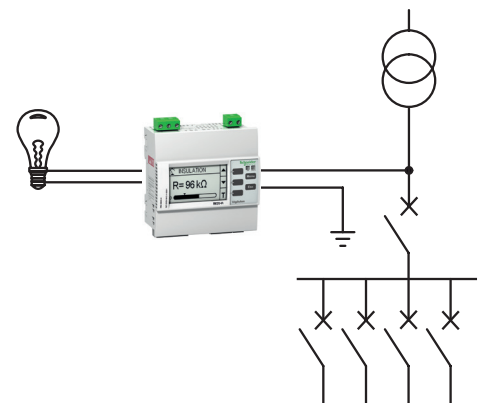

PB118031

Example of simple insulation monitoring system






The VigiloHM catalog offers a range of products suitable for these various applications, from the simplest insulation monitoring systems to the most advanced ones, including individual insulation monitoring per feeder and communication with supervision.

# Insulation Monitoring of IT / Ungrounded Networks

IT earthing systems are used for applications requiring continuity of service, such as:

- Healthcare: critical rooms in medical premises such as operating theaters, intensive care units, recovery rooms.
- Industry: critical processes in cement, steel, aluminium, oil and gas, chemical factories, food processing, car manufacturing, (painting area, other...) water, and waste water.
- Infrastructure: control tower and take-off path in airports, railways, seaports, tunnels, and signaling networks in rail.
- Utilities: power plants and control command systems.
- Photovoltaic: solar farms.
- Marine: electrical distribution of any type of ship.
- DC applications such as electrical vehicle charging stations.
- Medium Voltage: cable monitoring, distribution in industrial sites, MV loads-transformers and motors.

## Vigilohm Range Overview for Low Voltage Networks, Except Healthcare

| Product                           |   | LV  | MV  |
|-----------------------------------|---|---|---|
| IMD                               |    | IMD-IM9<br>IMD-IM10<br>IMD-IM20<br>IMD-IM400<br>IMDIM400L *<br>IMD-IM400C **  | IMDIM400THR<br>IMDIM400LTHR *   |
| LV > 480 V AC                     |  | IM20 + IM20-1700<br>IM400 + IM400-1700<br>IM400C+ IM400-1700C<br><br>IMD with Fault Locator<br>IM400 / 400L / 400C + PHT1000<br>and IFL12MC series +<br>IFL12VA1T | 1460872 (P1N)   |
| IFL                               |  | IMDIFL12<br>IMDIFL12L *<br>IMDIFL12C ***<br>IMDIFL12MC ***<br>IMDIFL12LMC *<br>IMDIFL12MCT ****   | None  |
| TOROIDS                           |  | 50437 (TA30) 50438 (PA50)<br>50439 (IA80) 50440 (MA120)<br>50441 (SA200)<br>50442 (GA300)<br>50420 (TOA80)<br>50421 (TOA120)                                      | None  |
| HRG,<br>Cardew<br>Mobile Locators |  | 50278, (XRM)<br>50282, (XGR)<br>50494, 498, 499 (Open CTs)<br>50159 (ZX Imp -HRG)<br>50170, 171, 172, 183 (Cardew)  | Voltage Transformers<br>03811728N0 (6.6 kV)<br>03811746N0 (22 kV)<br>03811749N0 (33 kV) |

L \* Power supply 24-48 V AC/DC

C \*\* Tropicalized (conformal coated)

C \*\*\* Communication

MC \*\*\* Measurement & Communication

MCT \*\*\*\* Measurement & Communication & Tropicalized (conformal coated)

# Vigilohm Range Overview for Low Voltage Networks, Except Healthcare

**Monitoring and Control**  
Power Monitoring & SCADA system


**Communication and Simple Monitoring**  
Gateway, Data logger & Web Server

**Insulation Monitoring Devices**  
Identification of a leakage to ground in the complete system

**Insulation Fault Locators**  
Identification of the faulty feeder

**Toroids**  
Used along with the Fault Locators

**A simple range to meet your needs**  
Industrial networks

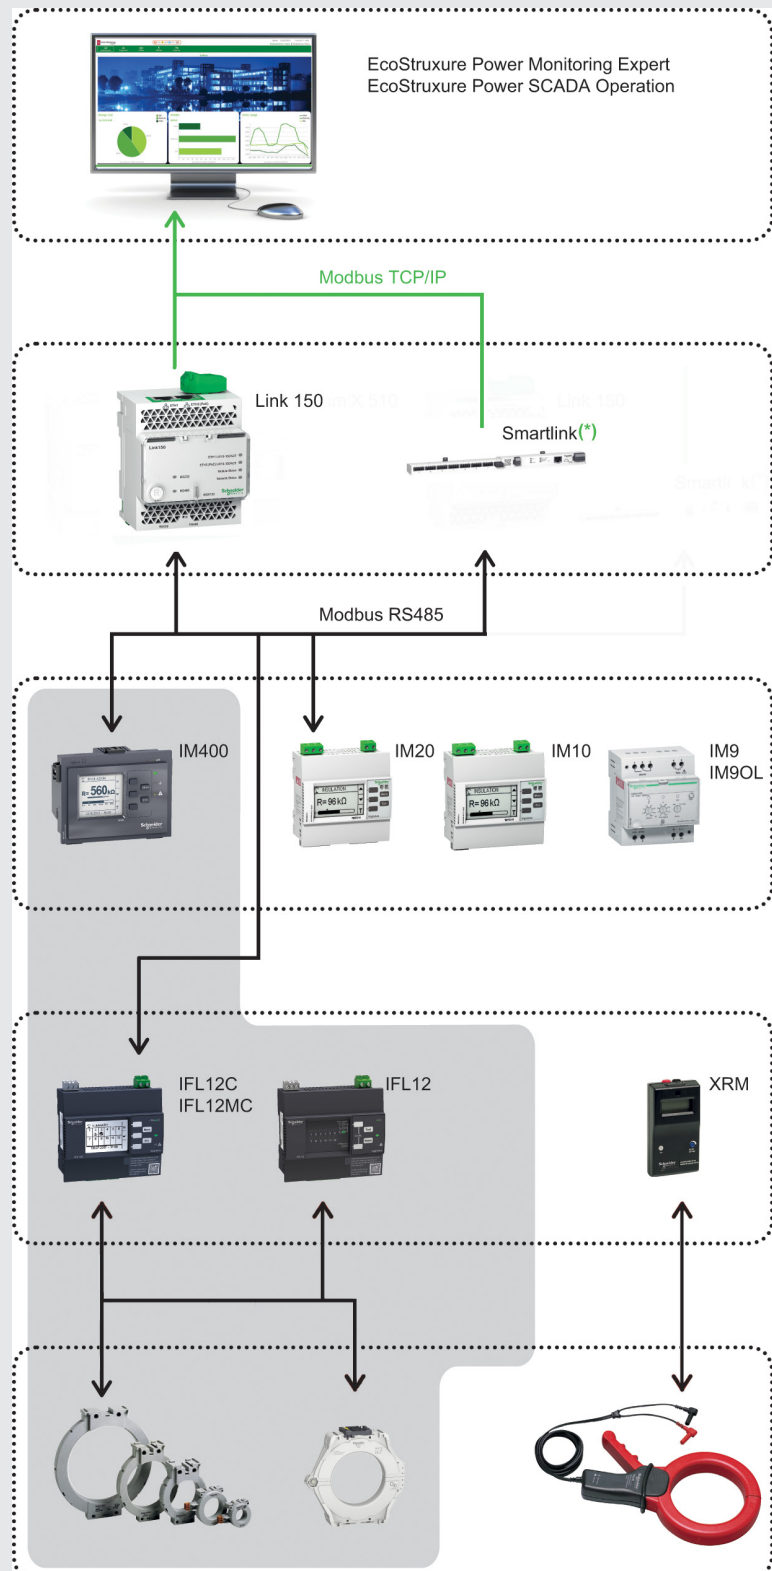

# Vigilohm Range Overview for Medium Voltage Networks

**Monitoring and Control**  
Power Monitoring & SCADA system


**Communication and Simple Monitoring**  
Gateway, Data logger & Web Server

**Insulation Monitoring Devices**  
Identification of a leakage to ground in the complete system

**Voltage adaptor**

**Voltage transformer**

**A simple range to meet your needs**  
Industrial networks

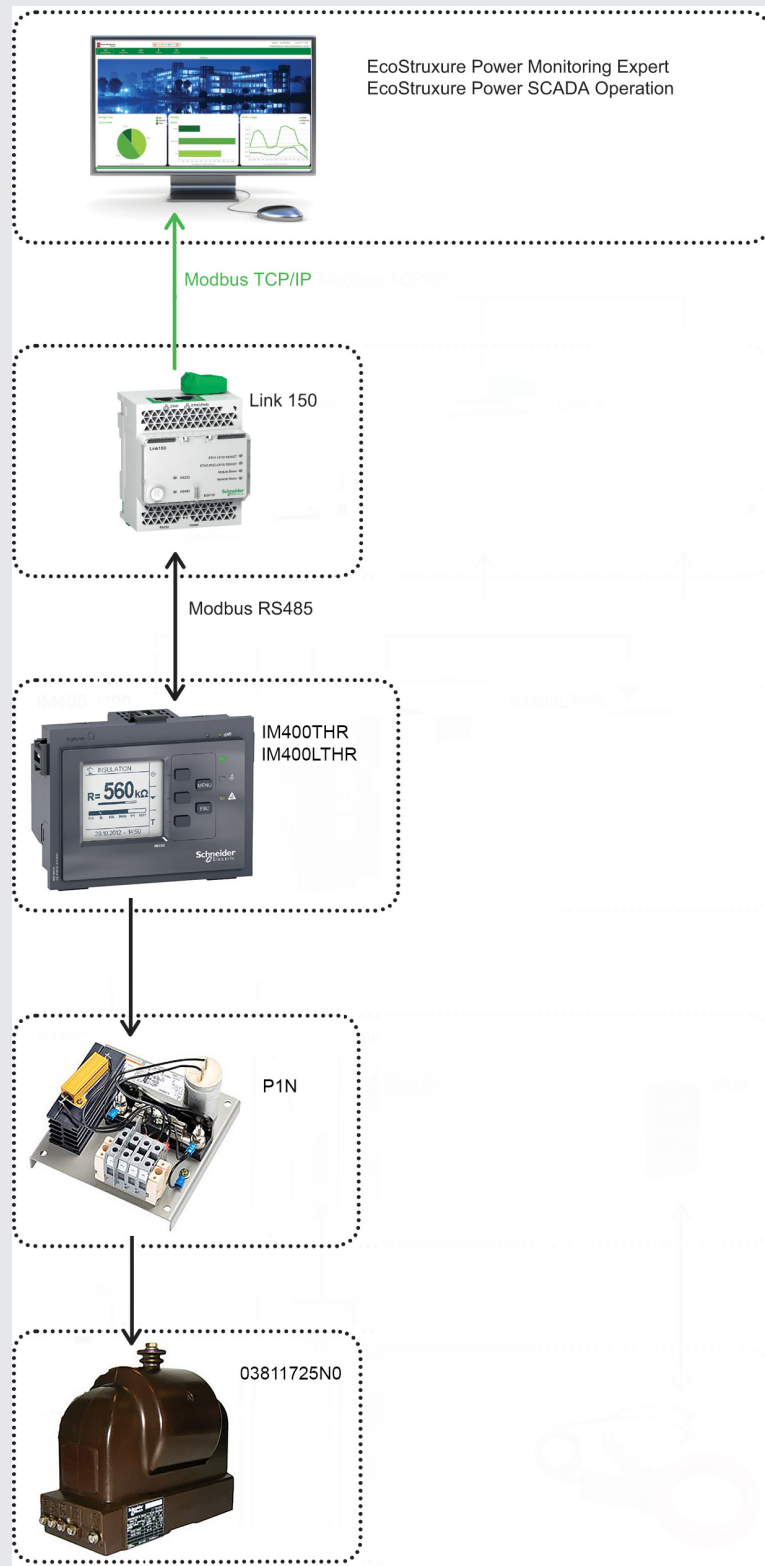


# Vigilohm Range Overview for Healthcare

Example of Healthcare network monitored by Vigilohm Insulation Monitoring Devices in compliance with IEC 60364-7-710.

The same hospital may have differing architectures, as shown below.

**Operating Theater 1** uses Link 150 to send data to the supervision system.  
**Operating Theater 2** uses Smartlink to send data to the supervision system, knowing that Smartlink can also collect data from the circuit breaker, tripped or not.

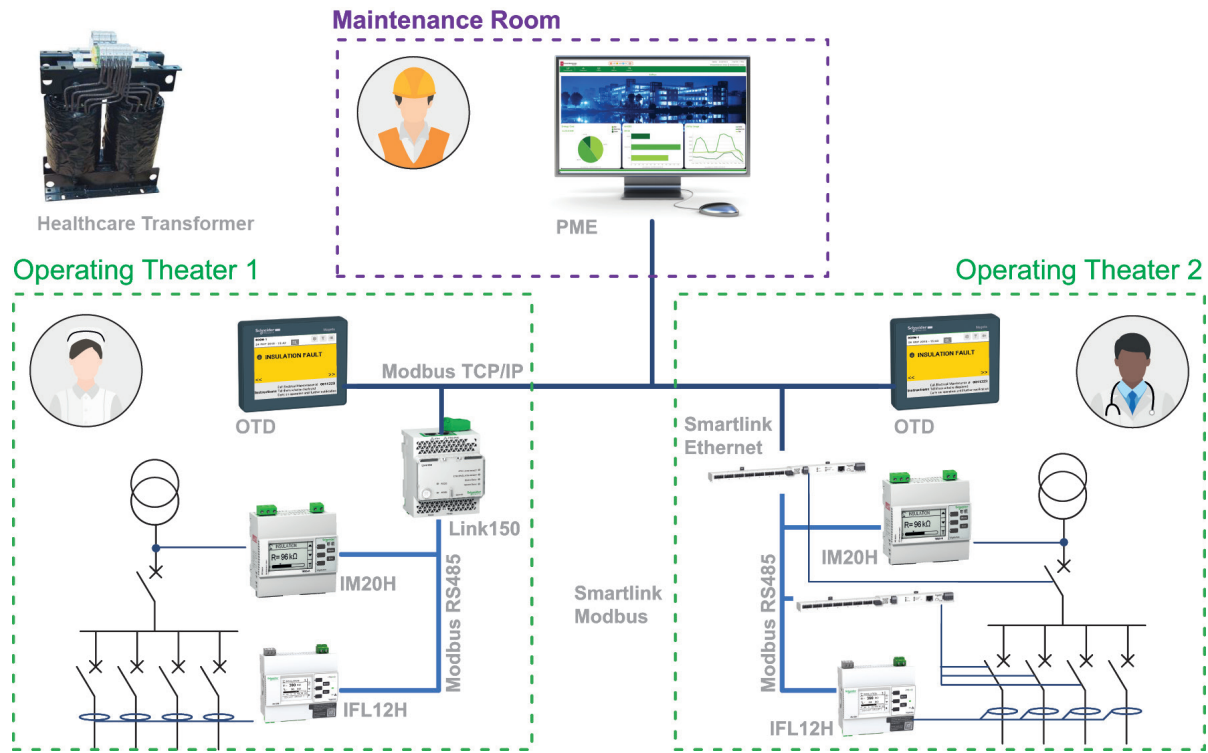

Medical staff is informed of electrical faults in the operating theater room through the local HMI

Technical staff is informed of any fault in the various operating theaters via a supervision system such as EcoStruxure Power Monitoring Expert.

This range of products, dedicated to Medical premises, meets requirements from IEC61364-7-710.

IMD and IFL are also “MED” certified, as they meet their product standard:

- IEC61557-8, annex A & B for IMDs and the remote panel
- IEC61557-9, annexA for IFLs

| Commercial reference numbers required for the healthcare application: |   |
|---|---|
| Isolation Transformer   | IMD-IT-S63-H, or IMD-IT-S80-H, or IMD-IT-S100-H                       |
| IMDs  | IMD-IM10-H, or IMDIM15H, or IMD-IM20/-H                               |
| Remote panel  | 50168 (HRP) or IMDLRDH  |
| Locator   | IMDIFL12H   |
| Toroids   | with IM20-H: METSECT5CC004 or METSECT5CC005<br>with IFL: 50437 (TA30) |
| Gateway Link150   | Link150   |

# Vigilohm Range Commercial Reference Numbers

| Commercial ref. no.                   | Description                   |
|---------------------------------------|-------------------------------|
| <b>Vigilohm Insulation Monitoring</b> |                               |
| <b>50159</b>                          | ZX impedance                  |
| <b>50168</b>                          | HOSPITAL REMOTE PANEL         |
| <b>50169</b>                          | CARDEW Holder                 |
| <b>50170</b>                          | CARDEW 250V CA Surge arestor  |
| <b>50171</b>                          | CARDEW 440V CA Surge arestor  |
| <b>50172</b>                          | CARDEW 660V CA Surge arestor  |
| <b>50183</b>                          | CARDEW 1000V CA Surge arestor |
| <b>50248</b>                          | PHT1000                       |
| <b>50278</b>                          | XRM                           |
| <b>50281</b>                          | XGR 115-127VCA                |
| <b>50282</b>                          | XGR 220-240VCA                |
| <b>50283</b>                          | XGR 380-415VCA                |
| <b>50420</b>                          | TOA80 open toroid             |
| <b>50421</b>                          | TOA120 open toroid            |
| <b>50437</b>                          | TA30 toroid                   |
| <b>50438</b>                          | PA50 toroid                   |
| <b>50439</b>                          | IA80 toroid                   |
| <b>50440</b>                          | MA120 toroid                  |
| <b>50441</b>                          | SA200 toroid                  |
| <b>50442</b>                          | GA300 toroid                  |
| <b>50494</b>                          | XP15 Open CT for XRM          |
| <b>50498</b>                          | XP50 Open CT for XRM          |
| <b>50499</b>                          | XP100 Open CT for XRM         |
| <b>1460872</b>                        | Voltage Adaptor P1N           |
| <b>IMDCP100</b>                       | Current Probe 100mm           |
| <b>IMDCP15</b>                        | Current Probe 15mm            |
| <b>IMDCP50</b>                        | Current Probe 50mm            |
| <b>IMDIFL12</b>                       | Ins Fault locator Entry       |
| <b>IMDIFL12C</b>                      | Ins Fault locator Entry Com   |
| <b>IMDIFL12H</b>                      | Ins Fault locator HC          |

| Commercial ref. no.    | Description                                |
|------------------------|--|
| <b>IMDIFL12L</b>       | Ins Fault locator Entry 24-48VDC           |
| <b>IMDIFL12LMC</b>     | Ins Fault locator Adv 24-48VDC             |
| <b>IMDIFL12MC</b>      | Ins Fault locator Adv                      |
| <b>IMDIFL12MCT</b>     | Ins Fault locator Adv Tropic               |
| <b>IMDIFL12VA1T</b>    | Voltage Adaptor for IFL12MC series_1000V   |
| <b>IMDIFLK1</b>        | Mobile Ins Fault locator 1 feeder          |
| <b>IMDIFLK12</b>       | Mobile Ins Fault locator 12 feeders        |
| <b>IMD-IM10</b>        | IM10                                       |
| <b>IMD-IM10-H</b>      | IM10 H                                     |
| <b>IMDIM15H</b>        | IM15 H                                     |
| <b>IMD-IM20</b>        | IM20                                       |
| <b>IMD-IM20-1700</b>   | Voltage Adaptor for IM20                   |
| <b>IMD-IM20-H</b>      | IM20 H                                     |
| <b>IMD-IM400</b>       | IM400                                      |
| <b>IMD-IM400-1700</b>  | Voltage adaptor for IM400                  |
| <b>IMD-IM400-1700C</b> | Voltage adaptor for IM400 Conformal coated |
| <b>IMD-IM400C</b>      | IM400C                                     |
| <b>IMDIM400L</b>       | IM400L                                     |
| <b>IMDIM400LTHR</b>    | IM400LTHR                                  |
| <b>IMDIM400THR</b>     | IM400THR                                   |
| <b>IMD-IM400VA2</b>    | Voltage adaptor for PV application Coated  |
| <b>IMD-IM9</b>         | IM9  |
| <b>IMD-IM9-OL</b>      | IM9OL                                      |
| <b>IMD-IT-S63-H</b>    | Single Phase, Isolated Transformer, 6,3KVA |
| <b>IMD-IT-S80-H</b>    | Single Phase, Isolated Transformer, 8KVA   |
| <b>IMD-IT-S100-H</b>   | Single Phase, Isolated Transformer, 10KVA  |
| <b>IMDLRDH</b>         | Remote Display Hospital                    |

Please see your Schneider Electric representative for complete ordering information.

# EcoStruxure™ Panel Server

## IoT for an intelligent power network

The EcoStruxure™ Panel Server is the next generation of gateway, providing a seamless connection of wired or unwired smart IoT devices to your edge control software or cloud-based applications and analytics. It is a foundational enabler for Schneider Electric EcoStruxure™ solutions.

### Electrical safety

Panel Server is an integral part of Schneider Electric's continuous thermal monitoring application, helping reduce risk of electrical fires, increase people and assets protection. Implement the thermal monitoring of your electrical panel by connecting thermal and heat sensors to your Panel Server.

### Power availability

Electrical distribution monitoring and power event analysis help avoid unplanned downtime caused by electrical failure. Panel Server collects real-time data and alarms, presenting information through embedded webpages, making it available to edge control software or cloud-based applications and analytics for electrical system diagnostics. Use embedded webpages for first-level monitoring or monitor from your edge or cloud control system.

### Optimize energy efficiency

Improve your facility's energy efficiency and reduce energy consumption with energy usage analysis and performance tracking. Panel Server collects and shares energy data to help achieve your energy conservation initiatives. It is part of an energy data management system certified for compliance with ISO 50001, 50002, 50006 requirements.

### Cybersecurity

Guarding your electrical assets and systems against cyber attacks is vital. Discover the enhanced cybersecurity benefits of Panel Server and its IEC62443-4-1 compliant development lifecycle. Explore its cybersecurity features through a dedicated guide, and discover how Panel Server empowers you to retrieve security logs, providing valuable insights into system security and activity.



DB410992



EcoStruxure Panel Server gives you access to the information you need to protect, maximize and optimize your power system.



Help keep people and assets safer



Maximize power availability



Optimize energy efficiency



Improve cybersecurity

### All-in-one gateway

- Separates your OT network from your IT network
- Wireless data concentrator
- Modbus RS485 to Modbus TCP/IP
- Supports multiple Ethernet connections for serving information to edge control software and cloud applications

### Simple commissioning


- EcoStruxure™ Power Commission software
- Device auto discovery
- Generation of acceptance reports to validate gateway configuration
- Commission via WiFi

### Intuitive operation

- User-friendly webpages offer first-level monitoring
- Contextualized data and operational insights
- Simple alarm setup for email notification
- Standardized IEC 62974-1 compliant datalogger and energy server



## Architecture overview

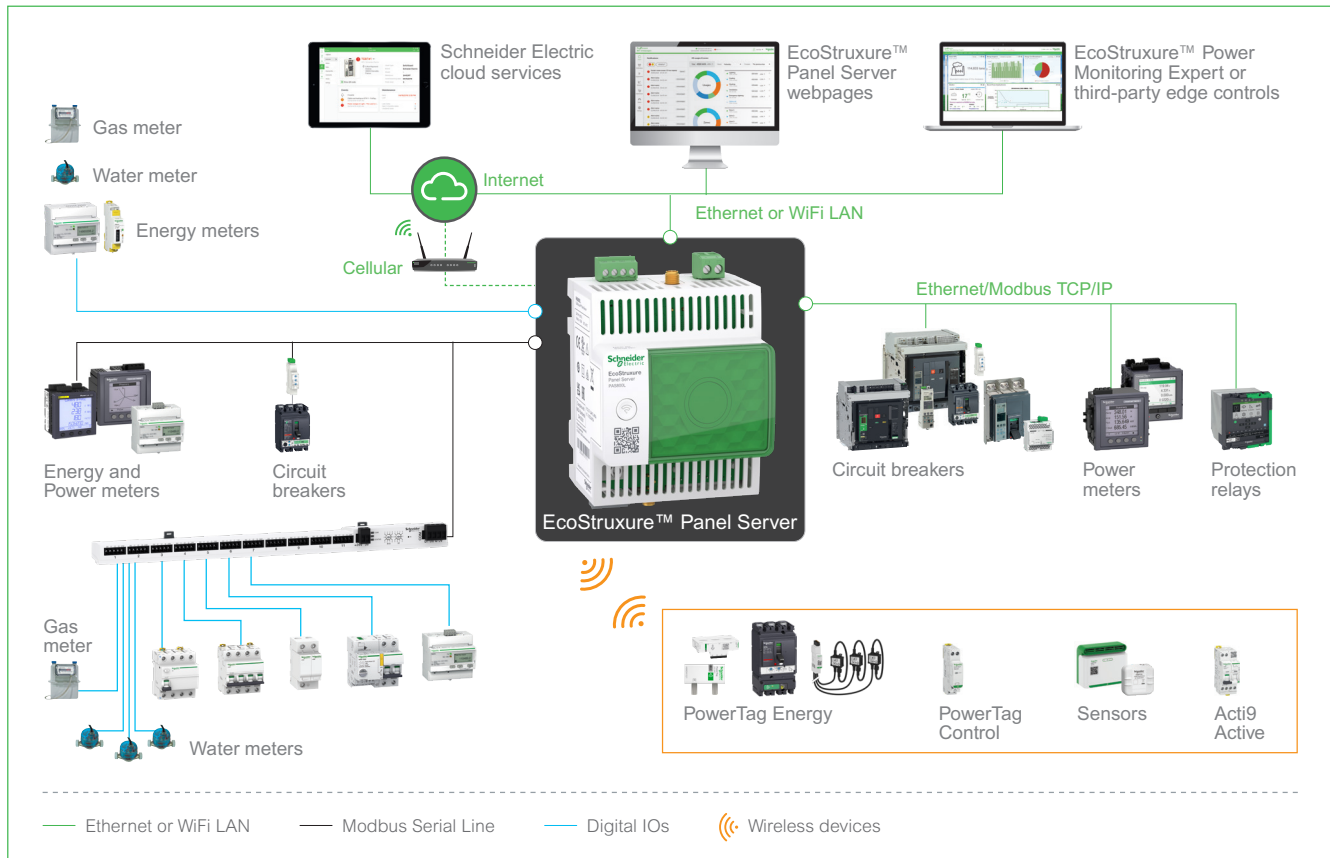

# Panel Server Entry



Panel Server Entry - Front ISO view

### Standards & certifications

- IEC 61010-1
- IEC 61010-2-201
- UL 61010-1
- UL 61010-2-201
- IEC 62974-1
- ETSI EN 301 489-1 V2.2.3
- ETSI EN 301 489-17 V3.2.4
- IEC 61326-1
- IEC 62974-1
- EN50581
- EN 62321
- EN 62474
- ETSI EN 300 328 V2.2.2



Compatible with a large set of wireless sensors, PowerTag Energy, Heat Tag, and others. PAS400 is the perfect fit for small networks or installations where space is a challenge.

### Functions

- Optimized gateway to retrieve data from your wireless devices.
- Connect to your monitoring and control software such as EcoStruxure™ Power Monitoring Expert, EcoStruxure™ Power Operation or to your Building Management System.
- Connect to Schneider Electric cloud applications such as EcoStruxure™ Energy Hub or Asset Advisor.
- Ease of commissioning with EcoStruxure™ Power Commission software or directly through the Panel Server webpages, enabling device plug-and-play and auto-discovery features.
- Ease of operation with user friendly embedded webpages, and data contextualization for more relevant analytics.

### Main features

- Power Supply 110...277 V AC/DC
- Designed to match with electrical switchboard environment (temperature, humidity electromagnetic compatibility)
- One Ethernet 10Base-T/100Base-T port
- Wi-Fi
- IEEE 802.15.4 wireless communication
- Modbus TCP/IP server
- Support of HTTPS, NTP, SNTP, DHCP client with proxy management
- Wireless devices concentrator to Modbus TCP/IP
- Designed through a Secured Development Life Cycle in accordance to IEC 62443-4-1
- Commissioning through EcoStruxure™ Power Commission or through Embedded Web-Pages
- Speed-up commissioning through device list import and configuration export to the monitoring software
- Fully integrated in Cybersecurity Admin Expert tool to facilitate the management of cybersecurity in your electrical network's (Security features such as enabling/disabling communication means).
- Embedded web server for real-time measurement visualization, and power consumption
- Real-time alarm display

| Comm. Reference | Description                          |
|-----------------|--------------------------------------|
| PAS400          | Panel Server Entry 110...277 V AC/DC |

\* Commercialised in Q3, 2022

# Panel Server Entry

## Panel Server Entry technical specification


| Technical data                        |   | EcoStruxure™ Panel Server Entry   |
|---------------------------------------|---|---|
| Commercial Reference                  |   | PAS400  |
| Power Supply                          |   |   |
| Voltage                               |   | 110...277 V AC/DC   |
| Tolerance                             |   | ± 10%   |
| Frequency                             |   | 45...65 Hz  |
| Maximum consumption                   |   | 3 W, 10 VA  |
| Ethernet & Wi-Fi                      |   |   |
| Ethernet<br>10/100base T              | Number of Ports                           | Single RJ45 Port  |
|                                       | PoE 802.3af & 802.3at Class 0             | NA  |
| Wi-Fi                                 | Supported Frequency                       | 2.4 & 5 GHz   |
| TCP/IP                                |   | Yes   |
| IP V4/IP V6                           |   | Yes   |
| DPWS                                  |   | Yes   |
| DHCP                                  | Client                                    | Yes   |
|                                       | Server (Separate Network)                 | No  |
| Modbus TCP/IP Server                  | Max. number of client connection          | 64  |
| Modbus TCP/IP Client                  | Max. number of Modbus TCP/IP devices      | NA  |
| Schneider Electric Cloud Services     |   | Yes   |
| HTTPS                                 |   | Yes   |
| External Wi-Fi/Antenna                |   | No  |
| Wireless Devices (IEEE 802.15.4)      |   |   |
| Number of devices                     | Total for mixed network                   | 20 devices  |
|                                       | PowerTag Energy & Easergy TH110/CL110     | 20 devices  |
|                                       | Other type of devices <sup>(+1)</sup>     | 20 devices  |
| External IEEE 802.15.4 Antenna        |   | No  |
| Serial Ports                          |   |   |
| Modbus RS485 Client                   | Max. number of devices w/o repeater       | NA  |
|                                       | Max. number of devices with repeater      | NA  |
|                                       | Maximum Length                            | NA  |
|                                       | Baud Rate                                 | NA  |
| Functionality                         |   |   |
| Data Buffering for cloud applications |   | 1 month   |
| Data Logger and Web-Server            | Data Logging                              | No  |
|                                       | Event logging                             | Yes <sup>(+2)</sup>   |
|                                       | Simple Monitoring Web-Pages               | Yes   |
|                                       | Monitoring Web-Pages with historical data | No  |
| Time Management                       | RTC (with battery)                        | Yes   |
|                                       | TimeUpdate (NTP & SNTP)                   | Yes   |
| Digital inputs                        |   |   |
| Two DI                                | WAGES & Dry-Contact                       | No  |
| Environmental                         |   |   |
| Protection Degree                     | Front Face                                | IP40  |
|                                       | Others                                    | IP20  |
| Overvoltage Category                  |   | OVC III   |
| Pollution Degree                      |   | 2   |
| Temperature                           | Operation                                 | -25...+60 °C  |
|                                       | Storage                                   | -40...+85 °C  |
| Altitude Max.                         |   | < 2000 m  |
| Relative Humidity                     |   | 5...95 %  |
| Mechanical                            |   |   |
| Form factor                           |   | Acti9   |
| Installation                          |   | Din Rail  |
| Width                                 |   | 54 mm   |
| Weight                                |   | 163 g   |
| Standard & Certification              |   |   |
| Certifications                        |   | CE, CULus, CB, RCM, UKCA, FCC, IC, RF, Marine certification (DNV)   |
| Standards                             |   | EN/ IEC 61010-1, EN/IEC 61010-2-201, UL 61010-1, UL 61010-2-201, CSA C22.2 No 61010-1-12, CAN/CSA C22.2 No 61010-2-201, EN IEC 62974-1, EN/IEC 61326-1, ETSI EN 301-489-1, ETSI EN 301-489-17, ETSI EN 300-328, IEEE 802.15.4, IEEE 802.11b/g/n, IEEE 802.3 af/at, EN 301-893, 47 CFR FCC Part 15, Subpart B, Class A, EN IEC 62311, ANSI C63, IACS UR E10, DNVGL-CG-0339 |

<sup>(+1)</sup> Consult the User Manual or other documentations to check the limit applicable to your wireless device.


<sup>(+2)</sup> Lower limits may apply depending on the firmware version, the serial line length, and the type of device(s). Consult the User Manual, Release Notes or other documentations.

# Panel Server Entry

## Panel Server Entry dimensions

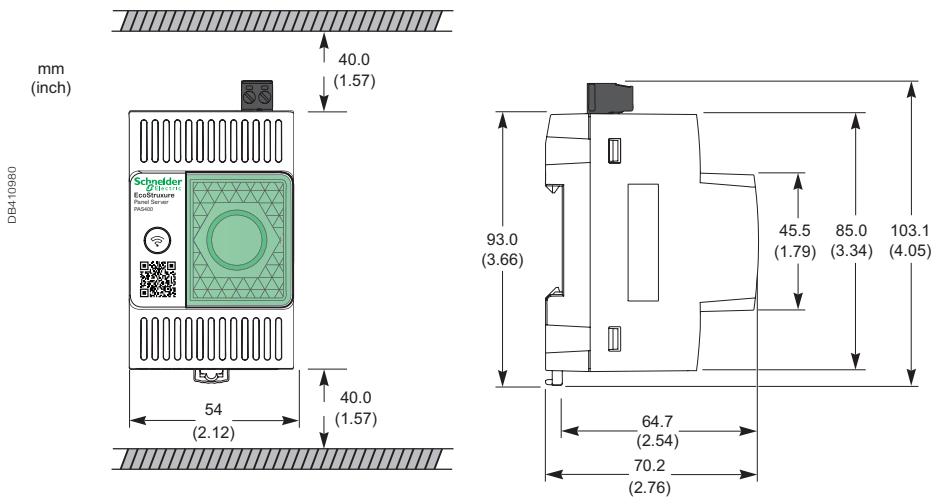

## Panel Server Entry physical descriptions

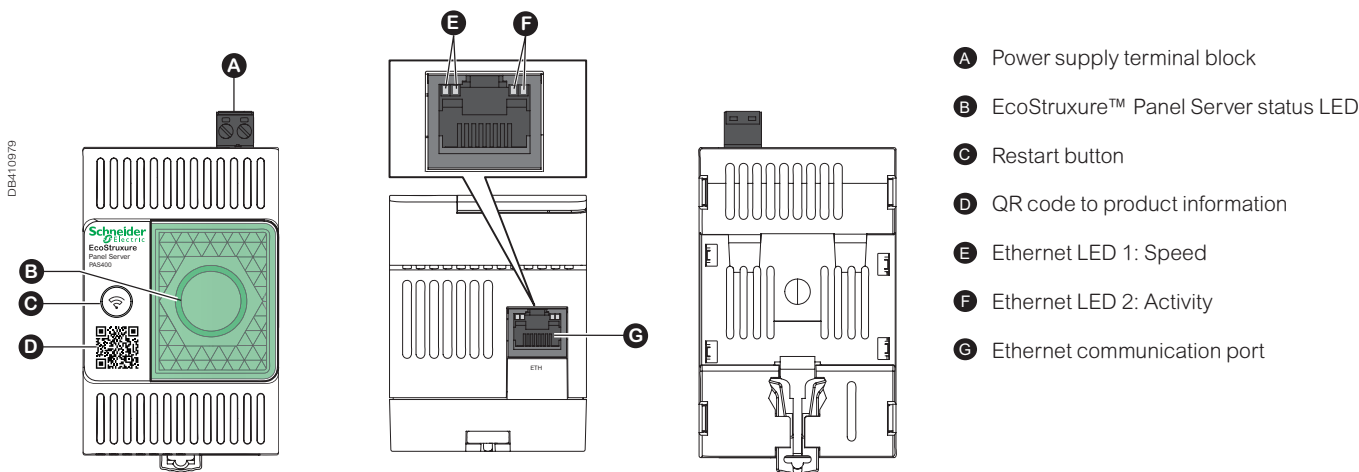

Please see the appropriate **Installation Guide** for accurate and complete information on the installation of this product.


# Panel Server Universal



Panel Server Universal - Front ISO view

## Standards & certifications

- IEC 61010-1
- IEC 61010-2-201
- UL 61010-1
- UL 61010-2-201
- IEC 62974-1
- ETSI EN 301 489-1 V.2.2.3
- ETSI EN 301 489-17 V.3.2.4
- IEC 61326-1
- IEC 62974-1
- EN50581
- EN 62321
- EN 62474
- ETSI EN 300 328 V2.2.2

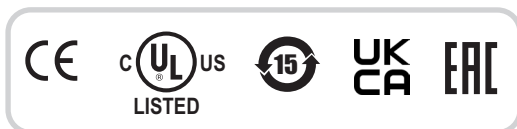

| Comm. Reference | Description  |
|-----------------|--|
| PAS600          | Panel Server Universal with 110...277 V AC/DC power supply   |
| PAS600L         | Panel Server Universal with 24 V DC power supply             |
| PAS600LWD       | Wired by Design Panel Server Universal with 24 V DC Power    |
| PAS600PWD       | Wired by Design Panel Server Universal with PoE power supply |

## All-in-one and Wired by Design Panel Server

- The All-in-one Panel Server Universal is designed to retrieve data from wireless, Modbus, and Ethernet based protocols to offer versatility and adaptability.
- Panel Server Universal Wired by Design is designed for specific cybersecure sensitive installations, dedicated to wired communication protocols (Modbus, Ethernet) and PAS embedded digital inputs.(PAS600LWD).

## Functions

- Connect to your monitoring and control software such as EcoStruxure™ Power Monitoring Expert, EcoStruxure™ Power Operation or to your Building Management System.
- Connect to Schneider Electric cloud applications such as EcoStruxure™ Energy Hub or Asset Advisor.
- Ease of commissioning with EcoStruxure™ Power Commission software or directly through the Panel Server webpages, enabling device plug-and-play and auto-discovery features.
- Ease of operation with user friendly embedded webpages, and data contextualization for more relevant analytics.

## Main features

- Power Supply 24 V DC, 110...277 V AC/DC, PoE-PD (CLASS 0, IEEE 802.3af/at)
- Designed to match demanding electrical switchboard environment (temperature, humidity electromagnetic compatibility)
- Two Ethernet 10Base-T/100Base-T port (supporting switched or separated network topology)
- Wi-Fi (All-in-one Panel Server Universal)
- Modbus RS485 serial communication
- IEEE 802.15.4 wireless communication (All-in-one Panel Server Universal)
- Modbus TCP/IP server and client
- Support of HTTPS, NTP, SNTP, DHCP client and server with proxy management
- Modbus RS485 to Modbus TCP/IP Gateway
- Wireless devices concentrator to Modbus TCP/IP (All-in-one Panel Server Universal)
- Two digital inputs (24 V DC version only) for contact information or WAGES pulse meter
- Designed through a Secured Development Life Cycle in accordance to IEC 62443-4-1
- Commissioning through EcoStruxure™ Power Commission or through Embedded Web-Pages
- Speed-up commissioning through device list import and configuration export to the monitoring software
- Fully integrated in Cybersecurity Admin Expert tool to facilitate the management of cybersecurity in your electrical network's (Security features and measures such as enabling/disabling communication means or implementation of two Wired by Design models)
- Embedded web server for real-time measurement visualization, and power consumption
- Real-time alarm display

## Accessories for All-in-one Panel Server Universal

- Wi-Fi external antenna (PASA-ANT1) for PAS600 and PAS600L

# Panel Server Universal

## Panel Server Universal technical specification

| Technical data                        |   | EcoStruxure™ Panel Server Universal  |                          |   |             |  |
|---------------------------------------|---|--|--------------------------|---|-------------|--|
| Commercial Reference                  |   | PAS600   | PAS600L                  | PAS600LWD   | PAS600PWD   |  |
| Power Supply                          |   |  |                          |   |             |  |
| Voltage                               |   | 110...277 V AC/DC  | 24 V DC                  | 24 V DC   | via POE     |  |
| Tolerance                             |   | ± 10%  |                          | ± 10%   | NA          |  |
| Frequency                             |   | 45...65 Hz   | NA                       |   |             |  |
| Maximum consumption                   |   | 3 W/10 VA  | 3 W                      | 3.5 W   |             |  |
| Ethernet & Wi-Fi                      |   |  |                          |   |             |  |
| Ethernet<br>10/100base T              | Number of Ports                           | Two RJ45 ports   |                          |   |             |  |
|                                       | PoE 802.3af & 802.3at Class 0             | No   |                          |   | 1 port (PD) |  |
| Wi-Fi                                 | Supported Frequency                       | 2.4 GHz  | -                        |   | -           |  |
| TCP/IP                                |   | Yes  |                          |   |             |  |
| IP V4/IP V6                           |   | Yes  |                          |   |             |  |
| DPWS                                  |   | Yes  |                          |   |             |  |
| DHCP                                  | Client                                    | Yes  |                          |   |             |  |
|                                       | Server (Separate Network)                 | Yes  |                          |   |             |  |
| Modbus TCP/IP Server                  | Max. number of client connection          | 64   |                          |   |             |  |
| Modbus TCP/IP Client                  | Max. number of Modbus TCP/IP devices      | 128 <sup>(+2)</sup>  |                          |   |             |  |
| Schneider Electric Cloud Services     |   | Yes  |                          |   |             |  |
| HTTPS                                 |   | Yes  |                          |   |             |  |
| External Wi-Fi/Antenna                |   | PASA-ANT1  | -                        |   | -           |  |
| Wireless Devices (IEEE 802.15.4)      |   |  |                          |   |             |  |
| Number of devices                     | Total for mixed network                   | up to 40 devices <sup>(+2)</sup>   |                          | NA  |             |  |
|                                       | PowerTag Energy & Easergy TH110/CL110     | up to 85 devices <sup>(+2)</sup>   |                          | NA  |             |  |
|                                       | Other type of devices <sup>(+1)</sup>     | 40 devices <sup>(+2)</sup>   |                          | NA  |             |  |
| Serial Ports                          |   |  |                          |   |             |  |
| Modbus RS485 Client                   | Max. number of devices w/o repeater       | 32 devices   |                          |   |             |  |
|                                       | Max. number of devices with repeater      | 128 devices  |                          |   |             |  |
|                                       | Maximum Length                            | 1000 m   |                          |   |             |  |
|                                       | Baud Rate                                 | 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200  |                          |   |             |  |
| Functionality                         |   |  |                          |   |             |  |
| Data Buffering for cloud applications |   | 1 month  |                          |   |             |  |
| Data Logger and Web-Server            | Data Logging                              | No   |                          |   |             |  |
|                                       | Event logging                             | Yes <sup>(+2)</sup>  |                          |   |             |  |
|                                       | Simple Monitoring Web-Pages               | Yes  |                          |   |             |  |
|                                       | Monitoring Web-Pages with historical data | No   |                          |   |             |  |
| Time Management                       | RTC (with battery)                        | Yes  |                          |   |             |  |
|                                       | TimeUpdate (NTP & SNTP)                   | Yes  |                          |   |             |  |
| Digital inputs                        |   |  |                          |   |             |  |
| Two DI                                | WAGES & Dry-Contact                       | No   | Yes                      | Yes   | No          |  |
| Environmental                         |   |  |                          |   |             |  |
| Protection Degree                     | Front Face                                | IP40   |                          |   |             |  |
|                                       | Others                                    | IP20   |                          |   |             |  |
| OverVoltage Category                  |   | OVC III  |                          |   |             |  |
| Pollution Degree                      |   | 2  | 3                        | 3   | 2           |  |
| Temperature                           | Operation                                 | -25...+70 °C   |                          |   |             |  |
|                                       | Storage                                   | -40...+85 °C   |                          |   |             |  |
| Altitude Max.                         |   | < 2000 m   | < 4000 m <sup>(+3)</sup> |   | < 2000 m    |  |
| Relative Humidity                     |   | 0...93%  | 5...95%                  | 5...95%   | 0...93%     |  |
| Mechanical                            |   |  |                          |   |             |  |
| Form factor                           |   | Acti9  |                          |   |             |  |
| Installation                          |   | Din Rail   |                          |   |             |  |
| Width                                 |   | 72 mm  |                          |   |             |  |
| Weight                                |   | 201 g  | 181 g                    | 180 g   | 182 g       |  |
| Standard & Certification              |   |  |                          |   |             |  |
| Certifications                        |   | CE, CULus, CB, RCM, UKCA, FCC, IC, RF, Marine certification (DNV)  |                          | CE, CULus, CB, RCM, UKCA, FCC, IC, Marine certification (DNV)   |             |  |
| Standards                             |   | EN/ IEC 61010-1, EN/IEC 61010-2-201, UL 61010-1, UL 61010-2-201, CSA C22.2 No 61010-1-12, CAN/CSA C22.2 No 61010-2-201, EN IEC 62974-1, EN/IEC 61326-1, ETSI EN 301-489-1, ETSI EN 301-489-17, ETSI EN 300-328, IEEE 802.15.4, IEEE 802.11b/g/n, IEEE 802.3 af/at, IEC 60945, 47 CFR FCC Part 15, Subpart B, Class A, EN IEC 62311, ANSI C63, IACS UR E10, DNVGL-CG-0339, IEC62443-3-3 (PAS600L) |                          | EN/ IEC 61010-1, EN/IEC 61010-2-201, UL 61010-1, UL 61010-2-201, CSA C22.2 No 61010-1-12, CAN/CSA C22.2 No 61010-2-201, EN IEC 62974-1, EN/IEC 61326-1, IEC 60945, 47 CFR FCC Part 15, Subpart B, Class A, IACS UR E10, DNVGL-CG-0339, EN 62947-1 |             |  |


<sup>(+1)</sup> Consult the User Manual or other documentations to check the limit applicable to your wireless device.

<sup>(+2)</sup> Lower limits may apply depending on the firmware version, the serial line length, and the type of device(s). Consult the User Manual, Release Notes or other documentations.


<sup>(+3)</sup> The maximum altitude can be less than 4000 m with an operating temperature of -25...+60 °C between 2000 m and 4000 m.

# Panel Server Universal

## Panel Server Universal dimensions

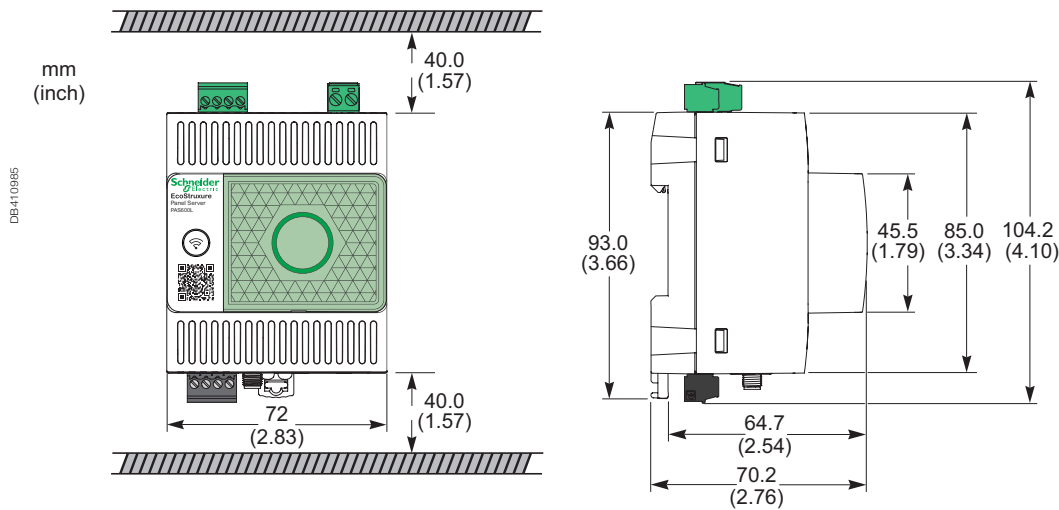

## Panel Server Universal physical descriptions

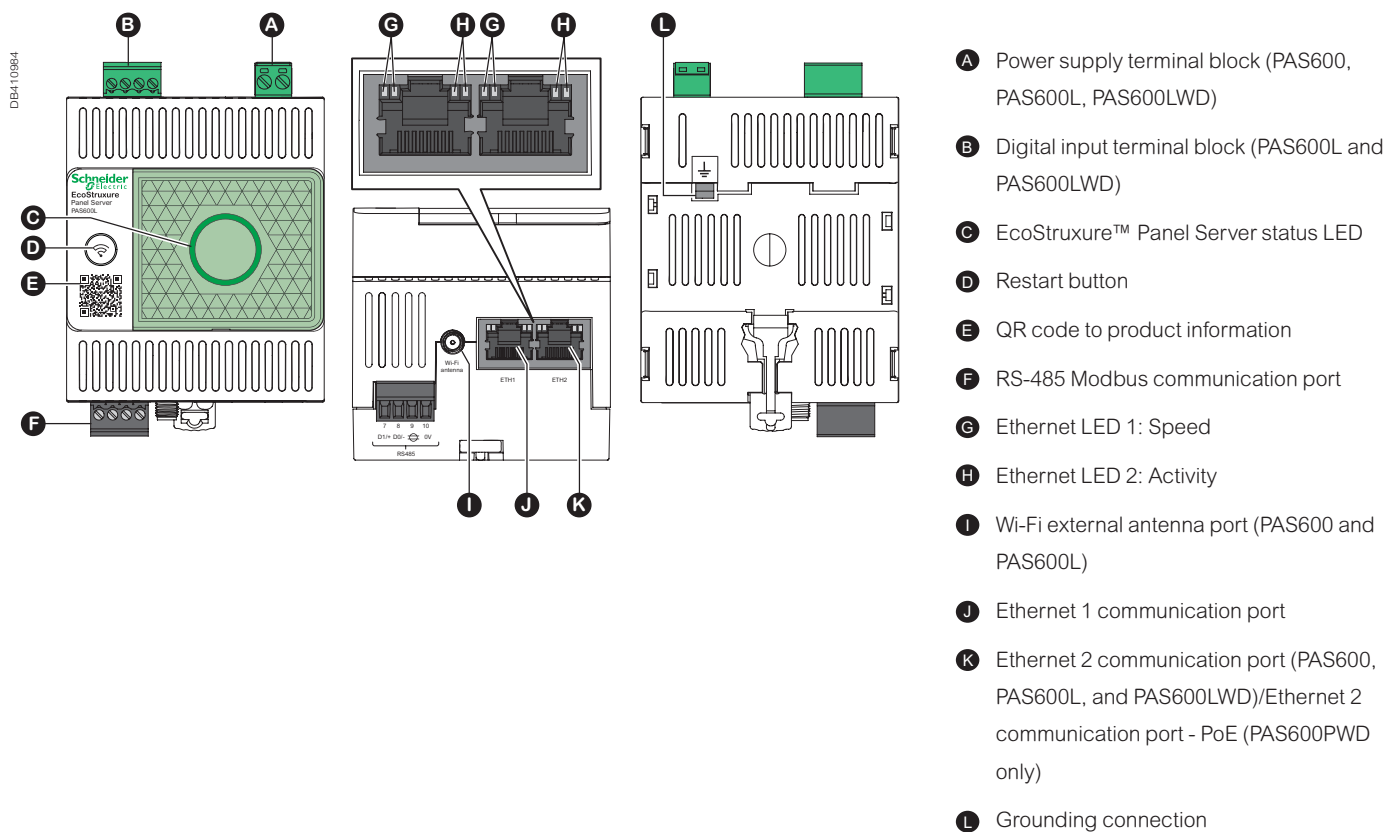

Please see the appropriate **Installation Guide** for accurate and complete information on the installation of this product.

# Panel Server Advanced



Panel Server Advanced- Front ISO view

### Standards & certifications

- IEC 61010-1
- IEC 61010-2-201
- UL 61010-1
- UL 61010-2-201
- IEC 62974-1
- ETSI EN 301 489-1 V.2.2.3
- ETSI EN 301 489-17 V.3.2.4
- IEC 61326-1
- IEC 62974-1
- EN50581
- EN 62321
- EN 62474
- ETSI EN 300 328 V2.2.2



| Comm. Reference | Description   |
|-----------------|---|
| PAS800L         | Panel Server Advanced with 24 V DC power supply           |
| PAS800P         | Panel Server Advanced with PoE power supply               |
| PAS800          | Panel Server Advanced with 110...277 V AC/DC power supply |

Panel Server has Data Logger and Local Energy Server capabilities. It embodies the first step into energy monitoring. Follow, analyze and compare your loads consumption to enable energy savings.

### Functions

- An all-in-one gateway to retrieve data from both your wireless IEEE 802.15.4 devices and Modbus devices.
- Monitor up to three years historized data and analyze your energy consumption directly through the Panel Server Advanced embedded webpages.
- Connect to your monitoring and control software such as EcoStruxure™ Power Monitoring Expert, EcoStruxure™ Power Operation or to your Building Management System.
- Connect to Schneider Electric cloud applications such as EcoStruxure™ Energy Hub or Asset Advisor.
- Ease of commissioning with EcoStruxure™ Power Commission software or directly through the Panel Server webpages, enabling device plug-and-play and auto-discovery features.
- Ease of operation with user friendly embedded webpages, and data contextualization for more relevant analytics.

### Main features

- Power Supply 24 V DC, 110...277 V AC/DC, PoE-PD (CLASS 0, IEEE802.3af/at)
- Designed to match demanding electrical switchboard environment (temperature, humidity electromagnetic compatibility)
- Two Ethernet 10Base-T/100Base-T port (supporting switched or separated network topology)
- Wi-Fi
- Modbus RS485 serial communication
- IEEE 802.15.4 wireless communication
- Modbus TCP/IP server and client
- Support of HTTPS, NTP, SNTP, DHCP client and server with proxy management
- Modbus RS485 to Modbus TCP/IP Gateway
- Wireless devices concentrator to Modbus TCP/IP
- Two digital inputs (24 V DC version only) for contact information or WAGES pulse meter
- Designed through a Secured Development Life Cycle in accordance to IEC 62443-4-1
- Commissioning through EcoStruxure™ Power Commission or though Embedded Web-Pages
- Speed-up commissioning through device list import and configuration export to the monitoring software
- Fully integrated in Cybersecurity Admin Expert tool for security settings (Security features such as enabling/disabling communication means)
- Embedded web server for real-time measurement and alarm visualization, energy & power consumption by usage and location, 3 years historical trending and dashboarding
- 3 years Data Logger with 32 GB memory
- Real-time alarm display and e-mail notification
- Event and alarm historization and dashboarding

### Compatible accessories

- Wi-Fi external antenna (PASA-ANT1)
- IEEE 802.15.4 external antenna (PASA-ANT1)

# Panel Server Advanced

## Panel Server Advanced technical specification

| Technical data                        |   |  | EcoStruxure™ Panel Server Advanced |             |
|---------------------------------------|---|--|------------------------------------|-------------|
| Commercial Reference                  |   | PAS800   | PAS800L                            | PAS800P     |
| Power Supply                          |   |  |                                    |             |
| Voltage                               |   | 110...277 V AC/DC  | 24 V DC                            | PoE         |
| Tolerance                             |   | ± 10 %   | ± 10 %                             |             |
| Frequency                             |   | 45...65 Hz   | NA                                 |             |
| Maximum consumption                   |   | 3 W/10 VA  | 3 W                                | 3.5 W       |
| Ethernet & Wi-Fi                      |   |  |                                    |             |
| Ethernet 10/100base T                 | Number of Ports                           | Two RJ45 ports   |                                    |             |
|                                       | PoE 802.3af & 802.3at Class 0             | No   |                                    | 1 port (PD) |
| Wi-Fi                                 | Supported Frequency                       | 2.4 & 5 GHz  |                                    |             |
| TCP/IP                                |   | Yes  |                                    |             |
| IP V4/IP V6                           |   | Yes  |                                    |             |
| DPWS                                  |   | Yes  |                                    |             |
| DHCP                                  | Client                                    | Yes  |                                    |             |
|                                       | Server (Separate Network)                 | Yes  |                                    |             |
| Modbus TCP/IP Server                  | Max. number of client connection          | 64   |                                    |             |
| Modbus TCP/IP Client                  | Max. number of Modbus TCP/IP devices      | 128 <sup>(+2)</sup>  |                                    |             |
| Schneider Electric Cloud Services     |   | Yes  |                                    |             |
| HTTPS                                 |   | Yes  |                                    |             |
| External Wi-Fi/Antenna                |   | PASA-ANT1  |                                    |             |
| Wireless Devices (IEEE 802.15.4)      |   |  |                                    |             |
| Number of devices                     | Total for mixed network                   | up to 40 devices <sup>(+2)</sup>   |                                    |             |
|                                       | PowerTag Energy & Easergy TH110/CL110     | up to 85 devices <sup>(+2)</sup>   |                                    |             |
|                                       | Other type of devices <sup>(+1)</sup>     | 40 devices <sup>(+2)</sup>   |                                    |             |
| External IEEE 802.15.4 Antenna        |   | PASA-ANT1  |                                    |             |
| Serial Ports                          |   |  |                                    |             |
| Modbus RS485 Client                   | Max. number of devices w/o repeater       | 32 devices   |                                    |             |
|                                       | Max. number of devices with repeater      | 128 devices  |                                    |             |
|                                       | Maximum Length                            | 1000 m   |                                    |             |
|                                       | Baud Rate                                 | 1200, 4800, 9600, 19200, 38400, 57600, 115200  |                                    |             |
| Functionality                         |   |  |                                    |             |
| Data Buffering for cloud applications |   | 3 months   |                                    |             |
| Data Logger and Web-Server            | Data Logging                              | 3 years  |                                    |             |
|                                       | Event logging                             | Yes <sup>(+2)</sup>  |                                    |             |
|                                       | Simple Monitoring Web-Pages               | Yes  |                                    |             |
|                                       | Monitoring Web-Pages with historical data | Yes  |                                    |             |
| Time Management                       | RTC (with battery)                        | Yes  |                                    |             |
|                                       | TimeUpdate (NTP & SNTP)                   | Yes  |                                    |             |
| Digital inputs                        |   |  |                                    |             |
| Two DI                                | WAGES & Dry-Contact                       | No   | Yes                                | No          |
| Environmental                         |   |  |                                    |             |
| Protection Degree                     | Front Face                                | IP40   |                                    |             |
|                                       | Others                                    | IP20   |                                    |             |
| OverVoltage Category                  |   | OVC III  |                                    |             |
| Pollution Degree                      |   | 2  | 3                                  | 2           |
| Temperature                           | Operation                                 | -25...70 °C  |                                    |             |
|                                       | Storage                                   | -40...85 °C  |                                    |             |
| Altitude Max.                         |   | < 2000 m   | < 4000 m <sup>(+3)</sup>           | < 2000 m    |
| Relative Humidity                     |   | 5...95%  |                                    |             |
| Mechanical                            |   |  |                                    |             |
| Form factor                           |   | Acti9  |                                    |             |
| Installation                          |   | Din Rail   |                                    |             |
| Width                                 |   | 72 mm  |                                    |             |
| Weight                                |   | 206 g  | 186 g                              | 184 g       |
| Standard & Certification              |   |  |                                    |             |
| Certifications                        |   | CE, CULus, CB, RCM, UKCA, FCC, IC, RF, Marine certification (DNV)  |                                    |             |
| Standards                             |   | EN/ IEC 61010-1, EN/IEC 61010-2-201, UL 61010-1, UL 61010-2-201, CSA C22.2 No 61010-1-12, CAN/CSA C22.2 No 61010-2-201, EN IEC 62974-1, EN/IEC 61326-1, ETSI EN 301-489-1, ETSI EN 301-489-17, ETSI EN 300-328, IEEE 802.15.4, IEEE 802.11b/g/n, IEEE 802.3 af/at, EN 301-893, IEC 60945, 47 CFR FCC Part 15, Subpart B, Class A, EN IEC 62311 |                                    |             |


<sup>(+1)</sup> Consult the User Manual or other documentations to check the limit applicable to your wireless device.

<sup>(+2)</sup> Lower limits may apply depending on the firmware version, the serial line length, and the type of device(s). Consult the User Manual, Release Notes or other documentations.


<sup>(+3)</sup> The maximum altitude can be less than 4000 m with an operating temperature of -25...+60 °C between 2000 m and 4000 m.

# Panel Server Advanced

## Panel Server Advanced dimensions

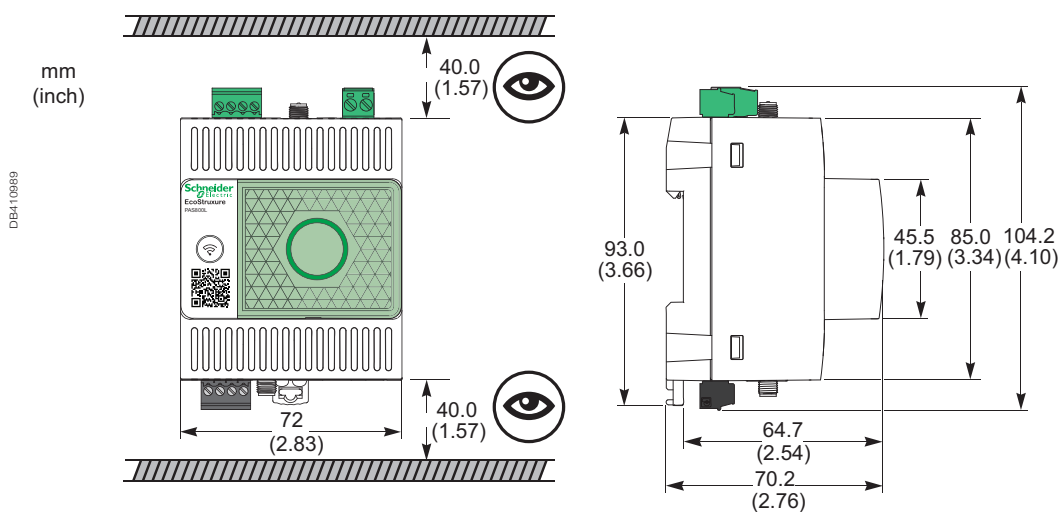

## Panel Server Advanced physical descriptions

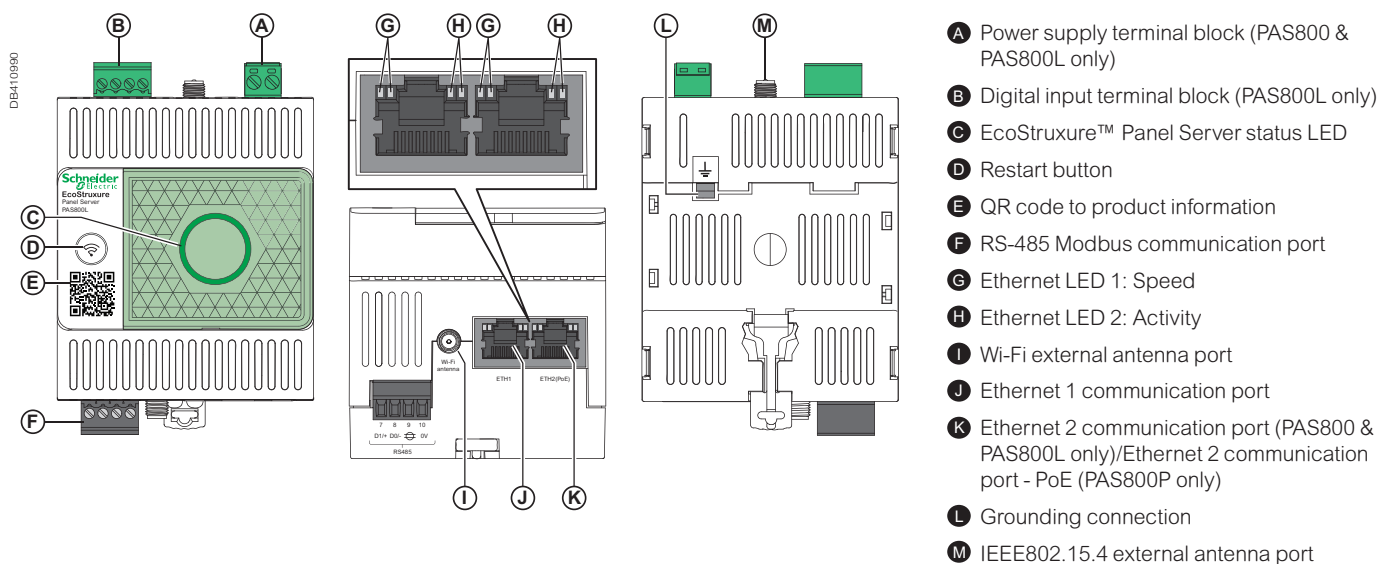

Please see the appropriate **Installation Guide** for accurate and complete information on the installation of this product.

# Commercial Reference Numbers

| Commercial reference number | Description  | Page      | Commercial reference number | Description                                   | Page      |
|-----------------------------|--|-----------|-----------------------------|---|-----------|
|                             | <b>Current Transformers</b>  | <b>16</b> | <b>METSECT5DB300</b>        | CT tropicalised 3000 5 dual out. bars 38x127  |           |
|                             | <b>CT Ip/5 A ratio</b>   | <b>18</b> | <b>METSECT5DC200</b>        | CT tropicalised 2000 5 dual out. bars 52x127  |           |
| <b>16550</b>                | 44 x 66 x 37 Adapter for DIN rails Mounting plate                          |           | <b>METSECT5DC250</b>        | CT tropicalised 2500 5 dual out. bars 52x127  |           |
| <b>16551</b>                | 56 x 84 x 60 Adapter for DIN rails Mounting plate, insulated locking screw |           | <b>METSECT5DC300</b>        | CT tropicalised 3000 5 dual out. bars 52x127  |           |
| <b>METSECT5CC004</b>        | CC 40 A  |           | <b>METSECT5DC400</b>        | CT tropicalised 4000 5 dual out. bars 52x127  |           |
| <b>METSECT5CC005</b>        | CC 50 A  |           | <b>METSECT5DD100</b>        | CT tropicalised 1000 5 dual out. bars 34x84   |           |
| <b>METSECT5CC006</b>        | CC 60 A  |           | <b>METSECT5DD125</b>        | CT tropicalised 1250 5 dual out. bars 34x84   |           |
| <b>METSECT5CC008</b>        | CC 75 A  |           | <b>METSECT5DD150</b>        | CT tropicalised 1500 5 dual out. bars 34x84   |           |
| <b>METSECT5CC010</b>        | CC 100 A   |           | <b>METSECT5DE100</b>        | CT tropicalised 1000 5 dual out. bars 54x102  |           |
| <b>METSECT5CC013</b>        | CC 125 A   |           | <b>METSECT5DE125</b>        | CT tropicalised 1250 5 dual out. bars 54x102  |           |
| <b>METSECT5CC015</b>        | CC 150 A   |           | <b>METSECT5DE150</b>        | CT tropicalised 1500 5 dual out. bars 54x102  |           |
| <b>METSECT5CC020</b>        | CC 200 A   |           | <b>METSECT5DE200</b>        | CT tropicalised 2000 5 dual out. bars 54x102  |           |
| <b>METSECT5CC025</b>        | CC 250 A   |           | <b>METSECT5DH125</b>        | CT tropicalised 1250 5 dual out. bars 38x102  |           |
| <b>METSECT5MB025</b>        | MB 250 A   |           | <b>METSECT5DH150</b>        | CT tropicalised 1500 5 dual out. bars 38x102  |           |
| <b>METSECT5MB030</b>        | MB 300 A   |           | <b>METSECT5DH200</b>        | CT tropicalised 2000 5 dual out. bars 38x102  |           |
| <b>METSECT5MB040</b>        | MB 400 A   |           |                             | <b>Split core CTs</b>                         | <b>28</b> |
| <b>METSECT5MA015</b>        | MA 150 A   |           |                             | <b>Busbar Type H</b>                          |           |
| <b>METSECT5MA020</b>        | MA 200 A   |           |                             | <b>Frame 1</b>                                |           |
| <b>METSECT5MA025</b>        | MA 250 A   |           | <b>METSECT5HA015</b>        | IEC Split Core CT Cable 150/5 A 1 VA cl.1     |           |
| <b>METSECT5MA030</b>        | MA 300 A   |           | <b>METSECT5HA020</b>        | IEC Split Core CT Cable 200/5 A 1.5 VA cl.1   |           |
| <b>METSECT5MA040</b>        | MA 400 A   |           | <b>METSECT5HA025</b>        | IEC Split Core CT Cable 250/5 A 1 VA cl.0.5   |           |
| <b>METSECT5MC025</b>        | MC 250 A   |           |                             | <b>Frame 2</b>                                |           |
| <b>METSECT5MC030</b>        | MC 300 A   |           | <b>METSECT5HD025</b>        | IEC Split Core CT Cable 250/5 A 1 VA cl.1     |           |
| <b>METSECT5MC040</b>        | MC 400 A   |           | <b>METSECT5HD030</b>        | IEC Split Core CT Cable 300/5 A 1.5 VA cl.1   |           |
| <b>METSECT5MC050</b>        | MC 500 A   |           | <b>METSECT5HD040</b>        | IEC Split Core CT Cable 400/5 A 2.5 VA cl.1   |           |
| <b>METSECT5MC060</b>        | MC 600 A   |           | <b>METSECT5HD050</b>        | IEC Split Core CT Cable 500/5 A 1 VA cl.0.5   |           |
| <b>METSECT5MC080</b>        | MC 800 A   |           |                             | <b>Frame 3</b>                                |           |
| <b>METSECT5MD050</b>        | MD 500 A   |           | <b>METSECT5HG010</b>        | IEC Split Core CT Cable 100/5 A 1.5 VA cl.3   |           |
| <b>METSECT5MD060</b>        | MD 600 A   |           | <b>METSECT5HG013</b>        | IEC Split Core CT Cable 125/5 A 2.5 VA cl.3   |           |
| <b>METSECT5MD080</b>        | MD 800 A   |           | <b>METSECT5HG015</b>        | IEC Split Core CT Cable 150/5 A 3 VA cl.3     |           |
| <b>METSECT5CYL1</b>         | Cylinder 8.5 mm dia.   |           | <b>METSECT5HG020</b>        | IEC Split Core CT Cable 200/5 A 3 VA cl.3     |           |
| <b>METSECT5CYL2</b>         | Cylinder 10.5 mm dia.  |           | <b>METSECT5HG025</b>        | IEC Split Core CT Cable 250/5 A 3 VA cl.3     |           |
| <b>METSECT5COVER</b>        | sealable cover 60.5 x 22 x 23.5 mm for CT TI                               |           | <b>METSECT5HG030</b>        | IEC Split Core CT Cable 300/5 A 2.5 VA cl.1   |           |
| <b>METSECT5VV500</b>        | CT tropicalised 5000 5 bars 55x165   |           | <b>METSECT5HG040</b>        | IEC Split Core CT Cable 400/5 A 5 VA cl.1     |           |
| <b>METSECT5VV600</b>        | CT tropicalised 6000 5 bars 55x165   |           | <b>METSECT5HG050</b>        | IEC Split Core CT Cable 500/5 A 5 VA cl.1     |           |
| <b>METSECT5DA040</b>        | CT tropicalised 400 5 dual out. bars 32x65                                 |           | <b>METSECT5HG060</b>        | IEC Split Core CT Cable 600/5 A 5 VA cl.1     |           |
| <b>METSECT5DA050</b>        | CT tropicalised 500 5 dual out. bars 32x65                                 |           |                             | <b>Frame 4</b>                                |           |
| <b>METSECT5DA060</b>        | CT tropicalised 600 5 dual out. bars 32x65                                 |           | <b>METSECT5HJ030</b>        | IEC Split Core CT Cable 300/5 A 2.5 VA cl.1   |           |
| <b>METSECT5DA080</b>        | CT tropicalised 800 5 dual out. bars 32x65                                 |           | <b>METSECT5HJ040</b>        | IEC Split Core CT Cable 400/5 A 5 VA cl.1     |           |
| <b>METSECT5DA100</b>        | CT tropicalised 1000 5 dual out. bars 32x65                                |           | <b>METSECT5HJ050</b>        | IEC Split Core CT Cable 500/5 A 5 VA cl.1     |           |
| <b>METSECT5DA125</b>        | CT tropicalised 1250 5 dual out. bars 32x65                                |           | <b>METSECT5HJ060</b>        | IEC Split Core CT Cable 600/5 A 2.5 VA cl.0.5 |           |
| <b>METSECT5DA150</b>        | CT tropicalised 1500 5 dual out. bars 32x65                                |           | <b>METSECT5HJ075</b>        | IEC Split Core CT Cable 750/5 A 2.5 VA cl.0.5 |           |
| <b>METSECT5DB100</b>        | CT tropicalised 1000 5 dual out. bars 38x127                               |           | <b>METSECT5HJ080</b>        | IEC Split Core CT Cable 800/5 A 2.5 VA cl.0.5 |           |
| <b>METSECT5DB125</b>        | CT tropicalised 1250 5 dual out. bars 38x127                               |           |                             |   |           |
| <b>METSECT5DB150</b>        | CT tropicalised 1500 5 dual out. bars 38x127                               |           |                             |   |           |
| <b>METSECT5DB200</b>        | CT tropicalised 2000 5 dual out. bars 38x127                               |           |                             |   |           |
| <b>METSECT5DB250</b>        | CT tropicalised 2500 5 dual out. bars 38x127                               |           |                             |   |           |

# PowerLogic™ Commercial Reference Numbers

| Commercial reference number | Description                                     | Page | Commercial reference number | Description  | Page      |
|-----------------------------|---|------|-----------------------------|--|-----------|
|                             | <b>Frame 5</b>                                  |      |                             | <b>Rogowski CTs</b>  | <b>34</b> |
| <b>METSECT5HM030</b>        | IEC Split Core CT Cable 300/5 A 2.5 VA cl.1     |      | <b>METSECTR25500</b>        | Rogowski CT, 250 mm core length, 80 mm dia.                  |           |
| <b>METSECT5HM040</b>        | IEC Split Core CT Cable 400/5 A 5 VA cl.1       |      | <b>METSECTR30500</b>        | Rogowski CT, 300 mm core length, 96 mm dia.                  |           |
| <b>METSECT5HM050</b>        | IEC Split Core CT Cable 500/5 A 5 VA cl.1       |      | <b>METSECTR46500</b>        | Rogowski CT, 400 mm core length, 146 mm dia.                 |           |
| <b>METSECT5HM060</b>        | IEC Split Core CT Cable 600/5 A 2.5 VA cl.0.5   |      | <b>METSECTR60500</b>        | Rogowski CT, 600 mm core length, 191 mm dia.                 |           |
| <b>METSECT5HM075</b>        | IEC Split Core CT Cable 750/5 A 2.5 VA cl.0.5   |      | <b>METSECTR90500</b>        | Rogowski CT, 900 mm core length, 287 mm dia.                 |           |
| <b>METSECT5HM080</b>        | IEC Split Core CT Cable 800/5 A 2.5 VA cl.0.5   |      |                             | <b>Panel Instruments</b>                                     | <b>35</b> |
|                             | <b>Frame 6</b>                                  |      |                             | <b>DIN rail analog ammeters, voltmeters</b>                  | <b>36</b> |
| <b>METSECT5HP025</b>        | IEC Split Core CT Cable 250/5 A 1.5 VA cl.1     |      | <b>16029</b>                | 0-30 A no 8  |           |
| <b>METSECT5HP030</b>        | IEC Split Core CT Cable 300/5 A 2.5 VA cl.1     |      | <b>16030</b>                | X/5 8  |           |
| <b>METSECT5HP040</b>        | IEC Split Core CT Cable 400/5 A 5 VA cl.1       |      | <b>16031</b>                | 0-5 A  |           |
| <b>METSECT5HP050</b>        | IEC Split Core CT Cable 500/5 A 5 VA cl.1       |      | <b>16032</b>                | 0-50 A 50/5  |           |
| <b>METSECT5HP060</b>        | IEC Split Core CT Cable 600/5 A 5 VA cl.1       |      | <b>16033</b>                | 0-75 A 75/5  |           |
| <b>METSECT5HP075</b>        | IEC Split Core CT Cable 750/5 A 5 VA cl.1       |      | <b>16034</b>                | 0-100 A 100/5  |           |
| <b>METSECT5HP080</b>        | IEC Split Core CT Cable 800/5 A 5 VA cl.1       |      | <b>16035</b>                | 0-150 A 150/5  |           |
| <b>METSECT5HP100</b>        | IEC Split Core CT Cable 1000/5 A 5 VA cl.1      |      | <b>16036</b>                | 0-200 A 200/5  |           |
|                             | <b>Busbar Type G</b>                            |      | <b>16037</b>                | 0-250 A 250/5  |           |
|                             | <b>Frame 7</b>                                  |      | <b>16038</b>                | 0-300 A 300/5  |           |
| <b>METSECT5GA010</b>        | IEC CT Split Core Busbar 100/5 A 1.25 VA cl.3   |      | <b>16039</b>                | 0-400 A 400/5  |           |
| <b>METSECT5GA015</b>        | IEC CT Split Core Busbar 150/5 A 1.5 VA cl.3    |      | <b>16040</b>                | 0-500 A 500/5  |           |
| <b>METSECT5GA020</b>        | IEC CT Split Core Busbar 200/5 A 2.5 VA cl.3    |      | <b>16041</b>                | 0-600 A 600/5  |           |
| <b>METSECT5GA025</b>        | IEC CT Split Core Busbar 250/5 A 1.5 VA cl.1    |      | <b>16042</b>                | 0-800 A 800/5  |           |
| <b>METSECT5GA030</b>        | IEC CT Split Core Busbar 300/5 A 3.75 VA cl.1   |      | <b>16043</b>                | 0-1000 A 1000/5  |           |
| <b>METSECT5GA040</b>        | IEC CT Split Core Busbar 400/5 A 1 VA cl.0.5    |      | <b>16044</b>                | 0-1500 A 1500/5  |           |
|                             | <b>Frame 8</b>                                  |      | <b>16045</b>                | 0-2000 A 2000/5  |           |
| <b>METSECT5GD025</b>        | IEC CT Split Core Busbar 250/5 A 1.5 VA cl.1    |      | <b>16060</b>                | 0-300 V 8  |           |
| <b>METSECT5GD030</b>        | IEC CT Split Core Busbar 300/5 A 2.5 VA cl.1    |      | <b>16061</b>                | 0-500 V 8  |           |
| <b>METSECT5GD040</b>        | IEC CT Split Core Busbar 400/5 A 1 VA cl.0.5    |      |                             | <b>DIN rail digital ammeters, voltmeter, frequency meter</b> | <b>37</b> |
| <b>METSECT5GD050</b>        | IEC CT Split Core Busbar 500/5 A 2.5 VA cl.0.5  |      | <b>15202</b>                | Direct reading iAMP 0-10 A No 4                              |           |
| <b>METSECT5GD060</b>        | IEC CT Split Core Busbar 600/5 A 2.5 VA cl.0.5  |      | <b>15209</b>                | Multi-rating iAMP 0-5000 A As per rating 4                   |           |
| <b>METSECT5GD075</b>        | IEC CT Split Core Busbar 750/5 A 2.5 VA cl.0.5  |      | <b>15201</b>                | iVLT 0-600 V 4   |           |
| <b>METSECT5GD080</b>        | IEC CT Split Core Busbar 800/5 A 2.5 VA cl.0.5  |      | <b>15208</b>                | iFRE 20-100 Hz 4   |           |
| <b>METSECT5GD100</b>        | IEC CT Split Core Busbar 1000/5 A 5 VA cl.0.5   |      |                             | <b>72x72 analog ammeter, voltmeter</b>                       | <b>38</b> |
|                             | <b>Frame 9</b>                                  |      | <b>16003</b>                | AMP for motor feeder   |           |
| <b>METSECT5GG025</b>        | IEC CT Split Core Busbar 250/5 A 1.5 VA cl.1    |      | <b>16004</b>                | AMP for standard feeder X/5                                  |           |
| <b>METSECT5GG030</b>        | IEC CT Split Core Busbar 300/5 A 2.5 VA cl.1    |      | <b>16009</b>                | AMP for standard feeder 0-50 A 50/5                          |           |
| <b>METSECT5GG040</b>        | IEC CT Split Core Busbar 400/5 A 2.5 VA cl.1    |      | <b>16010</b>                | AMP for standard feeder 0-100 A 100/5                        |           |
| <b>METSECT5GG050</b>        | IEC CT Split Core Busbar 500/5 A 2.5 VA cl.0.5  |      | <b>16011</b>                | AMP for standard feeder 0-200 A 200/5                        |           |
| <b>METSECT5GG060</b>        | IEC CT Split Core Busbar 600/5 A 2.5 VA cl.0.5  |      | <b>16012</b>                | AMP for standard feeder 0-400 A 400/5                        |           |
| <b>METSECT5GG075</b>        | IEC CT Split Core Busbar 750/5 A 2.5 VA cl.0.5  |      | <b>16013</b>                | AMP for standard feeder 0-600 A 600/5                        |           |
| <b>METSECT5GG080</b>        | IEC CT Split Core Busbar 800/5 A 2.5 VA cl.0.5  |      | <b>16014</b>                | AMP for standard feeder 0-1000 A 1000/5                      |           |
| <b>METSECT5GG100</b>        | IEC CT Split Core Busbar 1000/5 A 5 VA cl.0.5   |      | <b>16015</b>                | AMP for standard feeder 0-1250 A 1250/5                      |           |
| <b>METSECT5GG120</b>        | IEC CT Split Core Busbar 1200/5 A 5 VA cl.0.5   |      | <b>16016</b>                | AMP for standard feeder 0-1500 A 1500/5                      |           |
| <b>METSECT5GG125</b>        | IEC CT Split Core Busbar 1250/5 A 7.5 VA cl.0.5 |      | <b>16019</b>                | AMP for standard feeder 0-2000 A 2000/5                      |           |
| <b>METSECT5GG150</b>        | IEC CT Split Core Busbar 1500/5 A 7.5 VA cl.0.5 |      | <b>16006</b>                | AMP for motor feeder 0-30-90 A 30/5                          |           |
|                             | <b>Frame 10</b>                                 |      | <b>16007</b>                | AMP for motor feeder 0-75-225 A 75/5                         |           |
| <b>METSECT5GJ100</b>        | IEC CT Split Core Busbar 1000/5 A 10 VA cl.0.5  |      | <b>16008</b>                | AMP for motor feeder 0-200-600 A 200/5                       |           |
| <b>METSECT5GJ120</b>        | IEC CT Split Core Busbar 1200/5 A 10 VA cl.0.5  |      | <b>16005</b>                | VLT 0-500 V  |           |
| <b>METSECT5GJ150</b>        | IEC CT Split Core Busbar 1500/5 A 10 VA cl.0.5  |      |                             | <b>96x96 analog ammeter, voltmeter</b>                       | <b>39</b> |
| <b>METSECT5GJ160</b>        | IEC CT Split Core Busbar 1600/5 A 10 VA cl.0.5  |      | <b>16074</b>                | AMP for standard feeder X/5                                  |           |
| <b>METSECT5GJ200</b>        | IEC CT Split Core Busbar 2000/5 A 10 VA cl.0.5  |      | <b>16079</b>                | AMP for standard feeder 0-50 A 50/5                          |           |
| <b>METSECT5GJ250</b>        | IEC CT Split Core Busbar 2500/5 A 10 VA cl.0.5  |      | <b>16080</b>                | AMP for standard feeder 0-100 A 100/5                        |           |
| <b>METSECT5GJ300</b>        | IEC CT Split Core Busbar 3000/5 A 15 VA cl.0.5  |      | <b>16081</b>                | AMP for standard feeder 0-200 A 200/5                        |           |
| <b>METSECT5GJ400</b>        | IEC CT Split Core Busbar 4000/5 A 15 VA cl.0.5  |      | <b>16082</b>                | AMP for standard feeder 0-400 A 400/5                        |           |
|                             |   |      | <b>16083</b>                | AMP for standard feeder 0-600 A 600/5                        |           |
|                             |   |      | <b>16084</b>                | AMP for standard feeder 0-1000 A 1000/5                      |           |
|                             |   |      | <b>16085</b>                | AMP for standard feeder 0-1250 A 1250/5                      |           |
|                             |   |      | <b>16086</b>                | AMP for standard feeder 0-1500 A 1500/5                      |           |
|                             |   |      | <b>16087</b>                | AMP for standard feeder 0-2000 A 2000/5                      |           |
|                             |   |      | <b>16088</b>                | AMP for standard feeder 0-2500 A 2500/5                      |           |
|                             |   |      | <b>16089</b>                | AMP for standard feeder 0-3000 A 3000/5                      |           |

# PowerLogic™ Commercial Reference Numbers

| Commercial reference number | Description  | Page      | Commercial reference number | Description  | Page      |
|-----------------------------|--|-----------|-----------------------------|--|-----------|
| 16090                       | AMP for standard feeder 0-4000 A 4000/5  |           | A9MEM3250                   | iEM3250 energy meter & electrical parameter plus Modbus RS-485 comm port                       |           |
| 16091                       | AMP for standard feeder 0-5000 A 5000/5  |           | A9MEM3255                   | iEM3255 advanced multi-tariff energy meter & electrical parameter plus Modbus RS485 comm port  |           |
| 16092                       | AMP for standard feeder 0-6000 A 6000/5  |           | A9MEM3265                   | iEM3265 advanced multi-tariff energy meter & electrical parameter plus BACnet MS/TP comm port  |           |
| 16073                       | AMP for motor feeder X/5   |           | A9MEM3275                   | iEM3275 advanced multi-tariff energy meter & electrical parameter plus LON TP/FT-10 comm port  |           |
| 16076                       | AMP for motor feeder 0-30-90 A 30/5  |           | A9MEM3300                   | iEM3300 basic energy meter   |           |
| 16077                       | AMP for motor feeder 0-75-225 A 75/5   |           | A9MEM3310                   | iEM3310 energy meter with pulse output   |           |
| 16078                       | AMP for motor feeder 0-200-600 A 200/5   |           | A9MEM3335                   | iEM3335 advanced multi-tariff energy meter & electrical parameter plus M-Bus comm port         |           |
| 16075                       | VLT 0-500 V  |           | A9MEM3350                   | iEM3350 energy meter & electrical parameter plus Modbus RS-485 comm port                       |           |
|                             | <b>48x48 CMA, CMV selector switches</b>  | <b>40</b> | A9MEM3355                   | iEM3355 advanced multi-tariff energy meter & electrical parameter plus Modbus RS485 comm port  |           |
| 16017                       | CMA 20 4   |           | A9MEM3365                   | iEM3365 advanced multi-tariff energy meter & electrical parameter plus BACnet MS/TP comm port  |           |
| 16018                       | CMV 500 7  |           | A9MEM3375                   | iEM3375 advanced multi-tariff energy meter & electrical parameter plus LON TP/FT-10 comm port  |           |
|                             | <b>DIN rail iCMA, iCMV selector switches</b>   | <b>41</b> | A9MEM3455                   | iEM3455 advanced multi-tariff energy meter & electrical parameter plus Modbus RS-485 comm port |           |
| 15126                       | iCMA 10 415 4  |           | A9MEM3465                   | iEM3465 advanced multi-tariff energy meter & electrical parameter plus BACnet MS/TP comm port  |           |
| 15125                       | ICMV 10 415 4  |           | A9MEM3555                   | iEM3555 advanced multi-tariff energy meter & electrical parameter plus Modbus RS-485 comm port |           |
|                             | <b>iCH hour counter</b>  | <b>42</b> | A9MEM3565                   | iEM3565 advanced multi-tariff energy meter & electrical parameter plus BACnet MS/TP comm port  |           |
| 15440                       | iCH "DIN" 230 V AC $\pm 10\%$ /50 Hz 4mm   |           |                             | <b>LVCTs</b>   | <b>56</b> |
| 15607                       | CH "48 x 48" 24 V AC $\pm 10\%$ /50 Hz   |           | LVCT00050S                  | CT, split-core, Size 0, 50 A to 0.333 V  |           |
| 15608                       | CH "48 x 48" 230 V AC $\pm 10\%$ /50 Hz  |           | LVCT00101S                  | CT, split-core, Size 1, 100 A to 0.333 V   |           |
| 15609                       | CH "48 x 48" 12 to 36 V DC   |           | LVCT00201S                  | CT, split-core, Size 1, 200 A to 0.333 V   |           |
|                             | <b>iCI impulse counter</b>   | <b>43</b> | LVCT00102S                  | CT, split-core, Size 2, 100 A to 0.333 V   |           |
| 15443                       | iCI 4mm impulse counter DIN  |           | LVCT00202S                  | CT, split-core, Size 2, 200 A to 0.333 V   |           |
|                             | <b>Basic Energy Metering</b>   | <b>46</b> | LVCT00302S                  | CT, split-core, Size 2, 300 A to 0.333 V   |           |
|                             | <b>iEM2xxx</b>   | <b>47</b> | LVCT00403S                  | CT, split-core, Size 3, 400 A to 0.333 V   |           |
| A9MEM2000T                  | iEM2000T basic energy meter, no display  |           | LVCT00603S                  | CT, split-core, Size 3, 600 A to 0.333 V   |           |
| A9MEM2000                   | iEM2000 basic energy meter   |           | LVCT00803S                  | CT, split-core, Size 3, 800 A to 0.333 V   |           |
| A9MEM2010                   | iEM2010 energy meter, kWh pulse output   |           | LVCT00804S                  | CT, split-core, Size 4, 800 A to 0.333 V   |           |
| A9MEM2100                   | iEM2100 basic energy meter   |           | LVCT01004S                  | CT, split-core, Size 4, 1000 A to 0.333 V  |           |
| A9MEM2050                   | iEM2050 modular single phase power meter 230 V - 45 A with Modbus  |           | LVCT01204S                  | CT, split-core, Size 4, 1200 A to 0.333 V  |           |
| A9MEM2055                   | iEM2055 modular single phase power meter 230 V - 45 A with Modbus, MID   |           | LVCT01604S                  | CT, split-core, Size 4, 1600 A to 0.333 V  |           |
| A9MEM2105                   | iEM2105 energy meter, kWh pulse output with partial meter  |           | LVCT02004S                  | CT, split-core, Size 4, 2000 A to 0.333 V  |           |
| A9MEM2110                   | iEM2110 energy meter, kWh and kvarh pulse outputs with two tariffs, four quadrant energy measurement, MID certified      |           | LVCT02404S                  | CT, split-core, Size 4, 2400 A to 0.333 V  |           |
| A9MEM2135                   | iEM2135 energy meter, M-Bus communication, four quadrant energy measurement, two tariffs, MID certified                  |           |                             | <b>PM3000</b>  | <b>58</b> |
| A9MEM2150                   | iEM2150 energy meter, Modbus communication, four quadrant energy measurement   |           | METSEPM3200                 | PM3200 basic power meter   |           |
| A9MEM2155                   | iEM2155 energy meter, Modbus communication, four quadrant energy measurement, two tariffs, MID certified                 |           | METSEPM3210                 | PM3210 power meter with pulse output   |           |
| A9MEM2435                   | iEM2435 power and energy meter, Class 1, 230 V, 100 A, M-Bus, MID, 2 tariffs, 2 pulse outputs, 4 quadrants, LCD display  |           | METSEPM3250                 | PM3250 power meter with RS485 port   |           |
| A9MEM2455                   | iEM2455 power and energy meter, Class 1, 230 V, 100 A, RS-485, MID, 2 tariffs, 2 pulse outputs, 4 quadrants, LCD display |           | METSEPM3255                 | PM3255 power meter plus 2 digital inputs, 2 digital outputs with RS-485 port                   |           |
|                             | <b>iEM3000</b>   | <b>52</b> |                             | <b>PowerTag Energy</b>   | <b>64</b> |
| A9MEM3100                   | iEM3100 basic energy meter   |           | A9MEM1520                   | PowerTag Energy M63 1P+W   |           |
| A9MEM3110                   | iEM3110 energy meter with pulse output   |           | A9MEM1521                   | PowerTag Energy M63 1P+N Top   |           |
| A9MEM3115                   | iEM3115 multi-tariff energy meter  |           | A9MEM1522                   | PowerTag Energy M63 1P+N Bottom  |           |
| A9MEM3135                   | iEM3135 advanced multi-tariff energy meter & electrical parameter plus M-Bus comm port                                   |           | A9MEM1540                   | PowerTag Energy M63 3P   |           |
| A9MEM3150                   | iEM3150 energy meter & electrical parameter plus Modbus RS-485 comm port   |           | A9MEM1541                   | PowerTag Energy M63 3P+N Top   |           |
| A9MEM3155                   | iEM3155 advanced multi-tariff energy meter & electrical parameter plus Modbus RS-485 comm port                           |           | A9MEM1542                   | PowerTag Energy M63 3P+N Bottom  |           |
| A9MEM3165                   | iEM3165 advanced multi-tariff energy meter & electrical parameter plus BACnet MS/TP comm port                            |           | A9MEM1543                   | PowerTag Energy M63 3P 230 V LL  |           |
| A9MEM3175                   | iEM3175 advanced multi-tariff energy meter & electrical parameter plus LON TP/FT-10 comm port                            |           | A9MEM1560                   | PowerTag Energy F63 1P+N   |           |
| A9MEM3200                   | iEM3200 basic energy meter   |           | A9MEM1561                   | PowerTag Energy P63 1P+N Top   |           |
| A9MEM3210                   | iEM3210 energy meter with pulse output   |           | A9MEM1562                   | PowerTag Energy P63 1P+N Bottom  |           |
| A9MEM3215                   | iEM3215 multi-tariff energy meter  |           | A9MEM1563                   | PowerTag Energy P63 1P+N B RCBO  |           |
| A9MEM3235                   | iEM3235 advanced multi-tariff energy meter & electrical parameter plus M-Bus comm port                                   |           | A9MEM1564                   | PowerTag Energy F63 1P+N 110 V   |           |
|                             |  |           | A9MEM1570                   | PowerTag Energy F63 3P+N   |           |
|                             |  |           | A9MEM1571                   | PowerTag Energy P63 3P+N Top   |           |
|                             |  |           | A9MEM1572                   | PowerTag Energy P63 3P+N Bottom  |           |
|                             |  |           | A9MEM1573                   | PowerTag Energy F63 3P   |           |

# PowerLogic™ Commercial Reference Numbers

| Commercial reference number | Description   | Page | Commercial reference number | Description  | Page |
|-----------------------------|---|------|-----------------------------|--|------|
| A9MEM1574                   | PowerTag Energy F63 3P+N 127/220 V  |      | METSEPM5563                 | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, DIN mount, No display  |      |
| A9MEM1580                   | PowerTag Energy F160 3P / 3P+N  |      | METSEPM5563RD               | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, DIN mount, Remote display                                      |      |
| A9MEM1590                   | PowerTag Energy R200 3P / 3P+N  |      | METSEPM5570                 | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 2DI/2AI/2-DO, RS-485, Ethernet   |      |
| A9MEM1591                   | PowerTag Energy R600 3P / 3P+N  |      | METSEPM5580                 | Power Meter, 690V AC L-L/ 5A or 1A input, 24 to 64V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet   |      |
| A9MEM1592                   | PowerTag Energy R1000 3P / 3P+N   |      | METSEPM5650                 | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, Wave Form Capture and Sag/swell                                |      |
| A9MEM1593                   | PowerTag Energy R2000 3P / 3P+N   |      | METSEPM5660                 | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 2DI/2-DO, RS-485, Ethernet, Residual Current Monitor                                       |      |
| LV434020                    | PowerTag Energy M250 3P   |      | METSEPM5661                 | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 2DI/2-DO, RS-485, Ethernet, Residual Current Monitor, MID                                  |      |
| LV434021                    | PowerTag Energy M250 3P+N   |      | METSEPM5760                 | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 2DI/2-DO, RS-485, Ethernet, Wave Form Capture and Sag/swell, Residual current monitor      |      |
| LV434022                    | PowerTag Energy M630 3P   |      | METSEPM5761                 | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 2DI/2-DO, RS-485, Ethernet, Wave Form Capture and Sag/swell, Residual current monitor, MID |      |
| LV434023                    | PowerTag Energy M630 3P+N   |      |                             | <b>Residual Current Monitoring Toroids (Vigirex) - Closed Toroids, A Type</b>  | 125  |
| R9M20                       | PowerTag Energy R9 M63 1P+W   |      | 50437                       | TA30 - closed toroid A type, for RCM enabled power meters, 30 mm inner diameter, rated current 65 Amps, 1000 turns   |      |
| R9M21                       | PowerTag Energy R9 M63 1P+N Top   |      | 50438                       | PA50 - closed toroid A type, for RCM enabled power meters, 50 mm inner diameter, rated current 85 Amps, 1000 turns   |      |
| R9M22                       | PowerTag Energy R9 M63 1P+N Bottom  |      | 50439                       | IA80 - closed toroid A type, for RCM enabled power meters, 80 mm inner diameter, rated current 160 Amps, 1000 turns  |      |
| R9M40                       | PowerTag Energy R9 M63 3P   |      | 50440                       | MA120 - closed toroid A type, for RCM enabled power meters, 120 mm inner diameter, rated current 250 Amps, 1000 turns  |      |
| R9M41                       | PowerTag Energy R9 M63 3P+N Top   |      | 50441                       | SA200 - closed toroid A type, for RCM enabled power meters, 200 mm inner diameter, rated current 400 Amps, 1000 turns  |      |
| R9M42                       | PowerTag Energy R9 M63 3P+N Bottom  |      | 50442                       | GA300 - closed toroid A type, for RCM enabled power meters, 300 mm inner diameter, rated current 630 Amps, 1000 turns  |      |
| R9M43                       | PowerTag Energy R9 M63 3P 230 V LL  |      |                             | <b>Accessories for Closed Toroids</b>  | 125  |
| R9M60                       | PowerTag Energy R9 F63 1P+N   |      | 56055                       | Magnetic ring/ Iron screen accessory for TA30 toroid sensor  |      |
| R9M70                       | PowerTag Energy R9 F63 3P+N   |      | 56056                       | Magnetic ring/ Iron screen accessory for PA50 toroid sensor  |      |
|                             | <b>Wireless Products</b>  | 106  | 56057                       | Magnetic ring/ Iron screen accessory for IA80 toroid sensor  |      |
|                             | <b>PowerTag Control</b>   | 107  | 56058                       | Magnetic ring/ Iron screen accessory for MA120 toroid sensor   |      |
| A9XMC2D3                    | PowerTag C 2DI 230V digital input module  |      |                             | <b>Residual Current Monitoring Toroids (Vigirex) - Split Toroids, OA Type</b>  | 125  |
|                             | <b>HeatTag</b>  | 111  | 50420                       | TOA80 - split toroid OA type, 80 mm inner diameter, rated current 160 Amps, 1000 turns   |      |
| SMT10020                    | HeatTag smart sensor cable overheating  |      | 50421                       | TOA120 - split toroid OA type, 120 mm inner diameter, rated current 250 Amps, 1000 turns   |      |
|                             | <b>Basic Multi-Function Metering</b>  | 114  | 56053                       | L1 type - rectangular sensor, width 280 x height 115 mm, rated current 1600 Amps, 1000 turns   |      |
|                             | <b>PM5000</b>   | 115  | 56054                       | L2 type - rectangular sensor, width 470 x height 160 mm, rated current 3200 Amps, 1000 turns   |      |
| METSEPM5100                 | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 15th harmonic, 1DO   |      |                             | <b>0.333V (1/3 Volts), 3-in-1 CTs with RJ45 connectors for PM53x0R LVCT enabled power meter</b>  | 126  |
| METSEPM5110                 | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 15th harmonic, 1DO, RS-485   |      | METSECTV25006               | LVCT Solid core 3 in 1 with RJ45 cable, 25 mm phase center, 60 Amps, 0.333V output   |      |
| METSEPM5111                 | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 15th harmonic, 1DO, RS-485, MID  |      | METSECTV25010               | LVCT Solid core 3 in 1 with RJ45 cable, 25 mm phase center, 100 Amps, 0.333V output  |      |
| METSEPM5310                 | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO, RS-485   |      | METSECTV25013               | LVCT Solid core 3 in 1 with RJ45 cable, 25 mm phase center, 125 Amps, 0.333V output  |      |
| METSEPM5310R                | Power Meter, 600V AC L-L/ RJ45 LVCT input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO, RS-485  |      | METSECTV25016               | LVCT Solid core 3 in 1 with RJ45 cable, 25 mm phase center, 160 Amps, 0.333V output  |      |
| METSEPM5320                 | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO, Ethernet   |      |                             |  |      |
| METSEPM5320R                | Power Meter, 600V AC L-L/ RJ45 LVCT input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO, Ethernet  |      |                             |  |      |
| METSEPM5330                 | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO/2-Relay, RS-485   |      |                             |  |      |
| METSEPM5331                 | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO/2-Relay, RS-485, MID                                    |      |                             |  |      |
| METSEPM5340                 | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO/2-Relay, Ethernet                                       |      |                             |  |      |
| METSEPM5341                 | Power Meter, 600V AC L-L/ 5A or 1A input, 415V AC L-L or 250V DC control power, CI 0.5S, 31st harmonic, 256 kB, 2DI/2DO/2-Relay, Ethernet, MID                                  |      |                             |  |      |
| METSEPM5560                 | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet                                      |      |                             |  |      |
| METSEPM5561                 | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, MID                                 |      |                             |  |      |
| METSEPM5562                 | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, RMI CAN approved, Hardware lockable |      |                             |  |      |
| METSEPM5562MC               | Power Meter, 690V AC L-L/ 5A or 1A input, 480V AC L-L or 250V DC control power, CI 0.2S, 63rd harmonic, 1.1 MB, 4DI/2-DO, RS-485, Ethernet, RMI CAN approved, Factory sealed    |      |                             |  |      |

# PowerLogic™ Commercial Reference Numbers

| Commercial reference number | Description  | Page       |
|-----------------------------|--|------------|
| <b>METSECTV35006</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 60 Amps, 0.333V output   |            |
| <b>METSECTV35010</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 100 Amps, 0.333V output  |            |
| <b>METSECTV35012</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 120 Amps, 0.333V output  |            |
| <b>METSECTV35013</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 125 Amps, 0.333V output  |            |
| <b>METSECTV35015</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 150 Amps, 0.333V output  |            |
| <b>METSECTV35016</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 160 Amps, 0.333V output  |            |
| <b>METSECTV35020</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 200 Amps, 0.333V output  |            |
| <b>METSECTV35025</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 35 mm phase center, 250 Amps, 0.333V output  |            |
| <b>METSECTV45025</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 250 Amps, 0.333V output  |            |
| <b>METSECTV45030</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 300 Amps, 0.333V output  |            |
| <b>METSECTV45040</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 400 Amps, 0.333V output  |            |
| <b>METSECTV45050</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 500 Amps, 0.333V output  |            |
| <b>METSECTV45060</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 600 Amps, 0.333V output  |            |
| <b>METSECTV45063</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 45 mm phase center, 630 Amps, 0.333V output  |            |
| <b>METSECTV29006</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 60 Amps, 0.333V output   |            |
| <b>METSECTV29010</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 100 Amps, 0.333V output  |            |
| <b>METSECTV29012</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 120 Amps, 0.333V output  |            |
| <b>METSECTV29013</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 125 Amps, 0.333V output  |            |
| <b>METSECTV29015</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 150 Amps, 0.333V output  |            |
| <b>METSECTV29016</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 160 Amps, 0.333V output  |            |
| <b>METSECTV29020</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 29 mm phase center, 200 Amps, 0.333V output  |            |
| <b>METSECTV70080</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 70 mm phase center, 800 Amps, 0.333V output  |            |
| <b>METSECTV70100</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 70 mm phase center, 1000 Amps, 0.333V output   |            |
| <b>METSECTV70125</b>        | LVCT Solid core 3 in 1 with RJ45 cable, 70 mm phase center, 1250 Amps, 0.333V output   |            |
|                             | <b>Cable</b>   | <b>126</b> |
| <b>METSEPM5CAB03</b>        | RJ25 cable assembly for interfacing PM5563 meter and PM5RD remote display with 0.3 meter cable length                                  |            |
| <b>METSEPM5CAB1</b>         | RJ25 cable assembly for interfacing PM5563 meter and PM5RD remote display with 1.0 meter cable length                                  |            |
| <b>METSEPM5CAB10</b>        | RJ25 cable assembly for interfacing PM5563 meter and PM5RD remote display with 10 meter cable length                                   |            |
| <b>METSEPM5CAB3</b>         | RJ25 cable assembly for interfacing PM5563 meter and PM5RD remote display with 3 meter cable length                                    |            |
| <b>METSEPM5CAB4</b>         | RJ25 cable assembly for interfacing PM5563 meter and PM5RD remote display with 4 meter cable length                                    |            |
|                             | <b>Other related products</b>  | <b>126</b> |
| <b>METSEPM5RD</b>           | Remote display unit for PM5563 power meter supplied with mounting bracket, gasket, anti-rotation pin and RJ25 cable METSEPM5CABxy      |            |
| <b>METSEPM51HK</b>          | Hardware kit for PM51xx comprises 2 retainer clips and spare connectors for - Voltage in, Control power in, Digital IO & RS-485        |            |
| <b>METSEPM53HK</b>          | Hardware kit for PM51xx comprises 2 retainer clips and spare connectors for - Voltage in, Control power in, Digital IO, Relay & RS-485 |            |
| <b>METSEPM51_3RSK</b>       | Revenue sealing kit for PM51XX & PM53XX  |            |
| <b>METSEPM55RSK</b>         | Revenue sealing kit for PM55XX   |            |
| <b>METSEPM55HK</b>          | Hardware kit for PM55xx  |            |
| <b>METSEPM5CAB3</b>         | Remote Display cable   |            |

| Commercial reference number | Description  | Page       |
|-----------------------------|--|------------|
|                             | <b>PM5350</b>  | <b>128</b> |
| <b>METSEPM5350</b>          | RS-485 Modbus, THD, 4DI, 2Relay  |            |
| <b>METSEPM5350IB</b>        | RS-485, 4DI/2Relay, Multi-level alarm, UL480V, 4DI/2Relay  |            |
| <b>METSEPM5350PB</b>        | RS-485, 4DI/2Relay, Multi-level alarm, UL300V, 4DI/2Relay  |            |
| <b>METSEPM5350P</b>         | RS-485 Modbus, THD, 31st Individual harmonics, Multi-tariff, 4DI/2Relay  |            |
|                             | <b>Advanced Metering</b>   | <b>135</b> |
|                             | <b>PM8000</b>  | <b>136</b> |
| <b>METSEPM8210</b>          | 96 x 96 panel mount meter, LV DC power   |            |
| <b>METSEPM8240</b>          | DIN96 panel mount meter  |            |
| <b>METSEPM8243</b>          | DIN rail mount meter   |            |
| <b>METSEPM8244</b>          | DIN rail mount meter with remote display   |            |
| <b>METSEPM89RD96</b>        | Remote display, 3 metre cable, mounting hardware for 30mm hole (nut & centering pin), mounting hardware for DIN96 cutout (92x92mm) adapter plate |            |
| <b>METSEPM8000SK</b>        | Terminal covers for utility sealing  |            |
| <b>METSEPM8HWK</b>          | PM8000 hardware kit  |            |
| <b>METSEPM89M2600</b>       | Digital I/O module (6 digital inputs & 2 relay outputs)  |            |
| <b>METSEPM89M0024</b>       | Analog I/O module (4 analog inputs & 2 analog outputs)   |            |
| <b>METSEPM8213</b>          | DIN rail mount meter, LV DC power.   |            |
| <b>METSEPM8214</b>          | DIN rail mount meter with remote display, LV DC power.   |            |
| <b>METSEPM82401</b>         | MID approved panel mount meter.  |            |
| <b>METSEPM82403</b>         | RMICAN approved panel mount meter.   |            |
| <b>METSEPM82404</b>         | RMICAN sealed panel mount meter.   |            |
| <b>METSEPMRS4854W</b>       | 4-Wire RS 485 option module  |            |
| <b>METSEPMFIBER</b>         | Fiber-Ethernet option module   |            |
|                             | <b>ION9000</b>   | <b>145</b> |
| <b>METSEION92030</b>        | ION9000 meter, DIN mount, no display, hardware kit   |            |
| <b>METSEION92040</b>        | ION9000 meter, DIN mount, 192 mm display, B2B adapter, hardware kit  |            |
| <b>METSEION92043</b>        | ION9000 meter, DIN mount, 192 mm display, B2B adapter, hardware kit, Measurement Canada Ready (Canada only)                                      |            |
| <b>METSEION92044</b>        | ION9000 meter, DIN mount, 192 mm display, B2B adapter, hardware kit, Measurement Canada Sealed (Canada only)                                     |            |
| <b>METSEION92130</b>        | ION9000 Meter, 20-60 Vdc control input, DIN mount, no display, hardware kit  |            |
| <b>METSEION92140</b>        | ION9000 Meter, 20-60 Vdc control input, DIN mount, 192 mm display, B2B adapter, hardware kit   |            |
| <b>METSEION93030</b>        | ION9000 meter, LVCS, DIN mount, no display, hardware kit   |            |
| <b>METSEION93040</b>        | ION9000 meter, LVCS, DIN mount, 192 mm display, B2B adapter, hardware kit  |            |
| <b>METSEION93130</b>        | ION9000 Meter, LVCS, 20-60 Vdc control power, DIN mount, no display, hardware kit  |            |
| <b>METSEION93140</b>        | ION9000 Meter, LVCS, 20-60 Vdc control power, DIN mount, 192 mm display, B2B adapter, hardware kit   |            |
| <b>METSEION95030</b>        | ION9000T meter, HSTC, DIN mount, no display, hardware kit  |            |
| <b>METSEION95040</b>        | ION9000T meter, HSTC, DIN mount, 192 mm display, B2B adapter, hardware kit   |            |
| <b>METSERD192</b>           | Remote display, color touchscreen, 192 x 192 mm  |            |
| <b>METSEPM89RD96</b>        | Remote display, color LCD, 96 x 96 mm  |            |
| <b>METSEPM89M2600</b>       | I/O module, 2 relay outputs, 6 digital inputs  |            |
| <b>METSEPM89M0024</b>       | I/O module, 2 analog outputs, 4 analog inputs  |            |
| <b>METSE9HWK</b>            | ION9000 meter hardware kit – plugs, terminal guards, spare grounding screw, DIN clips  |            |

# PowerLogic™ Commercial Reference Numbers

| Commercial reference number | Description   | Page       |
|-----------------------------|---|------------|
| METSE9CTHWK                 | ION9000 Current Input hardware kit - terminal screws, CT covers   |            |
| METSERD192HWK               | RD192 remote display hardware kit   |            |
| METSE9B2BMA                 | ION9000 B2B (back to back) mounting adapter   |            |
| METSE9HWKLVCS               | ION9000 hardware kit for LVCS   |            |
| METSE9USBK                  | ION9000 USB cover hardware kit  |            |
| METSE7X4MAK                 | ION7X50 mounting adapter kit  |            |
| METSEPMRS4854W              | 4-Wire RS 485 option module   |            |
| METSEPMFIBER                | Fiber-Ethernet option module  |            |
|                             | <b>Advanced Utility Metering</b>  | <b>158</b> |
|                             | <b>ION7400</b>  | <b>159</b> |
| METSEION7400                | ION7400 Panel mount meter (integrated display with optical port and 2 energy pulse LEDs)                          |            |
| METSEION7410                | ION7400 Panel mount meter (integrated display with optical port and 2 energy pulse LEDs) 20-60 V DC control power |            |
| METSEION7403                | DIN rail mount - utility meter base   |            |
| METSEION7413                | DIN rail mount - utility meter base 20-60 V DC control power  |            |
| METSEION74001               | MID approved panel mount meter  |            |
| METSEPM89RD96               | Remote display, 3 m cable, mounting hardware for 30 mm hole and DIN96 cutout (92 x 92 mm) adapter plate           |            |
| METSEPM89M2600              | Digital I/O module (6 digital inputs (wetted) & 2 relay outputs)  |            |
| METSEPM89M0024              | Analog I/O module (4 analog inputs & 2 analog outputs)  |            |
| METSEPM8000SK               | Revenue sealing kit   |            |
| METSECAB10                  | Display Cable, 10 m   |            |
| METSEPMRS4854W              | 4-Wire RS-485 option module   |            |
| METSEPMFIBER                | Fiber-Ethernet option module  |            |
|                             | <b>ION8650</b>  | <b>169</b> |
| M8650A                      | ION8650A meter  |            |
| M8650B                      | ION8650B meter  |            |
| M8650C                      | ION8650C meter  |            |
| A-BASE-ADAPTER-9            | Form 9S to Form 9A adapter  |            |
| A-BASE-ADAPTER-35           | Form 35S to Form 35A adapter  |            |
| CBL-8X00BRKOUT              | Break out cable 1.5 m   |            |
| CBL-8X00IOE5FT              | Cable para I/O expander 1.5 m   |            |
| CBL-8X00IOE15FT             | I/O extension cable 4.6 m   |            |
| CBL-8XX0-BOP-IOBOX          | Cat.3 25PR UTP cable 205 m reel   |            |
|                             | <b>Multi-Circuit Metering</b>   | <b>179</b> |
|                             | <b>HDPM6000 Head Unit</b>   | <b>182</b> |
| METSEHDPM6S480VC            | HDPM 50 / 60 Hz up to 480 V   |            |
|                             | <b>HDPM6000B Busway Modules</b>   | <b>184</b> |
| METSEHDPM6BT4               | HDPM 4 Ckt Busway Module with Busway Tap Box mount  |            |
| METSEHDPM6BT8               | HDPM 8 Ckt Busway Module with Busway Tap Box mount  |            |
| METSEHDPM6BT8DIN            | HDPM 8 Ckt Busway Module with DIN mount   |            |
|                             | <b>HDPM6000R Retrofit Modules</b>   |            |
| METSEHDPM6R24               | HDPMR 24 Ckt Module   |            |
| METSEHDPM6R24WFC            | HDPMR 24 Ckt Module WFC   |            |
| METSEHDPM6R42               | HDPMR 42 Ckt Module   |            |
| METSEHDPM6R42WFC            | HDPMR 42 Ckt Module WFC   |            |
| METSEHDPM6R84               | HDPMR 84 Ckt Module   |            |
| METSEHDPM6R84WFC            | HDPMR 84 Ckt Module WFC   |            |
|                             | <b>HDPM6000S Strip Modules</b>  |            |
| METSEHDPM6S42W              | HDPM Strip Left and Right Set for 42 Ckts WFC   |            |
| METSEHDPM6S42               | HDPM Strip Left and Right Set for 42 Ckts   |            |
| METSEHDPM6S21WF             | HDPM Strip Right 21 Ckt WFC   |            |
| METSEHDPM6S21R              | HDPM Strip Right 21 Ckt   |            |
| METSEHDPM6S21WH             | HDPM Strip Left 21 Ckt WFC  |            |
| METSEHDPM6S21L              | HDPM Strip Left 21 Ckt  |            |

| Commercial reference number    | Description   | Page       |
|--------------------------------|---|------------|
|                                | <b>HDPM6000 Temperature and Humidity Sensors</b>  |            |
| METSEHDPMTEMP08B               | HDPM Temperature Sensor with 8ft Blue Cable   |            |
| METSEHDPMTEMP08Y               | HDPM Temperature Sensor with 8ft Yellow Cable   |            |
| METSEHDPMTEMP12B               | HDPM Temperature Sensor with 12ft Blue Cable  |            |
| METSEHDPMTEMP12Y               | HDPM Temperature Sensor with 12ft Yellow Cable  |            |
| METSEHDPMTEMP25B               | HDPM Temperature Sensor with 25ft Blue Cable  |            |
| METSEHDPMTEMP25Y               | HDPM Temperature Sensor with 25ft Yellow Cable  |            |
| METSEHDPMTEMPHM25B             | HDPM Temperature and Humidity Sensor with 25ft Blue Cable                                       |            |
| METSEHDPMTEMPHM25Y             | HDPM Temperature and Humidity Sensor with 25ft Yellow Cable                                     |            |
| METSEHDPMTEMPHM06B             | HDPM Temperature and Humidity Sensor with 25ft Yellow Cable                                     |            |
| METSEHDPMTEMPHM06Y             | HDPM Temperature and Humidity Sensor with 6ft Yellow Cable                                      |            |
|                                | <b>HDPM6000 I/O Module</b>  | <b>188</b> |
| METSEHDPM6IO                   | HDPM I/O Module   |            |
| METSEHDPM6DI                   | Expanded Input Module 2.0, 24 Channel   |            |
|                                | <b>HDPM6000 CT's</b>  |            |
| HDPM6000 CT's                  | Refer to HDPM6000 CT manual for full list   |            |
|                                | <b>HMI Displays</b>   |            |
| METSEHDPM6HMI4                 | HDPM 4.3" Color Touchscreen HMI Display   |            |
| METSEHDPM6HMI7                 | HDPM 7" Color Touchscreen HMI Display   |            |
|                                | <b>Power Supplies</b>   |            |
| METSEHDPM6PSV240*              | HDPM PS 24 VDC 60 watt  |            |
| METSEHDPM6PSV500*              | HDPM PS 24 VDC 90 watt  |            |
| *Phoenix Contact power supply. |   |            |
|                                | <b>BCPM (Branch Circuit Power Meter)</b>  | <b>192</b> |
| BCPMA084S                      | 84-circuit solid-core power & energy meter, 100 A CTs (4 strips), 19.05 mm spacing              |            |
| BCPMA184S                      | 84-circuit solid-core power & energy meter, 100 A CTs (4 strips), 25.4 mm spacing               |            |
| BCPMA042S                      | 42-circuit solid-core power & energy meter, 100 A CTs (2 strips), 19.05 mm spacing              |            |
| BCPMA142S                      | 42-circuit solid-core power & energy meter, 100 A CTs (2 strips), 25.4 mm spacing               |            |
| BCPMA224S                      | 24-circuit solid-core power & energy meter, 100 A CTs (2 strips), 18 mm spacing                 |            |
| BCPMA236S                      | 36-circuit solid-core power & energy meter, 100 A CTs (2 strips), 18 mm spacing                 |            |
| BCPMA242S                      | 42-circuit solid-iEM2000core power & energy meter, 100 A CTs (2 strips), 18 mm spacing          |            |
| BCPMA248S                      | 48-circuit solid-core power & energy meter, 100 A CTs (4 strips), 18 mm spacing                 |            |
| BCPMA272S                      | 72-circuit solid-core power & energy meter, 100 A CTs (4 strips), 18 mm spacing                 |            |
| BCPMA284S                      | 84-circuit solid-core power & energy meter, 100 A CTs (4 strips), 18 mm spacing                 |            |
| BCPMB084S                      | 84-circuit solid-core branch current, mains power meter, 100 A CTs (4 strips), 19.05 mm spacing |            |
| BCPMB184S                      | 84-circuit solid-core branch current, mains power meter, 100 A CTs (4 strips), 25.4 mm spacing  |            |
| BCPMB042S                      | 42-circuit solid-core branch current, mains power meter, 100 A CTs (2 strips), 19.05 mm spacing |            |
| BCPMB142S                      | 42-circuit solid-core branch current, mains power meter, 100 A CTs (2 strips), 25.4 mm spacing  |            |
| BCPMB224S                      | 24-circuit solid-core branch current, mains power meter, 100 A CTs (2 strips), 18 mm spacing    |            |
| BCPMB236S                      | 36-circuit solid-core branch current, mains power meter, 100 A CTs (2 strips), 18 mm spacing    |            |
| BCPMB242S                      | 42-circuit solid-core branch current, mains power meter, 100 A CTs (2 strips), 18 mm spacing    |            |
| BCPMB248S                      | 48-circuit solid-core branch current, mains power meter, 100 A CTs (4 strips), 18 mm spacing    |            |

For any CT rating not available in the reference list, please contact the Schneider Electric sales representative.

# PowerLogic™ Commercial Reference Numbers

| Commercial reference number | Description  | Page | Commercial reference number | Description  | Page |
|-----------------------------|--|------|-----------------------------|--|------|
| BCPMB272S                   | 72-circuit solid-core branch current, mains power meter, 100 A CTs (4 strips), 18 mm spacing         |      | BCPMSCC42S                  | 42 circuit split-core current meter, (42) 50 A CTs & (2) 1.21 m cables                       |      |
| BCPMB284S                   | 84-circuit solid-core branch current, mains power meter, 100 A CTs (4 strips), 18 mm spacing         |      | BCPMSCC60S                  | 60-circuit split-core current meter, (60) 50 A CTs & (4) 1.21 m cables                       |      |
| BCPMC084S                   | 84-circuit solid-core branch current meter, 100 A CTs (4 strips), 19.05 mm spacing                   |      | BCPMSCCY63S                 | 42-circuit split-core current meter, all boards on backplate, CTs and cables sold separately |      |
| BCPMC184S                   | 84-circuit solid-core branch current meter, 100 A CTs (4 strips), 25.4 mm spacing                    |      | BCPMSCC84S                  | 84-circuit split-core current meter, (84) 50 A CTs & (4) 1.21 m cables                       |      |
| BCPMC042S                   | 42-circuit solid-core branch current meter, 100 A CTs (2 strips), 19.05 mm spacing                   |      | BCPMSCE1S                   | 42-circuit split-core power and energy meter w/ Ethernet, CTs and cables sold separately     |      |
| BCPMC142S                   | 42-circuit solid-core branch current meter, 100 A CTs (2 strips), 25.4 mm spacing                    |      | BCPMSCE2S                   | 84-circuit split-core power and energy meter w/ Ethernet, CTs and cables sold separately     |      |
| BCPMC224S                   | 24-circuit solid-core branch current meter, 100 A CTs (2 strips), 18 mm spacing                      |      | BCPMSCE30S                  | 30-circuit split-core power and energy meter w/ Ethernet, (30) 50A CTs & (2) 1.21 m cables   |      |
| BCPMC236S                   | 36-circuit solid-core branch current meter, 100 A CTs (2 strips), 18 mm spacing                      |      | BCPMSCE42S                  | 42-circuit split-core power and energy meter w/ Ethernet, (42) 50 A CTs & (2) 1.21 m cables  |      |
| BCPMC242S                   | 42-circuit solid-core branch current meter, 100 A CTs (2 strips), 18 mm spacing                      |      | BCPMSCE60S                  | 60-circuit split-core power and energy meter w/ Ethernet, (60) 50 A CTs & (4) 1.21 m cables  |      |
| BCPMC248S                   | 48-circuit solid-core branch current meter, 100 A CTs (4 strips), 18 mm spacing                      |      | BCPMSCE84S                  | 84-circuit split-core power and energy meter w/ Ethernet, (84) 50 A CTs & (4) 1.21 m cables  |      |
| BCPME042S                   | 42-circuit solid-core power & energy meter w/Ethernet, 100 A CTs (2 strips), 19.05 mm spacing        |      | BCPMSCADPBS                 | BCPM adapter boards, quantity 2, for split core BCPM   |      |
| BCPME084S                   | 84-circuit solid-core power & energy meter w/Ethernet, 100 A CTs (4 strips), 19.05 mm spacing        |      | BCPMSCCT0                   | BCPM 50 A split core CTs, Quantity 6, 1.8 m lead lengths                                     |      |
| BCPME142S                   | 42-circuit solid-core power & energy meter w/Ethernet, 100 A CTs (2 strips), 25.4 mm spacing         |      | BCPMSCCT0R20                | BCPM 50 A split core CTs, quantity 6, 6 m lead lengths                                       |      |
| BCPME184S                   | 84-circuit solid-core power & energy meter w/Ethernet, 100 A CTs (4 strips), 25.4 mm spacing         |      | BCPMSCCT1                   | BCPM 100 A split core CTs, Quantity 6, 1.8 m lead lengths                                    |      |
| BCPME224S                   | 24-circuit solid-core power & energy meter w/Ethernet, 100 A CTs (2 strips), 18 mm spacing           |      | BCPMSCCT1R20                | BCPM 100 A split core CTs, Quantity 6, 6 m lead lengths                                      |      |
| BCPME236S                   | 36-circuit solid-core power & energy meter w/Ethernet, 100 A CTs (2 strips), 18 mm spacing           |      | BCPMSCCT3                   | BCPM 200 A split core CTs, Quantity 1, 1.8 m lead lengths                                    |      |
| BCPME242S                   | 42-circuit solid-core power & energy meter w/Ethernet, 100 A CTs (2 strips), 18 mm spacing           |      | BCPMSCCT3R20                | BCPM 200 A split core CTs, Quantity 1, 6 m lead lengths                                      |      |
| BCPME248S                   | 48-circuit solid-core power & energy meter w/Ethernet, 100 A CTs (4 strips), 18 mm spacing           |      | BCPMCOVERS                  | BCPM circuit board cover   |      |
| BCPME272S                   | 72-circuit solid-core power & energy meter w/Ethernet, 100 A CTs (4 strips), 18 mm spacing           |      | BCPMREPAIR                  | CT repair kit for solid core BCPM (includes one CT)  |      |
| BCPME284S                   | 84-circuit solid-core power & energy meter w/Ethernet, 100 A CTs (4 strips), 18 mm spacing           |      | CBL008                      | Flat Ribbon cable for BCPM, length = 0.45 m  |      |
| BCPMSCA1S                   | 42-circuit split-core power and energy meter, CTs and cables sold separately                         |      | CBL016                      | Flat Ribbon cable for BCPM, length = 1.2 m   |      |
| BCPMSCA2S                   | 84-circuit split-core power and energy meter, CTs and cables sold separately                         |      | CBL017                      | Flat Ribbon cable for BCPM, length = 1.5 m   |      |
| BCPMSCA30S                  | 30-circuit split-core power and energy meter, (30) 50 A CTs & (2) 1.21 m cables                      |      | CBL018                      | Flat Ribbon cable for BCPM, length = 1.8 m   |      |
| BCPMSCA42S                  | 42-circuit split-core power and energy meter, (42) 50 A CTs & (2) 1.21 m cables                      |      | CBL019                      | Flat Ribbon cable for BCPM, length = 2.4 m   |      |
| BCPMSCA60S                  | 60-circuit split-core power and energy meter, (60) 50 A CTs & (4) 1.21 m cables                      |      | CBL020                      | Flat Ribbon cable for BCPM, length = 3.0 m   |      |
| BCPMSCA84S                  | 84-circuit split-core power and energy meter, with (84) 50 A CTs & (4) 1.21 m cables                 |      | CBL021                      | Flat Ribbon cable for BCPM, length = 6.1 m   |      |
| BCPMSCB1S                   | 42-circuit split-core branch current, mains power meter, CTs and cables sold separately              |      | CBL022                      | Round Ribbon cable for BCPM, length = 1.2 m  |      |
| BCPMSCB2S                   | 84-circuit split-core branch current, mains power meter, CTs and cables sold separately              |      | CBL023                      | Round Ribbon cable for BCPM, length = 3 m  |      |
| BCPMSCB30S                  | 30-circuit split-core branch current, mains power meter, (30) 50 A CTs & (2) 1.21 m cables           |      | CBL024                      | Round Ribbon cable for BCPM, length = 6.1 m  |      |
| BCPMSCB42S                  | 42-circuit split-core branch current, mains power meter, (42) 50 A CTs & (2) 1.21 m cables           |      | CBL031                      | Round Ribbon cable for BCPM, length = 0.5 m  |      |
| BCPMSCB60S                  | 60-circuit split-core branch current, mains power meter, (60) 50 A CTs & (4) 1.21 m cables           |      | CBL033                      | Round Ribbon cable for BCPM, length = 0.8 m  |      |
| BCPMSCBY63S                 | 42-circuit split-core branch current, mains, all boards on backplate, CTs and cables sold separately |      | LVCT00050S                  | 50 A 10 mm x 11 mm   |      |
| BCPMSCC1S                   | 42-circuit split-core current meter, CTs and cables sold separately                                  |      | LVCT00101S                  | 100 A 16 mm x 20 mm  |      |
| BCPMSCC2S                   | 84-circuit split-core current meter, CTs and cables sold separately                                  |      | LVCT00102S                  | 100 A 30 mm x 31 mm  |      |
| BCPMSCC30S                  | 30-circuit split-core current meter, (30) 50 A CTs & (2) 1.21 m cables                               |      | LVCT00202S                  | 200 A 30 mm x 31 mm  |      |
|                             |  |      | LVCT00302S                  | 300 A 30 mm x 31 mm  |      |
|                             |  |      | LVCT00403S                  | 400 A 62 mm x 73 mm  |      |
|                             |  |      | LVCT00603S                  | 600 A 62 mm x 73 mm  |      |
|                             |  |      | LVCT00803S                  | 800 A 62 mm x 73 mm  |      |
|                             |  |      | LVCT00804S                  | 800 A 62 mm x 139 mm   |      |
|                             |  |      | LVCT01004S                  | 1000 A 62 mm x 139 mm  |      |
|                             |  |      | LVCT01204S                  | 1200 A 62 mm x 139 mm  |      |
|                             |  |      | LVCT01604S                  | 1600 A 62 mm x 139 mm  |      |
|                             |  |      | LVCT02004S                  | 2000 A 62 mm x 139 mm  |      |
|                             |  |      | LVCT02404S                  | 2400 A 62 mm x 139 mm  |      |
|                             |  |      | LVCT20050S                  | 50 A 10 mm   |      |
|                             |  |      | LVCT20100S                  | 100 A 10 mm  |      |
|                             |  |      | LVCT20202S                  | 200 A 25 mm  |      |

# PowerLogic™ Commercial Reference Numbers

| Commercial reference number | Description  | Page       | Commercial reference number | Description                                | Page |
|-----------------------------|--|------------|-----------------------------|--|------|
|                             | <b>EM4000</b>  | <b>206</b> | 50171                       | CARDEW 440V CA Surge arestor               |      |
| METSEEM403316               | 24 x 333 mV inputs, 120V control power 60 Hz   |            | 50172                       | CARDEW 660V CA Surge arestor               |      |
| METSEEM403336               | 24 x 333 mV inputs, 277V control power 60 Hz   |            | 50183                       | CARDEW 1000V CA Surge arestor              |      |
| METSEEM408016               | 24 x 80 mA inputs, 120V control power 60 Hz  |            | 50248                       | PHT1000                                    |      |
| METSEEM408036               | 24 x 80 mA inputs, 277V control power 60 Hz  |            | 50278                       | XRM  |      |
| METSECONV580                | EM4000 5 A : 80 mA converter   |            | 50281                       | XGR 115-127VCA                             |      |
| METSEPTMOD480               | 480 V PT Module for EM4X00 meter   |            | 50282                       | XGR 220-240VCA                             |      |
| METSEPTMOD347600            | 347 V/600 V PT Module for EM4X00 meter   |            | 50283                       | XGR 380-415VCA                             |      |
| METSECTTERM                 | EM4000 CT termination module   |            | 50420                       | TOA80 open toroid                          |      |
| METSECTSHORT                | EM4000 CT shorting module  |            | 50421                       | TOA120 open toroid                         |      |
| METSECT80200                | EM4000 solid-core CT 200 A / 80 mA secondary   |            | 50437                       | TA30 toroid                                |      |
| METSECT80400                | EM4000 solid-core CT 400 A / 80 mA secondary   |            | 50438                       | PA50 toroid                                |      |
| METSECT80600                | EM4000 solid-core CT 600 A / 80 mA secondary   |            | 50439                       | IA80 toroid                                |      |
|                             | <b>EM4800</b>  | <b>215</b> | 50440                       | MA120 toroid                               |      |
| METSEEM480525               | 24 x 5 A inputs, 230/240 V control power, 50 Hz  |            | 50441                       | SA200 toroid                               |      |
| METSEEM480516               | 24 x 5 A inputs, 120 V control power, 60 Hz  |            | 50442                       | GA300 toroid                               |      |
| METSEEM483325               | 24 x 333 mV inputs, 230/240 V control power, 50 Hz   |            | 50494                       | XP15 Open CT for XRM                       |      |
| METSEEM483316               | 24 x 333 mV inputs, 120 V control power, 60 Hz   |            | 50498                       | XP50 Open CT for XRM                       |      |
| METSEEM488016               | 24 x 80 mA inputs, 120 V control power, 60 Hz  |            | 50499                       | XP100 Open CT for XRM                      |      |
| METSEEM488026               | 24 x 80 mA inputs, 230/240 V control power, 50 Hz  |            | 1460872                     | Voltage Adaptor P1N                        |      |
| METSECONV580                | EM4000 5 A : 80 mA converter   |            | IMDCP100                    | Current Probe 100mm                        |      |
| METSEPTMOD480               | 480 V PT Module for EM4X00 meter   |            | IMDCP15                     | Current Probe 15mm                         |      |
| METSEPTMOD347600            | 347 V/600 V PT Module for EM4X00 meter   |            | IMDCP50                     | Current Probe 50mm                         |      |
| METSECTTERM                 | EM4000 CT termination module   |            | IMDIFL12                    | Ins Fault locator Entry                    |      |
| METSECTSHORT                | EM4000 CT shorting module  |            | IMDIFL12C                   | Ins Fault locator Entry Com                |      |
|                             | <b>EM4900</b>  | <b>220</b> | IMDIFL12H                   | Ins Fault locator HC                       |      |
| METSEEM4904A                | EM4900 (4) 3-phase meters - Modbus RTU only  |            | IMDIFL12L                   | Ins Fault locator Entry 24-48VDC           |      |
| METSEEM4908A                | EM4900 (8) 3-phase meters - Modbus RTU only  |            | IMDIFL12LMC                 | Ins Fault locator Adv 24-48VDC             |      |
| METSEEM4914A                | EM4900 (14) 3-phase meters - Modbus RTU only   |            | IMDIFL12MC                  | Ins Fault locator Adv                      |      |
| METSEEM4928A                | EM4900 (28) 3-phase meters - Modbus RTU only   |            | IMDIFL12MCN                 | Ins Fault locator Adv                      |      |
| METSEEM4904E                | EM4900 (4) 3-phase meters - Ethernet and Serial (Modbus, BACnet & SNMP)  |            | IMDIFL12MCT                 | Ins Fault locator Adv Tropic               |      |
| METSEEM4908E                | EM4900 (8) 3-phase meters - Ethernet and Serial (Modbus, BACnet & SNMP)  |            | IMDIFL12VA1T                | Voltage Adaptor for IFL12MC series_1000V   |      |
| METSEEM4914E                | EM4900 (14) 3-phase meters - Ethernet and Serial (Modbus, BACnet & SNMP)   |            | IMDIFLK1                    | Mobile Ins Fault locator 1 feeder          |      |
| METSEEM4928E                | EM4900 (28) 3-phase meters - Ethernet and Serial (Modbus, BACnet & SNMP)   |            | IMDIFLK12                   | Mobile Ins Fault locator 12 feeders        |      |
|                             | <b>Retrofit Products</b>   | <b>229</b> | IMD-IM10                    | IM10                                       |      |
|                             | <b>EM3500</b>  | <b>230</b> | IMD-IM10-H                  | IM10 H                                     |      |
| METSEEM3502                 | EM3502 Pulse out only  |            | IMDIM15H                    | IM15 H                                     |      |
| METSEEM3550                 | EM3550 Modbus - 2 quadrant   |            | IMD-IM20                    | IM20                                       |      |
| METSEEM3555                 | EM3555 Modbus - 4 quadrant with logging  |            | IMD-IM20-1700               | Voltage Adaptor for IM20                   |      |
| METSEEM3560                 | EM3560 BACnet with logging   |            | IMD-IM20-H                  | IM20 H                                     |      |
| METSEEM3502A                | EM3502A Pulse Rope CT model  |            | IMD-IM400                   | IM400                                      |      |
| METSEEM3550A                | EM3550A Modbus Rope CT Model   |            | IMD-IM400-1700              | Voltage adaptor for IM400                  |      |
| METSEEM3560A                | EM3560A BACnet w/ logging Rope CT Model  |            | IMD-IM400-1700C             | Voltage adaptor for IM400 Conformal coated |      |
| METSEEM3561                 | EM3561 BACnet without logging  |            | IMD-IM400C                  | IM400C                                     |      |
| METSEEM3561A                | EM3561A BACnet without loggingRope CT Model  |            | IMDIM400L                   | IM400L                                     |      |
|                             | <b>EM4200</b>  | <b>236</b> | IMDIM400N                   | IM400N                                     |      |
| METSEEM4235                 | Enercept, Class 0.2S meter, Modbus/BACnet communication, Uni-Directional/Bi-Directional, RS-485, IEC wire code, single circuit, Modbus/BACnet  |            | IMDIM400LTHR                | IM400LTHR                                  |      |
| METSEEM4236                 | Enercept, Class 0.2S meter, Modbus/BACnet communication, Uni-Directional/Bi-Directional, RS-485, ANSI wire code, single circuit, Modbus/BACnet |            | IMDIM400THR                 | IM400THR                                   |      |
|                             | <b>Insulation Monitoring Devices</b>   | <b>242</b> | IMDIM400THRN                | IM400THRN                                  |      |
|                             | <b>Vigilohm Insulation Monitoring</b>  | <b>248</b> | IMD-IM400VA2                | Voltage adaptor for PV application Coated  |      |
| 50159                       | ZX impedance   |            | IMD-IM9                     | IM9  |      |
| 50168                       | HOSPITAL REMOTE PANEL  |            | IMD-IM9-OL                  | IM9OL                                      |      |
| 50169                       | CARDEW Holder  |            | IMD-IT-S63-H                | Single Phase, Isolated Transformer, 6,3KVA |      |
| 50170                       | CARDEW 250V CA Surge arestor   |            | IMD-IT-S80-H                | Single Phase, Isolated Transformer, 8KVA   |      |
|                             |  |            | IMD-IT-S100-H               | Single Phase, Isolated Transformer, 10KVA  |      |
|                             |  |            | IMDLRDH                     | Remote Display Hospital                    |      |

# PowerLogic™ Commercial Reference Numbers

| Commercial reference number   | Description  | Page       |
|---|--|------------|
|   | <b>EcoStruxure™ Panel Server</b>                         | <b>249</b> |
|   | <b>Panel Server Entry</b>                                | <b>251</b> |
| PAS400  | Panel Server Entry 110..277 V AC/DC                      |            |
|   | <b>Panel Server Universal</b>                            | <b>254</b> |
| PAS600L   | Panel Server Universal with 24 V DC power supply         |            |
| PAS600T   | Panel Server Universal with 100-240 V AC/DC power supply |            |
| PAS600  | Panel Server Universal with 100-277 V AC/DC power supply |            |
|   | <b>Panel Server Advanced</b>                             | <b>257</b> |
| PAS800L   | Panel Server Advanced with 24 V DC power supply          |            |
| PAS800P   | Panel Server Advanced with PoE power supply              |            |
| PAS800  | Panel Server Advanced with 100-277 V AC/DC power supply  |            |
| For any enclosure or product configuration not listed, please see your Schneider Electric Representative for complete ordering information. |  |            |





[www.se.com](http://www.se.com)

Schneider Electric Industries SAS  
35, Rue Joseph Monier  
CS 30323  
92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439  
Capital social 928 298 512 €  
[www.se.com](http://www.se.com)

July 2024  
PowerLogic™ Catalog  
**PLSED309005EN**

© 2024 - Schneider Electric. All rights reserved.  
All trademarks are owned by Schneider Electric  
Industries SAS or its affiliated companies.

As standards, specifications and designs develop from time to time, please  
ask for confirmation of the information given in this document.

Over 75 % of Schneider Electric products  
have been awarded the Green Premium ecolabel.

