

# Specifier's Guide

Line installation and protective  
equipment master catalog  
5 kV - 35 kV electrical  
distribution systems



*Powering Business Worldwide*

## Education and Training

### OCP and OVP CEU-Accredited Workshops



## Overvoltage Protection Workshop

Learn how to economically prevent excessive transient overvoltages from damaging electric utility distribution systems equipment or interrupting normal power system operation in Eaton's two-day Overvoltage Protection Workshop. The workshop is designed for utility distribution engineers or any engineer who is involved with design or implementation of overvoltage protection schemes for utility distribution systems.

### Class topics include:

- Basic overvoltage protection
- Basic Insulation Level (BIL)
- Insulation coordination
- Sources of system overvoltages
- Arrester fundamentals
- Application of arresters and other overvoltage protection schemes
- Distribution equipment protection
- Overhead and underground systems protection
- Substation transients
- Low voltage surge protection

## Overcurrent Protection Workshop

### Register Today!

Get hands-on experience learning how to apply overcurrent protection schemes in Eaton's two-day Distribution Overcurrent Protection Workshop. Any engineer who is involved with design or operation of overcurrent protection schemes for utilities will benefit. The workshop will be more beneficial to you if you have a working knowledge of overcurrent protection devices.

### Class topics include:

System coordination rules and procedures to incorporate into your daily routine

- Fuse-to-fuse expulsion and current-limiting coordination
- Transformer fusing protection
- Protection with sectionalizers
- Recloser and source-side coordination and load-side coordination
- Exposure to CYMET™ Power Engineering Software... and many more!

## Additional Details

The classes are held at our Power Systems Experience Center, 130 Commonwealth Drive, Warrendale, PA.  
Contact your local Eaton representative to register today!


[eaton.com/electricaltraining](http://eaton.com/electricaltraining)

| Table of Contents   | Page |
|---|------|
| Standard Interfaces For Separable Connectors and Components       | 4    |
| Certified Tests and Performance                                   | 5    |
| Conductor Sizing  | 6    |
| AEIC Insulation Diameter Chart                                    | 8    |
| ICEA Insulation Diameter Chart                                    | 9    |
| 200 A Loadbreak Connectors  | 10   |
| 200 A Deadbreak Connectors  | 12   |
| 200 A Stacking Dimensions   | 16   |
| Cleer 600 A Loadbreak Connectors                                  | 18   |
| 600/900 A Deadbreak Connectors                                    | 22   |
| 600/900 A Components and Replacement Parts                        | 24   |
| 600/900 A Connector Systems                                       | 26   |
| 600 A Stacking Dimensions   | 28   |
| Junction Bars/Cable Transition and Oil Stop Modules               | 30   |
| Splices   | 36   |
| Underground Surge Arresters                                       | 38   |
| Tools & Maintenance   | 40   |
| Bushings  | 44   |
| Fusing  | 46   |
| MagneX Single-Phase Interrupter                                   | 48   |
| MagneX Three-Phase Interrupter                                    | 50   |
| Faulted Circuit Indicators  | 52   |
| Sectionalizing Cabinets   | 56   |
| Part Number Index   | 62   |
| Energizing a World that Demands More                              | 64   |
| Product Application Overhead and Underground Distribution Systems | 66   |

# Standard interfaces for separable connectors and components

The following diagram specifies the IEEE Std 386™ standard interfaces supplied by Eaton for various applications to ensure interchangeability of any mating components.

## Interface Description Per IEEE Std 386™ standard

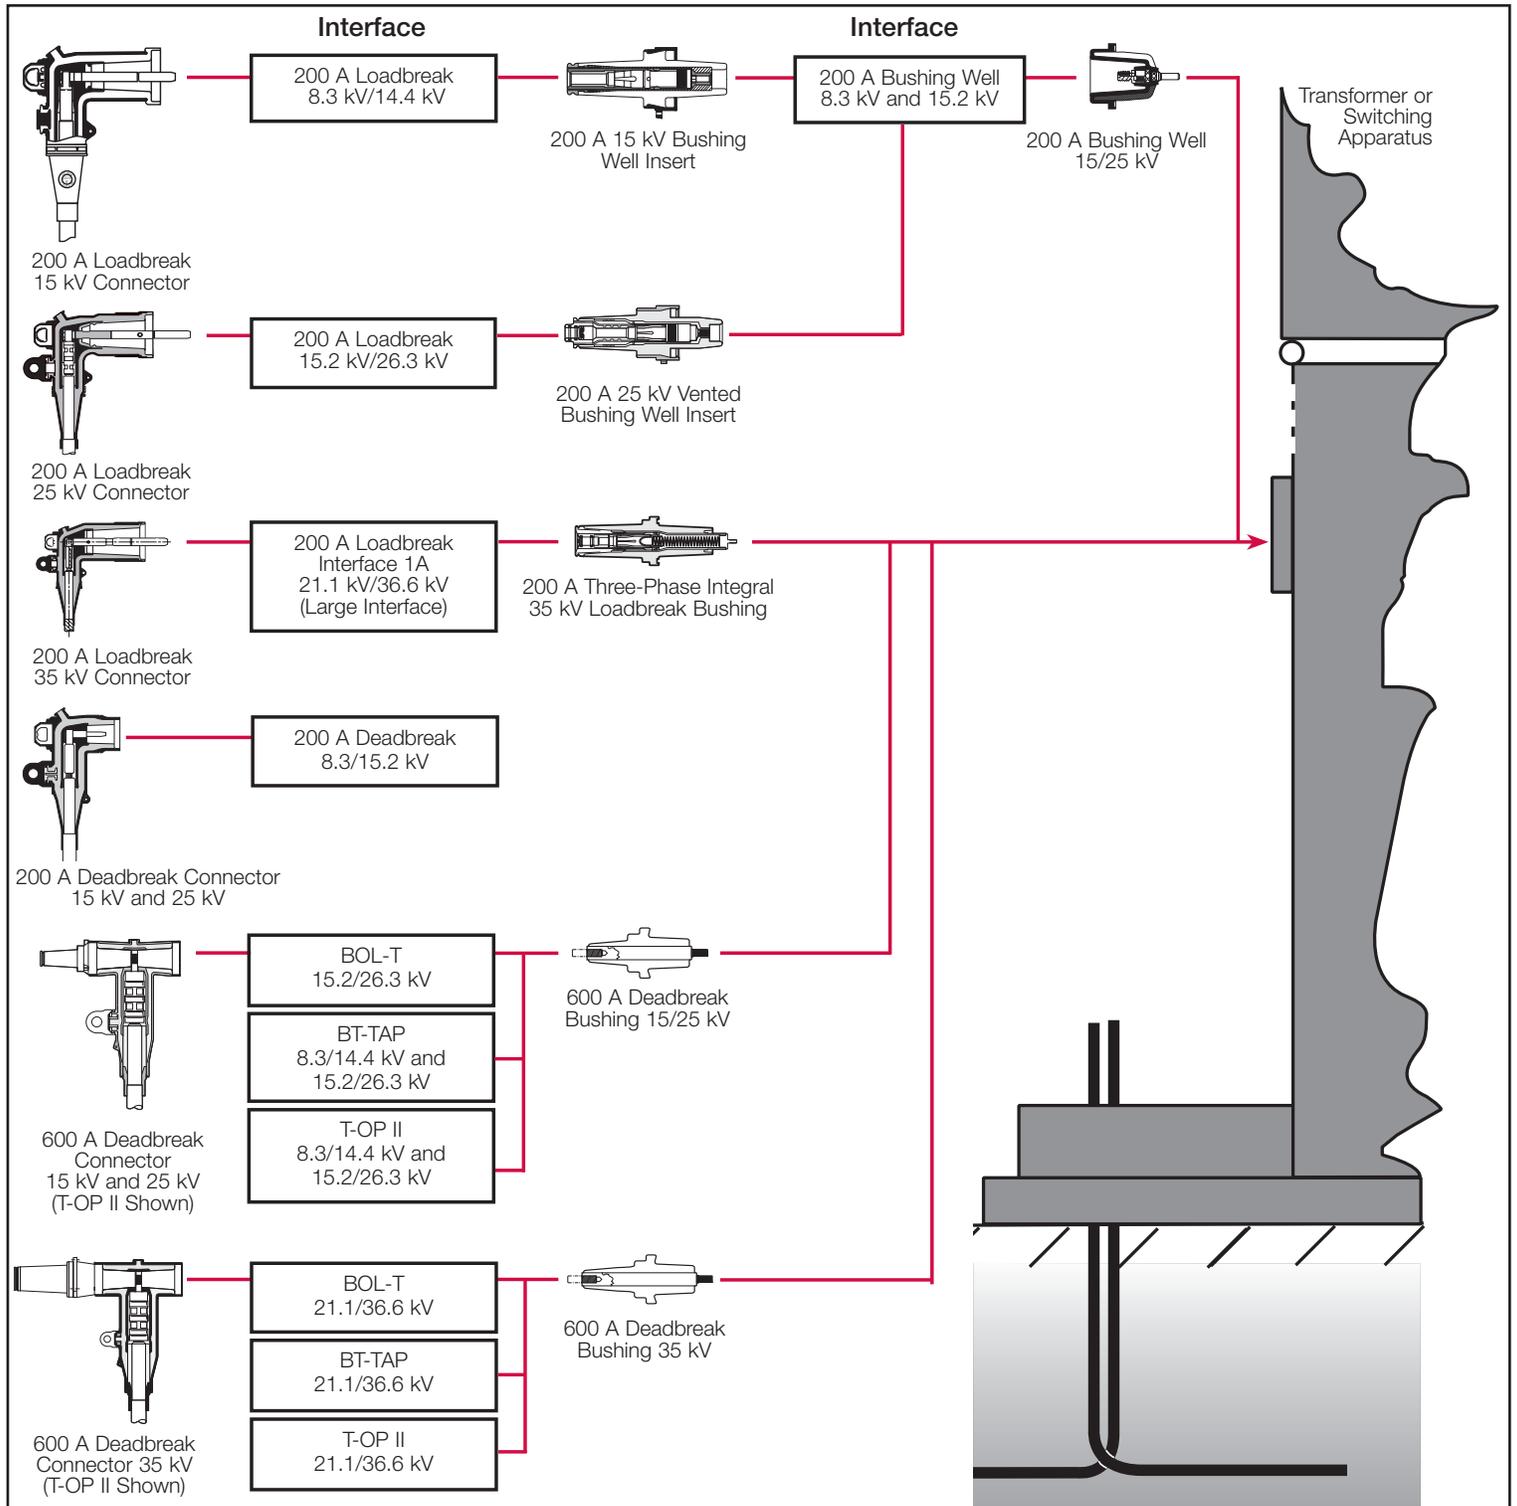

Eaton's Cooper Power series Connectors, Splices, Underground Surge Arresters, Tools, Bushings, Fusing, Faulted Circuit Indicators and Sectionalizing Equipment have been designed and tested per applicable portions of Institute of Electrical and Electronics Engineers, Inc. (IEEE®), American National Standards Institute (ANSI®), National Electrical Manufacturers Association (NEMA) and other industry standards including:

- **IEEE Std 386™** standard for Separable Connectors
- **IEEE Std 404™** standard for Cable Joints and Splices
- **IEEE Std C62.11™** standard for Metal Oxide Surge Arresters
- **IEEE Std C37.41™** standard for Current-Limiting Fuses
- **IEEE Std 592™** standard for Exposed Semi-conducting Shields
- **ANSI C119.4 Standard** for Copper and Aluminum Conductor Connectors
- **AEIC CS5, CS6 and CS8 Standards** for XLP and EPR Insulated Cables
- **ICEA S-94-649 Standard** for XLP and EPR Insulated Cables

Eaton rates its Cooper Power series Separable Connectors for 15 kV, 25 kV and 35 kV systems in accordance with the following ratings.

#### Splice Voltage Ratings in Accordance with IEEE Std 404™ standard

| Voltage Ratings and Characteristics     |         |      |      |
|---|---------|------|------|
| Description                             | Voltage |      |      |
| Standard Voltage Class (kV)             | 15      | 25   | 35   |
| Maximum Rating Phase-to-Ground (kV rms) | 8.7     | 14.4 | 20.2 |
| AC 60 Hz 1 Minute Withstand (kV rms)    | 35      | 52   | 69   |
| DC 15 Minute Withstand (kV)             | 70      | 100  | 125  |
| BIL and Full Wave Crest (kV peak)       | 110     | 150  | 200  |
| Minimum Corona Voltage Level (kV)       | 13      | 22   | 31   |

#### Splice Current Ratings in Accordance with IEEE Std 404™ standard

| Current Ratings and Characteristics |   |
|-------------------------------------|---|
| Description                         | Amperes   |
| Continuous                          | Equal to the current rating of the cable per IEEE Std 404™ standard |
| Short Time                          | Equal to the current rating of the cable per IEEE Std 404™ standard |

#### 200 A Loadbreak Connector Ratings in Accordance with IEEE Std 386™ standard

| Voltage Ratings                | 15 kV  | 25 kV  | 35 kV  |
|--------------------------------|--|--|--|
| Standard Voltage Class         | 15   | 25   | 35   |
| Maximum Rating Phase-to-Phase  | 14.4   | 26.3   | 36.6   |
| Maximum Rating Phase-to-Ground | 8.3  | 15.2   | 21.1   |
| AC 60 Hz 1 Minute Withstand    | 34   | 40   | 50   |
| DC 15 Minute Withstand         | 53   | 78   | 103  |
| BIL and Full Wave Crest        | 95   | 125  | 150  |
| Minimum Corona Voltage Level   | 11   | 19   | 26   |
| Current Ratings                | 15 kV  | 25 kV  | 35 kV  |
| Continuous                     | 200 A rms  | 200 A rms  | 200 A rms  |
| Switching                      | 10 make/break operations at 200 A rms at 14.4 kV                     | 10 make/break operations at 200 A rms at 26.3 kV                     | 10 make/break operations at 200 A rms at 36.6 kV                     |
| Fault Closure                  | 10,000 A rms sym. at 14.4 kV for 0.17s after 10 switching operations | 10,000 A rms sym. at 26.3 kV for 0.17s after 10 switching operations | 10,000 A rms sym. at 36.6 kV for 0.17s after 10 switching operations |
| Short Time                     | 10,000 A rms sym. for 0.17s<br>3,500 A rms sym. for 3.0s             | 10,000 A rms sym. for 0.17s<br>3,500 A rms sym. for 3.0s             | 10,000 A rms sym. for 0.17s<br>3,500 A rms sym. for 3.0s             |

#### 600 A Deadbreak Connector Ratings in Accordance with IEEE Std. 386™ standard

| Voltage Ratings  | 15 kV  | 25 kV  | 35 kV  |
|--|--|--|--|
| Standard Voltage Class                                 | 25   | 25   | 35   |
| Maximum Rating Phase-to-Ground                         | 15.2   | 15.2***  | 21.1   |
| AC 60 Hz 1 Minute Withstand                            | 40   | 40   | 50   |
| DC 15 Minute Withstand                                 | 78   | 78   | 103  |
| BIL and Full Wave Crest                                | 125  | 125  | 150  |
| Minimum Corona Voltage Level                           | 19   | 19   | 26   |
| Current Ratings  | 15 kV  | 25 kV  | 35 kV  |
| 600 A Interface**                                      |  |  |  |
| Continuous   | 600 A rms  | 600 A rms  | 600 A rms  |
| 24 Hour Overload                                       | 1,000 A rms  | 1,000 A rms  | 1,000 A rms  |
| Short Time   | 25,000 A rms sym. for 0.17 s<br>10,000 A rms sym. for 3.0 s          | 25,000 A rms sym. for 0.17 s<br>10,000 A rms sym. for 3.0 s          | 25,000 A rms sym. for 0.17 s<br>10,000 A rms sym. for 3.0 s          |
| 200 A Interface On Loadbreak Reducing Tap Plug (LRTP)* |  |  |  |
| Continuous   | 200 A rms  | 200 A rms  | 200 A rms  |
| Switching  | 10 make/break operations at 200 A rms at 14.4 kV                     | 10 make/break operations at 200 A rms at 26.3 kV                     | 10 make/break operations at 200 A rms at 36.6 kV                     |
| Fault Closure  | 10,000 A rms sym. at 14.4 kV for 0.17s after 10 switching operations | 10,000 A rms sym. at 26.3 kV for 0.17s after 10 switching operations | 10,000 A rms sym. at 36.6 kV for 0.17s after 10 switching operations |
| Short Time   | 10,000 A rms sym. for 0.17 s<br>3,500 A rms sym. for 3.0s            | 10,000 A rms sym. for 0.17 s<br>3,500 A rms sym. for 3.0s            | 10,000 A rms sym. for 0.17 s<br>3,500 A rms sym. for 3.0s            |

#### Notes:

- \* System design and protection must recognize the ratings of 200 A interface.
- \*\* Optional 900 A rating is available. Refer to 600/900 A Deadbreak Connector section for more detail.
- \*\*\* 25 kV insulating plugs and standoff bushings are rated 16.2 kV phase-to-ground.

# Conductor sizing

## Part Number Selection Process for Cable Sensitive Products

Eaton designs its Cooper Power series 200 A and 600 A connector products for applications on XLPE, EPR or other solid dielectric insulated underground electrical cables. In order to maintain a reliable termination, the cable accessories must be sized correctly with the cable conductor size and cable insulation diameter.

The cable conductor size is used to determine the compression connector used. Proper sizing is important to ensure reliable current transfer from the underground cable conductor to the elbow connector. Conductor diameters are dependent on the conductor size in AWG or kcmil, and conductor type (stranded, compressed, compact or solid).

The cable insulation diameter (the diameter over the insulation) is critical because it is important to maintain a tightly sealed fit between the cable insulation and the elbow housing at the cable entrance. As the insulation thickness changes, so must the range of the cable accessory. Cable insulation diameter can be determined from the cable manufacturer's specification, or by referring to pages 8 (for cable made to the AEIC Standard including the  $\pm 0.030$  inch tolerance) or 9 (for cable made to the ICEA Standard) for minimum and maximum diameters.

## EXAMPLE: PROPER ELBOW PART NUMBER SELECTION

Select an Eaton's Cooper Power series 15 kV 200 A Loadbreak Elbow with optional integral jacket seal and test point for an AEIC standard tape-shielded 15 kV cable with 133% insulation and 1/0 compact stranded conductor with an outer jacket diameter of 1.07".

### Step 1 – Base Part Number Selection

Select base part number of **LEJ215** from page 11 for 15 kV voltage class. Note that on page 11 reference is also made to tables CR1 and CC1.

### Step 2 – Determine Insulation Outside Diameter Range

Since cable is made to AEIC Standards, refer to page 8. 133% 15 kV cable corresponds to 220 mil insulation wall thickness. The AEIC table gives a range of 0.805" to 0.865" for 1/0 compact 220 mil cable.

### Step 3 – Elbow Cable Range Selection

Refer to CR1 Table on page 13 and select a cable range code of "**AB**" with a range of 0.610" to 0.970" to cover 0.805" to 0.865".

LEJ215

CABLE RANGE  
CODE (CR1)

### Step 4 – Elbow Connector Selection

Refer to CC1 Table on page 13 and select a conductor code of "**05**" which applies to the specified 1/0 compact conductor.

LEJ215

AB

CONDUCTOR  
CODE (CC1)

### Step 5 – Optional Test Point Selection

In accordance with Note 1 on page 11, for an elbow with test point, add a "**T**" after the cable range and conductor code.

LEJ215

AB

05

T

### Step 6 – Optional Ground Strap

Tape-shielded cable requires a ground strap and bleeder wire to terminate. Add "**GS**" after test point option.

LEJ215

AB


05

TGS


### Step 7 – Ordering

Therefore, order part number

**LEJ215AB05TGS**

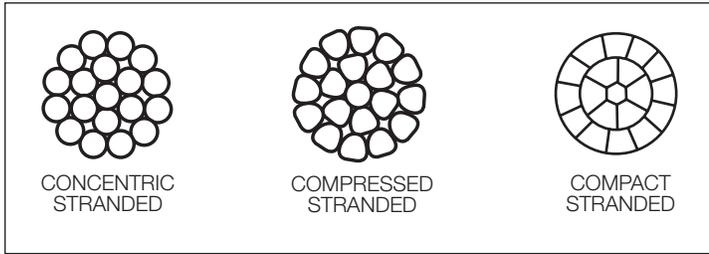

Types of Stranded Conductor

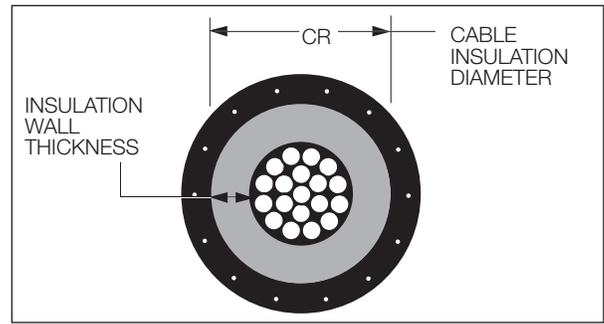

Cable insulation

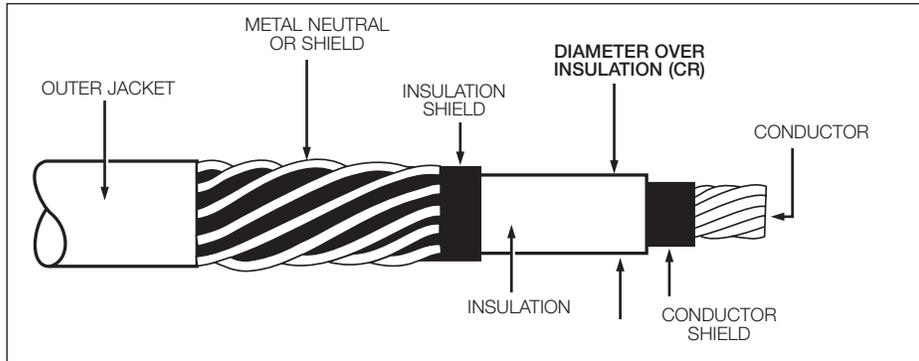


Illustration showing typical construction of medium voltage underground cable.

### Cable Conductor Reference

| Conductor Size<br>AWG or kcmil | No. of Strands<br>and their Nom.<br>Strand Dia. (in.) | Cross-sectional Area |                               | Stranded<br>Conductors<br>(inches) | Compressed<br>Conductors<br>(inches) | Compact<br>Conductors<br>(inches) | Solid<br>Conductors<br>(inches) |
|--------------------------------|---|----------------------|-------------------------------|------------------------------------|--------------------------------------|-----------------------------------|---------------------------------|
|                                |   | Square<br>Inches     | mm <sup>2</sup><br>Conversion |                                    |                                      |                                   |                                 |
| 14                             | 7 x 0.0242  | 0.0032               | 2.08                          | 0.073                              | -                                    | -                                 | 0.064                           |
| 12                             | 7 x 0.0305  | 0.0051               | 3.31                          | 0.092                              | -                                    | -                                 | 0.081                           |
| 10                             | 7 x 0.0385  | 0.0082               | 5.26                          | 0.116                              | -                                    | -                                 | 0.102                           |
| 8                              | 7 x 0.0486  | 0.0130               | 8.37                          | 0.146                              | -                                    | -                                 | 0.129                           |
| 6                              | 7 x 0.0612  | 0.0206               | 13.30                         | 0.184                              | -                                    | -                                 | 0.162                           |
| 4                              | 7 x 0.0772  | 0.0328               | 21.15                         | 0.232                              | -                                    | -                                 | 0.204                           |
| 2                              | 7 x 0.0974  | 0.0521               | 33.62                         | 0.292                              | 0.283                                | 0.268                             | 0.258                           |
| 1                              | 19 x 0.0664   | 0.0657               | 42.41                         | 0.332                              | 0.322                                | 0.299                             | 0.289                           |
| 1/0                            | 19 x 0.0745   | 0.0829               | 53.49                         | 0.373                              | 0.362                                | 0.336                             | 0.325                           |
| 2/0                            | 19 x 0.0837   | 0.1045               | 67.43                         | 0.418                              | 0.405                                | 0.376                             | -                               |
| 3/0                            | 19 x 0.0940   | 0.1318               | 85.01                         | 0.470                              | 0.456                                | 0.423                             | -                               |
| 4/0                            | 19 x 0.1055   | 0.1662               | 107.2                         | 0.528                              | 0.512                                | 0.475                             | -                               |
| 250                            | 37 x 0.0822   | 0.1964               | 127                           | 0.575                              | 0.558                                | 0.520                             | -                               |
| 350                            | 37 x 0.0973   | 0.2749               | 177                           | 0.681                              | 0.661                                | 0.616                             | -                               |
| 500                            | 37 x 0.1162   | 0.3927               | 253                           | 0.813                              | 0.789                                | 0.736                             | -                               |
| 600                            | 61 x 0.0992   | 0.4712               | 304                           | 0.893                              | 0.866                                | 0.813                             | -                               |
| 700                            | 61 x 0.1071   | 0.5498               | 355                           | 0.964                              | 0.935                                | 0.877                             | -                               |
| 750                            | 61 x 0.1109   | 0.5891               | 380                           | 0.998                              | 0.968                                | 0.908                             | -                               |
| 800                            | 61 x 0.1145   | 0.6283               | 405                           | 1.031                              | 1.000                                | 0.938                             | -                               |
| 900                            | 61 x 0.1215   | 0.7069               | 456                           | 1.094                              | 1.061                                | 0.999                             | -                               |
| 1000                           | 61 x 0.1280   | 0.7854               | 507                           | 1.152                              | 1.117                                | 1.060                             | -                               |

# AEIC insulation diameter chart

Cable Insulation Diameters for Standard AEIC Cables with 175, 220, 260, and 345 mil Insulation Wall Thickness

| Insulation<br>AWG or<br>kcmil | Wall<br>Thickness*<br>(Inches) | Voltage<br>Class kV | Concentric<br>Stranded   |                          | Compressed<br>Stranded   |                          | Compact<br>Stranded      |                          | Solid                    |                          |
|-------------------------------|--------------------------------|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
|                               |                                |                     | Min.<br>Dia.<br>(inches) | Max.<br>Dia.<br>(inches) | Min.<br>Dia.<br>(inches) | Max.<br>Dia.<br>(inches) | Min.<br>Dia.<br>(inches) | Max.<br>Dia.<br>(inches) | Min.<br>Dia.<br>(inches) | Max.<br>Dia.<br>(inches) |
| #2                            | .175                           | 15                  | 0.670                    | 0.730                    | 0.665                    | 0.725                    | 0.650                    | 0.710                    | 0.640                    | 0.700                    |
|                               | .220                           | 15                  | 0.760                    | 0.820                    | 0.775                    | 0.815                    | 0.740                    | 0.800                    | 0.730                    | 0.790                    |
|                               | .260                           | 25                  | —                        | —                        | —                        | —                        | —                        | —                        | —                        | —                        |
|                               | .345                           | 35                  | —                        | —                        | —                        | —                        | —                        | —                        | —                        | —                        |
| #1                            | .175                           | 15                  | 0.710                    | 0.770                    | 0.700                    | 0.760                    | 0.680                    | 0.740                    | 0.670                    | 0.730                    |
|                               | .220                           | 15                  | 0.800                    | 0.860                    | 0.790                    | 0.850                    | 0.770                    | 0.830                    | 0.760                    | 0.820                    |
|                               | .260                           | 25                  | 0.880                    | 0.940                    | 0.870                    | 0.930                    | 0.850                    | 0.910                    | 0.840                    | 0.900                    |
|                               | .345                           | 35                  | —                        | —                        | —                        | —                        | —                        | —                        | —                        | —                        |
| 1/0                           | .175                           | 15                  | 0.755                    | 0.815                    | 0.740                    | 0.800                    | 0.715                    | 0.775                    | 0.705                    | 0.765                    |
|                               | .220                           | 15                  | 0.845                    | 0.905                    | 0.830                    | 0.890                    | 0.805                    | 0.865                    | 0.795                    | 0.855                    |
|                               | .260                           | 25                  | 0.925                    | 0.985                    | 0.910                    | 0.970                    | 0.885                    | 0.945                    | 0.875                    | 0.935                    |
|                               | .345                           | 35                  | 1.095                    | 1.155                    | 1.080                    | 1.140                    | 1.055                    | 1.115                    | 1.045                    | 1.105                    |
| 2/0                           | .175                           | 15                  | 0.800                    | 0.860                    | 0.785                    | 0.845                    | 0.755                    | 0.815                    | 0.805                    | 0.905                    |
|                               | .220                           | 15                  | 0.890                    | 0.950                    | 0.875                    | 0.935                    | 0.845                    | 0.905                    | 0.835                    | 0.895                    |
|                               | .260                           | 25                  | 0.970                    | 1.030                    | 0.955                    | 1.015                    | 0.925                    | 0.985                    | 0.915                    | 0.975                    |
|                               | .345                           | 35                  | 1.140                    | 1.200                    | 1.125                    | 1.185                    | 1.095                    | 1.155                    | 1.085                    | 1.145                    |
| 3/0                           | .175                           | 15                  | 0.850                    | 0.910                    | 0.835                    | 0.895                    | 0.805                    | 0.865                    | 0.850                    | 0.940                    |
|                               | .220                           | 15                  | 0.940                    | 1.000                    | 0.925                    | 0.985                    | 0.895                    | 0.955                    | 0.880                    | 0.940                    |
|                               | .260                           | 25                  | 1.020                    | 1.080                    | 1.005                    | 1.065                    | 0.975                    | 1.035                    | 0.960                    | 1.020                    |
|                               | .345                           | 35                  | 1.190                    | 1.250                    | 1.175                    | 1.235                    | 1.145                    | 1.205                    | 1.130                    | 1.190                    |
| 4/0                           | .175                           | 15                  | 0.910                    | 0.970                    | 0.890                    | 0.950                    | 0.855                    | 0.915                    | 0.900                    | 0.990                    |
|                               | .220                           | 15                  | 1.000                    | 1.060                    | 0.980                    | 1.040                    | 0.945                    | 1.005                    | 0.930                    | 0.990                    |
|                               | .260                           | 25                  | 1.080                    | 1.140                    | 1.060                    | 1.120                    | 1.025                    | 1.085                    | 1.010                    | 1.070                    |
|                               | .345                           | 35                  | 1.250                    | 1.310                    | 1.230                    | 1.290                    | 1.195                    | 1.255                    | 1.180                    | 1.240                    |
| 250                           | .175                           | 15                  | 0.965                    | 1.025                    | 0.950                    | 1.010                    | 0.910                    | 0.970                    | —                        | —                        |
|                               | .220                           | 15                  | 1.055                    | 1.115                    | 1.040                    | 1.100                    | 1.000                    | 1.060                    | —                        | —                        |
|                               | .260                           | 25                  | 1.145                    | 1.205                    | 1.130                    | 1.190                    | 1.095                    | 1.150                    | —                        | —                        |
|                               | .345                           | 35                  | 1.320                    | 1.380                    | 1.305                    | 1.365                    | 1.265                    | 1.325                    | —                        | —                        |
| 350                           | .175                           | 15                  | 1.070                    | 1.130                    | 1.050                    | 1.110                    | 1.005                    | 1.065                    | —                        | —                        |
|                               | .220                           | 15                  | 1.160                    | 1.220                    | 1.140                    | 1.200                    | 1.095                    | 1.155                    | —                        | —                        |
|                               | .260                           | 25                  | 1.250                    | 1.310                    | 1.230                    | 1.290                    | 1.185                    | 1.245                    | —                        | —                        |
|                               | .345                           | 35                  | 1.425                    | 1.485                    | 1.405                    | 1.465                    | 1.360                    | 1.420                    | —                        | —                        |
| 500                           | .175                           | 15                  | 1.205                    | 1.265                    | 1.180                    | 1.240                    | 1.125                    | 1.185                    | —                        | —                        |
|                               | .220                           | 15                  | 1.295                    | 1.355                    | 1.270                    | 1.330                    | 1.215                    | 1.275                    | —                        | —                        |
|                               | .260                           | 25                  | 1.385                    | 1.445                    | 1.360                    | 1.420                    | 1.305                    | 1.365                    | —                        | —                        |
|                               | .345                           | 35                  | 1.560                    | 1.620                    | 1.535                    | 1.595                    | 1.480                    | 1.540                    | —                        | —                        |
| 600                           | .175                           | 15                  | 1.295                    | 1.355                    | 1.265                    | 1.325                    | 1.215                    | 1.275                    | —                        | —                        |
|                               | .220                           | 15                  | 1.385                    | 1.445                    | 1.355                    | 1.415                    | 1.305                    | 1.365                    | —                        | —                        |
|                               | .260                           | 25                  | 1.475                    | 1.535                    | 1.445                    | 1.505                    | 1.395                    | 1.455                    | —                        | —                        |
|                               | .345                           | 35                  | 1.650                    | 1.710                    | 1.625                    | 1.680                    | 1.570                    | 1.630                    | —                        | —                        |
| 700                           | .175                           | 15                  | 1.365                    | 1.425                    | 1.335                    | 1.395                    | 1.275                    | 1.335                    | —                        | —                        |
|                               | .220                           | 15                  | 1.455                    | 1.515                    | 1.425                    | 1.485                    | 1.365                    | 1.425                    | —                        | —                        |
|                               | .260                           | 25                  | 1.545                    | 1.605                    | 1.515                    | 1.575                    | 1.455                    | 1.515                    | —                        | —                        |
|                               | .345                           | 35                  | 1.720                    | 1.780                    | 1.690                    | 1.750                    | 1.630                    | 1.690                    | —                        | —                        |
| 750                           | .175                           | 15                  | 1.400                    | 1.460                    | 1.370                    | 1.430                    | 1.310                    | 1.370                    | —                        | —                        |
|                               | .220                           | 15                  | 1.490                    | 1.550                    | 1.460                    | 1.520                    | 1.400                    | 1.460                    | —                        | —                        |
|                               | .260                           | 25                  | 1.580                    | 1.640                    | 1.550                    | 1.610                    | 1.490                    | 1.550                    | —                        | —                        |
|                               | .345                           | 35                  | 1.755                    | 1.815                    | 1.725                    | 1.785                    | 1.665                    | 1.725                    | —                        | —                        |
| 800                           | .175                           | 15                  | 1.430                    | 1.490                    | 1.400                    | 1.460                    | 1.340                    | 1.400                    | —                        | —                        |
|                               | .220                           | 15                  | 1.520                    | 1.580                    | 1.490                    | 1.550                    | 1.430                    | 1.490                    | —                        | —                        |
|                               | .260                           | 25                  | 1.610                    | 1.670                    | 1.580                    | 1.640                    | 1.520                    | 1.580                    | —                        | —                        |
|                               | .345                           | 35                  | 1.785                    | 1.845                    | 1.755                    | 1.815                    | 1.695                    | 1.755                    | —                        | —                        |
| 900                           | .175                           | 15                  | 1.495                    | 1.555                    | 1.460                    | 1.520                    | 1.400                    | 1.460                    | —                        | —                        |
|                               | .220                           | 15                  | 1.585                    | 1.645                    | 1.550                    | 1.610                    | 1.490                    | 1.550                    | —                        | —                        |
|                               | .260                           | 25                  | 1.675                    | 1.735                    | 1.640                    | 1.700                    | 1.580                    | 1.640                    | —                        | —                        |
|                               | .345                           | 35                  | 1.850                    | 1.910                    | 1.815                    | 1.875                    | 1.755                    | 1.815                    | —                        | —                        |
| 1000                          | .175                           | 15                  | 1.550                    | 1.610                    | 1.515                    | 1.575                    | 1.460                    | 1.520                    | —                        | —                        |
|                               | .220                           | 15                  | 1.640                    | 1.700                    | 1.605                    | 1.665                    | 1.550                    | 1.610                    | —                        | —                        |
|                               | .260                           | 25                  | 1.730                    | 1.790                    | 1.695                    | 1.755                    | 1.640                    | 1.700                    | —                        | —                        |
|                               | .345                           | 35                  | 1.850                    | 1.955                    | 1.815                    | 1.920                    | 1.760                    | 1.865                    | —                        | —                        |

\* See table below for standard insulation thickness.

175 mil is 100% insulated cable at 15 kV.  
 220 mil is 133% insulated cable at 15 kV.  
 260 mil is 100% insulated cable at 25 kV.  
 345 mil is 133% insulated cable at 25 kV.  
 345 mil is 100% insulated cable at 35 kV.

# ICEA insulation diameter chart

Cable Insulation Diameters for Standard ICEA Cables with 175, 220, 260, and 345 mil Insulation Wall Thickness

| AWG or kcmil | Insulation Wall Thickness* (Inches) | Voltage Class kV | Concentric Stranded |                    | Compressed Stranded |                    | Compact Stranded   |                    | Solid              |                    |
|--------------|-------------------------------------|------------------|---------------------|--------------------|---------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
|              |                                     |                  | Min. Dia. (inches)  | Max. Dia. (inches) | Min. Dia. (inches)  | Max. Dia. (inches) | Min. Dia. (inches) | Max. Dia. (inches) | Min. Dia. (inches) | Max. Dia. (inches) |
| #2           | .175                                | 15               | 0.645               | 0.730              | 0.635               | 0.720              | 0.620              | 0.705              | 0.610              | 0.695              |
|              | .220                                | 15               | 0.735               | 0.825              | 0.725               | 0.815              | 0.710              | 0.800              | 0.700              | 0.790              |
|              | .260                                | 25               | -                   | -                  | -                   | -                  | -                  | -                  | -                  | -                  |
|              | .345                                | 35               | -                   | -                  | -                   | -                  | -                  | -                  | -                  | -                  |
| #1           | .175                                | 15               | 0.685               | 0.770              | 0.675               | 0.760              | 0.655              | 0.735              | 0.645              | 0.725              |
|              | .220                                | 15               | 0.775               | 0.865              | 0.765               | 0.855              | 0.745              | 0.830              | 0.735              | 0.820              |
|              | .260                                | 25               | 0.845               | 0.935              | 0.835               | 0.925              | 0.815              | 0.905              | 0.805              | 0.895              |
|              | .345                                | 35               | -                   | -                  | -                   | -                  | -                  | -                  | -                  | -                  |
| 1/0          | .175                                | 15               | 0.725               | 0.810              | 0.715               | 0.800              | 0.690              | 0.775              | 0.680              | 0.760              |
|              | .220                                | 15               | 0.815               | 0.905              | 0.805               | 0.895              | 0.780              | 0.865              | 0.770              | 0.855              |
|              | .260                                | 25               | 0.885               | 0.980              | 0.875               | 0.965              | 0.850              | 0.940              | 0.835              | 0.925              |
|              | .345                                | 35               | 1.055               | 1.155              | 1.045               | 1.145              | 1.020              | 1.120              | 1.010              | 1.110              |
| 2/0          | .175                                | 15               | 0.775               | 0.855              | 0.760               | 0.845              | 0.730              | 0.815              | 0.715              | 0.800              |
|              | .220                                | 15               | 0.865               | 0.950              | 0.850               | 0.935              | 0.820              | 0.905              | 0.805              | 0.895              |
|              | .260                                | 25               | 0.935               | 1.025              | 0.920               | 1.010              | 0.890              | 0.980              | 0.875              | 0.965              |
|              | .345                                | 35               | 1.105               | 1.200              | 1.090               | 1.190              | 1.060              | 1.160              | 1.045              | 1.145              |
| 3/0          | .175                                | 15               | 0.825               | 0.905              | 0.810               | 0.895              | 0.775              | 0.860              | 0.765              | 0.845              |
|              | .220                                | 15               | 0.915               | 1.000              | 0.900               | 0.985              | 0.865              | 0.955              | 0.855              | 0.940              |
|              | .260                                | 25               | 0.985               | 1.075              | 0.970               | 1.060              | 0.935              | 1.030              | 0.925              | 1.015              |
|              | .345                                | 35               | 1.155               | 1.255              | 1.140               | 1.240              | 1.105              | 1.205              | 1.095              | 1.195              |
| 4/0          | .175                                | 15               | 0.880               | 0.965              | 0.865               | 0.950              | 0.830              | 0.910              | 0.815              | 0.895              |
|              | .220                                | 15               | 0.970               | 1.060              | 0.955               | 1.045              | 0.920              | 1.005              | 0.905              | 0.990              |
|              | .260                                | 25               | 1.040               | 1.135              | 1.025               | 1.115              | 0.990              | 1.080              | 0.975              | 1.065              |
|              | .345                                | 35               | 1.210               | 1.310              | 1.195               | 1.295              | 1.160              | 1.260              | 1.145              | 1.245              |
| 250          | .175                                | 15               | 0.935               | 1.020              | 0.920               | 1.005              | 0.880              | 0.965              | -                  | -                  |
|              | .220                                | 15               | 1.025               | 1.115              | 1.010               | 1.100              | 0.970              | 1.060              | -                  | -                  |
|              | .260                                | 25               | 1.095               | 1.190              | 1.080               | 1.175              | 1.040              | 1.135              | -                  | -                  |
|              | .345                                | 35               | 1.265               | 1.370              | 1.250               | 1.350              | 1.210              | 1.315              | -                  | -                  |
| 350          | .175                                | 15               | 1.045               | 1.130              | 1.025               | 1.110              | 0.980              | 1.065              | -                  | -                  |
|              | .220                                | 15               | 1.135               | 1.220              | 1.115               | 1.200              | 1.070              | 1.155              | -                  | -                  |
|              | .260                                | 25               | 1.205               | 1.295              | 1.185               | 1.275              | 1.140              | 1.230              | -                  | -                  |
|              | .345                                | 35               | 1.375               | 1.475              | 1.355               | 1.455              | 1.310              | 1.410              | -                  | -                  |
| 500          | .175                                | 15               | 1.175               | 1.260              | 1.150               | 1.235              | 1.100              | 1.185              | -                  | -                  |
|              | .220                                | 15               | 1.265               | 1.355              | 1.240               | 1.330              | 1.190              | 1.275              | -                  | -                  |
|              | .260                                | 25               | 1.335               | 1.430              | 1.310               | 1.405              | 1.260              | 1.350              | -                  | -                  |
|              | .345                                | 35               | 1.505               | 1.605              | 1.480               | 1.580              | 1.430              | 1.530              | -                  | -                  |
| 600          | .175                                | 15               | 1.265               | 1.350              | 1.235               | 1.325              | 1.185              | 1.270              | -                  | -                  |
|              | .220                                | 15               | 1.355               | 1.445              | 1.325               | 1.415              | 1.275              | 1.365              | -                  | -                  |
|              | .260                                | 25               | 1.425               | 1.520              | 1.395               | 1.490              | 1.345              | 1.440              | -                  | -                  |
|              | .345                                | 35               | 1.595               | 1.695              | 1.565               | 1.670              | 1.515              | 1.615              | -                  | -                  |
| 700          | .175                                | 15               | 1.335               | 1.420              | 1.305               | 1.390              | 1.245              | 1.335              | -                  | -                  |
|              | .220                                | 15               | 1.425               | 1.515              | 1.395               | 1.485              | 1.335              | 1.430              | -                  | -                  |
|              | .260                                | 25               | 1.495               | 1.590              | 1.465               | 1.560              | 1.405              | 1.500              | -                  | -                  |
|              | .345                                | 35               | 1.665               | 1.765              | 1.635               | 1.740              | 1.575              | 1.680              | -                  | -                  |
| 750          | .175                                | 15               | 1.370               | 1.455              | 1.340               | 1.425              | 1.280              | 1.365              | -                  | -                  |
|              | .220                                | 15               | 1.460               | 1.550              | 1.430               | 1.520              | 1.370              | 1.460              | -                  | -                  |
|              | .260                                | 25               | 1.530               | 1.625              | 1.500               | 1.595              | 1.440              | 1.535              | -                  | -                  |
|              | .345                                | 35               | 1.700               | 1.800              | 1.670               | 1.770              | 1.610              | 1.710              | -                  | -                  |
| 800          | .175                                | 15               | 1.400               | 1.490              | 1.370               | 1.455              | 1.310              | 1.395              | -                  | -                  |
|              | .220                                | 15               | 1.490               | 1.580              | 1.460               | 1.550              | 1.400              | 1.490              | -                  | -                  |
|              | .260                                | 25               | 1.560               | 1.655              | 1.530               | 1.625              | 1.470              | 1.565              | -                  | -                  |
|              | .345                                | 35               | 1.730               | 1.835              | 1.700               | 1.805              | 1.640              | 1.740              | -                  | -                  |
| 900          | .175                                | 15               | 1.465               | 1.550              | 1.430               | 1.520              | 1.370              | 1.455              | -                  | -                  |
|              | .220                                | 15               | 1.555               | 1.645              | 1.520               | 1.610              | 1.460              | 1.550              | -                  | -                  |
|              | .260                                | 25               | 1.625               | 1.720              | 1.590               | 1.685              | 1.530              | 1.625              | -                  | -                  |
|              | .345                                | 35               | 1.795               | 1.895              | 1.760               | 1.865              | 1.700              | 1.800              | -                  | -                  |
| 1000         | .175                                | 15               | 1.520               | 1.610              | 1.485               | 1.575              | 1.430              | 1.515              | -                  | -                  |
|              | .220                                | 15               | 1.610               | 1.705              | 1.575               | 1.670              | 1.520              | 1.610              | -                  | -                  |
|              | .260                                | 25               | 1.680               | 1.775              | 1.645               | 1.740              | 1.590              | 1.685              | -                  | -                  |
|              | .345                                | 35               | 1.850               | 1.955              | 1.815               | 1.920              | 1.760              | 1.865              | -                  | -                  |

\* See table below for standard insulation thickness.

175 mil is 100% insulated cable at 15 kV.  
 220 mil is 133% insulated cable at 15 kV.  
 260 mil is 100% insulated cable at 25 kV.  
 345 mil is 133% insulated cable at 25 kV.  
 345 mil is 100% insulated cable at 35 kV.

# 200 A loadbreak connectors

Eaton connects underground cable to transformers, sectionalizing cabinets and junctions with its Cooper Power series 200 A 15, 25, and 35 kV loadbreak elbow connectors and accessories which are ideal for submersible, fully-shielded and insulated plug-in terminations. These connectors are molded using high-quality, peroxide-cured EPDM insulation for reliable field performance.

15 kV and 25 kV loadbreak elbows are available with an integral jacket seal for use with concentric neutral and other types of shielded cables.

All 200 A loadbreak connectors meet the electrical, mechanical, and dimensional requirements of IEEE Std 386™ standard and are designed to be fully interchangeable with other major manufacturers currently complying with IEEE Std 386™ standard.

## 25 kV POSI-BREAK Elbow and Cap

Eaton increases strike distance and improves reliability with its Cooper Power series POSI-BREAK™ elbow and cap. The added features solve problems, such as:

- **Partial Vacuum Flashovers** – Under certain conditions during 25 kV switching, a partial vacuum can decrease the dielectric strength of the air inside the elbow/bushing or cap/bushing. This increases the possibility of a flashover from the elbow or cap's probe along the bushing interface to the grounded collar on the mating bushing product. The POSI-BREAK design eliminates the possibility of partial vacuum flashovers during switching because of the increased strike distance.
- **Contamination** – The field-proven interface seal prevents the ingress of moisture or contaminants. However, contamination introduced during installation or switching operations can reduce the strike distance along the interface. The increased insulation of the POSI-BREAK design counteracts the effect of contamination, increasing system reliability.

## 25 kV POSI-BREAK elbow and cap specification information

To capitalize on the benefits of the POSI-BREAK elbow and cap, include the following information for both the 25 kV 200 A loadbreak elbow and insulated protective cap in your specification:

- Both elbow and cap must fully comply with IEEE Std 386™ standard.
- Strike distance from energized component to ground shall be at least 5.6" at 1/2" interface separation.
- Both elbow and cap shall have an insulated probe and conductive Faraday Cage for relief of electrical stress and prevention of partial discharge.
- Semi-conductive insert shall be completely surrounded with EPDM insulating rubber.



## 35 kV large interface elbow bushing system\*

Eaton's Cooper Power series 35 kV 200 A large interface elbow bushing system is a reliable, field proven design. This system has over 25 years of field experience while being used on large 35 kV distribution systems. Features of the large interface system include:


- Increased strike distance to provide greater reliability and overall performance.
- Reliable loadbreak switching and fault closure capability.
- Full line of large interface accessory products.

\* Refer to bushing section on page 44 for more information on the bushing.

## 35 kV elbow and accessories specification information


To capitalize on the benefits of our 35 kV large interface elbow include the following information in your specification:

- The 200 A elbows and accessories shall be 21.1 kV/36.6 kV three-phase rated, meeting the requirements of IEEE Std 386™ standard interface No. 1A (large 35 kV class interface).

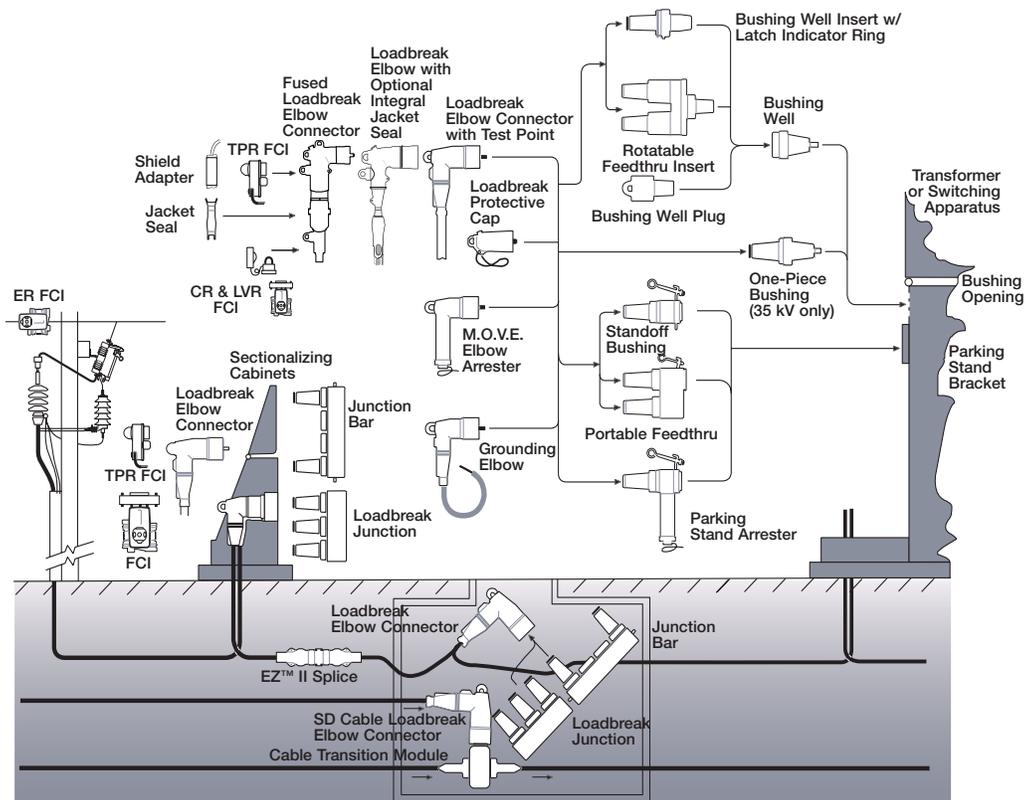

## 200 A loadbreak & deadbreak connectors

- For an elbow **with test point**, add a "T" after the conductor code (CC1).
- For an elbow kit with a **hold down bail assembly** included, insert a "B" after the test point option code. 15 kV only.
- For optional braided ground strap/bleeder wire for termination tape and wire shielded cable, insert "GS" after test point and/or bail option code.
- For **individually packaged** product in a corrugated cardboard box, insert an "X" as the last character in the part number.
- To include the **SA Series Cold Shrinkable Metallic Shield Adapters Kit** or **CS Series Cold Shrink Cable Sealing Kit**, add the appropriate suffix "SA1", "SA2", "SA3", "SA4" or "CS1", "CS2", or "CS3" to the end of the loadbreak elbow catalog number. Refer to Tables CJ1 and CJ2 on Page 13.
- To order the **long version** (extended) of the **bushing insert**, put in an "L" as the seventh character in the part number.
- Specify the number of **interfaces** by inserting a "2", "3", or "4" directly after the base part number.
- To add a **stainless steel bracket**, insert a "B" as the last character in the part number, or to add **U-straps**, insert a "U" as the last character in the part number.
- To substitute a **stainless steel bracket**, insert a "S" as the last character in the part number.
- Each **CS Series Cold Shrink Cable Sealing Kit** includes:
  - Cold Shrinkable Sleeve
  - Mastic Sealing Strips
  - Installation Instructions
 For use on Concentric Neutral Cable.
- For use with tape shield, drain wire, linear corrugated and Unishield® cable.
- Each **SA Series Kit** includes:
  - Cold Shrinkable Sleeve
  - Tinned Copper Ground Strap with attached elbow drain wire
  - Constant Force Spring
  - Semi-Conductive Tape
  - Mastic Sealing Strips
  - Installation Instructions
- Probe kit includes probe, installation tool, silicone lubricant and installation instructions.
- For 200 A loadbreak inserts only.
- 5 kV cable for luse in 15 kV and 25 kV "CC" size elbow only.
- Fuses sold separately. See Table 500-110 on page 13. Reference Cat. 240-97.

| Catalog Section  | Description  | kV Class                                     | Base Part Number   | Notes                |
|--|--|--|--|----------------------|
| <br>CA650062EN  | Loadbreak Elbow                                      | 15 kV  | <b>LE215 CR1 CC1</b><br>(see CR1 & CC1 Tables Pg. 13)  | 1, 2, 4, 5           |
| <br>CA650062EN  | Loadbreak Elbow with Integral Jacket Seal            | 15 kV  | <b>LEJ215CR1 CC1</b><br>(see CR1 & CC1 Tables Pg. 13)  | 1, 2, 3, 4           |
| <br>CA650098EN  | Loadbreak Elbow                                      | 25 kV  | <b>LE225 CR1 CC1</b><br>(see CR1 & CC1 Tables Pg. 13)  | 1, 4, 5              |
| <br>CA650098EN  | Loadbreak Elbow with Integral Jacket Seal            | 25 kV  | <b>LEJ225CR1 CC1</b><br>(see CR1 & CC1 Tables Pg. 13)  | 1, 3, 4              |
| <br>CA650100EN  | POSI-BREAK Loadbreak Elbow                           | 25 kV  | <b>PLE225 CR1 CC1</b><br>(see CR1 & CC1 Tables Pg. 13)   | 1, 4, 5              |
| <br>CA650100EN  | POSI-BREAK Loadbreak Elbow with Integral Jacket Seal | 25 kV  | <b>PLEJ225CR1 CC1</b><br>(see CR1 & CC1 Tables Pg. 13)   | 1, 3, 4              |
| <br>CA650069EN   | Fused Loadbreak Elbow Connector                      | 15 kV  | <b>LFEP215TFEC CR3 CC2 AT</b><br>(see CR3 and CC2 Tables on page 13<br>(see Table 500-110 on page 13 for Fuse Ratings and Catalog Numbers) | 16                   |
| <br>CA650070EN  | Fused Loadbreak Elbow Connector                      | 25 kV  | <b>LFEP225TFEC CR3 CC2 AT</b><br>(see CR3 and CC2 Tables on page 13<br>(see Table 500-110 on page 13 for Fuse Ratings and Catalog Numbers) | 16                   |
| <br>CA650068EN  | Loadbreak Elbow                                      | 35 kV  | <b>CA650062EN CR2 CC1</b><br>(see CR2 & CC1 Tables Pg. 13)   | 1, 4, 5              |
| <br>CA650073EN  | Loadbreak Bushing Insert                             | 15 kV  | <b>LBI215</b>  | 4                    |
| <br>CA650074EN  | Loadbreak Bushing Insert                             | 25 kV  | <b>LBI225</b>  | 4, 6                 |
| <br>CA650078EN and CA650077EN                                     | Loadbreak Feedthru Insert                            | 15 kV<br>25 kV                               | <b>LFI215</b><br><b>LFI225</b>   |                      |
| <br>CA650072EN  | Loadbreak Portable Feedthru                          | 15 kV<br>horizontal<br>vertical<br>universal | <b>LPF215H</b><br><b>LPF215V</b><br><b>LPF215U</b>   |                      |
| <br>CA650092EN  | Loadbreak Portable Feedthru                          | 25 kV<br>horizontal<br>vertical<br>universal | <b>LPF225H</b><br><b>LPF225V</b><br><b>LPF225U</b>   |                      |
| <br>CA650015EN  | Loadbreak Portable Feedthru                          | 35 kV<br>horizontal<br>vertical              | <b>LPF235H</b><br><b>LPF235V</b>   |                      |
| <br>CA650102EN (15kV) and CA650081EN (25kV) and CA650014EN (35kV) | Loadbreak Junction                                   | 15 kV<br>25 kV<br>35 kV                      | <b>LJ215C _</b><br><b>LJ225C _</b><br><b>LJ235C _</b>  | 7, 8<br>7, 8<br>7, 8 |
| <br>CA650094EN  | Insulated Bushing Well Plug                          | 15/25 kV                                     | <b>IBWP225</b>   |                      |
| <br>CA650076EN  | Loadbreak Protective Cap                             | 15 kV  | <b>LPC215</b>  | 4                    |

# 200 A loadbreak & deadbreak connectors

## 200 A loadbreak & deadbreak connectors

- For **individually packaged** product in a corrugated cardboard box, insert an "X" as the last character in the part number.
- To substitute a **stainless steel bracket**, insert a "S" as the last character in the part number.
- Each **CS Series Cold Shrink Cable Sealing Kit** includes:
  - Cold Shrinkable Sleeve
  - Mastic Sealing Strips
  - Installation Instructions
 For use on Concentric Neutral Cable.
- For use with tape shield, drain wire, linear corrugated and Unishield® cable.
- Each **SA Series Kit** includes:
  - Cold Shrinkable Sleeve
  - Tinned Copper Ground Strap with attached elbow drain wire
  - Constant Force Spring
  - Semi-Conductive Tape
  - Mastic Sealing Strips
  - Installation Instructions
- Probe kit includes probe, installation tool, silicone lubricant and installation instructions.
- For 200 A loadbreak inserts only.
- 5 kV cable for use in 15 kV and 25 kV "CC" size elbow only.

(continued from previous page)

| Catalog Section  | Description  | kV Class    | Base Part Number   | Notes |
|--|--|-------------|--|-------|
| <br>CA650085EN  | Loadbreak Protective Cap                                     | 25 kV       | LPC225   | 1     |
| <br>CA650083EN  | POSI-BREAK Loadbreak Protective Cap                          | 25 kV       | PLPC225  | 1     |
| <br>CA650087EN  | Loadbreak Protective Cap                                     | 35 kV       | LPC235   | 1     |
| <br>CA650089EN  | Insulated Standoff Bushing                                   | 15 kV       | ISB215   | 2     |
| <br>CA650004EN  | Insulated Standoff Bushing                                   | 25 kV       | ISB225   | 2     |
| <br>CA650088EN  | Insulated Standoff Bushing                                   | 35 kV       | ISB235   | 2     |
| <br> | SA Series Cold Shrinkable Metallic Shield Adapter Kit        | 15/25/35 kV | <b>SA CJ2</b><br>(see CJ2 Table Pg. 13)  | 4, 5  |
| <br> | CS Series Cold Shrink Cable Seal Kit                         | 15/25/35 kV | <b>CS CJ1</b><br>(see CJ1 Table Pg. 13)  | 3     |
| <br>CA650062EN and<br>CA650098EN and<br>CA650100EN and<br>CA650068EN                  | Coppertop Connector<br>200 A, 2.88" Long<br>Bi-Metal         | 15/25/35 kV | <b>CC2C CC1 T</b><br>(see CC1 Table Pg. 13)  |       |
|  | 200 A Loadbreak Probe Kit                                    | 15 kV       | <b>PK215</b>   | 6     |
|  |  | 25 kV       | <b>PK225</b>   | 6     |
|  |  |             | <b>PKPB225</b> (POSI-BREAK)  | 6     |
|  |  | 35 kV       | <b>PK235</b>   | 6     |
|  | Silicone Lubricant<br>Cooper 117<br>(for Elbows and Splices) | 15/25/35 kV | <b>2603393A03</b><br>(0.175 oz., 5 g packet)<br><b>2605670A02M</b><br>(5.25 oz., 150 g tube) |       |

| Catalog Section  | Description   | kV Class | Base Part Number               | Notes  |
|--|---|----------|--------------------------------|--------|
| <br>CA650073EN  | Installation and Torque Tool                                  | 15/25 kV | LBITOOL                        | 7      |
| <br>CA650062EN  | Cable Adapter, 5 kV<br>0.495" - 0.585"<br>0.575" - 0.685"     | 15/25 kV | <b>CA225A</b><br><b>CA225B</b> | 8<br>8 |
| <br>CA650102EN and<br>CA650081EN and<br>CA650014EN                                      | U-Strap Kit with Hardware (1 strap) for Loadbreak Junction    | 15 kV    | <b>2625439A16B</b>             |        |
|  |   | 25 kV    | <b>2625439A17B</b>             |        |
|  |   | 35 kV    | <b>2637570A01B</b>             |        |
| <br> | 2-way Stainless Steel Bracket Assembly for Loadbreak Junction | 15 kV    | <b>2637172B01BS</b>            |        |
|  |   | 25 kV    | <b>2637160B01BS</b>            |        |
|  |   | 35 kV    | <b>2604688B01B</b>             |        |
| <br> | 3-way Stainless Steel Bracket Assembly for Loadbreak Junction | 15 kV    | <b>2637172B02BS</b>            |        |
|  |   | 25 kV    | <b>2637160B02BS</b>            |        |
|  |   | 35 kV    | <b>2604688B02B</b>             |        |
|  | 4-way Stainless Steel Bracket Assembly for Loadbreak Junction | 15 kV    | <b>2637172B03BS</b>            |        |
|  |   | 25 kV    | <b>2637160B03BS</b>            |        |
|  |   | 35 kV    | <b>2604688B03B</b>             |        |

**Use for  
Base Number**

LE215  
LEJ215  
LE225  
LEJ225  
PLE225  
PLEJ225

**TABLE CR1  
Cable Diameter (Insulation) Range**

| Cable Diameter Range |             | CABLE RANGE CODE |
|----------------------|-------------|------------------|
| Inches               | Millimeters |                  |
| 0.495-0.585          | 12.6-14.9   | CCA*             |
| 0.575-0.685          | 14.6-17.4   | CCB*             |
| 0.610-0.970          | 15.5-24.6   | AB               |
| 0.750-1.080          | 19.1-27.4   | CC               |
| 0.890-1.220          | 22.6-30.0   | DD               |

\* Uses 5 kV cable adapter. (For use with "CC" range elbow only.)

**Use for  
Base Number**

LE235

**TABLE CR2  
Cable Diameter (Insulation) Range**

| Cable Diameter Range |             | CABLE RANGE CODE |
|----------------------|-------------|------------------|
| Inches               | Millimeters |                  |
| 0.825-1.000          | 21.00-25.40 | B                |
| 0.995-1.180          | 25.20-30.00 | D                |
| 1.180-1.340          | 30.00-34.00 | F                |

**Use for  
Base Number**

LFEP215  
LFEP225

**TABLE CR3  
Cable Diameter (Insulation) Range for Fused Loadbreak Elbow**

| Cable Diameter Range |             | CABLE RANGE CODE |
|----------------------|-------------|------------------|
| Inches               | Millimeters |                  |
| 0.610-0.820          | 15.5-20.8   | A                |
| 0.740-0.980          | 18.8-24.9   | B                |
| 0.910-1.180          | 23.10-29.9  | C                |

**Use for  
Base Number**

LE215  
LEJ215  
LE225  
LEJ225  
PLE225  
PLEJ225  
LE235  
CC2C

**TABLE CC1  
Conductor Size and Type**

| Concentric or Compressed |                 | Compact or Solid |                 | CONDUCTOR CODE |
|--------------------------|-----------------|------------------|-----------------|----------------|
| AWG                      | mm <sup>2</sup> | AWG              | mm <sup>2</sup> |                |
| No Connector             |                 |                  |                 | 00             |
| #6                       | 16              | #4               | -               | 01             |
| #4                       | -               | #3               | 25              | 02             |
| #3                       | 25              | #2               | 35              | 03             |
| #2                       | 35              | #1               | -               | 04             |
| #1                       | -               | 1/0              | 50              | 05             |
| 1/0                      | 50              | 2/0              | 70              | 06             |
| 2/0                      | 50              | 3/0              | -               | 07             |
| 3/0                      | -               | 4/0              | 95              | 08             |
| 4/0                      | 95              | 250              | 120             | 09             |
| 250*                     | 120             | 300              | -               | 10             |

\* Compressed stranding only.

**Use for  
Base Number**

CS

**TABLE CJ1  
Jacketed Concentric Neutral Cable**

| Minimum Seal Diameter Inches | Maximum Installed Diameter (Inches) | CODE |
|------------------------------|-------------------------------------|------|
| 0.950                        | 1.94                                | 1    |
| 1.28                         | 2.67                                | 2    |
| 1.60                         | 3.50                                | 3    |

**Use for  
Base Number**

SA

**TABLE CJ2  
Cable Jacket (Outside Diameter) Range**

| Cable Jacket OD (Inches) | JACKET CODE |
|--------------------------|-------------|
| 0.590-1.050              | 1           |
| 0.830-1.640              | 2           |
| 1.270-2.170              | 3           |
| 1.600-2.600              | 4           |

**Use for  
Base Number**

LFEP215  
LFEP225  
FECC

**TABLE CC2  
Conductor Size and Type for Fused Loadbreak Elbow**

| Class B Stranded or Compressed |                 | Compact or Solid |                 | CONDUCTOR CODE |
|--------------------------------|-----------------|------------------|-----------------|----------------|
| AWG                            | mm <sup>2</sup> | AWG              | mm <sup>2</sup> |                |
| No Connector                   |                 |                  |                 | 00             |
|                                |                 | #2               | 35              | 03             |
| #2                             | 35              | #1               | -               | 04             |
| #1                             | -               | 1/0              | 50              | 05             |
| 1/0                            | 50              | 2/0              | 70              | 06             |
| 2/0                            | 70              | 3/0              | -               | 07             |
| 3/0                            | -               | 4/0              | 95              | 08             |
| 4/0                            | 95              | -                | -               | 09             |
| 250*                           | 120             | -                | -               | 10             |

\* Compressed stranding only.

**Note:** Coppertop compression connector may be used on both aluminum and copper cable conductors.

**Table 500-110: Fused Loadbreak Elbow Connector Fuse Electrical Ratings and Catalog Numbers (see Catalog CA650069EN and CA650070EN)**

| Nominal System Voltage Class - kV | Nominal Fuse Voltage Rating kV | Nominal Fuse Current rating in Amperes | Fuse Catalog Number | Maximum Continuous Current |       |       | Minimum Melt I <sup>2</sup> t (A <sup>2</sup> s) | Maximum Total I <sup>2</sup> t (A <sup>2</sup> s) |
|-----------------------------------|--------------------------------|--|---------------------|----------------------------|-------|-------|--|---|
|                                   |                                |  |                     | 25° C                      | 40° C | 65° C |  |   |
| 15.5                              | 8.3                            | 6                                      | FEF083A006          | 8.9                        | 8.5   | 8.0   | 710  | 3,800   |
|                                   |                                | 8                                      | FEF083A008          | 12.1                       | 11.7  | 10.9  | 1,000  | 5,425   |
|                                   |                                | 10                                     | FEF083A010          | 15.0                       | 14.4  | 13.5  | 1,200  | 5,825   |
|                                   |                                | 12                                     | FEF083A012          | 16.6                       | 16.0  | 15.0  | 1,200  | 5,825   |
|                                   |                                | 18                                     | FEF083A018          | 21.9                       | 21.1  | 19.7  | 1,500  | 8,000   |
|                                   |                                | 20                                     | FEF083A020          | 25.5                       | 24.6  | 23.0  | 2,425  | 12,000  |
|                                   |                                | 25                                     | FEF083A025          | 34.5                       | 33.2  | 31.1  | 4,500  | 20,500  |
|                                   |                                | 30                                     | FEF083A030          | 40.1                       | 38.7  | 36.2  | 6,000  | 26,200  |
| 25                                | 15.5                           | 40                                     | FEF083A040          | 45.5                       | 43.8  | 41.0  | 9,700  | 39,750  |
|                                   |                                | 6                                      | FEF155A006          | 8.3                        | 8.5   | 8.0   | 710  | 3,800   |
|                                   |                                | 8                                      | FEF155A008          | 11.3                       | 11.7  | 10.9  | 1,000  | 5,435   |
|                                   |                                | 10                                     | FEF155A010          | 13.9                       | 14.4  | 13.5  | 1,200  | 5,500   |
|                                   |                                | 12                                     | FEF155A012          | 15.5                       | 16.0  | 15.0  | 1,200  | 5,500   |
|                                   |                                | 18                                     | FEF155A018          | 20.4                       | 21.1  | 19.7  | 1,500  | 7,800   |
|                                   |                                | 20                                     | FEF155A020          | 23.7                       | 24.6  | 23.0  | 2,425  | 12,000  |

**Note:** Peak arc voltage levels found during testing were within the values specified for Distribution-Class Current-Limiting Fuses in ANSI® C37.47 Standard - latest edition.

# 200 A loadbreak & deadbreak connectors

1. Bail assembly included in kit.
2. Bail assembly is ordered separately.
3. See following for appropriate junction strap. For DJ250-2 order quantity 2 of 2639524B01. For DJ250-T2, order quantity 1 of 2638617C01.

| Catalog Section   | Description                                | kV Class | Base Part Number  | Notes |
|---|--|----------|---|-------|
| <br>CA650048EN | Deadbreak Elbow                            | 15/25 kV | <b>DE225 CR4 CC3 T</b><br>(see CR4 & CC3 Tables, page 15)             | 1     |
| <br>CA650045EN | Deadbreak Straight                         | 15/25 kV | <b>DS225 CR4 CC3 T</b><br>(see CR4 & CC3 Tables, page 15)             | 1     |
| <br>CA650023EN | Deadbreak Junction                         | 15/25 kV | <b>DJ250-T2</b><br>(3-way, Type 2)                                    | 2, 3  |
| <br>CA650023EN |  | 15/25 kV | <b>DJ250-2</b>  | 2, 3  |
| <br>CA650024EN | Insulated Deadend Plug                     | 15/25 kV | <b>DPD250</b>   | 2     |
| <br>CA650024EN | Insulated Standoff Bushing                 | 15/25 kV | <b>DPS250</b>   | 2     |
| <br>CA650024EN | Grounded Standoff Bushing                  | 15/25 kV | <b>DPE250</b>   | 2     |
| <br>CA650024EN | Deadbreak Protective Cap                   | 15/25 kV | <b>DRC250</b>   | 1     |
| <br>CA650024EN | Coppertop Connectors for Deadbreak Elbows  | 15/25 kV | <b>CC2C CC3 T</b><br>(see CC3 Table, page 15)                         |       |
| <br>CA650024EN | Crimp Connectors for Deadbreak Straight    | 15/25 kV | <b>CC2C CC3 S</b><br>(see CC3 Table, page 15)                         |       |
| <br>CA650024EN | Probe and Probe Wrench for Deadbreak Elbow | 15/25 kV | <b>2638370C01EX</b><br>(Probe)<br><b>2639205B01</b><br>(Probe Wrench) |       |
| <br>CA650048EN | Bail Assembly for DE225                    | 15/25 kV | <b>2638409C06B</b>  |       |

**Use for  
Base Number**

DE225  
DS225

**TABLE CR4  
Cable Diameter (Insulation) Range**

| Cable Diameter Range |             | CABLE<br>RANGE CODE |
|----------------------|-------------|---------------------|
| Inches               | Millimeters |                     |
| 0.531-0.685          | 13.5-17.4   | BA                  |
| 0.640-0.820          | 16.3-20.8   | DA                  |
| 0.770-0.950          | 19.6-24.1   | FA                  |
| 0.910-1.130          | 23.1-28.7   | HA                  |
| 1.100-1.320          | 27.9-33.5   | JA                  |

**Use for  
Base Number**


DE225  
DS225  
CC2C

**TABLE CC3  
Conductor Size and Type**


| Concentric or Compressed |                 | Compact or Solid |                 | CONDUCTOR<br>CODE |
|--------------------------|-----------------|------------------|-----------------|-------------------|
| AWG                      | mm <sup>2</sup> | AWG              | mm <sup>2</sup> |                   |
| No Connector             |                 |                  |                 | 00                |
| #6                       | 16              | #4               | -               | 01                |
| #4                       | -               | #3               | 25              | 02                |
| #3                       | 25              | #2               | 35              | 03                |
| #2                       | 35              | #1               | -               | 04                |
| #1                       | -               | 1/0              | 50              | 05                |
| 1/0                      | 50              | 2/0              | 70              | 06                |
| 2/0                      | 70              | 3/0              | -               | 07                |
| 3/0                      | -               | 4/0              | 95              | 08                |
| 4/0                      | 95              | 250              | 120             | 09                |
| 250*                     | 120             | 300              | -               | 10                |

\*Compressed stranding only.


# 200 A stacking dimensions

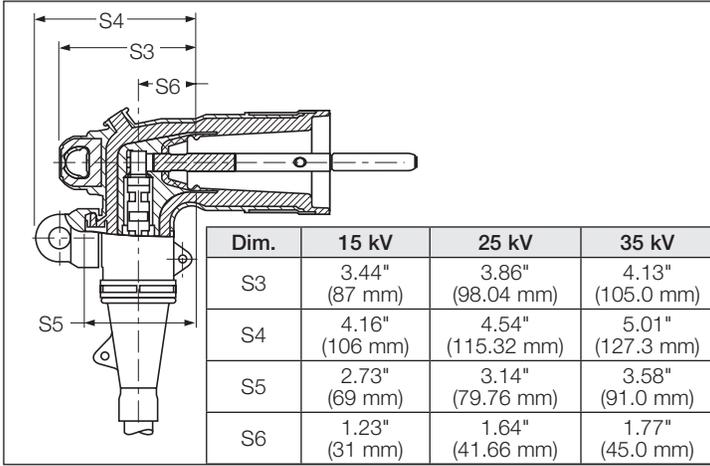



Elbow connector (25 kV POSI-BREAK shown)

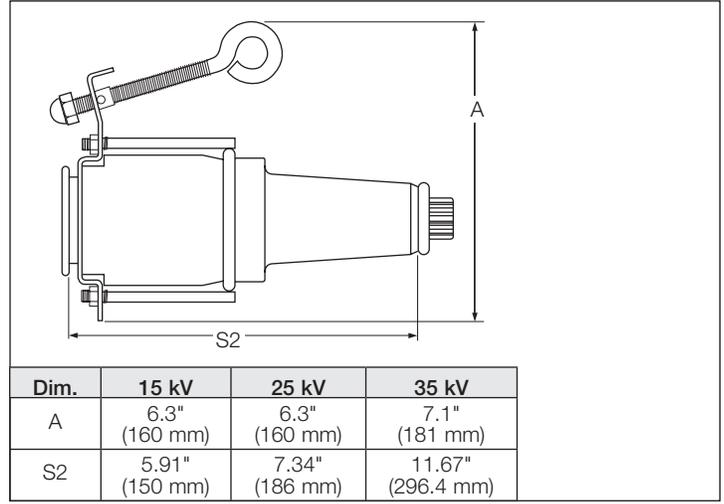


Insulated standoff bushing (25 kV shown)

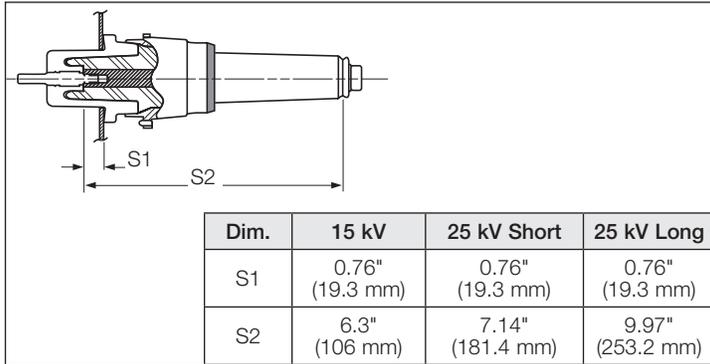


Vented bushing insert with latch ring indicator (25 kV shown)

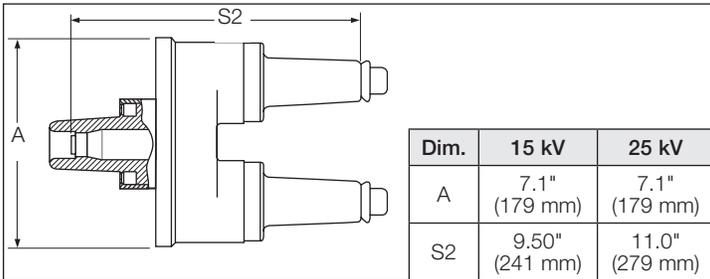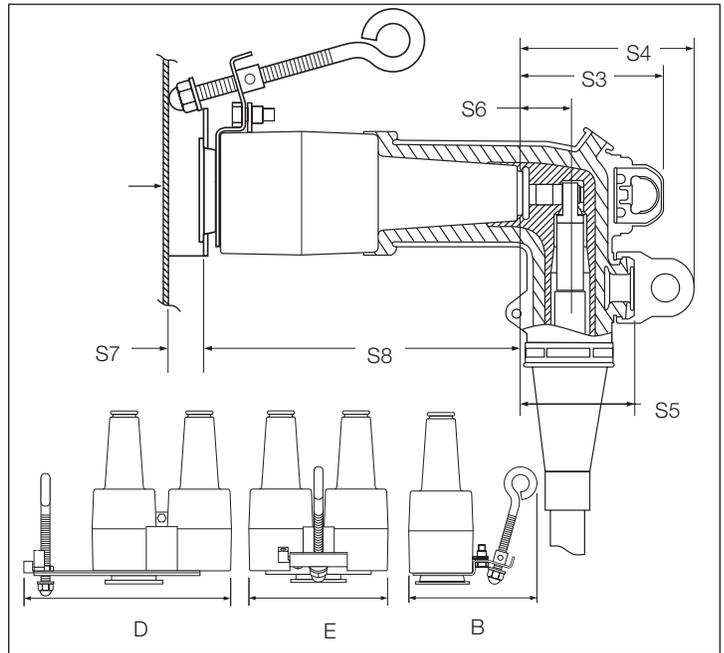

Rotatable feedthru insert (25 kV shown)

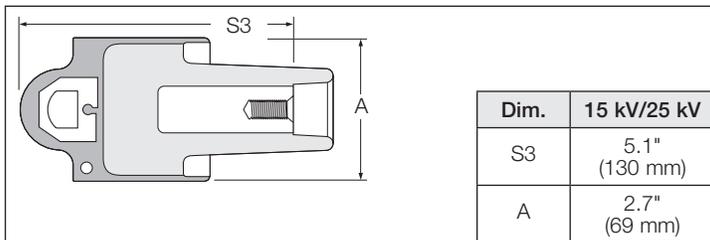


Insulated Bushing well plug

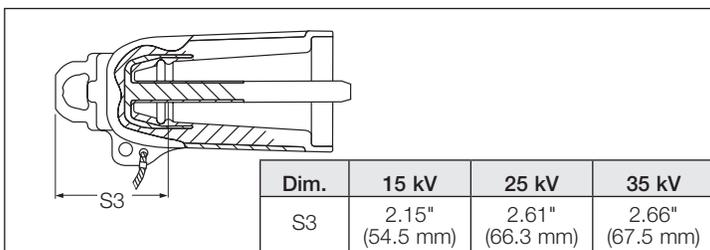

Loadbreak protective cap (25 kV POSI-BREAK shown)

| Dim. | 15 kV              |                   | 25 kV              |                   | 35 kV               |                     |
|------|--------------------|-------------------|--------------------|-------------------|---------------------|---------------------|
|      | Horizontal         | Vertical          | Horizontal         | Vertical          | Horizontal          | Vertical            |
| B    | 5.6"<br>(142.2 mm) | -                 | 5.6"<br>(142.2 mm) | -                 | 7.2"<br>(182.9 mm)  | -                   |
| D    | -                  | 8.9"<br>(226 mm)  | -                  | 8.9"<br>(226 mm)  | -                   | 11.6"<br>(294 mm)   |
| E    | 6.0"<br>(153 mm)   | -                 | 6.7"<br>(171 mm)   | -                 | 8.8"<br>(224 mm)    | -                   |
| S3   | 3.44"<br>(87 mm)   | 3.44"<br>(87 mm)  | 3.86"<br>(98 mm)   | 3.86"<br>(98 mm)  | 4.13"<br>(105 mm)   | 4.13"<br>(105 mm)   |
| S4   | 4.16"<br>(106 mm)  | 4.16"<br>(106 mm) | 4.54"<br>(115 mm)  | 4.54"<br>(115 mm) | 5.01"<br>(127.3 mm) | 5.01"<br>(127.3 mm) |
| S5   | 2.73"<br>(69 mm)   | 2.73"<br>(69 mm)  | 3.14"<br>(80 mm)   | 3.14"<br>(80 mm)  | 3.58"<br>(91 mm)    | 3.58"<br>(91 mm)    |
| S6   | 1.23"<br>(31 mm)   | 1.23"<br>(31 mm)  | 1.64"<br>(42 mm)   | 1.64"<br>(42 mm)  | 1.77"<br>(45 mm)    | 1.77"<br>(45 mm)    |
| S7   | 0.75"<br>(19 mm)   | 0.75"<br>(19 mm)  | 0.75"<br>(19 mm)   | 0.75"<br>(19 mm)  | 0.75"<br>(19 mm)    | 0.75"<br>(19 mm)    |
| S8   | 7.07"<br>(180 mm)  | 7.20"<br>(183 mm) | 8.63"<br>(219 mm)  | 8.77"<br>(223 mm) | 11.8"<br>(300 mm)   | 11.8"<br>(300 mm)   |

Loadbreak portable feedthru (15 kV shown)

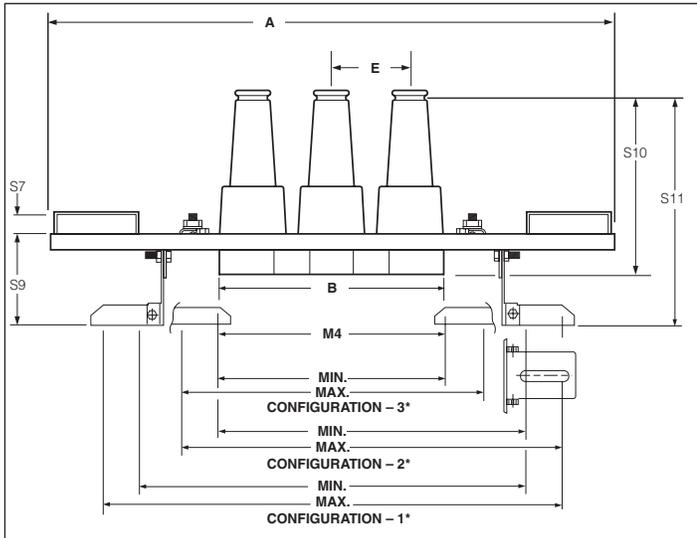

| Dim. | 15 kV           | 25 kV           | 35 kV           |
|------|-----------------|-----------------|-----------------|
| E    | 3.25" (83 mm)   | 4.0" (102 mm)   | 5.0" (127 mm)   |
| S7   | 0.75" (19 mm)   | 0.75" (19 mm)   | 1.02" (26 mm)   |
| S9   | 4.38" (111 mm)  | 4.38" (111 mm)  | 5.46" (139 mm)  |
| S10  | 6.77" (172 mm)  | 8.34" (212 mm)  | 11.8" (299 mm)  |
| S11  | 9.20" (234 mm)  | 10.77" (274 mm) | 13.9" (163 mm)  |
| M4   | See Table 15 kV | See Table 25 kV | See Table 35 kV |

**TABLE 15 kV**

| Number of Interfaces | Physical Dimensions in./mm |                | M4 Mounting Dimensions in./mm |                |                 |                |                 |                |
|----------------------|----------------------------|----------------|-------------------------------|----------------|-----------------|----------------|-----------------|----------------|
|                      |                            |                | Configuration 1               |                | Configuration 2 |                | Configuration 3 |                |
|                      | A                          | B              | Min.                          | Max.           | Min.            | Max.           | Min.            | Max.           |
| 2                    | 12.5" (318 mm)             | 6.0" (152 mm)  | 10.8" (275 mm)                | 14.4" (366 mm) | 7.2" (183 mm)   | 10.8" (275 mm) | 3.6" (92 mm)    | 7.2" (183 mm)  |
| 3                    | 19.6" (498 mm)             | 9.2" (230 mm)  | 14.7" (374 mm)                | 18.3" (465 mm) | 11.1" (282 mm)  | 14.7" (374 mm) | 7.4" (188 mm)   | 11.1" (282 mm) |
| 4                    | 22.9" (582 mm)             | 12.4" (315 mm) | 17.9" (455 mm)                | 21.5" (547 mm) | 14.3" (364 mm)  | 17.9" (455 mm) | 10.7" (272 mm)  | 14.3" (364 mm) |

Configuration 1. Both feet turned out.  
 Configuration 2. One foot turned out, one in.  
 Configuration 3. Both feet turned in.

**TABLE 25 kV**

| Number of Interfaces | Physical Dimensions in./mm |                | M4 Mounting Dimensions in./mm |                |                 |                |                 |                |
|----------------------|----------------------------|----------------|-------------------------------|----------------|-----------------|----------------|-----------------|----------------|
|                      |                            |                | Configuration 1               |                | Configuration 2 |                | Configuration 3 |                |
|                      | A                          | B              | Min.                          | Max.           | Min.            | Max.           | Min.            | Max.           |
| 2                    | 14.2" (361 mm)             | 6.7" (170 mm)  | 11.9" (302 mm)                | 15.6" (396 mm) | 8.0" (203 mm)   | 11.7" (297 mm) | 4.2" (107 mm)   | 7.8" (198 mm)  |
| 3                    | 23.0" (584 mm)             | 10.7" (272 mm) | 16.8" (427 mm)                | 20.4" (518 mm) | 12.9" (328 mm)  | 16.5" (419 mm) | 9.0" (229 mm)   | 12.6" (320 mm) |
| 4                    | 27.0" (686 mm)             | 14.7" (373 mm) | 20.8" (528 mm)                | 24.4" (620 mm) | 16.9" (429 mm)  | 20.5" (521 mm) | 13.0" (330 mm)  | 16.6" (422 mm) |


Configuration 1. Both feet turned out.  
 Configuration 2. One foot turned out, one in.  
 Configuration 3. Both feet turned in.

**TABLE 35 kV**

| Number of Interfaces | Mounting Dimensions in./mm |                |    |    |
|----------------------|----------------------------|----------------|----|----|
|                      | A                          | B              | C  | D  |
| 2                    | 23.1" (587 mm)             | 8.8" (223 mm)  | ** | ** |
| 3                    | 33.3" (846 mm)             | 13.8" (350 mm) | ** | ** |
| 4                    | 38.5" (978 mm)             | 18.8" (477 mm) | ** | ** |

\*\* Refer to Catalog Section CA650014EN for detailed drawing of 35 kV junction.

**Loadbreak junctions (15 kV shown)**

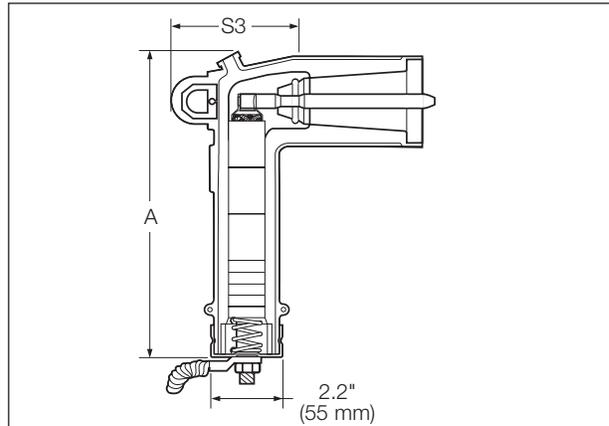


**M.O.V.E. arrester**

| Dim. | Duty Cycle (kV) | 15 kV/25 kV    | 35 kV          |
|------|-----------------|----------------|----------------|
| A    | 9-15            | 8.5" (216 mm)  | -              |
|      | 18-27           | 10.9" (276 mm) | 13.3" (338 mm) |
| S3   | 9-27            | 4.2" (107 mm)  | 4.7" (120 mm)  |

**M.O.V.E. Arrester**

| Dim. | Duty Cycle (kV) | 15 kV/25 kV   | 35 kV          |
|------|-----------------|---------------|----------------|
| A    | 3-27            | 8.5" (216 mm) | 13.3" (338 mm) |
| S3   | 3-27            | 4.2" (107 mm) | 4.7" (120 mm)  |

**Underground surge arresters**

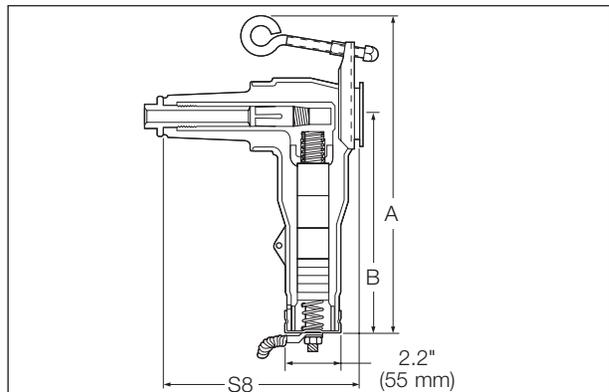

**MOV parking stand arrester**

| Dim. | Duty Cycle (kV) | 15 kV          | 25 kV          |
|------|-----------------|----------------|----------------|
| A    | 9-15            | 11.9" (302 mm) | 11.9" (302 mm) |
|      | 18-21           | 14.5" (368 mm) | 14.5" (368 mm) |
| B    | 9-15            | 8.0" (203 mm)  | 8.0" (203 mm)  |
|      | 18-21           | 10.6" (269 mm) | 10.6" (269 mm) |
| S8   | 9-21            | 7.4" (188 mm)  | 7.4" (188 mm)  |

**MOV parking stand arrester**

| Dim. | Duty Cycle (kV) | 15 kV          | 25 kV          |
|------|-----------------|----------------|----------------|
| A    | 3-21            | 11.9" (302 mm) | 11.9" (302 mm) |
| B    | 3-21            | 8.0" (203 mm)  | 8.0" (203 mm)  |
| S8   | 3-21            | 7.4" (188 mm)  | 7.4" (188 mm)  |

**Parking stand arresters**

### Cleer loadbreak connector: 600 Amp loadbreak technology provides efficient, reliable visible break and visible ground



#### Cleer loadbreak connector system

Eaton's Cooper Power series Cleer™ loadbreak connector system is a 600 A loadbreak device rated for operation on 15 and 25 kV class systems. It is used to provide a visible break and visible ground on 600 A network and distribution systems without having to remove 600 A terminations and move heavy cable. The Cleer loadbreak connector system is fully shielded, submersible and meets the applicable requirements of IEEE Std 386™ standard - "Separable Insulated Connector Systems".

Many configurations are possible with this connector system. Under normal operating conditions, the current path is through one of the 600 A loadbreak/deadbreak 2-position junctions, through the 600 A loadbreak "C" (LCN) connector and through the second 600 A loadbreak/deadbreak junction.

When isolating underground cable, with the system energized or de-energized, with or without rated load current, with the use of a clampstick, the LCN connector can be removed.

A 600 A loadbreak protective cap (LPC6\_ \_) can then be installed on the two exposed loadbreak interfaces. All bushings of the connector system are then insulated and deadfront. If a 600 A termination with a 200 A reducing tap plug is used on the IEEE Std 386™ standard 600 A 15/25 kV deadbreak interfaces of the junction, a grounding elbow can be installed, providing a visible ground. It is then safe to perform work on the underground cable.

Once an underground circuit is sectionalized, for maximum safety, a visible break and visible ground must be achieved prior to performing any repair or maintenance. Distribution feeders can easily retrofit the Cleer loadbreak connector system into 600 A applications, allowing operators confidence when working on a piece of underground equipment or cable as they can clearly see the open circuit.

Cleer loadbreak connectors allow the operator to safely pull the loadbreak interface while the system is energized to sectionalize the system into smaller segments to prevent taking longer outages. The Cleer 600 A loadbreak connector makes this easy:

- The C-shaped connector breaks the circuit in two places for twice the contact separation.
- The new Cleer loadbreak connector incorporates field-proven POSI-BREAK technology which provides:
  - Increased strike distance, greatly reducing the possibility of partial vacuum flashovers
  - Added dielectric strength along the probes for superior switching performance and reliability
- The remainder of this simple system consists of:
  - Two Eaton's Cooper Power series 600 A loadbreak interfaces
  - Two IEEE Std 386™ standard 600 A deadbreak interfaces
- A yellow latch indicator is included to assure positive connection
- Fully submersible, and exceeds the applicable requirements of IEEE Std 386™ standard for use in above- and underground environments prone to flooding
- When using BT-TAP or T-OP II connectors a visible ground can be achieved by connecting a grounding elbow directly to a 200 A loadbreak reducing tap plug.

## 15 kV Class 600 A Cleer Loadbreak Connector System Ratings

| 600 A Loadbreak Interface  |  |
|--|--|
| Continuous Current   | 600 A rms  |
| Loadbreak Switching  | Ten make and break operations at 600 A at 14.4 kV Phase-Phase  |
|  | Three make and break operations at 900 A at 14.4 kV Phase-Phase  |
| Fault Closure  | 16 kA rms symmetrical at 14.4 kV Phase-Phase after ten 600 A loadbreak switching operations for 0.17 seconds   |
|  | 16 kA rms symmetrical at 14.4 kV Phase-Phase after three 900 A loadbreak switching operations for 0.17 seconds |
| 4 Hour Overload Current  | 900 A rms  |
| Short Time Current   | 16 kA rms symmetrical for 0.17 seconds (limited by fault closure rating)*                                      |
|  | 10 kA rms symmetrical for 3.0 seconds  |
| IEEE Std 386™ -2006 standard 600 A, 15/25 kV Deadbreak Interface |  |
| Continuous Current   | 600 A rms  |
| 4 Hour Overload Current  | 900 A rms  |
| Short Time Current   | 16 kA rms symmetrical for 0.17 seconds*  |
|  | 10 kA rms symmetrical for 3.0 seconds  |

Current ratings and characteristics are in accordance with applicable IEEE Std 386™ -2006 standard requirements.

\* 600 A loadbreak connectors are generally capable of short-time current ratings well in excess of those listed (25 kA to 40 kA ratings for 0.17s are typical). However, ratings are limited by the fault-closure rating. Contact your Eaton representative for maximum short-time current ratings if fault-closure operations are infeasible in your application.

## 25 kV Class 600 A Cleer Loadbreak Connector System Ratings

| 600 A Loadbreak Interface  |   |
|--|---|
| Continuous Current   | 600 A rms   |
| Loadbreak Switching  | Five make and break operations at 600 A at 26.3 kV Phase-Phase  |
|  | One make and break operation at 900 A at 26.3 kV Phase-Phase  |
| Fault Closure  | 10 kA rms symmetrical at 26.3 kV Phase-Phase after five 600 A loadbreak switching operations for 0.17 seconds |
|  | 10 kA rms symmetrical at 26.3 kV Phase-Phase after one 900 A loadbreak switching operations for 0.17 seconds  |
| 4 Hour Overload Current  | 900 A rms   |
| Short Time Current   | 10 kA rms symmetrical for 0.17 seconds (limited by fault closure rating)*                                     |
|  | 10 kA rms symmetrical for 3.0 seconds   |
| IEEE Std 386™ -2006 standard 600 A, 15/25 kV Deadbreak Interface |   |
| Continuous Current   | 600 A rms   |
| 4 Hour Overload Current  | 900 A rms   |
| Short Time Current   | 10 kA rms symmetrical for 0.17 seconds*   |
|  | 10 kA rms symmetrical for 3.0 seconds   |

Current ratings and characteristics are in accordance with applicable IEEE Std 386™ -2006 standard requirements.

\* 600 A loadbreak connectors are generally capable of short-time current ratings well in excess of those listed (25 kA to 40 kA ratings for 0.17s are typical). However, ratings are limited by the fault-closure rating. Contact your Eaton representative for maximum short-time current ratings if fault-closure operations are infeasible in your application.





## 28 kV Class 600 A Cleer Loadbreak Connector System Ratings

| 600 A Loadbreak Interface  |   |
|--|---|
| Continuous Current   | 600 A rms   |
| Loadbreak Switching  | Five make and break operations at 600 A at 28.0 kV Phase-Phase  |
|  | One make and break operation at 900 A at 28.0 kV Phase-Phase  |
| Fault Closure  | 10 kA rms symmetrical at 28.0 kV Phase-Phase after five 600 A loadbreak switching operations for 0.17 seconds |
|  | 10 kA rms symmetrical at 28.0 kV Phase-Phase after one 900 A loadbreak switching operation for 0.17 seconds   |
| 4 Hour Overload Current  | 900 A rms   |
| Short Time Current (See Important below)                         | 25 kA rms symmetrical for 0.17 seconds (limited by fault closure rating)*                                     |
|  | 10 kA rms symmetrical for 3.0 seconds   |
| IEEE Std 386™ -2006 standard 600 A, 15/25 kV Deadbreak Interface |   |
| Continuous Current   | 600 A rms   |
| 4 Hour Overload Current  | 900 A rms   |
| Short Time Current (See Important below)                         | 25 kA rms symmetrical for 0.17 seconds*   |
|  | 10 kA rms symmetrical for 3.0 seconds   |



Current ratings and characteristics are in accordance with applicable IEEE Std 386™ -2006 standard requirements.

\* 600 A loadbreak connectors are generally capable of short-time current ratings well in excess of those listed (25 kA to 40 kA ratings for 0.17s are typical). However, ratings are limited by the fault-closure rating. Contact your Eaton representative for maximum short-time current ratings if fault-closure operations are infeasible in your application.



# 600 A loadbreak connectors

| Catalog Section   | Description  | kV Class | Base Part Number | Notes |
|---|--|----------|------------------|-------|
|  | Loadbreak Connector Assembly includes: two loadbreak/deadbreak junctions with loadbreak "C" connector assembled in an In-Line SS Bracket | 15 kV    | LCN2DLJ615A2ILB  |       |
|  | Loadbreak Connector Assembly includes: two loadbreak/deadbreak junctions with loadbreak "C" connector assembled in a Square SS Bracket   |          | LCN2DLJ615A2SQB  |       |
|   | Loadbreak "C" Connector  |          | LCN615           |       |
| CA650010EN  | Loadbreak Protective Cap   |          | LPC615           |       |
|  | Loadbreak Connector Assembly includes: two loadbreak/deadbreak junctions with loadbreak "C" connector assembled in an In-Line SS Bracket | 25 kV    | LCN2DLJ625A2ILB  |       |
|  | Loadbreak Connector Assembly includes: two loadbreak/deadbreak junctions with loadbreak "C" connector assembled in a Square SS Bracket   | 25 kV    | LCN2DLJ625A2SQB  |       |
|   | Loadbreak "C" Connector  |          | LCN625           |       |
| CA650011EN  | Loadbreak Protective Cap   |          | LPC625           |       |
|   | Loadbreak Connector Assembly includes: two loadbreak/deadbreak junctions with loadbreak "C" connector assembled In-Line SS Bracket       | 28 kV    | LCN2DLJ628A2ILB  |       |
|   | Loadbreak Connector Assembly includes: two loadbreak/deadbreak junctions with loadbreak "C" connector assembled in Square SS Bracket     | 28 kV    | LCN2DLJ628A2SQB  |       |
|   | Loadbreak "C" Connector  |          | LCN628           |       |
| CA650012EN  | Loadbreak Protective Cap   |          | LPC628           |       |
| <b>Accessories:</b>   |  |          |                  |       |
|   | Loadbreak Standoff Bushing (Parking Stand Mount)   | 15/25 kV | PS625CLEER       |       |
| CA650010EN<br>CA650011EN  | Loadbreak Standoff Bushing (Direct Wall Mount)   | 15/25 kV | PS625CLEERDM     |       |


Cleer SecTER sectionalizing cabinet information can be found on page 56

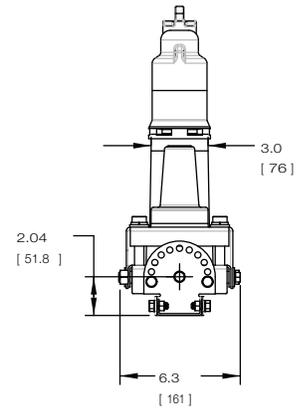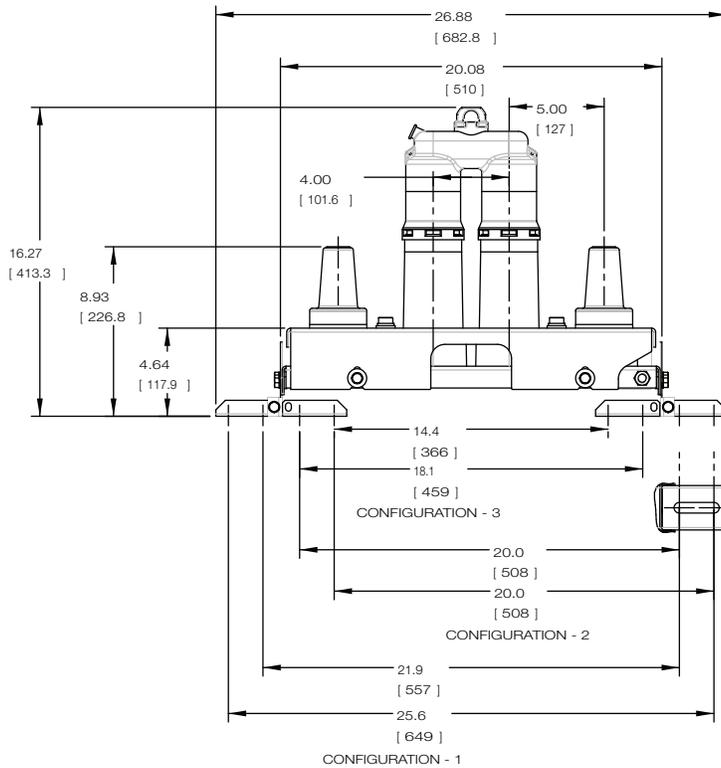

Clear Loadbreak Connector Assembly  
(In-Line SS Bracket).

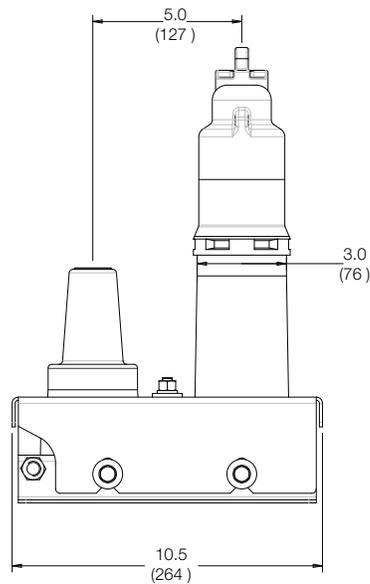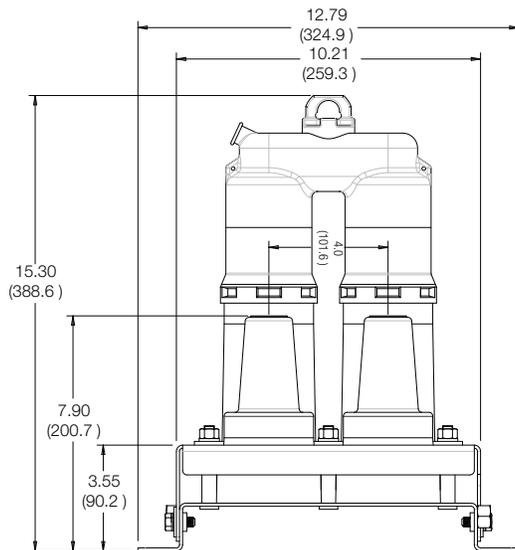

Clear Loadbreak Connector Assembly  
(Square SS Bracket).

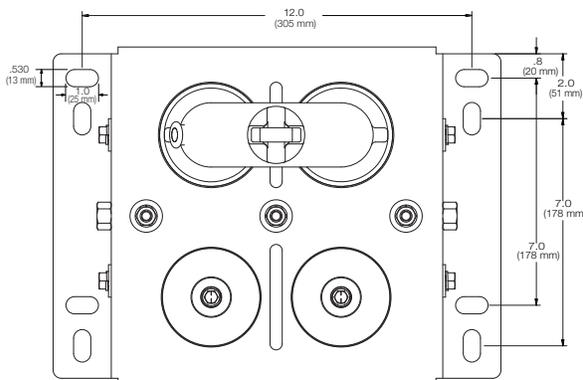

# 600/900 A deadbreak connectors

Eaton designs its Cooper Power series 600/900 A deadbreak connector systems to fill the demand for a deadfront underground installation in 600/900 A main and lateral feeders. They provide a completely shielded, deadfront, fully submersible cable connection for high-voltage apparatus – such as transformers, switchgear, large motors, etc., and can also be used to make splices, junctions, taps and deadends for main underground, distribution feeders. They provide the same high degree of operating flexibility and reliability as our 200 A products. All components fit together easily and assembly variations are available.

These connector systems are designed for installation on various types of cables. The entire system can be applied to concentric neutral cable, and with our CS & SA Series Shield Adapter Kits to almost any other type of cable.

All of our deadbreak connectors meet the electrical, mechanical and dimensional requirements of IEEE Std 386™ standard and are designed to be fully interchangeable with those currently available from other major manufacturers.

## 900 A rating

Eaton achieves a 900 A continuous rating with its Cooper Power series BOL-T™, BT-TAP™ and T-OP™ II systems when used with a coppertop compression connector and all copper mating components including apparatus bushing or junction. (See note 1 on page 23 for details when selecting a system.)

## BOL-T connector system

Eaton designs its Cooper Power series BOL-T Deadbreak Connector System for use on applications where the terminations would not be operated after installation, would not need a 200 A interface for grounding or arrester provisions, and would not require direct conductor testing or the use of a hotstick. It is a bolted design that is interchangeable with other manufacturers' bolted 600/900 A systems and requires no special tools for installation.

## BT-TAP connector system

Eaton's Cooper Power series BT-TAP deadbreak connector system includes a 200 A loadbreak tap instead of the standard insulated plug. The other components of BT-TAP are the same as BOL-T, making it an ideal option to retrofit existing BOL-T (or other bolted systems that use unthreaded compression connectors) systems with a 200 A loadbreak tap for testing, grounding, or overvoltage protection.

## T-OP II connector system


Eaton's Cooper Power series T-OP II deadbreak connector system also has a 200 A loadbreak tap and has all the advantages of the BT-TAP system. In addition, the T-OP II connector is single-person hotstick operable, making it ideal for terminations that may require moving or sectionalizing to achieve a visible open or visible ground. The T-OP II connector design offers added reliability (900 A rated all copper alloy current path and copper top connector) and has several assembly/operating advantages.








## PUSH-OP connector system

Eaton's Cooper Power series PUSH-OP™ deadbreak connector system is essentially a T-OP II termination with a non-bolted design for use on any deadfront apparatus where the terminations may be operated frequently. The PUSH-OP connector's 600 A deadbreak probe and finger contact design eliminates cross-threading and normal thread wear during repeated sectionalizing operations. It is the only available system that allows operators to move the terminator while it is fully grounded. The PUSH-OP system provides stainless steel bracketry and a mechanical lever for the fastest and easiest one-person hotstick operation possible. The PUSH-OP system requires special apparatus bushings, which makes it suitable for new installations only.

**Note:** 600 A Separable Splice kits can be found in the splice section starting on page 36.

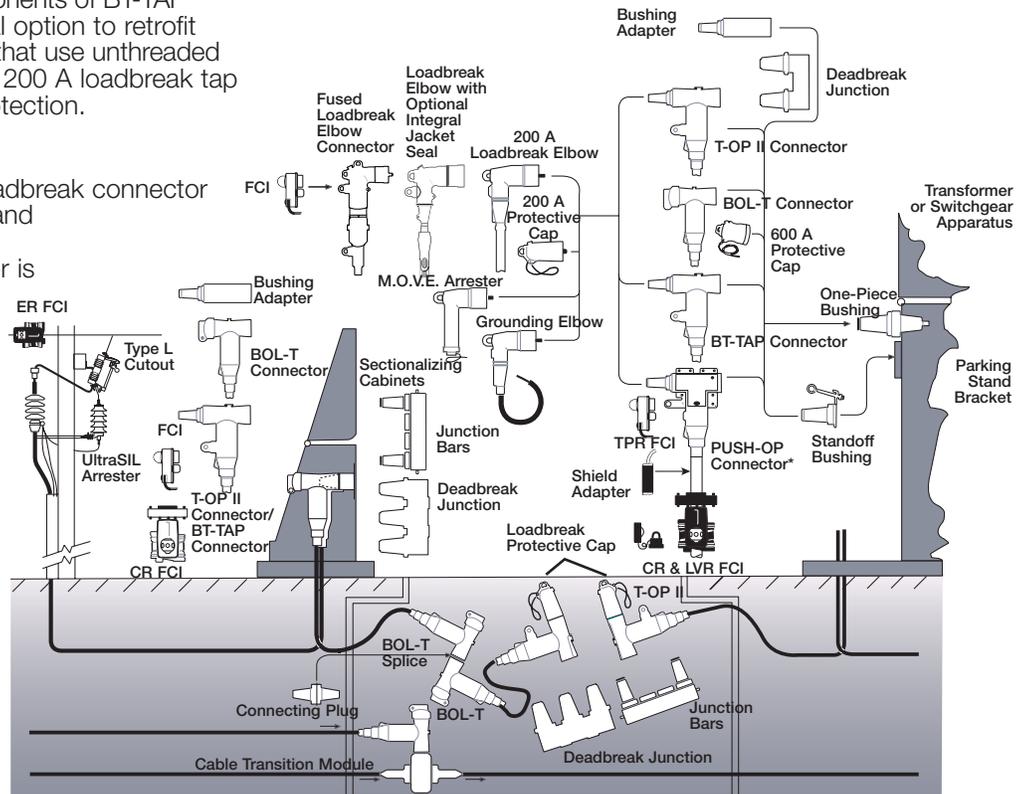

PUSH-OP requires modified bushing and tank hardware.

| Catalog Section   | Description   | kV Class    | Base Part Number   | Notes                    |
|---|---|-------------|--|--------------------------|
| <br>CA650003EN<br>CA650008EN                 | BOL-T<br>Connector Kit                                      | 15/25 kV    | <b>BT625 CR5 CC4</b><br>(see CR5 & CC4 Tables pg. 24)      | 1, 2, 3, 4, 13,<br>14    |
|   |   | 35 kV       | <b>BT635 CR6 CC4</b><br>(see CR6 & CC4 Tables pg. 24)      | 1, 2, 3, 4, 13,<br>14    |
| <br>CA650002EN<br>CA650001EN<br>CA650009EN   | BT-TAP<br>Connector Kit                                     | 15 kV       | <b>BTP615 CR5 CC4</b><br>(see CR5 & CC4 Tables pg. 24)     | 1, 2, 3, 4, 6,<br>13, 14 |
|   |   | 25 kV       | <b>BTP625 CR5 CC4</b><br>(see CR5 & CC4 Tables pg. 24)     | 1, 2, 3, 4, 6,<br>13, 14 |
|   |   | 35 kV       | <b>BTP635 CR6 CC4</b><br>(see CR6 & CC4 Tables pg. 24)     | 1, 2, 4, 6, 13,<br>14    |
| <br>CA650017EN<br>CA650059EN<br>CA650055EN   | T-OP II<br>Connector Kit                                    | 15 kV       | <b>TP615 CR5 CC4</b><br>(see CR5 & CC4 Tables pg. 24)      | 2, 5, 6, 13, 14          |
|   |   | 25 kV       | <b>TP625 CR5 CC4</b><br>(see CR5 & CC4 Tables pg. 24)      | 2, 5, 6, 13, 14          |
|   |   | 35 kV       | <b>TP635 CR6 CC4</b><br>(see CR6 & CC4 Tables pg. 24)      | 2, 5, 6, 13, 14          |
| <br>CA650019EN<br>CA650018EN<br>CA650052EN   | PUSH-OP<br>Connector Kit                                    | 15 kV       | <b>POP615 CR5 CC4</b><br>(see CR5 & CC4 Tables pg. 24)     | 2, 5, 6, 13, 14          |
|   |   | 25 kV       | <b>POP625 CR5 CC4</b><br>(see CR5 & CC4 Tables pg. 24)     | 2, 5, 6, 13, 14          |
|   |   | 35 kV       | <b>POP635 CR6 CC4</b><br>(see CR6 & CC4 Tables pg. 24)     | 2, 5, 6, 13, 14          |
| <br>CA650041EN<br>CA650042EN<br>CA650054EN   | Bushing Adapter<br>with LRTP<br>(STUD-T Included)           | 15 kV       | <b>DBA615</b>  | 6                        |
|   |   | 25 kV       | <b>DBA625</b>  | 6                        |
|   |   | 35 kV       | <b>DBA635</b>  | 6                        |
| <br>CA650019EN<br>CA650103EN<br>CA650056EN   | PUSH-OP Bushing<br>Adapter                                  | 15 kV       | <b>PDBA615</b>   | 6                        |
|   |   | 25 kV       | <b>PDBA625</b>   | 6                        |
|   |   | 35 kV       | <b>PDBA635</b>   | 6                        |
| <br>CA650066EN<br>CA650057EN               | Standoff<br>Bushings  | 15/25 kV    | <b>ISB625A</b><br>(Aluminum)<br><b>ISB625C</b><br>(Copper) | 7, 8                     |
|   |   | 35 kV       | <b>ISB635A</b><br>(Aluminum)<br><b>ISB635C</b><br>(Copper) | 7, 8<br>7                |
|   |   |             |  |                          |
| <br>CA650043EN<br>CA650064EN<br>CA650049EN | PUSH-OP<br>Standoff Bushings                                | 15/25 kV    | <b>PISB625</b><br><b>PISB625HP</b><br>(with hitch pin)     |                          |
|   |   | 35 kV       | <b>PISB635</b><br><b>PISB635HP</b><br>(with hitch pin)     |                          |
| <br>CA650060EN<br>CA650058EN               | Standard<br>Protective Cap<br>(with Permanent Stud)         | 15/25 kV    | <b>DPC625</b>  | 9                        |
|   |   | 35 kV       | <b>DPC635</b>  | 9                        |
| <br>CA650060EN<br>CA650058EN               | Protective Cap<br>for T-OP II and                           | 15/25 kV    | <b>DPC625UT</b>  | 9                        |
|   |   | 35 kV       | <b>DPC635UT</b>  | 9                        |
| <br>CA650096EN<br>CA650053EN               | Deadbreak<br>Junctions                                      | 15/25 kV    | <b>DJ625A</b><br>(Aluminum)<br><b>DJ625C</b><br>(Copper)   | 10, 11<br>10, 11         |
|   |   | 35 kV       | <b>DJ635A</b><br>(Aluminum)<br><b>DJ635C</b><br>(Copper)   | 10, 11<br>10, 11         |
|    | SA Series Cold<br>Shrinkable Metallic<br>Shield Adapter Kit | 15/25/35 kV | <b>SA CJ3</b><br>(see CJ3 Table pg. 24)                    | 12, 13, 14               |
|    | CS Series Cold<br>Shrinkable Metallic<br>Cable Seal Kit     | 15/25/35 kV | <b>CS CJ4</b><br>(see CJ4 Table pg. 24)                    | 13, 14                   |

- Determine whether all aluminum components or all copper components are required:  
**BOL-T Kit with 600 A Rating** - Insert "A" in digit 10 (digit 9 for 35 kV) for Aluminum.  
**BT-TAP Kit with 600 A Rating** - Insert "A" in digit 11 (digit 10 for 35 kV) for Aluminum.  
**BOL-T Kit with 900 A Rating** - Insert "C" in digit 10 (digit 9 for 35 kV) for Copper (includes coppertop compression connector).  
**BT-TAP Kit with 900 A Rating** - Insert "C" in digit 11 (digit 10 for 35 kV) for Copper (includes coppertop compression connector).
- To specify an **ALL copper connector**, add 50 to the conductor code from Table CC4 (page 24). **Example:** CC6C11T becomes CC6C61T.
- To specify a **stud**:  
**BOL-T Kit** - insert a "1" in digit 11 to include stud, or a "2" in digit 11 for kit without stud.  
**BT-TAP Kit** - insert "S" in digit 12 to include standard length stud or "L" in digit 12 to include extended length stud.
- To specify T-Body with test point (optional):  
**BOL-T Kit** - insert a "T" in digit 12.  
**BT-TAP Kit (15 & 25 kV)** - insert a "T" in digit 13.  
**BT-TAP Kit (35 kV)** - insert a "T" in digit 11.
- For T-OP II and PUSH-OP kits only, to specify a T-Body with test point, add "T" after the conductor code.
- To specify a **BOL-T, BT-TAP or T-OP II** kit with a **loadbreak protective cap**, insert a "C" after the test point/non-test point option. **Bushing Adapters** - insert a "C" as the last character of the part number. **Note:** 25 kV kits include a **POSI-BREAK protective Cap**.
- To specify stud in kit, add "SA" for aluminum stud (only available with aluminum interface); add "SC" for copper stud; add "ST" for T-OP II stud; or add "SU" for U-OP stud as the last characters in the part number.
- To specify a **grounded standoff bushing**, replace the "I" with a "G" as the first character in the part number.
- For **individually packaged** product in a corrugated cardboard box, insert an "X" as the last character in the part number.
- It is required to specify the number of interfaces by inserting a "2", "3", or "4" directly after the base part number.
- To add a **stainless steel bracket**, insert a "B"; or to add **U-straps**, insert a "U" as the last character in the part number.
- For use with tape shield, drain wire, linear corrugated, and Unishield® cable.
- To add a **CS Series Sealing kit** or a **SA Series Adapter kit** to the 600 A connector kit, add a "SA\_" or "CS\_" at end of catalog number. Refer to Table CJ3 or CJ4 on page 24.
- Each **SA Series Kit** includes:  
(1) Cold Shrinkable Sleeve (1) Tinned Copper Ground Strap with attached elbow drain wire (1) Constant Force Spring (1) Semi-Conductive Tape (3) Mastic Sealing Strips (1) Installation Instructions.  
**Each CS Series Sealing Kit** includes:  
(1) Cold shrinkable sleeve, (3) Mastic sealing strips, and (1) Installation Instructions.

# 600/900 A components & replacement parts

## Use for Base Number

BT625  
BTP615  
BTP625  
TP615  
TP625  
POP615  
POP625  
CA625

**TABLE CR5**  
Cable Diameter (Insulation) Range

| Cable Diameter Range |           |                  |
|----------------------|-----------|------------------|
| Inches               | mm        | CABLE RANGE CODE |
| 0.610-0.970          | 15.5-24.6 | AB               |
| 0.750-1.080          | 19.1-27.4 | CC               |
| 0.970-1.310          | 24.6-33.3 | DD               |
| 1.090-1.470          | 27.7-37.3 | EE               |
| 1.260-1.640          | 32.0-41.7 | FF               |
| 1.360-1.710          | 34.5-43.4 | GG               |
| 1.500-1.850          | 38.1-47.0 | HH               |
| 1.700-1.970          | 43.2-50.0 | JJ               |

## Use for Base Number

BT625  
BT635  
BTP615  
BTP625  
BTP635  
TP615  
TP625  
TP635  
POP615  
POP625  
POP635  
CC6A \_ U  
CC6C \_ T  
CC6C \_ U  
CDT \_\_\_\_\_

**TABLE CC4**  
Conductor Size and Type

| Concentric or Compressed |                 | Compact or Solid |                 | CONDUCTOR CODE |
|--------------------------|-----------------|------------------|-----------------|----------------|
| AWG or kcmil             | mm <sup>2</sup> | AWG or kcmil     | mm <sup>2</sup> |                |
| No Connector             |                 |                  |                 | 00             |
| #2                       | 35              | 1                | -               | 11             |
| #1                       | -               | 1/0              | 50              | 12             |
| 1/0                      | 50              | 2/0              | 70              | 13             |
| 2/0                      | 70              | 3/0              | -               | 14             |
| 3/0                      | -               | 4/0              | 95              | 15             |
| 4/0                      | 95              | 250              | 120             | 16             |
| 250                      | 120             | 300              | -               | 17             |
| 300                      | -               | 350              | -               | 18             |
| 350                      | -               | 400              | 185             | 19             |
| 400                      | 185             | 450              | -               | 20             |
| 450                      | -               | 500 <sup>a</sup> | 240             | 21             |
| 500                      | 240             | 600              | 300             | 22             |
| 600                      | 300             | 700              | -               | 23             |
| 650 <sup>b</sup>         | -               | 750 <sup>c</sup> | -               | 24             |
| 750 <sup>d</sup>         | -               | 900              | -               | 25             |
| 900                      | -               | 1000             | 500             | 26             |
| 1000                     | 500             | -                | -               | 27             |
| 1250                     | 630             | -                | -               | 28             |

- a. Also accepts 550 kcmil compact conductor.  
b. Also accepts 700 kcmil compressed conductor.  
c. Also accepts 800 kcmil compact conductor.  
d. Also accepts 700 kcmil concentric conductor.

## Use for Base Number

SA

**TABLE CJ3**  
Cable Jacket (Outside Diameter) Range

| Cable Jacket OD (Inches) | JACKET CODE |
|--------------------------|-------------|
| 0.590-1.050              | 1           |
| 0.830-1.640              | 2           |
| 1.270-2.170              | 3           |
| 1.600-2.600              | 4           |

## Use for Base Number

CS

**TABLE CJ4**  
Jacketed Concentric Neutral Cable

| Minimum Seal Diameter (Inches) | Maximum Installed Diameter(Inches) | CODE |
|--------------------------------|------------------------------------|------|
| .950                           | 1.94                               | 1    |
| 1.28                           | 2.67                               | 2    |
| 1.60                           | 3.50                               | 3    |

## Use for Base Number

BT635  
BTP635  
TP635  
POP635  
CA635

**TABLE CR6**  
Cable Diameter (Insulation) Range

| Cable Diameter Range |           |                  |
|----------------------|-----------|------------------|
| Inches               | mm        | CABLE RANGE CODE |
| 0.875-0.985          | 22.2-25.0 | D                |
| 0.930-1.040          | 23.6-26.4 | E                |
| 0.980-1.115          | 24.9-28.3 | F                |
| 1.040-1.175          | 26.4-29.8 | G                |
| 1.095-1.240          | 27.8-31.5 | H                |
| 1.160-1.305          | 29.5-33.1 | J                |
| 1.220-1.375          | 31.0-34.9 | K                |
| 1.285-1.395          | 32.5-35.4 | L                |
| 1.355-1.520          | 34.4-38.6 | M                |
| 1.485-1.595          | 37.7-40.5 | N                |
| 1.530-1.640          | 38.9-41.7 | P                |
| 1.575-1.685          | 40.0-42.8 | Q                |
| 1.665-1.785          | 42.3-45.3 | R                |
| 1.755-1.875          | 44.6-47.9 | S                |
| 1.845-1.965          | 46.9-50.0 | T                |
| 1.960-2.210          | 49.8-56.1 | U                |

## Shear Bolt Connector

| Cable Conductor Size |            |            |                                | Shear Bolt Connector |                |
|----------------------|------------|------------|--------------------------------|----------------------|----------------|
| AWG or kcmil         |            |            | mm <sup>2</sup> Standard Sized | Conductor Code       | Catalog Number |
| Compact              | Compressed | Concentric |                                |                      |                |
| 1/0                  | 1/0        | 1/0        | 50                             | S1                   | CDT630SB150    |
| 2/0                  | 2/0        | 2/0        | 70                             |                      |                |
| 3/0                  | 3/0        | 3/0        | -                              |                      |                |
| 4/0                  | 4/0        | 4/0        | 95                             |                      |                |
| 250                  | 250        | 250        | 120                            |                      |                |
| 350                  | -          | -          | 150                            | S3                   | CDT630SB300    |
| -                    | 350        | 350        | 185                            |                      |                |
| 500                  | 500        | 500        | 240                            |                      |                |
| 600                  | 600        | 600        | 300                            |                      |                |
| 700                  | -          | -          | -                              |                      |                |
| -                    | 700        | 700        | -                              | S4                   | CDT630SB400    |
| 750                  | 750        | 750        | -                              |                      |                |
| 800                  | 800        | -          | 400                            |                      |                |
| 900                  | -          | -          | -                              |                      |                |
| -                    | -          | 800        | -                              |                      |                |
| -                    | 900        | 900        | -                              | S6                   | CDT1250SB630   |
| 1000                 | 1000       | 1000       | 500                            |                      |                |
| -                    | 1100       | 1100       | -                              |                      |                |
| -                    | 1200       | 1200       | -                              |                      |                |
| -                    | 1250       | 1250       | 630                            |                      |                |
| -                    | 1300       | 1300       | -                              | S8                   | CDT1250SB800   |
| -                    | 1400       | 1400       | -                              |                      |                |
| -                    | 1500       | 1500       | 800                            |                      |                |

Not available with T-OP II or PUSH OP.

| Catalog Section   | Description   | kV Class   | Base Part Number | Notes  |
|---|---|--|------------------|--|
| <br>CA650007EN<br>CA650006EN | T-Body  | 15/25 kV   | <b>DT625</b>     | 1, 2   |
|   |   | 35 kV  | <b>DT635</b>     | 1, 2   |
| <br>CA650007EN<br>CA650006EN | Cap for Insulating Plug   | 15/25/35 kV  | <b>DIPCAP</b>    |  |
|   |   | Insulating Plug w/o Stud (cap included)            | 15/25 kV         | <b>DIP625A</b><br>(Aluminum)<br><b>DIP625C</b><br>(Copper)     |
| CA650007EN<br>CA650006EN  |   |  | 35 kV            | <b>DIP635A</b><br>(Aluminum)<br><b>DIP635C</b><br>(Copper)     |
|   |   | Connecting Plug w/o Stud                           | 15/25 kV         | <b>DCP625A</b><br>(Aluminum)<br><b>DCP625C</b><br>(Copper)     |
| CA650007EN<br>CA650006EN  |   |  | 35 kV            | <b>DCP635A</b><br>(Aluminum)<br><b>DCP635C</b><br>(Copper)     |
|   |   | BOL-T Stud   | 15/25 kV         | <b>STUD-A</b><br>(Aluminum)<br><b>STUD-C</b><br>(Copper)       |
| CA650007EN<br>CA650006EN  |   |  | 35 kV            | <b>STUD635-A</b><br>(Aluminum)<br><b>STUD635-C</b><br>(Copper) |
|   |   | T-OP II Stud                                       | 15/25/35 kV      | <b>STUD-T</b>  |
| CA650007EN<br>CA650006EN  | 1 1/16 in. Unthreaded Aluminum Compression Connector  |  | 15/25/35 kV      | <b>CC6A CC4 U</b><br>(see CC4 Table pg. 24)                    |
|   |   | 15/16 in. Threaded Coppertop Compression Connector | 15/25/35 kV      | <b>CC6C CC4 T</b><br>(see CC4 Table pg. 24)                    |
| CA650007EN<br>CA650006EN  | 11/16 in. Unthreaded Coppertop Compression Connector  |  | 15/25/35 kV      | <b>CC6C CC4 U</b><br>(see CC4 Table pg. 24)                    |
|   |   | Cable Adapter                                      | 15/25 kV         | <b>CA625 CR5</b><br>(see CR5 Table pg. 24)                     |
| CA650007EN<br>CA650006EN  |   |  | 35 kV            | <b>CA635 CR6</b><br>(see CR6 Table pg. 24)                     |
|   |   | T-OP II Installation and Torque Tool               | 15/25 kV         | <b>TQHD625</b><br>(15/25 kV-T-OP II Only)                      |
| 35 kV   | <b>TQHD635</b><br>(35 kV T-OP II Only)  |  |                  |  |
| CA650007EN<br>CA650006EN  | T-OP II Combination Operating, Test, and Torque Tool (For single person hotstick operation) | 15 kV  | <b>OTTQ615</b>   | 9  |
|   |   | 25 kV  | <b>OTTQ625</b>   | 9  |
|   |   | 35 kV  | <b>OTTQ635</b>   | 9  |
| CA650007EN<br>CA650006EN  | T-WRENCH for BT-TAP/T-OP II   | 15/25/35 kV  | <b>TWRENCH</b>   | 10   |
|   |   | 5/16" Hex Shaft with 3/8" Socket Drive Tool        | 15/25 kV         | <b>HD625</b>   |
| CA650007EN<br>CA650006EN  | Bushing Extender  |  | 35 kV            | <b>HD635</b>   |
|   |   | 15/25 kV   | <b>DBE625</b>    | 2  |
| CA650007EN<br>CA650006EN  | Loadbreak Reducing Tap Plug for T-OP II (Stud-T included)                                   | 35 kV  | <b>DBE635</b>    | 2  |
|   |   | 15 kV  | <b>LRTP615</b>   |  |
| CA650041EN<br>CA650042EN<br>CA650054EN  | BOL-T Loadbreak Reducing Tap Plug for BT-TAP  | 25 kV  | <b>LRTP625</b>   |  |
|   |   | 35 kV  | <b>LRTP635</b>   |  |
|   |   | 15 kV  | <b>BLRTP615</b>  | 12, 13   |
|   |   | 25 kV  | <b>BLRTP625</b>  | 12, 13   |
|   |   | 35 kV  | <b>BLRTP635</b>  |  |

- To specify a **test point** insert a "T" in the sixth digit.
- To add stud to kit, add a "SA" for an **aluminum stud**, or a "SC" for a **copper stud** as the last characters in the part number.
- To add **STUD** to kit, add a "S" after the base part number. Material of stud supplied will match with material of the plug conductor ordered.
- Copper alloy stud for use with T-OP II connectors only.
- To specify an **all copper connector**, add **50** to the conductor code from Table CC4 (page 24). Example: CC6C11T becomes CC6C61T.
- Stud comes loose in kit, add a "P" as the last character for permanent **factory installation**.
- TQHD6\_ allows for installation of T-OP II connector to 600 A bushing.
- OTTQ6\_ allows for installation and single hotstick operation of T-OP II connector.
- TWRENCH allows for installation of loadbreak reducing tap plug for BT-TAP or T-OP II connector.
- HD6\_ allows for installation of BLRTP6\_ reducing tap plug and connecting plug in 600 A separable splices.
- Specify "A" for 600 A rating or "C" for 900 A rating in digit 9.
- To add standard length stud to kit, add "S" to end of part number. To add an extended length stud to kit add "L" to end of part number.

## BOL-T connector system

Eaton designs its Cooper Power series BOL-T deadbreak connector system for use on applications that will not be operated, do not need grounding or arrester provisions, and do not require direct conductor testing or the use of a hotstick. It is a bolted design that is interchangeable with other manufacturers' bolted 600 A systems that require no special tools for installation.

The capacitive test point on the insulating plug provides a means of confirming an energized circuit without disturbing the bolted connection. In addition to the capacitive test point feature on the insulating plug, we offer a capacitive test point on the T-Body. This allows the use of our "TPR" faulted circuit indicators, and provides a means of confirming that a circuit is energized when used with high impedance voltage sensing devices designed for test points.

Refer to Figure 1 for BOL-T connector kit components.

### Installation of BOL-T on a 600/900 A bushing

The BOL-T connector is installed on any 600/900 A bushing using a standard 1-inch socket. No special tools are required.

#### BOL-T specification information

To specify the BOL-T connector system, include in your specification:

- The system must fully comply with IEEE Std 386™ standard.
- All cable adapters, insulating plugs, compression connectors and other component parts must be interchangeable with other manufacturers.
- For 900 A rating, full copper current carrying path with coppertop compression connector, copper stud and insulating plug with copper insert.
- BOL-T connector system base part number BT625 for 15 kV and 25 kV systems and BT635 for 35 kV systems.

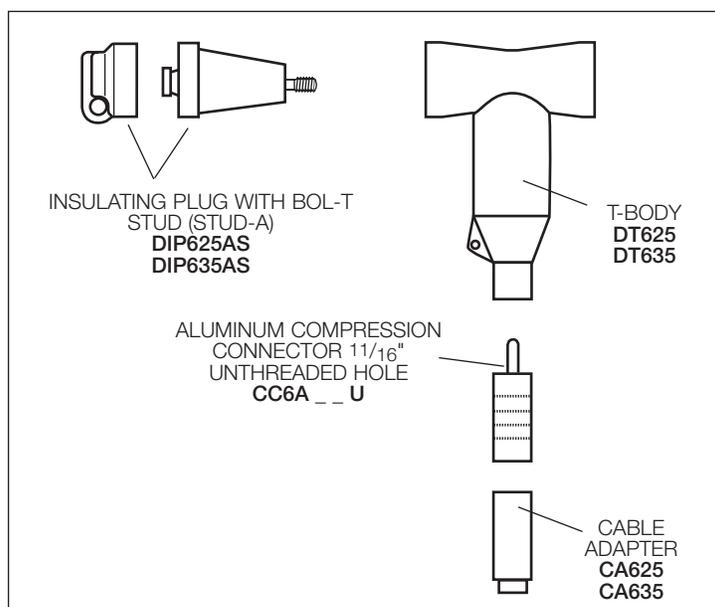


Figure 1. BOL-T connector kit (BT6.5) components. For more details, see catalog sections CA650003EN and CA650008EN.

## BT-TAP connector system

The BT-TAP deadbreak connector system is designed for use on applications where a 200 A interface is required for testing, grounding, or overvoltage protection. It is primarily used in retrofit applications of existing 600 A or 900 A BOL-T installations (or other bolted systems that use unthreaded compression connectors).

The BT-TAP connector system uses the standard unthreaded compression connector, which makes it ideal for retrofitting existing BOL-T connector installations into a system with a 200 A tap.

The BT-TAP connector provides the following features:

- Visible ground and visible break
- 200 A Interface for:
  - addition of our M.O.V.E. arresters for overvoltage protection
  - addition of our grounding elbows
  - access for direct conductor phasing and testing
  - hipot testing of switch or cables

Refer to Figure 2 for BT-TAP connector kit components.

### Installation of BT-TAP on a 600 A bushing

The BT-TAP connector is installed on an apparatus bushing using a 600 A torque tool.

#### BT-TAP specification information

To specify a BT-TAP connector system, include in your specification:

- The system must fully comply with IEEE Std 386™ standard.
- The connector system must provide operation with hot line tools, direct conductor phasing and testing.
- It must provide a location to add overvoltage arresters and access for direct conductor phasing or hipot testing of switch or cables.
- Must be easy to install with proper torque such that concern for cross threading is eliminated.
- Loadbreak reducing tap plug must include latch indicator ring.
- BT-TAP Connector System base part number BTP615 (A) (C) for 15 kV, BTP625 (A) (C) for 25 kV and BTP635 for 35 kV.

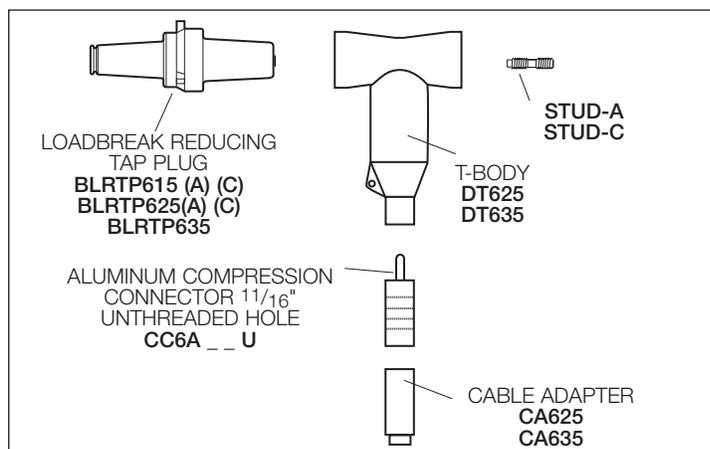


Figure 2. BT-TAP connector kit (BTP6.5) components. For more details, see catalog sections CA650002EN, CA650001EN and CA650009EN.

## T-OP II connector system

Eaton designs its Cooper Power series T-OP II deadbreak connector system for use on applications where a 200 A interface is required for testing, grounding, or overvoltage protection. It is single person hotstick operable and is ideal for terminations that may require moving to achieve a visible open or visible ground. One person can move the T-OP II deadbreak terminator from the apparatus bushing to a standoff bushing using a hotstick and operating test and torque tool (OTTQ6\_5). The T-OP II connector system uses a threaded coppertop (bi-metal) compression connector for a threaded connection. It also has an alignment segment and internal rotating nut feature in the loadbreak reducing tap plug which, along with the extended length stud, eliminates cross threading and ensures proper torque.

The T-OP II system provides the following features:

- Single person hotstick operable
- Mechanical assist
- Copper alloy current path and copper-top connector
- 900 A continuous current rating
- Visible ground and visible break
- 200 A Interface for:
  - addition of our M.O.V.E arresters for overvoltage protection
  - addition of our grounding elbows
  - access for direct conductor phasing and testing
  - hipot testing of switch or cables

Refer to Figure 3 for T-OP II connector kit components.

### Installation of T-OP II on a 600/900 A bushing

The T-OP II connector is installed on an apparatus bushing using a T-Wrench and a 600 A torque tool.

### T-OP II specification information

To specify a 900 A T-OP II system, include in your specification:

- The system must fully comply with IEEE Std 386™ standard.
- Must include an all copper alloy current path and copper-top connector.
- System must include disconnecting back-off feature.
- The connector system must provide operation with live line tools, direct conductor phasing and testing, visible ground and visible break.
- It must provide a location to add overvoltage arresters and access for direct conductor phasing or hipot testing of switch or cables.
- Must be one-person hotstick operable and easy to install with proper torque such that concern for cross threading is eliminated.
- Loadbreak reducing tap plug must include extended length stud, internal rotating nut and an alignment segment feature to eliminate cross threading of this compression connector and ensure proper torque.
- Loadbreak reducing tap plug must include latch indicator ring.
- T-OP II connector system base part number TP615 for 15 kV, TP625 for 25 kV and TP635 for 35 kV.



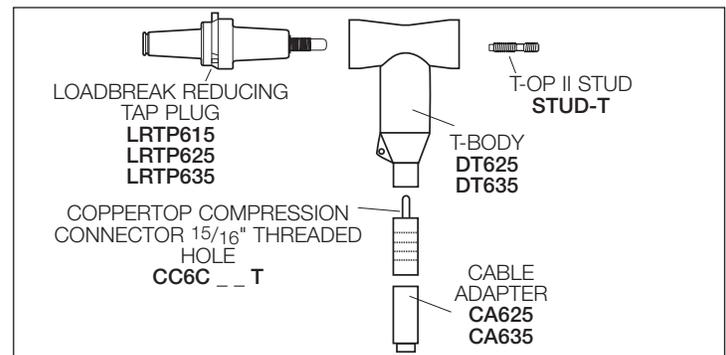


Figure 3. T-OP II connector kit (TP6\_5\_) components. For more details, see catalog sections CA650017EN, CA650059EN, CA650055EN.


# 600 A stacking dimensions

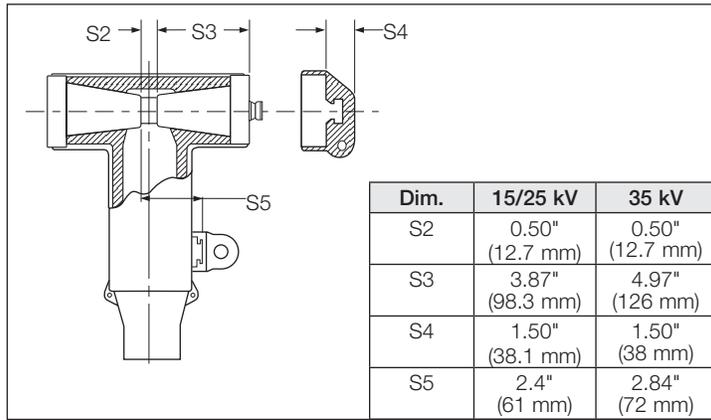


**BOL-T deadbreak connector**

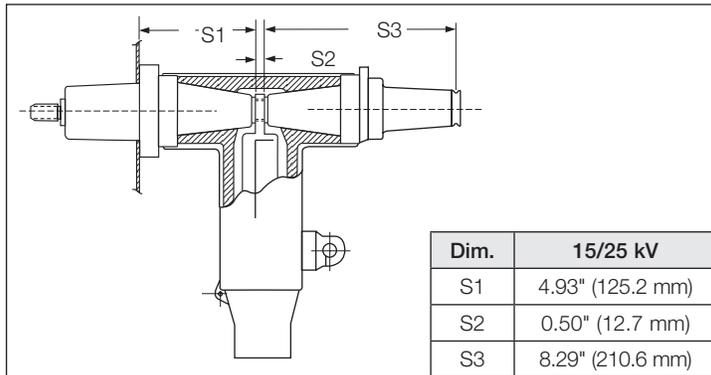


**BT-TAP and T-OP II deadbreak connector 15 kV and 25 kV**

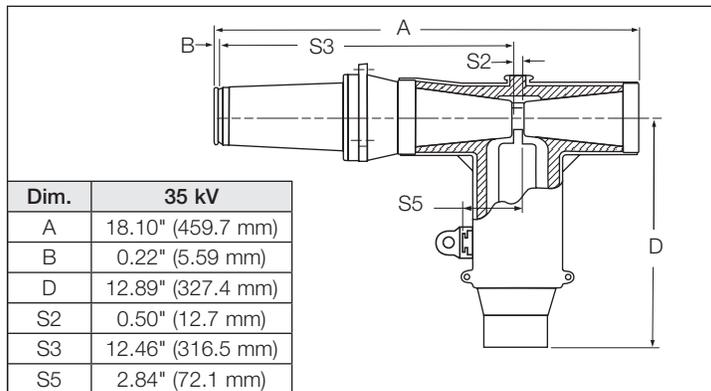


**BT-TAP and T-OP II deadbreak connector 35 kV**

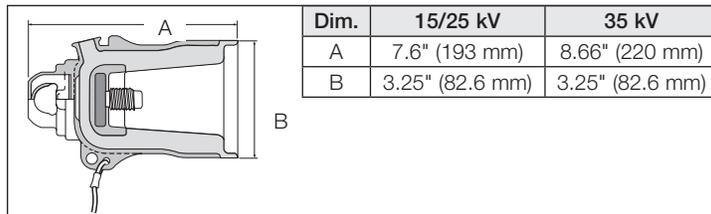


**Standard protective cap**

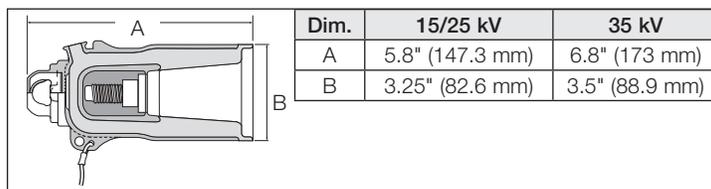


**Protective cap for T-OP II and U-OP (15/25 kV shown)**

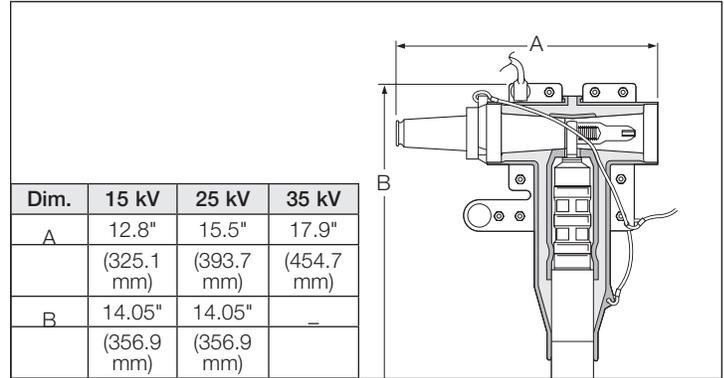


**PUSH-OP deadbreak connector (15 kV shown)**

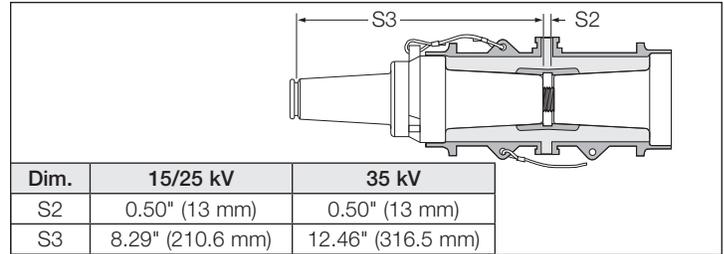


**Bushing adapter with LRTP (15 kV shown)**

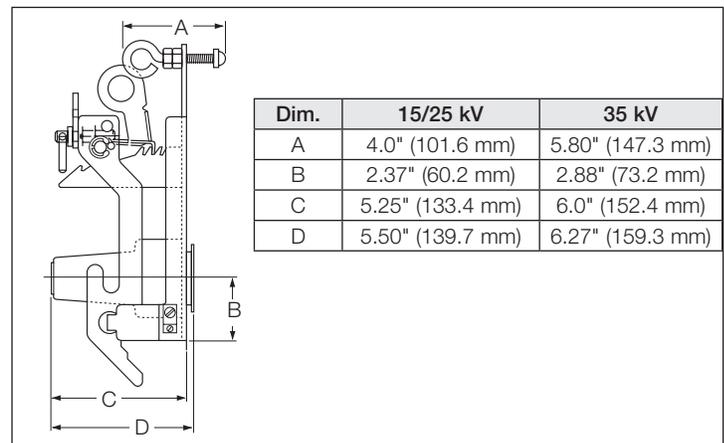


**PUSH-OP standoff bushing (15/25 kV shown)**

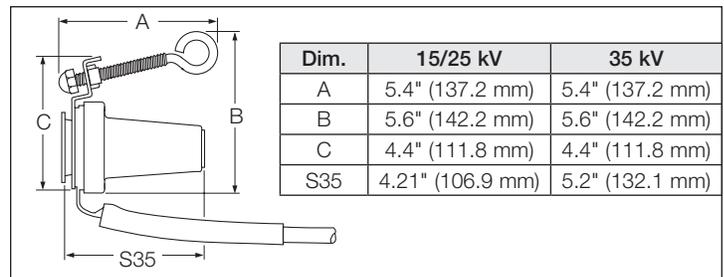

**Standoff bushing**

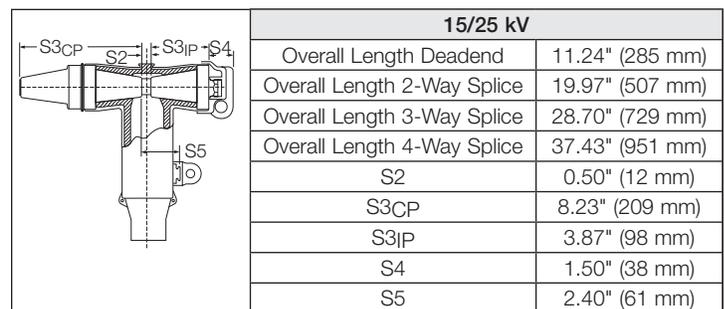

**Separable splice**

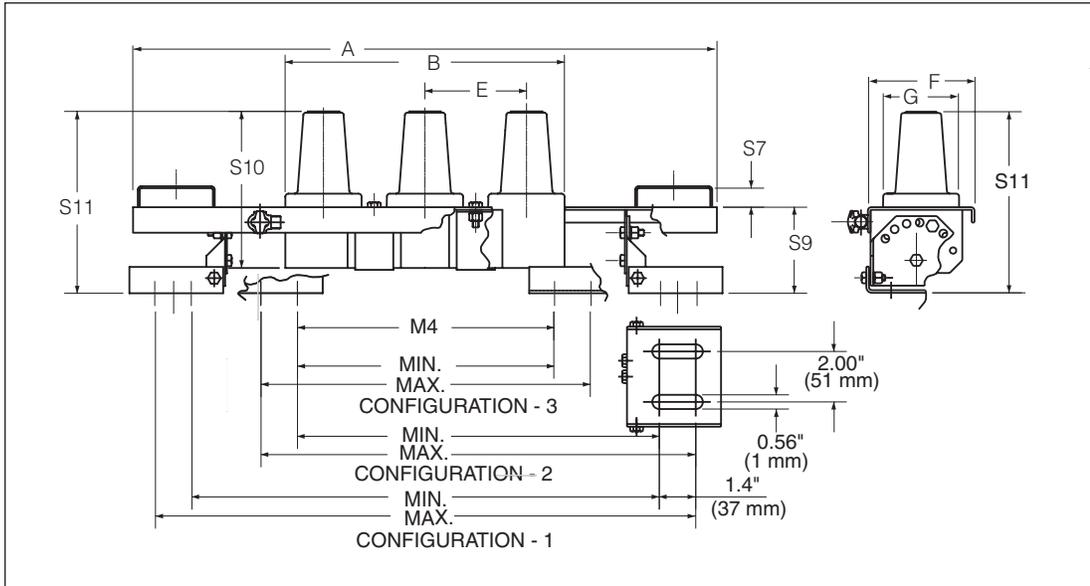


Deadbreak junction (15/25 kV shown)

| Dim. | 15/25 kV      |
|------|---------------|
| E    | 4.0" (101 mm) |
| F    | 4.1" (102 mm) |
| G    | 3.0" (76 mm)  |
| S7   | 0.75" (19 mm) |
| S9   | 3.4" (86 mm)  |
| S10  | 6.2" (157 mm) |
| S11  | 7.2" (182 mm) |

TABLE 15/25 kV

| Number of Interfaces | Physical Dimensions in./(mm) |                   | M4 Mounting Dimensions in./(mm) |                   |                   |                   |                   |                   |
|----------------------|------------------------------|-------------------|---------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|                      |                              |                   | Configuration 1                 |                   | Configuration 2   |                   | Configuration 3   |                   |
|                      |                              |                   | Min.                            | Max.              | Min.              | Max.              | Min.              | Max.              |
| 2                    | 19.0"<br>(483 mm)            | 7.0"<br>(178 mm)  | 14.1"<br>(358 mm)               | 16.9"<br>(429 mm) | 9.7"<br>(248 mm)  | 12.5"<br>(318 mm) | 5.6"<br>(142 mm)  | 8.4"<br>(213 mm)  |
| 3                    | 23.0"<br>(584 mm)            | 11.0"<br>(279 mm) | 18.6"<br>(472 mm)               | 21.4"<br>(544 mm) | 14.2"<br>(361 mm) | 17.0"<br>(432 mm) | 10.1"<br>(257 mm) | 12.9"<br>(328 mm) |
| 4                    | 27.1"<br>(686 mm)            | 15.0"<br>(381 mm) | 24.1"<br>(612 mm)               | 26.9"<br>(686 mm) | 19.7"<br>(500 mm) | 22.5"<br>(572 mm) | 15.6"<br>(396 mm) | 18.4"<br>(467 mm) |

Configuration 1. Both feet turned out.  
 Configuration 2. One foot turned out, the other in.  
 Configuration 3. Both feet turned in.

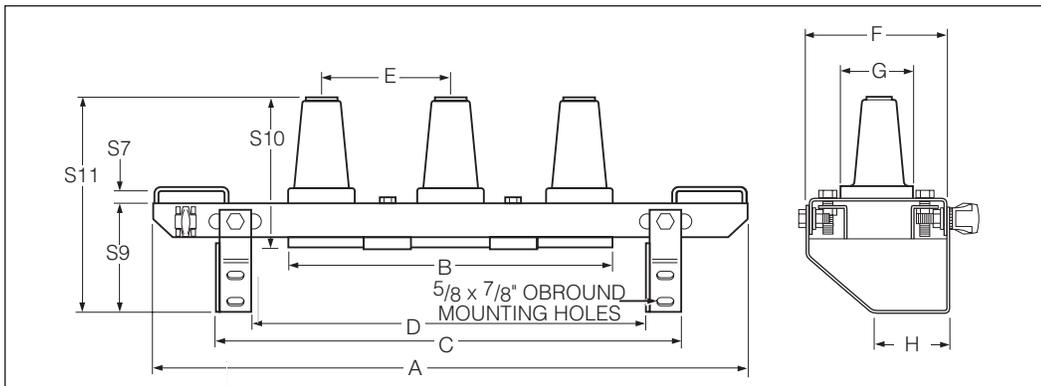

Deadbreak junction (35 kV shown)

| Dim. | 35 kV          |
|------|----------------|
| E    | 6.0" (152 mm)  |
| F    | 6.2" (158 mm)  |
| G    | 3.0" (76 mm)   |
| H    | 3.8" (96 mm)   |
| S7   | 0.75" (19 mm)  |
| S9   | 5.55" (141 mm) |
| S10  | 7.0" (178 mm)  |
| S11  | 10.4" (264 mm) |

TABLE 35 kV

| Number of Interfaces | Physical Dimensions in. (mm) |                   | Mounting Dimensions in. (mm) |                   |
|----------------------|------------------------------|-------------------|------------------------------|-------------------|
|                      | A                            | B                 | C                            | D                 |
| 2                    | 21.5"<br>(546 mm)            | 9.0"<br>(229 mm)  | 15.5"<br>(394 mm)            | 12.5"<br>(318 mm) |
| 3                    | 27.5"<br>(699 mm)            | 15.0"<br>(381 mm) | 21.5"<br>(546 mm)            | 18.5"<br>(470 mm) |
| 4                    | 33.5"<br>(851 mm)            | 21.0"<br>(533 mm) | 27.5"<br>(699 mm)            | 24.5"<br>(622 mm) |

Note: C and D are minimum and maximum stud centerline separations for mounting.

# Junction bars/cable transition & oil stop modules

Eaton designs its Cooper Power series junction bars for vault or apparatus applications and can be used for looping, tapping, and sectionalizing.

Cable transition modules (CTMs) and oil stop modules (OSMs) are designed for splicing paper insulated lead cable (PILC) into solid dielectric cable.

Junction bars and cable transition modules are fully shielded, submersible, resistant to harsh materials, and are designed and manufactured in accordance with IEEE Std 386™ standard - "Separable Insulated connector Systems".

Junction bars and cable transition and oil stop modules are manufactured in 200 A, 600 A or 900 A configurations. The 200 A designs incorporate a universal bushing well design making it possible to use either a 200 A loadbreak or deadbreak bushing well insert.



## Junction bar catalog numbering key

- "JBI" = Junction Bar, In-Line
- "JBL" = Junction Bar, "L" Splice
- "JBY" = Junction Bar, "Y" Splice
- "JBS" = Junction Bar, Stacked
- "25" = 15/25 kV Rating
- "35" = 35 kV Rating\*\*\*
- "335" = Three-Phase, 35 kV Rating
- "U" = With U-Straps
- "PS" = Bracket with (2) Parking Stands
- "W" = 200 A Well
- "B" = 600 A Bushing
- "S" = 600 A Straight Interface Bushing
- "C" = Copper

## Available Mounting Provisions

| Junction Type        | S.S. Mtg. Bracket<br>0-60° Mtg. Angles | Non-Adjustable<br>S.S. Flush Mtg. Bracket | S.S. U-Straps* | S.S. Mtg. Bracket with (2) Parking Stands** |
|----------------------|--|---|----------------|---|
| In-Line Junction Bar | Std.                                   |   | Yes            | Yes   |
| Stacked Junction Bar |  | Std.                                      | No             | Yes   |
| "L" Splice           | Std.                                   |   | Yes            | Yes   |
| "Y" Splice           |  | Std.                                      | No             | No  |

\* For U-straps add suffix U on the end of the standard catalog number.

\*\* For Parking Stand Bracket add suffix PS on the end of the standard catalog number.

# 15/25 and 35 kV in-line junction bars with stainless steel bracket






| Catalog Section   | Description                                 | kV Class          | Base Part Number                           | Notes |
|---|---|-------------------|--|-------|
| CA650079EN  |   |                   |  |       |
|    | 2 Point 200 A                               | 15/25 kV<br>35 kV | <b>JB125C2W</b><br><b>JB135C2W</b>         | 1,2   |
|    | 3 Point 200 A                               | 15/25kV<br>35 kV  | <b>JB125C3W</b><br><b>JB135C3W</b>         | 1,2   |
|    | 4 Point 200 A                               | 15/25kV<br>35 kV  | <b>JB125C4W</b><br><b>JB135C4W</b>         | 1,2   |
|    | 5 Point 200 A                               | 15/25kV<br>35 kV  | <b>JB125C5W</b><br><b>JB135C5W</b>         | 1,2   |
|    | 6 Point 200 A                               | 15/25kV<br>35 kV  | <b>JB125C6W</b><br><b>JB135C6W</b>         | 1,2   |
|    | 2 Point 600/900 A*                          | 15/25kV<br>35 kV  | <b>JB125C2B</b><br><b>JB135C2B</b>         | 1,2   |
|    | 3 Point 600/900 A*                          | 15/25kV<br>35 kV  | <b>JB125C3B</b><br><b>JB135C3B</b>         | 1,2   |
|    | 4 Point 600/900 A*                          | 15/25kV<br>35 kV  | <b>JB125C4B</b><br><b>JB135C4B</b>         | 1,2   |
|    | 5 Point 600/900 A*                          | 15/25kV<br>35 kV  | <b>JB125C5B</b><br><b>JB135C5B</b>         | 1,2   |
|    | 6 Point 600/900 A*                          | 15/25kV<br>35 kV  | <b>JB125C6B</b><br><b>JB135C6B</b>         | 1,2   |
|    | 3 Point 1 x 200 A<br>2 x 600 A              | 15/25kV<br>35 kV  | <b>JB125C1W2B</b><br><b>JB135C1W2B</b>     | 1,2   |
|    | 3 Point 1 x 600 A<br>1 x 200 A<br>1 x 600 A | 15/25kV<br>35 kV  | <b>JB125C1B1W1B</b><br><b>JB135C1B1W1B</b> | 1,2   |
|    | 3 Point 2 x 200 A<br>1 x 600 A              | 15/25kV<br>35 kV  | <b>JB125C2W1B</b><br><b>JB135C2W1B</b>     | 1,2   |
|  | 4 Point 1 x 200 A<br>3 x 600 A              | 15/25kV<br>35 kV  | <b>JB125C1W3B</b><br><b>JB135C1W3B</b>     | 1,2   |
|  | 4 Point 2 x 200 A<br>2 x 600 A              | 15/25kV<br>35 kV  | <b>JB125C2W2B</b><br><b>JB135C2W2B</b>     | 1,2   |
|  | 4 Point 3 x 200 A<br>1 x 600 A              | 15/25kV<br>35 kV  | <b>JB125C3W1B</b><br><b>JB135C3W1B</b>     | 1,2   |
|  | 4 Point 1 x 600 A<br>2 x 200 A<br>1 x 600 A | 15/25kV<br>35 kV  | <b>JB125C1B2W1B</b><br><b>JB135C1B2W1B</b> | 1,2   |
|  | 5 Point 1 x 200 A<br>4 x 600 A              | 15/25kV<br>35 kV  | <b>JB125C1W4B</b><br><b>JB135C1W4B</b>     | 1,2   |
|  | 5 Point 2 x 200 A<br>3 x 600 A              | 15/25kV<br>35 kV  | <b>JB125C2W3B</b><br><b>JB135C2W3B</b>     | 1,2   |
|  | 5 Point 4 x 200 A<br>1 x 600 A              | 15/25kV<br>35 kV  | <b>JB125C4W1B</b><br><b>JB135C4W1B</b>     | 1,2   |
|  | 5 Point 1 x 600 A<br>3 x 200 A<br>1 x 600 A | 15/25kV<br>35 kV  | <b>JB125C1B3W1B</b><br><b>JB135C1B3W1B</b> | 1,2   |
|  | 6 Point 3 x 200 A<br>3 x 600 A              | 15/25kV<br>35 kV  | <b>JB125C3W3B</b><br><b>JB135C3W3B</b>     | 1,2   |
|  | 6 Point 1 x 600 A<br>4 x 200 A<br>1 x 600 A | 15/25kV<br>35 kV  | <b>JB125C1B4W1B</b><br><b>JB135C1B4W1B</b> | 1,2   |

1. For U-Straps, add "U" on end of catalog number.
2. For (2) parking stand brackets add "PS" to end of catalog number.

\* A 900 A rating can be achieved when mated with comparably rated separable connectors.








# 15/25 kV and 35 kV L-splices and Y-splices with stainless steel brackets

1. for U-Straps, add "U" on end of catalog number.
2. For (2) parking stand brackets add "PS" to end of catalog number.

| Catalog Section  | Description  | kV Class          | Base Part Number           | Notes |
|--|--|-------------------|----------------------------|-------|
| CA650079EN   | <b>L-SPLICES 15/25 AND 35 KV WITH STAINLESS STEEL BRACKETS</b>       |                   |                            |       |
|   | 3 Point Single-Phase<br>2 x 200 A<br>1 x 200 A                       | 15/25 kV<br>35 kV | JBL25C2W1W<br>JBL35C2W1W   | 1, 2  |
|   | 6 Point Single-Phase<br>4 x 200 A<br>2 x 600 A                       | 15/25 kV<br>35 kV | JBL25C4W2B<br>JBL35C4W2B   | 1, 2  |
| CA650079EN   | <b>Y SPLICES, THREE-PHASE 15/25 KV WITH STAINLESS STEEL BRACKETS</b> |                   |                            |       |
|   | 9 Point Three-Phase<br>3 x 200 A<br>Per Phase                        | 15/25 kV<br>35 kV | JBY325C3W<br>JBY335C3W     |       |
|   | 9 Point Three-Phase<br>2 x 600 A<br>1 x 200 A<br>Per Phase           | 15/25 kV<br>35 kV | JBY325C1W2B<br>JBY335C1W2B |       |
|  | 12 Point Three-Phase<br>3 x 600 A<br>1 x 200 A<br>Per Phase          | 15/25 kV<br>35 kV | JBY325C1W3B<br>JBY335C1W3B |       |












# 15/25 & 35 kV stacked junction bars with stainless steel brackets

1. For (2) parking stand brackets add "PS" to end of catalog number.



| Catalog Section   | Description                                    | kV Class          | Base Part Number             | Notes |
|---|--|-------------------|------------------------------|-------|
| CA650079EN  |  |                   |                              |       |
|    | 5 Point<br>5 x 200 A                           | 15/25 kV<br>35 kV | JBS25C2W3W<br>JBS35C2W3W     | 1     |
|    | 5 Point<br>2 x 200 A<br>3 x 600 A              | 15/25 kV<br>35 kV | JBS25C2W3B<br>JBS35C2W3B     | 1     |
|    | 5 Point<br>2 x 600 A<br>1 x 200 A<br>2 x 600 A | 15/25 kV<br>35 kV | JBS25C2B1W2B<br>JBS35C2B1W2B | 1     |
|    | 6 Point<br>6 x 200 A                           | 15/25 kV<br>35 kV | JBS25C3W3W<br>JBS35C3W3W     | 1     |
|    | 6 Point<br>3 x 200 A<br>1 x 600 A<br>2 x 200 A | 15/25 kV<br>35 kV | JBS25C3W1B2W<br>JBS35C3W1B2W | 1     |
|  | 6 Point<br>3 x 200 A<br>1 x 200 A<br>2 x 600 A | 15/25 kV<br>35 kV | JBS25C3W1W2B<br>JBS35C3W1W2B | 1     |
|  | 8 Point<br>8 x 200 A                           | 15/25 kV<br>35 kV | JBS25C4W4W<br>JBS35C4W4W     | 1     |

# 15 and 25 kV cable transition modules

1. Cable Lug Size required at time of order.

| Catalog Section   | Description                     | kV Class        | Base Part Number               | Notes |
|---|---------------------------------|-----------------|--------------------------------|-------|
| CA650080EN  | <b>STRAIGHT THROUGH</b>         |                 |                                |       |
|    | 3 Point 200 A                   | 15 kV and 25 kV | <b>CTM005A</b>                 | 1     |
|    | 3 Point 600 A                   | 15 kV and 25 kV | <b>CTM012A</b>                 | 1     |
| CA650080EN  | <b>TAP</b>                      |                 |                                |       |
|    | 3 Point 200 A                   | 15 kV and 25 kV | <b>CTM015A</b>                 | 1     |
|    | 6 Point 200 A                   | 15 kV and 25 kV | <b>CTM025A</b>                 | 1     |
|    | 3 Point 600 A                   | 15 kV and 25 kV | <b>CTM011A</b>                 | 1     |
|    | 6 Point 600 A                   | 15 kV and 25 kV | <b>CTM020A</b>                 | 1     |
| CA650080EN  | <b>STRAIGHT THROUGH AND TAP</b> |                 |                                |       |
|    | 3 Point 200 A                   | 15 kV and 25 kV | <b>CTM010A</b>                 | 1     |
|    | 6 Point 200 A                   | 15 kV and 25 kV | <b>CTM024A</b>                 | 1     |
|  | 3 Point 600 A                   | 15 kV and 25 kV | <b>CTM009A</b>                 | 1     |
|  | 6 Point 600 A                   | 15 kV and 25 kV | <b>CTM019A</b>                 | 1     |
|  | 3 Point 200 A                   | 15 kV and 25 kV | <b>CTM029A</b>                 | 1     |
|  | 3 Point 600 A                   | 15 kV and 25 kV | <b>CTM030A</b>                 | 1     |
| CA650080EN  | <b>ACCESSORIES</b>              |                 |                                |       |
|  | Wiping Sleeve                   | 15 kV and 25 kV | <b>WS1112</b><br><b>WS1118</b> |       |
|  | Wiping Flange                   | 15 kV and 25 kV | <b>WS12</b>                    |       |

# 15 and 25 kV Cable Transition & Oil Stop Modules

| Catalog Section   | Description  | kV Class        | Base Part Number | Notes |
|---|--|-----------------|------------------|-------|
| CA650080EN  | <b>MOUNTING BRACKET</b>  |                 |                  |       |
|  | Saddle   | 15 kV and 25 kV | <b>BRK469</b>    |       |
| CA650080EN  | <b>OIL STOP MODULES</b>  |                 |                  |       |
|  | Three-Phase 600 A<br>PILC to PILC Splice   | 15 kV and 25 kV | <b>OSM004</b>    | 1     |
|  | Tap Transition, Paper<br>Insulated Lead Cable<br>(PILC) Run to<br>3 Point 200 A and<br>3 Point 600 A Tap | 15 kV and 25 kV | <b>CTM035A</b>   | 1     |

1. Cable Lug Size required at time of order.

# Splices

Eaton offers various types of splices for your underground needs on 200 A and 600 A systems. Eaton's Cooper Power series EZ II one-piece splices at 15, 25, and 35 kV include advantages for typical applications of repair, replacement, or extension of high voltage underground cables. These all peroxide-cured EPDM rubber splices provide a highly reliable, permanent, fully shielded, and submersible cable joint with a current rating equal to that of the mating cable. EZ II splices can be installed in conduit, direct buried or in vault applications. The EZ II splice line meets or exceeds all requirements of IEEE Std 404™-1993 standard.

We offer a full line of 600/900 A separable splice kits for application on feeder circuits. These use standard BOL-T type components along with a peroxide-cured EPDM rubber connecting plug that allows for installation of multiple way splices. Separable splices are used to splice multiple cables or to deadend a single cable. The splices are rated for 600 A (900 A ratings are available) and are suitable for the repair or extension of underground feeders. Separable splice kits meet or exceed the requirements of IEEE Std 386™-2006 standard.

## EZ II splices

The EZ II one-piece splices offer a number of features and benefits, including:

**Easiest to Install** – The design features of the EZ II splice including the tapered cable entrance, smooth bore, relieved conductive insert, and reformulated rubber provide for easier field installation. EZ II splices have been shown to be 30% easier to install than other manufacturers' splices.

**Wide Range Taking** – The wide range taking cable entrances are sized to accept all common cable insulation diameters. The wider cable ranges increase installation flexibility.


**Sure Grip** – The contoured EZ II splice body provides an easy gripping location during installation.

**Long Term Reliability** – The EZ II splice has successfully passed all requirements of the IEEE Std 404™-1993 standard and our exclusive field-proven multi-stress test to show the long term reliability of the design.


### EZ II splice specification information


To ensure you have the most reliable, economical, installation friendly premolded one-piece splice available, your specification for EZ II Splice should include:

- Manufactured in full compliance with all applicable IEEE Std 404™-1993 standard.
- Manufactured from peroxide-cured EPDM rubber.
- Tapered ribs of the inside diameter of the conductive insert.
- Molded in compression connector diameters.
- Conductive insert ends encapsulated with insulating rubber.

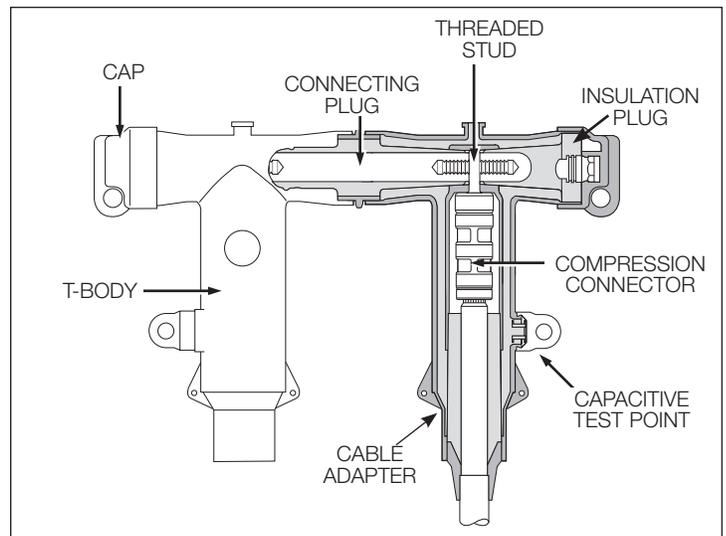

Typical components of a 600 A 2-way separable splice.

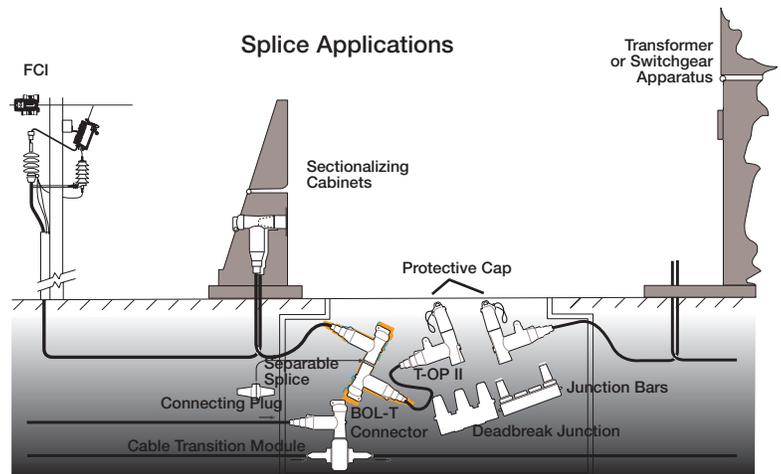

| Catalog Section   | Description  | kV Class | Base Part Number                                    | Notes      |
|---|--------------|----------|---|------------|
|  | EZ II Splice | 15 kV    | <b>SP15 CR6 CC5</b><br>(see CR6 & CC5 Tables Below) | 1, 2, 3, 4 |
|   |              | 25 kV    | <b>SP25 CR6 CC5</b><br>(see CR6 & CC5 Tables Below) | 1, 2, 3, 4 |
|   |              | 35 kV    | <b>SP35 CR6 CC5</b><br>(see CR6 & CC5 Tables Below) | 1, 2, 3, 4 |

CA650020EN

**Use for Base Number** (both tables)  
**SP15 SP25 SP35**


**TABLE CR6 Cable Diameter (Insulation) Range**

| Cable Diameter Range |             | Voltage Class | Conductor Range    | CABLE RANGE CODE |
|----------------------|-------------|---------------|--------------------|------------------|
| Inches               | Millimeters |               |                    |                  |
| 0.640-0.910          | 16.3-23.1   | 15 kV         | #3 str - 3/0 cmpct | <b>A</b>         |
| 0.750-1.010          | 19.1-25.7   | 15 & 25       | #3 str - 3/0 cmpct | <b>B</b>         |
| 0.890-1.140          | 22.6-29.0   | 15 & 25       | #3 str - 250 str   | <b>C</b>         |
| 0.840-1.110          | 21.3-28.2   | 25 & 35       | #3 str - 250 str   | <b>D</b>         |
| 1.000-1.310          | 25.4-33.3   |               |                    | <b>E</b>         |
| 1.140-1.450          | 29.0-36.8   | 35            | #3 str - 250 str   | <b>F</b>         |




**TABLE CC5 Conductor Size and Type**

| Stranded or Compressed |                 | Compact or Solid |                 | CONDUCTOR CODE |
|------------------------|-----------------|------------------|-----------------|----------------|
| AWG                    | mm <sup>2</sup> | AWG              | mm <sup>2</sup> |                |
| #3                     | 25              | #2               | 35              | <b>001</b>     |
| #2                     | 35              | #1               | -               | <b>002</b>     |
| #1                     | -               | 1/0              | 50              | <b>003</b>     |
| 1/0                    | 50              | 2/0              | 70              | <b>004</b>     |
| 2/0                    | 70              | 3/0              | -               | <b>005</b>     |
| 3/0                    | -               | 4/0              | 95              | <b>006</b>     |
| 4/0                    | 95              | 250              | 120             | <b>007</b>     |
| 250*                   | 120             | -                | -               | <b>008</b>     |

\* Compressed stranding only

|   |   |                      |                  |            |
|---|---|----------------------|------------------|------------|
|  | 600 A Separable Splices<br>(Kits Do Not Include Cable Adapters or Compression Connector. Refer to 600 A Replacement Parts Page 25)  | 15/25 kV Deadend Kit | <b>SSPL625A1</b> | 5, 6, 7, 8 |
|   |   | 2-way Splice Kit     | <b>SSPL625A2</b> | 5, 6, 7, 8 |
|   |   | 3-way Splice Kit     | <b>SSPL625A3</b> | 5, 6, 7, 8 |
|   |   | 4-way Splice Kit     | <b>SSPL625A4</b> | 5, 6, 7, 8 |
|  | 600 A Separable Splices with 200 A Tap<br>(Kits Do Not Include Required Threaded and Unthreaded Compression Connectors or Cable Adapters. Refer to 600 A Replacement Parts Page 25) | 35 kV Deadend Kit    | <b>SSPL635A1</b> | 5, 6, 7, 8 |
|   |   | 2-way Splice Kit     | <b>SSPL635A2</b> | 5, 6, 7, 8 |
|   |   | 3-way Splice Kit     | <b>SSPL635A3</b> | 5, 6, 7, 8 |
|   |   | 4-way Splice Kit     | <b>SSPL635A4</b> | 5, 6, 7, 8 |

CA650051EN  
CA650050EN

|   |   |                           |                   |               |
|---|---|---------------------------|-------------------|---------------|
|  | T-OP II 600 A Separable Splices with 200 A Tap<br>(Kits Do Not Include Required Threaded and Unthreaded Compression Connectors or Cable Adapters. Refer to 600 A Replacement Parts Page 25) | 15 kV T-OP II Deadend Kit | <b>SSPLT615A1</b> | 5, 6, 7, 8, 9 |
|   |   | T-OP II 2-way Splice Kit  | <b>SSPLT615A2</b> | 5, 6, 7, 8, 9 |
|   |   | T-OP II 3-way Splice Kit  | <b>SSPLT615A3</b> | 5, 6, 7, 8, 9 |
|   |   | T-OP II 4-way Splice Kit  | <b>SSPLT615A4</b> | 5, 6, 7, 8, 9 |
|  | T-OP II 600 A Separable Splices with 200 A Tap<br>(Kits Do Not Include Required Threaded and Unthreaded Compression Connectors or Cable Adapters. Refer to 600 A Replacement Parts Page 25) | 25 kV T-OP II Deadend Kit | <b>SSPLT625A1</b> | 5, 6, 7, 8, 9 |
|   |   | T-OP II 2-way Splice Kit  | <b>SSPLT625A2</b> | 5, 6, 7, 8, 9 |
|   |   | T-OP II 3-way Splice Kit  | <b>SSPLT625A3</b> | 5, 6, 7, 8, 9 |
|   |   | T-OP II 4-way Splice Kit  | <b>SSPLT625A4</b> | 5, 6, 7, 8, 9 |
|  | T-OP II 600 A Separable Splices with 200 A Tap<br>(Kits Do Not Include Required Threaded and Unthreaded Compression Connectors or Cable Adapters. Refer to 600 A Replacement Parts Page 25) | 35 kV T-OP II Deadend Kit | <b>SSPLT635A1</b> | 5, 6, 7, 8, 9 |
|   |   | T-OP II 2-way Splice Kit  | <b>SSPLT635A2</b> | 5, 6, 7, 8, 9 |
|   |   | T-OP II 3-way Splice Kit  | <b>SSPLT635A3</b> | 5, 6, 7, 8, 9 |
|   |   | T-OP II 4-way Splice Kit  | <b>SSPLT635A4</b> | 5, 6, 7, 8, 9 |

CA650051EN  
CA650050EN

**TABLE 4**  
**Separable Splice Kits**

| Assembly   | Splice Kit Contents  |   |  |  |   | Order Separately (Refer to pg 25)   |  |  |
|--|--|---|--|--|---|---|--|--|
|  |  T-Body |  Insulating Plug w/Cap |  Insulating Plug w/Cap and Stud |  Connecting Plug w/Stud |  Loadbreak Reducing Tap Plug (Includes STUD-T) |  Cable Adapter |  Unthreaded Compression Connector |  Threaded Coppertop Connector |
|  Deadend              | 1  | 1   | 1  | -  | -   | 1   | 1  | -  |
|  2-Way Splice         | 2  | 1   | 1  | 1  | -   | 2   | 2  | -  |
|  3-Way Splice         | 3  | 1   | 1  | 2  | -   | 3   | 3  | -  |
|  4-Way Splice         | 4  | 1   | 1  | 3  | -   | 4   | 4  | -  |
|  T-OP II Deadend      | 1  | 1   | -  | -  | 1   | 1   | -  | 1  |
|  T-OP II 2-Way Splice | 2  | 1   | -  | 1  | 1   | 2   | 1  | 1  |
|  T-OP II 3-Way Splice | 3  | 1   | -  | 2  | 1   | 3   | 2  | 1  |
|  T-OP II 4-Way Splice | 4  | 1   | -  | 3  | 1   | 4   | 3  | 1  |

BR100003EN

- For an **all copper connector**, change digit six from a "0" to a "C".
- For a **splice with a single-piece** re-jacketing kit, insert a "S" or a **2-piece** re-jacketing kit, insert a "D" as the ninth character in the part number.
- For **individually packaged** product in a corrugated cardboard box, insert an "X" as the last character in the part number.
- To splice different sized cables, refer to transition splice information in catalog section CA650020EN.
- For **900 A rating** (copper components) replace the "A" with a "C".
- For T-bodies with **test points**, insert a "T" directly after the base part number.
- Studs are bagged and loose in kit. To have **studs permanently installed** at the factory, add a "P" after the test point designation (if applicable) or after the base part number.
- Installation requires a standard 5/16" hex key (HD625).
- To include **200 A loadbreak protective cap**, add a "C" as the last character in the part number.

# Underground surge arresters

Eaton provides shielded deadfront arrester protection with its Cooper Power series metal oxide varistor elbow (M.O.V.E.) and parking stand arresters used in pad-mounted transformer and entry cabinets, vaults, switching enclosures and other installations. These arresters are designed for use with 200 A loadbreak interfaces to limit overvoltages to acceptable levels, protect equipment and extend cable life.

## POSI-BREAK M.O.V.E. elbow arrester

The POSI-BREAK M.O.V.E. arrester provides the same safety benefits of the POSI-BREAK connector system with over-voltage protection. Eaton is the only manufacturer to offer a solution to the partial vacuum flashover in elbow arresters.

The POSI-BREAK M.O.V.E. arrester is available for 9-21 kV for 25 kV class interfaces.

## M.O.V.E. DirectConnect elbow arrester

M.O.V.E. DirectConnect elbow arresters are used on underground systems in pad-mounted transformer and entry cabinets, vaults, switching enclosures and other installations to provide shielded deadfront arrester protection. They are designed for use with 600 A, 35 kV Class deadbreak interfaces that conform to IEEE Std 386™ standard to limit overvoltages to acceptable levels, protect equipment and extend cable life.



### M.O.V.E. DirectConnect elbow arrester specification information

#### Design Tests


- IEEE Std 386™ standard, Separable Insulated Connector Systems
- IEEE Std C62.11 standard, Metal Oxide Surge Arresters for AC Power Circuits



DirectConnect elbow arrester.

**TABLE 1**  
Commonly Applied Voltage Ratings of M.O.V.E. and Parking Stand Arresters

| System Voltage (V rms) |                 | Commonly Applied Arrester Duty-cycle (MCOV) Voltage Rating (kV rms) on Distribution Systems |                               |  |
|------------------------|-----------------|---|-------------------------------|--|
| Nominal Voltage        | Maximum Voltage | 4-Wire Multigrounded Neutral Wye  | 3-Wire Low Impedance Grounded | Delta and 3-Wire High Impedance Grounded |
| 2400                   | 2540            | –   | –                             | 3 (2.55)                                 |
| 4160 Y/2400            | 4400 Y/2540     | 3 (2.55)  | 6 (5.1)                       | 6 (5.1)                                  |
| 4260                   | 4400            | –   | –                             | 6 (5.1)                                  |
| 4800                   | 5080            | –   | –                             | 6 (5.1)                                  |
| 6900                   | 7260            | –   | –                             | 9 (7.65)                                 |
| 8320 Y/4800            | 8800 Y/5080     | 6 (5.1)   | 9 (7.65)                      | –  |
| 12000 Y/6930           | 12700 Y/7330    | 9 (7.65)  | 12 (10.2)                     | –  |
| 12470 Y/7200           | 13200 Y/7620    | 9 (7.65) or 10 (8.4)  | 15 (12.7)                     | –  |
| 13200 Y/7620           | 13970 Y/8070    | 10 (8.4)  | 15 (12.7)                     | –  |
| 13800 Y/7970           | 14520 Y/8388    | 10 (8.4) and 12 (10.2)  | 15 (12.7)                     | –  |
| 13800                  | 14520           | –   | –                             | 18 (15.3)                                |
| 20780 Y/12000          | 22000 Y/12700   | 15 (12.7)   | 21 (17.0)                     | –  |
| 22860 Y/12000          | 22000 Y/12700   | 15 (12.7)   | 21 (17.0)                     | –  |
| 24940 Y/14400          | 26400 Y/15240   | 18 (15.3)   | 27 (22.0)                     | –  |
| 27600 Y/15935          | 29255 Y/16890   | 21 (17.0)   | –                             | –  |
| 34500 Y/19920          | 36510 Y/21080   | 27 (22.0) or 30 (24.4)  | –                             | –  |
| 46000 Y/26600          | 48300 Y/28000   | 36 (29.0)   | –                             | –  |



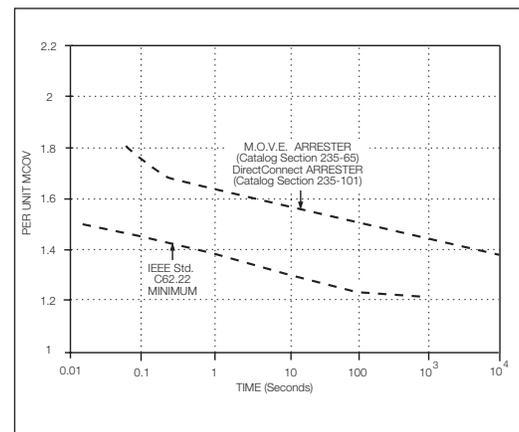


Temporary overvoltage curve. No prior duty at 85° C ambient.

The following notes apply to all part numbers on this page.

■ Digits 9 & 10 designate duty cycle voltage rating. For other protective characteristics, refer to Table 2 for M.O.V.E. and Parking Stand Arresters and Table 3 for DirectConnect elbow arresters.

■ Refer to page 17 for dimensional information or referenced catalog section.

| Catalog Section  | Description                              | kV Class                              | Base Part Number | MCOV (kV) |
|--|--|---------------------------------------|------------------|-----------|
|   | Metal Oxide Elbow (M.O.V.E.) Arrester    | 15 kV                                 | 3238018C03M      | 2.55      |
|  |  |                                       | 3238018C06M      | 5.1       |
|  |  |                                       | 3238018C09M      | 7.65      |
|  |  |                                       | 3238018C10M      | 8.4       |
|  |  |                                       | 3238018C12M      | 10.2      |
|  |  |                                       | 3238018C15M      | 12.7      |
|  |  | 3238018C18M                           | 15.3             |           |
|  |  | 25 kV                                 | 3238019C09M      | 7.65      |
|  |  |                                       | 3238019C10M      | 8.4       |
|  |  |                                       | 3238019C12M      | 10.2      |
|  |  |                                       | 3238019C15M      | 12.7      |
|  |  |                                       | 3238019C18M      | 15.3      |
|  |  |                                       | 3238019C21M      | 17.0      |
|  |  | 25 kV<br>POSI-BREAK<br>Elbow Arrester | PLEA225N03       | 2.55      |
|  |  |                                       | PLEA225N06       | 5.1       |
|  |  |                                       | PLEA225N09       | 7.65      |
|  |  |                                       | PLEA225N10       | 8.4       |
|  |  |                                       | PLEA225N12       | 10.2      |
|  |  |                                       | PLEA225N15       | 12.7      |
|  |  | PLEA225N18                            | 15.3             |           |
| PLEA225N21   | 17.0                                     |                                       |                  |           |
| 35 kV<br>(Interface 1A<br>Large Interface per<br>IEEE Std 386™ -2006<br>standard)  | 3238020C18M                              | 15.3                                  |                  |           |
|  | 3238020C21M                              | 17.0                                  |                  |           |
|  | 3238020C24M                              | 19.5                                  |                  |           |
|  | 3238020C27M                              | 22.0                                  |                  |           |
|  | 3238020C30M                              | 24.4                                  |                  |           |
|  | 3238020C33M                              | 27                                    |                  |           |
| 3238020C36M  | 29                                       |                                       |                  |           |
| CA235025EN   |  |                                       |                  |           |
|   | Metal Oxide (MOV) Parking Stand Arrester | 15 kV                                 | 3237686C03M      | 2.55      |
|  |  |                                       | 3237686C06M      | 5.1       |
|  |  |                                       | 3237686C09M      | 7.65      |
|  |  |                                       | 3237686C10M      | 8.4       |
|  |  |                                       | 3237686C12M      | 10.2      |
|  |  |                                       | 3237686C15M      | 12.7      |
|  |  | 3237686C18M                           | 15.3             |           |
|  |  | 25 kV                                 | 3237758C09M      | 7.65      |
|  |  |                                       | 3237758C10M      | 8.4       |
|  |  |                                       | 3237758C12M      | 10.2      |
|  |  |                                       | 3237758C15M      | 12.7      |
|  |  |                                       | 3237758C18M      | 15.3      |
| 3237758C21M  | 17.0                                     |                                       |                  |           |
| CA235027EN   |  |                                       |                  |           |
|  | M.O.V.E. DirectConnect Elbow Arrester    | 35 kV                                 | DCEA635M27       | 22.0      |
|  |  |                                       | DCEA635M30       | 24.4      |
|  |  |                                       | DCEA635M33       | 27.0      |
|  |  |                                       | DCEA635M36       | 29.0      |
|  |  |                                       | CA235026EN       |           |

**TABLE 2**  
M.O.V.E. and Parking Stand Arrester Protective Characteristics

| Duty Cycle Voltage Rating (kV) | MCOV (kV) | Equivalent Front-of-Wave (kV crest)* | Maximum Discharge Voltage (kV crest) 8/20 μs Current Wave |      |      |       |       |
|--------------------------------|-----------|--------------------------------------|---|------|------|-------|-------|
|                                |           |                                      | 1.5 kA  | 3 kA | 5 kA | 10 kA | 20 kA |
| 3                              | 2.55      | 11                                   | 9   | 9.7  | 10.7 | 11.4  | 13    |
| 6                              | 5.1       | 22                                   | 18.0  | 19.4 | 20.8 | 22.7  | 26    |
| 9                              | 7.65      | 31.7                                 | 26  | 28   | 30   | 32.8  | 37.4  |
| 10                             | 8.4       | 33                                   | 27  | 29.1 | 31.2 | 34.1  | 38.9  |
| 12                             | 10.2      | 41.5                                 | 33.9  | 36.6 | 39.2 | 42.9  | 48.9  |
| 15                             | 12.7      | 51.8                                 | 42.4  | 45.7 | 49   | 53.6  | 61.1  |
| 18                             | 15.3      | 62.2                                 | 50.9  | 54.9 | 58.8 | 64.3  | 73.4  |
| 21                             | 17.0      | 66                                   | 54.0  | 58.2 | 62.4 | 68.2  | 77.9  |
| 24                             | 19.5      | 77                                   | 63.0  | 67.9 | 72.8 | 79.6  | 90.8  |
| 27                             | 22.0      | 87.2                                 | 71.4  | 76.9 | 82.4 | 90.1  | 103   |
| 30                             | 24.4      | 97.1                                 | 79.5  | 85.7 | 91.8 | 100.0 | 115.0 |
| 33                             | 27        | 108                                  | 87.8  | 95.1 | 102  | 112   | 127   |
| 36                             | 29        | 116                                  | 95.3  | 103  | 110  | 120   | 137   |

\* Equivalent front-of-wave voltage is the expected discharge voltage of the arrester when tested with a 5 kA current surge cresting in 0.5 μs.

**TABLE 3**  
M.O.V.E. DirectConnect Elbow Arrester Electrical Ratings and Characteristics

| Duty Cycle Voltage Rating (kV) | MCOV (kV) | Front-of-Wave Protective Level* (kV crest) | Maximum Discharge Voltage 8/20 μs Current Wave (kV crest) |      |      |       |       |
|--------------------------------|-----------|--|---|------|------|-------|-------|
|                                |           |  | 1.5 kA  | 3 kA | 5 kA | 10 kA | 20 kA |
| 27                             | 22.0      | 105.0                                      | 75.0  | 82.0 | 87.4 | 96.2  | 110.0 |
| 30                             | 24.4      | 112.0                                      | 79.5  | 85.7 | 91.8 | 100.0 | 115.0 |
| 33                             | 27        | 108  | 87.8  | 95.1 | 102  | 112   | 127   |
| 36                             | 29        | 116  | 95.3  | 103  | 110  | 120   | 137   |

\* Equivalent front-of-wave voltage is the expected discharge voltage of the arrester when tested with a 5 kV current surge cresting in 0.5 μs.

# Tools & maintenance

Eaton's Cooper Power series Kearney operation offers a wide variety of Hi-Line™ tools and maintenance equipment including Insulated sticks, Fit-On™ tools, tree trimmers, fuse pullers, cover-up equipment, jumpering/grounding equipment, compression tools, cutters and accessories.

Kearney also offers a wide range of connectors. Products include:

- Aqua Seal™ and Airseal™ insulating and sealing material
- Compression Squeezon™ connectors, tee-taps, stirrups, terminals, grounding lugs, spacers
- Secondary terminal connectors, and a wide variety of sleeves



| O-Tool Dies                             |        | WH2, WH3, WH4, BH4, PH2 & PH13 Dies |               | PH4, PH15 & RH15 Dies |              |
|---|--------|-------------------------------------|---------------|-----------------------|--------------|
| Catalog Number                          |        | Catalog Number                      |               | Catalog Number        |              |
| 30554CPS                                | B      | 36457                               | D             | 100472CPS             | D            |
| 26994                                   | D      | 36459**                             | N             | 100473CPS             | N            |
| 48410                                   | J      | 36467*                              | O             | 100474                | U            |
| 40495CPS                                | K      | 36472                               | U             | 100057                | R            |
| 26993                                   | O      | 36474*                              | 15/16         | 100470CPS             | 1-2          |
| 30611CPS                                | P      | 36476*                              | 840           | 100471CPS             | 1-1/8-2      |
| 40493CPS                                | T      | 36478*                              | 781           | 100440CPS             | 1-5/16       |
| 30084                                   | 737    | 36480*                              | 737           | 100460CPS             | 1-1/2        |
| 30450                                   | 781    | 36482CPS*                           | 635           | 100459                | 1-5/8        |
| 30124                                   | 840    | 36484CPS*                           | 5/8-1         | 100075CPS             | 1-3/4        |
| 36181CPS                                | 3/16   | 36486CPS*                           | 19/32         | 100096CPS             | Adapter      |
| 30154                                   | 1/4    | 36488*                              | 9/16          | <b>PH25 DIES</b>      |              |
| 30043                                   | 5/16   | 36490CPS*                           | 1/2           | 100006-16             | 1- 1/8-1     |
| 30042                                   | 3/8    | 36494CPS*                           | 3/8           | 100006-7              | 727          |
| 30041                                   | 1/2    | 36496*                              | 5/16          | 100006-12             | 840          |
| 26958                                   | 9/16   | 36498*                              | 1/4           | 100006-15             | 1 (Hex)      |
| 30914                                   | 19/32  | 36828CPS*                           | P             | 100007-1              | 1 9/32 (Hex) |
| 26992CPS                                | 5/8-1  | 36830CPS                            | C             | 100007-3              | 1 1/2 (Hex)  |
| 40114CPS                                | 11/16  | 36832CPS*                           | B-K-T         | 100007-4              | 1 5/8 (Hex)  |
| <b>Non-Bow Dies</b>                     |        | 36834CPS*                           | 747           | 100007-6              | 1 3/4 (Hex)  |
| 100625CPS                               | 500    | 36836*                              | 572           | 100007-9              | 2 1/8 (Hex)  |
| 100600CPS                               | 510    | 36838*                              | 510           | 100007-23             | R            |
| 100613                                  | 620    | 40063*                              | 727           |                       |              |
| 100601                                  | 635    | 40151CPS*                           | 11/16         |                       |              |
| 100618CPS                               | 702    | 40517                               | 1 1/4 (Hex)   |                       |              |
| 100602                                  | 747    | 49435*                              | 3/4 (Hex)     |                       |              |
| 100609                                  | 845    | 49437*                              | 29/32 (Hex)   |                       |              |
| 100606                                  | 980    | 100370CPS                           | 15/16 (Hex)   |                       |              |
| <b>EEl Dies</b>                         |        | 100399                              | 1-2 (Hex)     |                       |              |
| 100603-7                                | 7A     | 100400                              | 1 1/8-2 (Hex) |                       |              |
| 100603-9                                | 9A     | 100433CPS                           | 1 5/16 (Hex)  |                       |              |
| 100603-11                               | 11A    | 100434CPS                           | 1 1/2 (Hex)   |                       |              |
| <b>Other Dies &amp; Accessories</b>     |        | 100455                              | 9/16 Wide     |                       |              |
| 30744                                   | BU-C   | 100456                              | 840 Wide      |                       |              |
| 49341                                   | Orange |                                     |               |                       |              |
| 36559                                   | Plum   |                                     |               |                       |              |
| <b>Wire Cutter Die for 2/0 ACSR Max</b> |        |                                     |               |                       |              |
| 30500CPS                                |        |                                     |               |                       |              |

\* These dies may be used with adapter #100096 in PH3, PH4 and PH14 tools.

\*\* For WH3 tool, use 36469-3

The following are Non Bow equivalents of standard dies:  
737→747, 840→845,  
1/2→500, 5/8-1→620

| Cases for O-Tools |             |                |              |
|-------------------|-------------|----------------|--------------|
| For Tool Model    | Description | Catalog Number | Net Wt. Each |
| O-60 Series       | Die Case    | 30642CPS       | 1 lb.        |

| Catalog Section | Description   | kV Class | Base Part Number | Notes   |
|-----------------|---|----------|------------------|---------|
| CA325006EN      |  TYPE "OS" TOOLS<br>5/8 Fixed Die  |          | OS50             |         |
|                 |  620 Fixed Die   |          | OS-620           |         |
| CA325006EN      |  TYPE O-62 TOOLS 5/8" FIXED NOSE DIE<br>17" Straight Handles –<br>Non-Insulated Head                             |          | O-62F            | 1, 4, 8 |
|                 |  21" Straight Handles –<br>Non-Insulated Head  |          | O-62-21F         | 2, 4, 8 |
|                 |  17" Bent Handles –<br>Non-Insulated Head  |          | O-62-50F         | 3, 4, 8 |
|                 |  TYPE O-63 TOOLS WITH FIXED "O" NOSE DIE<br>17" Straight Handles –<br>Non-Insulated Head                         |          | O-63F            | 4, 5, 8 |
| CA325006EN      |  21" Straight Handles –<br>Non-Insulated Head  |          | O-63-21F         | 2, 4, 8 |
|                 |  17" Bent Handles –<br>Non-Insulated Head  |          | O-63-50F         | 3, 4, 8 |
|                 |  TYPE O-620 TOOLS WITH FIXED 620 NOSE DIE<br>17" Straight Handles –<br>Non-Insulated Head                        |          | O-620F           | 4, 7, 8 |
| CA325006EN      |  21" Straight Handles –<br>Non-Insulated Head  |          | O-620-21F        | 2, 4, 8 |
|                 |  17" Bent Handles –<br>Non-Insulated Head  |          | O-620-50F        | 3, 4, 8 |
|                 |  TYPE O-65 TOOLS WITH FIXED 5/8" AND "D" DIE<br>17" Straight Handles –<br>Non-Insulated Head                     |          | O-65FB           | 8, 9    |
| CA325006EN      |  21" Straight Handles –<br>Non-Insulated Head  |          | O-65-21FB        | 2, 8    |
|                 |  17" Bent Handles –<br>Non-Insulated Head  |          | O-65-50FB        | 3, 8    |
|                 |  TYPE O-68 TOOLS WITH FIXED "O" AND "D" DIE<br>17" Straight Handles –<br>Non-Insulated Head                    |          | O-68FB           | 8, 10   |
| CA325006EN      |  21" Straight Handles –<br>Non-Insulated Head  |          | O-68-21FB        | 2, 8    |
|                 |  17" Bent Handles –<br>Non-Insulated Head  |          | O-68-50FB        | 3, 8    |
|                 |  PH13 SERIES 12-TON REMOTE HYDRAULIC TOOL<br>12 Ton, 4,000 PSI<br>Remote Hydraulic Tool<br>w/Case – 13" length |          | PH13-4           | 11      |

1. For an **insulated head**, insert a "-3" between the "2" and the "F".  
Example: 0-62-3F.
2. For an **insulated head**, replace the "1" with a "2".
3. For an **insulated head**, replace the "50" with a "53".
4. To include "D" insert die, add a "B" as the last character in the part number.
5. For an **insulated head**, insert a "-3" between the "3" and the "F".  
Example: 0-63-3F.
6. Consult customer service for availability.
7. For an **insulated head**, insert a "-3" between the "0" and the "F".  
Example: 0-620-3F.
8. Accepts Burndy® Type "W" dies.
9. For an **insulated head**, insert a "-3" between the "5" and the "F".  
Example: 0-65-3FB.
10. For an **insulated head**, insert a "-3" between the "8" and the "F".  
Example: 0-68-3FB.
11. For **tool without case**, insert a "K" as the first character in the part number.


| Catalog Section              | Description                | kV Class | Base Part Number                               | Notes |
|------------------------------|----------------------------|----------|--|-------|
| <b>Hand Operated Cutters</b> |                            |          |  |       |
|                              | General Purpose Center Cut |          | <b>0190FC</b><br><b>0113C</b> (Cutter Head)    |       |
|                              | Heavy-Duty                 |          | <b>0290MCX</b><br><b>0213CX</b> (Cutter Head)  |       |
|                              | Ratchet – Type Soft Cable  |          | <b>8690FSK</b><br><b>8613FSK</b> (Cutter Head) |       |
|                              | Ratchet – Type Hard Cable  |          | <b>8690FH</b><br><b>8613FH</b> (Cutter Head)   |       |
|                              | Ratchet – Type Guy Strand  |          | <b>8690CK</b><br><b>8613CK</b> (Cutter Head)   |       |
|                              | Ratchet – Type Wire Rope   |          | <b>8690TN</b><br><b>8613TN</b> (Cutter Head)   |       |
|                              | ACSR Wire Rope and Cable   |          | <b>0290FHJ</b>                                 |       |
|                              | Shear – Type Hand Operated |          | <b>0290FCS</b><br><b>0213CSS</b> (Cutter Head) |       |
|                              | Compact Electric Cable     |          | <b>0890CSJ</b>                                 |       |
| CA325006EN                   | Compact Ratcheting Cable   |          | <b>6990FHL</b>                                 |       |
| <b>CLAMPSTICKS</b>           |                            |          |  |       |
|                              | Clampstick                 |          | <b>See Table 1</b>                             |       |
|                              | Clampstick, Cam-EL™        |          | <b>See Table 1</b>                             |       |
|                              | Clampstick, Hinged         |          | <b>See Table 1</b>                             |       |
| CA325005EN                   | Clampstick Leverage Tool   |          | <b>CS125UFLTOOL</b>                            |       |

18" Fit-On Leverage tool provides mechanical advantage during loadbreak switching.

**Note:** Use external rod clampsticks only.



**TABLE 1. Clampstick Significant Digit Catalog Number System**

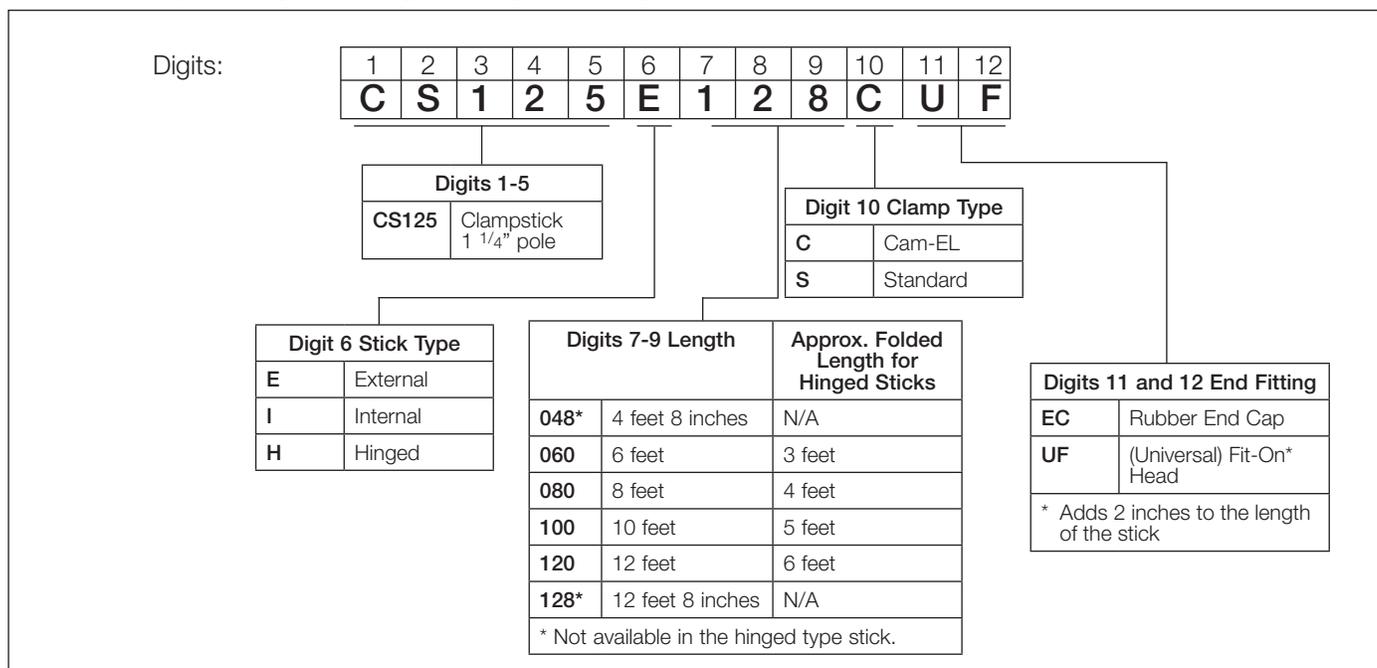

| Catalog Section   | Description  | kV Class | Base Part Number   | Notes |
|---|--|----------|--|-------|
| <b>Temporary Grounding Sets</b>   |  |          |  |       |
|   | Single-Phase<br>Three-Clamp Set<br>Pad-mounted                             |          | <b>133040</b><br>(1/0 Black Cable)   |       |
|   | Three-Phase<br>Four-Clamp Set<br>Pad-mounted                               |          | <b>133040-1</b><br>(1/0 Black Cable)<br><b>133040-2</b><br>(2/0 Black Cable) |       |
|   | Single Replacement<br>Clamp for 1/0 Cable                                  |          | <b>133045CPS</b>   |       |
| TD325001EN  | Single Replacement<br>Clamp for 2/0 Cable                                  |          | <b>133045Z20</b>   |       |
| <b>GROUNDING ELBOWS</b>   |  |          |  |       |
|  | Grounding<br>Elbow   | 15 kV    | <b>GE215-1Y06-1/0 Cable</b><br><b>GE215-2Y06-2/0 Cable</b>                   | 1     |
|   |  | 25 kV    | <b>GE225-1Y06-1/0 Cable</b><br><b>GE225-2Y06-2/0 Cable</b>                   | 1     |
|   |  | 35 kV    | <b>GE235-1Y06-1/0 Cable</b><br><b>GE235-2Y06-2/0 Cable</b>                   | 1     |
| TD325001EN  |  |          |  |       |
|  | Grounding Kit  | 15 kV    | <b>GE215-1Y06-K1</b>   | 2     |
|   |  |          | <b>GE215-2Y06-K1</b>   | 3     |
|   |  |          | <b>GE215-1Y06-K3</b>   | 4     |
|   |  |          | <b>GE215-2Y06-K3</b>   | 5     |
|   |  | 25 kV    | <b>GE225-1Y06-K1</b>   | 2     |
|   |  |          | <b>GE225-2Y06-K1</b>   | 3     |
| 35 kV   | <b>GE225-1Y06-K3</b>   | 4        |  |       |
|   | <b>GE225-2Y06-K3</b>   | 5        |  |       |
| TD325001EN  |  |          |  |       |
| <b>INSULATING AND SEALING MATERIALS</b>   |  |          |  |       |
| Aqua Seal   |  |          |  |       |
|   | 3 3/4" x 3 3/4" Pads – 25 per Box  |          | <b>104742-2</b>  | 6     |
|   | 3 3/4" x 10' Roll  |          | <b>104742</b>  | 6     |
| Air Seal  |  |          |  |       |
| 325-24  | 4" x 4" Pads – 25 per Box  |          | <b>18415-8</b>   | 6     |
|   | 4" x 10' Roll  |          | <b>18415-3</b>   | 6     |
| <b>KEARNALEX™ INHIBITOR</b>   |  |          |  |       |
| Specification 118 (Non-Petroleum Base)  |  |          |  |       |
|   | 4 oz. Plastic Dispenser Bottle   |          | <b>30584-25</b>  |       |
|   | 8 oz. Plastic Dispenser Bottle   |          | <b>30584-3</b>   |       |
|   | 8 oz. Plastic Dispenser Bottle – Gritless                                  |          | <b>30584-30</b>  |       |
| <b>CONDUCTOR CLEANING BRUSHES</b>   |  |          |  |       |
|   | Hand Element and Replacement Brush for<br>Fit-On Head – 477 kcmil ACSR MAX |          | <b>48900</b>   |       |
|   | Hand Element and Replacement Brush for<br>Fit-On Head– 954 kcmil ACSR MAX  |          | <b>48900-2</b>   |       |
|   | V-Brush with Handle and Guard  |          | <b>118004</b>  |       |
| 325-30  | Single Replacement Brush for V-Brush                                       |          | <b>19100</b>   |       |

1. Clamp and ferrule are not included with the grounding elbow.
2. Single kit with (1) elbow with 1/0 cable, (1) portable feedthru, (1) protective cap and (1) test probe in a carrying bag.
3. Single kit with (1) elbow with 2/0 cable, (1) portable feedthru, (1) protective cap and (1) test probe in a carrying bag.
4. Triple kit with (3) elbows with 1/0 cable, (3) portable feedthrus, (3) protective caps and (1) test probe in a carrying bag.
5. Triple kit with (3) elbows with 2/0 cable, (3) portable feedthrus, (3) protective caps and (1) test probe in a carrying bag.
6. Other material sizes available.

# Bushings

Eaton has a full line of one-piece bushings, bushing wells, bushing well inserts, and feed-thru inserts in its Cooper Power series products for installation on transformers and/or sectionalizing cabinets. The 15 kV and 25 kV class bushing inserts use a knurled piston providing maximum copper-to-copper current transfer and maximum thermal stability. After fault close operation, it locks the piston in the outward position, providing a visible indication against dangerous repetitive fault closure.

| Type Primary Bushings               | Current Rating (A) | Voltage Rating (kV) |
|-------------------------------------|--------------------|---------------------|
| Bushing wells                       | 200                | 15, 25, 35          |
| Integral loadbreak bushing 3Ø rated | 200                | 35                  |
| Deadbreak apparatus bushing         | 600                | 15/25, 35           |
| Deadbreak PUSH-OP Apparatus Bushing | 600                | 15/25, 35           |



## 200 A integral loadbreak bushing specification information


- 200 A, 35 kV three-phase rated integral loadbreak bushing meeting the requirements of IEEE Std 386™ standard No. 1A (large 35 kV class interface).
- Voltage and current ratings in accordance with IEEE Std 386™ standard.

## 600 A PUSH-OP deadbreak bushing specification information


- 600 A deadbreak apparatus bushing shall be compatible with 600 A PUSH-OP connectors.
- Complete with plated copper finger contacts to accept PUSH-OP probe, to achieve a non-bolted connection.
- Voltage and current ratings in accordance with IEEE Std 386™ standard.

## 200 A HTN Tri-Clamp bushing well specification information

- Molded-in semi-conductive shield.
- 35 kV, 150 kV BIL.
- HTN material.
- Removable stud shall have provisions for easy removal of broken parts from both the bushing well and insert.
- Voltage and current ratings in accordance with IEEE Std 386™ standard.

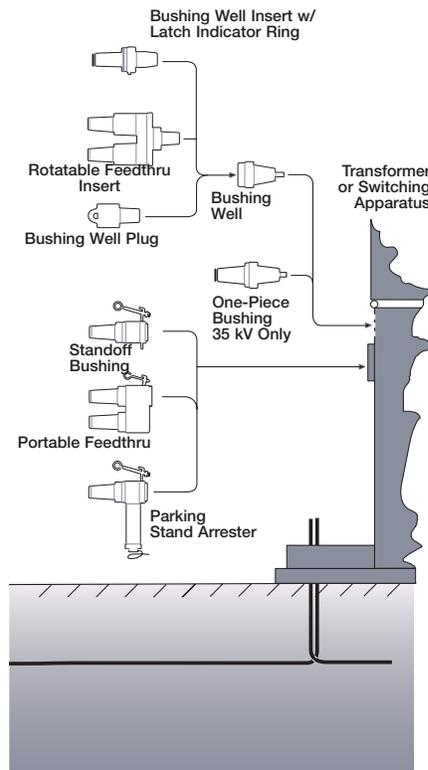

200 A Applications

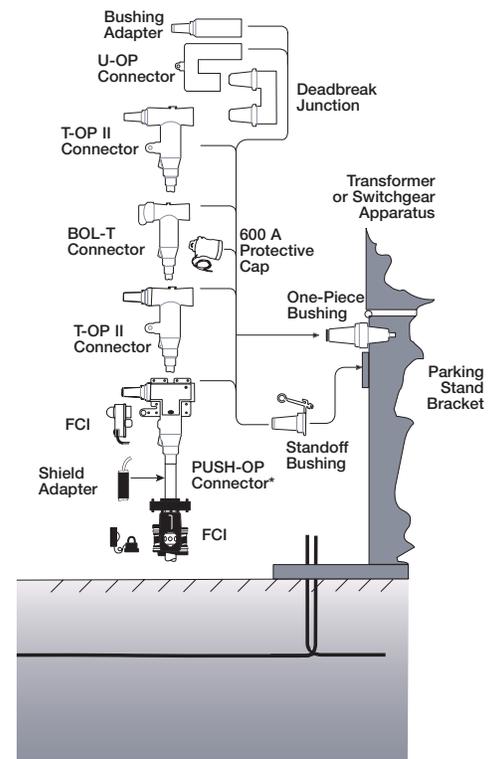

600 A Applications

| Catalog Section  | Description  | kV Class          | Base Part Number   | Notes              |
|--|--|-------------------|--|--------------------|
|  CA800016EN               | 200 A Plastic (HTN)<br>TRI-Clamp Bushing Well<br>2 9/16" Dia Hole Size | 15/25/35 kV       | <b>BW150F</b><br>(with fixed stud)<br><b>BW150R</b><br>(with removable stud)           | 2                  |
|  CA800014EN               | 200 A Plastic (HTN) Bushing<br>Well<br>2 9/16" Dia.Hole Size           | 15/25/28 kV       | <b>2638372C01</b><br>(with fixed stud)<br><b>2638372C02R</b><br>(with removable stud)  | 1, 2, 5<br>1, 2, 5 |
|  CA800015EN               | 200 A Epoxy Bushing Well<br>2 9/16" Dia.Hole Size                      | 15/25/28 kV       | <b>2603973B02T</b><br>(with fixed stud)<br><b>2603973B02R</b><br>(with removable stud) | 1, 2<br>1, 2       |
|  CA800021EN               | 200 A Three-Phase Integral<br>Loadbreak Bushing                        | 35 kV             | <b>2637024C01M</b><br>(Externally Clamped – 2 3/4")                                    | 3                  |
|                           | 600 A Deadbreak Bushing<br>(Externally Clamped without<br>Stud)        | 15/25 kV          | <b>2637019B02</b> (Aluminum)   | 3                  |
|  |  | 15/25 kV          | <b>2637019B04</b> (Copper)   | 3                  |
|  |  | 35 kV             | <b>DB635B150 (150 kV BIL)</b><br><b>DB635B200 (200 kV BIL)</b><br>(Aluminum) (2 9/16") | 3                  |
|  |  | 35 kV             | <b>DB935B150 (150 kV BIL)</b><br><b>DB935B200 (200 kV BIL)</b><br>(Copper) (2 9/16")   | 3                  |
| CA800025EN<br>CA800020EN   |  |                   |  |                    |
|  CA800022EN<br>CA800028EN | 600 A Deadbreak<br>PUSH-OP Bushing<br>(Externally Clamped)             | 15/25 kV<br>35 kV | <b>2637604C01</b> (2 9/16")<br><b>DB635B150P</b>                                       | 4<br>4             |
|                           | <b>3-STUD CLAMPS</b>   |                   |  |                    |
|  | 4,688 B.C. w/flange<br>4 Bail Tabs                                     | 15/25/35 kV       | <b>2085399A01</b><br><b>2085399A02</b> (Stainless Steel)                               |                    |
|                           | <b>4-STUD CLAMPS</b>   |                   |  |                    |
|  | 3.25 C-C   | 15/25/28 kV       | <b>2606821A01</b>  |                    |
|  | 3.25 C-C<br>2 Bail Tabs  | 15/25/28 kV       | <b>2606823A02</b>  |                    |
|  | 3.25 C-C<br>4 Bail Tabs  | 15/25/28 kV       | <b>2606823A04</b>  |                    |
|  | 3.90 C-C   | 35 kV             | <b>2603989B01</b>  |                    |
|  | 3.43 C-C (600 A)   | 15/25/35 kV       | <b>2637023B01</b>  |                    |
|  | 2 9/16" Dia. Hole Gasket   | 15/25/28/35 kV    | <b>0537980C22</b>  |                    |
|  | 2 9/16" Dia. Hole Gasket   | 15/25 kV          | <b>0537980C07</b>  |                    |
|  | 2 3/4" Dia. Hole Gasket  | 35 kV             | <b>0537980C12</b>  |                    |
|  | 2 9/16" Dia. Hole Gasket   | 15/25/35 kV       | <b>0537980C06</b>  |                    |
|  | Red Shipping Cap   | 15/25/35 kV       | <b>2638640C01</b>  |                    |
|  | Red Shipping Cap   | 35 kV             | <b>2606754A03</b>  |                    |
|  | Red Shipping Cap   | 15/25 kV          | <b>2637700B02</b>  |                    |
|  | Red Shipping Cap   | 35 kV             | <b>2610082P01</b>  |                    |
|  | Red Shipping Cap   | 35 kV             | <b>2610082P01</b>  |                    |
|  | Removable Stud (Well)<br>Replacement Kit                               | 15/25/28/35 kV    | <b>2639081B01B</b>   |                    |
|  | Removable Threaded Stud<br>(600 A Bushings)                            | 15/25 kV          | <b>STUD-A</b><br>(Aluminum)<br><b>STUD-C</b><br>(Copper)                               |                    |
|  |  | 35 kV             | <b>STUD635-A</b><br>(Aluminum)<br><b>STUD635-C</b><br>(Copper)                         |                    |
|  | Contact Tube Assembly  | 35 kV             | <b>2637407B03B</b>   |                    |
|  | Contact Tool Replacement<br>Tool                                       | 35 kV             | <b>2637585B01</b>  |                    |
|  | PUSH-OP Bail Bracket<br>Assembly                                       | 15/25/35 kV       | <b>2638772B03M</b>   | 6                  |
|  | PUSH-OP Bracket Alignment<br>Fixture                                   | 15/25/35 kV       | <b>2637904C01</b>  |                    |
|  | Grounding tab  | 15/25/35 kV       | <b>0739658A02</b>  |                    |

1. Clamp must be ordered separately.
2. Bushing includes gasket and shipping cap.
3. Clamp and gasket must be ordered separately.
4. Clamp, gasket and bracket assembly must be ordered separately.
5. For **35 kV (150 kV BIL)** add "S" to end of the part number.
6. Latch handle standard on left side. For **latch handle on right side**, change digit 10 from a "3" to a "5".

Eaton offers Cooper Power series fuses under multiple trade names: Cooper, Kearney, McGraw-Edison and Combined Technologies™. We have the broadest range of overcurrent protective devices to meet your application needs.

## Bay-O-Net fuse assembly

In the late 1960s, we introduced the Bay-O-Net assembly and links to the industry for pad-mounted transformer protection. The Bay-O-Net fuse has grown into the industry standard protection package for single- and three-phase transformers. The assembly combines the ease of hotstick operation with the safety of deadfront construction and is used with an isolation link to prevent line personnel from closing into a fault when replacing a blown Bay-O-Net link. Alternately, a back-up, current-limiting fuse can be used in place of the isolation link to increase interrupting ratings to 50 kA.



### Flapper™ valve Bay-O-Net assembly specification information

- Bay-O-Net assembly shall include a valve that will shut when the inner holder is removed from the housing and minimize oil from spilling out of the Bay-O-Net assembly.

## TransFusion™ coordination program

This free, web-based, easy-to-use coordination tool makes transformer protective device selection for pad-mounted transformers effortless. By simply inputting a few pieces of data and selecting the desired level of protection, you can quickly find the right Eaton product within its Cooper Power series fuse product line, whether its the ELSP fuse, Bay-O-Net fuse, or MagneX interrupter suitable for your application. The TransFusion coordination program provides you the flexibility of trying various combinations before deciding on the one that best fits your application needs. A simple click of the print button allows you to print your TCC curves and part numbers.

Go to this site for your coordination program  
[www.coopertransfusion.com](http://www.coopertransfusion.com).

**TABLE 1**  
**ELSP Fuse\* Combinations**

| Voltage (kV) | Current Rating (A) | ELSP Part Numbers | Description        |
|--------------|--------------------|-------------------|--------------------|
| 8.3          | 30                 | CBUC08030C100     | 8.3 kV 30 A        |
|              | 40                 | CBUC08040C100     | 8.3 kV 40 A        |
|              | 50                 | CBUC08050C100     | 8.3 kV 50 A        |
|              | 65                 | CBUC08065C100     | 8.3 kV 65 A        |
|              | 80                 | CBUC08080C100     | 8.3/9.9 kV 80 A    |
|              | 100                | CBUC08100C100     | 8.3/9.9 kV 100 A   |
|              | 125                | CBUC08125C100     | 8.3 kV 125 A       |
|              | 150                | CBUC08150D100     | 8.3 kV 150 A       |
|              | 165                | CBUC08165D100     | 8.3 kV 165 A       |
|              | 180                | CBUC08180D100     | 8.3 kV 180 A       |
| 9.9          | 250                | CBUC08250D100     | 8.3 kV 250 A       |
|              | 30                 | CBUC09030C100     | 9.9 kV 30 A        |
|              | 40                 | CBUC09040C100     | 9.9 kV 40 A        |
|              | 50                 | CBUC09050C100     | 9.9 kV 50 A        |
|              | 65                 | CBUC09065C100     | 9.9 kV 65 A        |
| 15.5         | 30                 | CBUC15030C100     | 15.5 kV 30 A       |
|              | 40                 | CBUC15040C100     | 15.5 kV 40 A       |
|              | 50                 | CBUC15050C100     | 15.5 kV 50 A       |
|              | 65                 | CBUC15065C100     | 15.5 kV 65 A       |
|              | 80                 | CBUC15080C100     | 15.5/17.2 kV 80 A  |
|              | 100                | CBUC15100C100     | 15.5/17.2 kV 100 A |
|              | 125                | CBUC15125C100     | 15.5/17.2 kV 125 A |
|              | 150                | CBUC15150D100     | 15.5 kV 150 A      |
|              | 165                | CBUC15165D100     | 15.5 kV 165 A      |
| 180          | CBUC15180D100      | 15.5 kV 180 A     |                    |
| 17.2         | 30                 | CBUC17030C100     | 17.2 kV 30 A       |
|              | 40                 | CBUC17040C100     | 17.2 kV 40 A       |
|              | 50                 | CBUC17050C100     | 17.2 kV 50 A       |
|              | 65                 | CBUC17065C100     | 17.2 kV 65 A       |
| 23           | 30                 | CBUC23030C100     | 23 kV 30 A         |
|              | 40                 | CBUC23040C100     | 23 kV 40 A         |
|              | 50                 | CBUC23050C100     | 23 kV 50 A         |
|              | 65                 | CBUC23065C100     | 23 kV 65 A         |
|              | 80                 | CBUC23080C100     | 23 kV 80 A         |
|              | 100                | CBUC23100C100     | 23 kV 100 A        |
|              | 125                | CBUC23125D100     | 23 kV 125 A        |
|              | 150                | CBUC23150D100     | 23 kV 150 A        |
|              | 165                | CBUC23165D100     | 23 kV 165 A        |
| 38           | 50                 | CBUC38050D100     | 38 kV 50 A         |
|              | 65                 | CBUC38065D100     | 38 kV 65 A         |
|              | 80                 | CBUC38080D100     | 38 kV 80 A         |
|              | 100                | CBUC38100D100     | 38 kV 100 A        |
|              | 120                | CBUC38120D100     | 38 kV 120 A        |
|              | 140                | CBUC38140D100     | 38 kV 140 A        |

\* Catalog CA132013EN provides detailed information for the ELSP current-limiting back-up fuse.

| Catalog Section   | Description  | kV Class              | Base Part Number      | Notes        |         |
|---|--|-----------------------|-----------------------|--------------|---------|
|    | <b>SIDE- AND COVER-MOUNTED BAY-O-NET FUSE ASSEMBLY</b> |                       |                       |              |         |
|   | Flapper Side Wall-Mount                                | 23 kV                 | 4000361C99FV          |              |         |
|   | Side Wall  |                       | 4000361C99MC          |              |         |
|   | w/o Flapper Valve                                      |                       |                       |              |         |
|   | Cover-Mount (Short)                                    |                       | 4001177B51MC          |              |         |
|   | Cover-Mount (Long)                                     |                       | 4001177B53MC          |              |         |
| CA132015EN  | Silver-plated  | 38 kV                 | 4038380B03M           |              |         |
| <b>CURRENT SENSING BAY-O-NET FUSE LINK</b>  |  |                       |                       |              |         |
|    | 6 A  |                       | 4000353C04            | 1, 3, 4      |         |
|   | 10 A   |                       | 4000353C06            | 1, 3, 4      |         |
|   | 15 A   |                       | 4000353C08            | 1, 3, 4      |         |
|   | 25 A   |                       | 4000353C10            | 1, 3, 4      |         |
|   | 40 A   |                       | 4000353C12            | 1, 3, 4      |         |
|   | 65 A   |                       | 4000353C14            | 1, 3, 4      |         |
|   | 100 A  |                       | 4000353C16            | 1, 3, 4      |         |
| CA132009EN  | 140 A  |                       | 4000353C17            | 1, 3, 4      |         |
| <b>DUAL SENSING BAY-O-NET FUSE LINK</b>   |  |                       |                       |              |         |
|    | 3 A  |                       | 4000358C03            | 1, 3, 4      |         |
|   | 8 A  |                       | 4000358C05            | 1, 3, 4      |         |
|   | 15 A   |                       | 4000358C08            | 1, 3, 4      |         |
|   | 25 A   |                       | 4000358C10            | 1, 3, 4      |         |
|   | 50 A   |                       | 4000358C12            | 1, 3, 4      |         |
|   | 65 A   |                       | 4000358C14            | 1, 3, 4      |         |
|   | 100 A  |                       | 4000358C16CB          | 1, 3, 4      |         |
|   | CA132010EN   | 140 A                 |                       | 4000358C18CB | 1, 3, 4 |
| <b>DUAL ELEMENT BAY-O-NET FUSE LINK</b>   |  |                       |                       |              |         |
|    | 5 A  |                       | 4038108C03            | 1, 3, 4      |         |
|   | 6 A  |                       | 4038108C04            | 1, 3, 4      |         |
|   | 8 A  |                       | 4038108C05            | 1, 3, 4      |         |
|   | 12 A   |                       | 4038108C06            | 1, 3, 4      |         |
|   | 15 A   |                       | 4038108C07            | 1, 3, 4      |         |
|   | 25 A   |                       | 4038108C09            | 1, 3, 4      |         |
|   | 40 A   |                       | 4038108C11            | 1, 3, 4      |         |
|   | 50 A   |                       | 4038108C12            | 1, 3, 4      |         |
|   | CA132011EN   | 65 A                  |                       | 4038108C14   | 1, 3, 4 |
|   | <b>HIGH AMPERE OVERLOAD BAY-O-NET FUSE LINK</b>        |                       |                       |              |         |
|  | 65 A   |                       | 4038361C03CB          | 2, 3, 4      |         |
|   | 100 A  |                       | 4038361C04CB          | 2, 3, 4      |         |
|   | 125 A  |                       | 4038361C05CB          | 2, 3, 4      |         |
| CA132007EN  | Shorting Bar (Solid Link)                              |                       | 4038361C10CB          | 2, 3, 4      |         |
| <b>BAY-O-NET FUSE LINK</b>  |  |                       |                       |              |         |
|  | 10 A   | 38 kV                 | 4000380C06CB          |              |         |
|   | 15 A   |                       | 4000380C08CB          |              |         |
|   | 25 A   |                       | 4000380C10CB          |              |         |
|   | 30 A   |                       | 4000380C11CB          |              |         |
|   | 40 A   |                       | 4000380C12CB          |              |         |
|   | CA132006EN   | 65 A                  |                       | 4000380C14CB |         |
| <b>ISOLATION LINK 23 KV (MAXIMUM)</b>   |  |                       |                       |              |         |
| CA132012EN  |  |                       | 3001861A_ _ _         | 3            |         |
| <b>ELSG FULL RANGE</b>  |  |                       |                       |              |         |
|  | 240-82   | Current-Limiting Fuse | 359_ _ _ _ M_ M       |              |         |
|   |  |                       | (See Table 2 Below)   |              |         |
| <b>ELSP BACKUP</b>  |  |                       |                       |              |         |
|  | CA132013EN   | Current-Limiting Fuse | CBUC_ _ _ _ _         |              |         |
|   |  |                       | (See Table 1 Page 46) |              |         |

1. Add suffix "B" to order individual fuse; add "M" to order bag of 50.
2. When ordering high ampere overload Bay-O-Net Fuse Link, a silver-plated Bay-O-Net Fuse Assembly, part number 4038804B03M, must be ordered.
3. To coordinate an isolation link with a Bay-O-Net Fuse when an ELSP Fuse is not used, see Catalog Section 240-47.
4. For recommended ELSP backup CLF ratings, see Catalog Section 240-98 or TransFusion Coordination Program.

# MagneX single-phase interrupter

Eaton offers a solution to the utility sector wanting to eliminate oil exposure in the field when operation occurs due to transformer overloads with its Cooper Power series MagneX™ single-phase interrupter. There is no need for replacement fuse links, resulting in economic value to the user. In addition, a MagneX interrupter in series with a back-up, current-limiting fuse offers additional protection.

**TABLE 1**  
Voltage Ratings and Characteristics

| Description                        | Rating    |
|------------------------------------|-----------|
| Impulse 1.2x50 Microsecond Wave    | 150 kV    |
| 60 Hz-1 Minute Voltage Withstand   | 50 kV     |
| Continuous Current Rating          | 42 A      |
| Switching Load Currents, 200 Times | 42 A      |
| Magnetizing Current Switching      | 200 Times |

Continuous current ratings and dielectric testing are in accordance with ANSI/IEEE Std C57.12™ standard. Switching and Fault Close IEEE Std C37.41™ standard. Overload Protection IEEE Std C57.41™ standard.


**TABLE 2**  
Interrupting Rating

| Voltage kV-LG | RMS Symmetric (A) | RMS Asymmetric (A) |
|---------------|-------------------|--------------------|
| 8.3           | 2800              | 4200               |
| 15.5          | 1500              | 2250               |
| 23.0          | 500               | 750                |



**TABLE 3**  
MagneX Significant Digit Catalog Number System

Example: To order a single-phase MagneX interrupter without indicator, single-phase trip, with float and E12 sensor, the catalog number would be **MX1BN1SYE12**. (Refer to Catalog Section 240-34.)

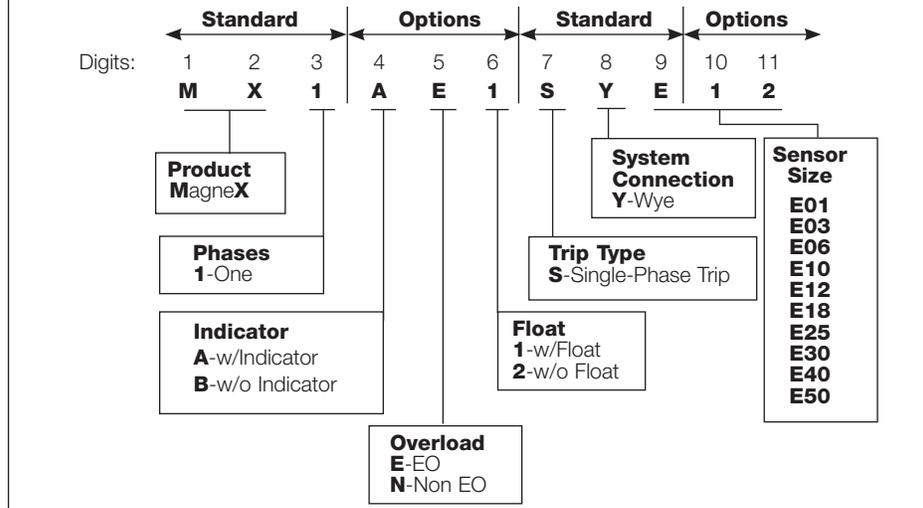

To select the correct isolation link, use Table 1 to cross reference the isolation link to the selected MagneX sensor. **An isolation link is required if the MagneX is not in series with a current-limiting fuse.**

**TABLE 4**  
Isolation Link - MagneX Correlation Chart

| Sensor Number | Isolation Link |
|---------------|----------------|
| E01           | 3637803B01     |
| E03           | 3637803B08     |
| E06           | 3637803B02     |
| E10           | 3637803B09     |
| E12           | 3637803B10     |
| E18           | 3637803B03     |
| E25           | 3637803B03     |
| E30           | 3637803B05     |
| E40           | 3637803B05     |
| E50           | 3637803B05     |

## Ordering information

Use Table 6 to determine the correct MagneX interrupter suffix (sensor number) for the application.

Use Table 3 to determine the catalog number.

When ordering a MagneX interrupter with a standard handle, a hardware kit must be ordered separately. Use Table 7 to determine the hardware kit catalog number.

To select the correct isolation link, use Table 4 to cross reference the isolation link to the selected MagneX interrupter.

**An isolation link is required if the MagneX is not in series with a current-limiting fuse.**

Example – MagneX interrupter with an emergency overload, indicator, and a float in series with an ELSP Current-Limiting Fuse for a single-phase, 7.2 kV phase-to-ground, 25 kVA transformer, specify:

- 1 – 40 A ELSP Fuse 3543040M61M
- 1 – MagneX interrupter MX1AE1SYE06
- 1 – Hardware Kit (with Emergency Overload, indicator, and no adaptor) 3638535A05

See the following Catalog Sections for further information:

ELSP Fuse Holder TD132003EN

ELSP Current-Limiting Backup Fuse CA132013EN

## MagneX with current-limiting fuse

To order a MagneX interrupter and current-limiting fuse combination, see Table 5.

**TABLE 5**  
Hardware Kits

| Description                             | Catalog Number |
|---|----------------|
| Without emergency overload              | 3638535A04     |
| With emergency overload                 | 3638535A05     |
| With adaptor without emergency overload | 3638535A07     |
| With adaptor with emergency overload    | 3638535A08     |
| Hotstick adaptor only                   | 3639585A01     |

## Using TCC Curves

To determine or confirm the MagneX interrupter will coordinate with upstream and down stream system requirements, use the time-current characteristic curves (See R240-91-310). For full size TCC curves, contact your Eaton representative.

**TABLE 6**  
**Single-Phase Transformer (Phase-to-Ground) Applications Correlation Chart**

| kVA/kV | Primary Voltage kV |      |     |     |     |      |      |      |       |       |      |      |      |       |       |
|--------|--------------------|------|-----|-----|-----|------|------|------|-------|-------|------|------|------|-------|-------|
|        | 2.4                | 4.16 | 4.8 | 6.9 | 7.2 | 7.62 | 7.97 | 8.32 | 12.00 | 12.47 | 13.2 | 13.8 | 14.4 | 16.34 | 19.92 |
| 10     | E06                | E06  | E03 | E03 | E03 | E03  | E03  | E03  | E01   | E01   | E01  | E01  | E01  | E01   | E01   |
| 15     | E10                | E06  | E06 | E03 | E03 | E03  | E03  | E03  | E03   | E03   | E03  | E03  | E03  | E01   | E01   |
| 25     | E18                | E10  | E10 | E06 | E06 | E06  | E06  | E06  | E03   | E03   | E03  | E03  | E03  | E03   | E03   |
| 37.5   | E25                | E18  | E12 | E10 | E10 | E10  | E10  | E10  | E06   | E06   | E06  | E06  | E06  | E03   | E03   |
| 50     | E30                | E18  | E18 | E12 | E12 | E12  | E12  | E10  | E06   | E06   | E06  | E06  | E06  | E06   | E06   |
| 75     | E50                | E30  | E25 | E18 | E18 | E18  | E18  | E18  | E10   | E10   | E10  | E10  | E10  | E06   | E06   |
| 100    | E50                | E40  | E30 | E25 | E18 | E18  | E18  | E18  | E12   | E12   | E12  | E12  | E12  | E10   | E10   |
| 167    | -                  | E50  | E50 | E40 | E40 | E40  | E40  | E30  | E18   | E18   | E18  | E18  | E18  | E18   | E12   |
| 250    | -                  | -    | -   | E50 | E50 | E50  | E50  | E50  | E30   | E30   | E30  | E30  | E30  | E25   | E18   |
| 333    | -                  | -    | -   | -   | -   | -    | -    | E50  | E40   | E40   | E40  | E40  | E40  | E30   | E25   |
| 500    | -                  | -    | -   | -   | -   | -    | -    | -    | E50   | E50   | E50  | E50  | E50  | E50   | E40   |

**Notes:**

Recommendations are based on:

- Minimum trip curves, and Maximum trip and clear curves, R240-91-310.
- Deration factor of 0.5% per °C above 25 °C.
- Allowable loading greater than 140% for four (4) hours in accordance with ANSI/IEEE Std C57.91.1981™ standard Guide for Loading Distribution Transformers, Table 6.

**TABLE 7**  
**Recommended MagneX Interrupter Sensor and ELSP Current-Limiting Fuse Combinations**

| Nominal Single Phase<br>(kV Phase-to-ground)                      | 8.3 kV     |            |            | 15.5 kV   |           | 23 kV     |
|---|------------|------------|------------|-----------|-----------|-----------|
|   | 2.4        | 4.16-4.8   | 6.9-8.0    | 12.0-14.4 | 16.34     | 19.92     |
| 10 kVA<br>ELSP Rating with Emergency Overload<br>MagneX Element   | 30<br>E06  | 30<br>E03  | 30<br>E03  | 30<br>E01 | 30<br>E01 | 30<br>E01 |
| 15 kVA<br>ELSP Rating with Emergency Overload<br>MagneX Element   | 50<br>E10  | 30<br>E06  | 30<br>E03  | 30<br>E03 | 30<br>E01 | 30<br>E01 |
| 25 kVA<br>ELSP Rating with Emergency Overload<br>MagneX Element   | 80<br>E18  | 50<br>E10  | 30<br>E06  | 30<br>E03 | 30<br>E03 | 30<br>E03 |
| 37.5 kVA<br>ELSP Rating with Emergency Overload<br>MagneX Element | 100<br>E18 | 80<br>E12  | 50<br>E10  | 30<br>E06 | 30<br>E03 | 30<br>E03 |
| 50 kVA<br>ELSP Rating with Emergency Overload<br>MagneX Element   | 150<br>E30 | 100<br>E18 | 50<br>E12  | 30<br>E06 | 30<br>E06 | 30<br>E03 |
| 75 kVA<br>ELSP Rating with Emergency Overload<br>MagneX Element   | 150<br>E40 | 125<br>E25 | 100<br>E18 | 40<br>E10 | 30<br>E06 | 30<br>E06 |
| 100 kVA<br>ELSP Rating with Emergency Overload<br>MagneX Element  | 250<br>E50 | 165<br>E40 | 100<br>E18 | 50<br>E12 | 40<br>E10 | 30<br>E06 |
| 167 kVA<br>ELSP Rating with Emergency Overload<br>MagneX Element  | -<br>-     | 180<br>E50 | 150<br>E40 | 80<br>E18 | 80<br>E18 | 50<br>E12 |

**Notes:**

Table shows minimum recommended ELSP Fuse ratings. Recommended ELSP Backup Fuse (described in Catalog Section CA132013EN) will coordinate with the MagneX interrupter and melt on internal transformer faults. The MagneX interrupter recommendations are based on:

- Minimum trip curves, and Maximum trip and clear curves R240-91-310.
- Deration factor of 0.5% per °C above 25°C.
- Allowable loading greater than 140% for four hours in accordance with IEEE Std C57.41™-1981 standard guide for Loading Distribution Transformers, Table 6.

# MagneX three-phase interrupter

The Three-Phase MagneX interrupter offers a solution to the utility wanting to eliminate oil exposure in the field when operation occurs due to transformer overloads. There is no need for replacement fuse links, resulting in economic value to the user. In addition, a MagneX interrupter in series with a back-up, current-limiting fuse offers additional protection.

### MagneX interrupter specification information

- Breaker shall be installed on the primary side of transformer.
- Breaker shall have the capability to energize and de-energize the 3Ø transformer by one hotstick operation.

**TABLE 1**  
Voltage Ratings and Characteristics

| Description                      | kV     | Rating |
|----------------------------------|--------|--------|
| Impulse 1.2x50 Microsecond Wave  | 150 kV | -      |
| 60 Hz-1 Minute Voltage Withstand | 50 kV  | -      |
| Continuous Current Rating        | -      | 42     |
| Switching Load Currents          | -      | 42     |

Continuous current ratings and dielectric testing are in accordance with IEEE Std C57.12™ standard.  
Switching and Fault Close IEEE Std C37.41™ standard.  
Overload Protection IEEE Std C57.41™ standard.

**TABLE 2**  
Interrupting Rating

| Voltage kV-LG (A) | RMS Symmetric (A) | RMS Asymmetric (A) |
|-------------------|-------------------|--------------------|
| 8.3               | 2800              | 4200               |
| 15.5              | 1500              | 2250               |
| 23.0              | 500               | 750                |

**TABLE 3**  
Hardware Kits


| Description   | Catalog Number |
|---|----------------|
| Standard Handle Kit & Hardware without Emergency Overload | 3638535A09     |
| Hotstick Adapter  | 3639585A01     |

## TransFusion™ coordination program

This free, web-based, easy-to-use coordination tool makes transformer protective device selection for pad-mounted transformers effortless. By simply inputting a few pieces of data and selecting the desired level of protection, you can quickly find the right Eaton product within its Cooper Power series fuse product line, whether its the ELSP fuse, Bay-O-Net fuse, or MagneX interrupter suitable for your application. The TransFusion coordination program provides you the flexibility of trying various combinations before deciding on the one that best fits your application needs. A simple click of the print button allows you to print your TCC curves and part numbers.

Go to this site for your coordination program  
[www.coopertransfusion.com](http://www.coopertransfusion.com).

**TABLE 4**  
MagneX Significant Digit Catalog Number System

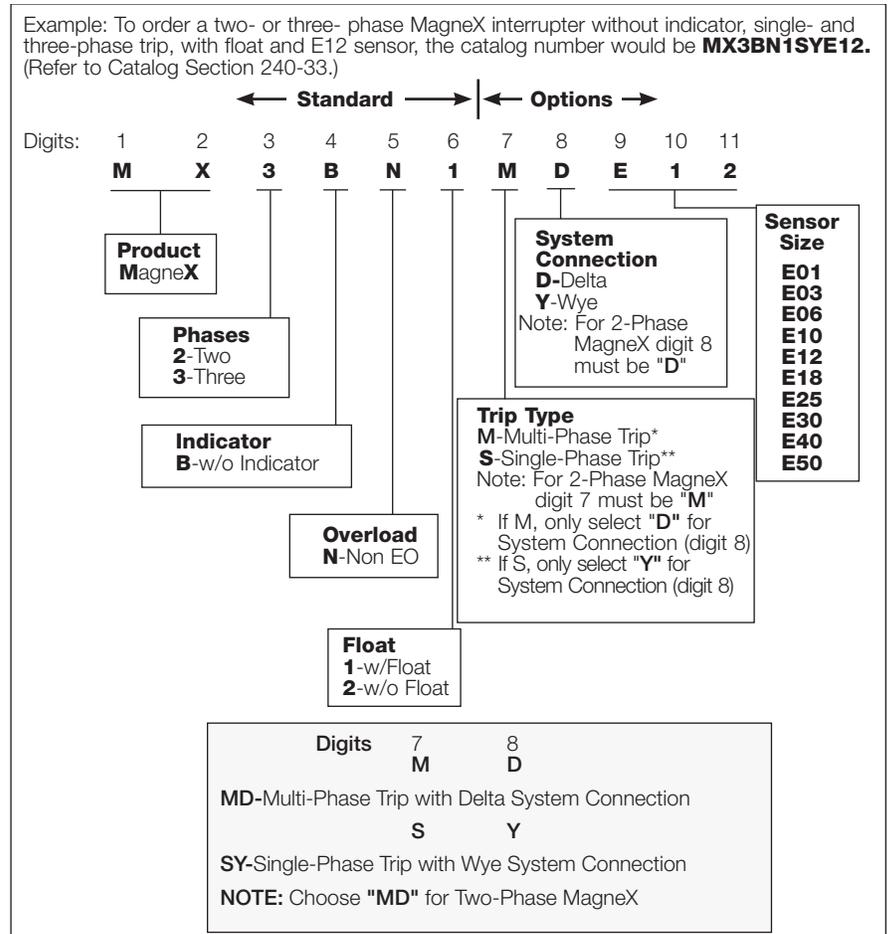

## ORDERING INFORMATION

Use Table 4 to determine the catalog number.

When ordering a MagneX interrupter with a standard handle, a hardware kit must be ordered separately. Use Table 3 to determine the hardware kit catalog number.

## Two- and three-phase MagneX interrupter operation


Figure 1 demonstrates the circuit diagram for the three-phase MagneX interrupter with single-phase sense, single-phase trip. The three-phase MagneX interrupter with single-phase sense, single-phase trip contains one sensors per phase. It reacts to fault currents on one phase and will cause tripping of that phase only. The MagneX interrupter then can be reset via the single operating handle by opening all three phases and closing all phases back in simultaneously.

Figure 2 demonstrates the circuit diagram for the three-phase MagneX interrupter with single-phase sense, three-phase trip, containing one sensor in two of the three phases. This product should only be applied to delta-connected primary transformers, where any fault current flow in one phase will also flow in an adjacent phase. It reacts to fault currents on one phase and will cause tripping of all three phases. The MagneX interrupter then can be reset via the single operating handle by opening all three phases and closing all phases back in simultaneously.


The three-phase MagneX interrupter with single-phase sense, three-phase trip should always be used in series with at least one backup current-limiting fuse in each of the three phases.

The backup current limiting fuses (see ELSP catalog section 240-98) provide high-current interruption capability.


Figure 3 shows the circuit diagram for the two-phase MagneX interrupter. The two-phase MagneX interrupter was specifically designed for single-phase, two bushing transformers, where disconnection of both bushings is desired following fault/overload detection. The MagneX interrupter will react to a fault sensed in either leg of the transformer primary. Interruption takes place in both interruption chambers simultaneously, disconnecting both legs of the transformer from the circuit.

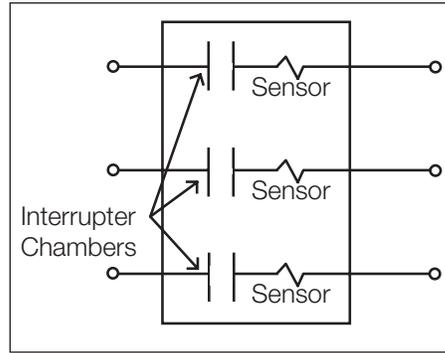

**Figure 1.**  
Three-phase MagneX interrupter, single-phase sense, single-phase trip.

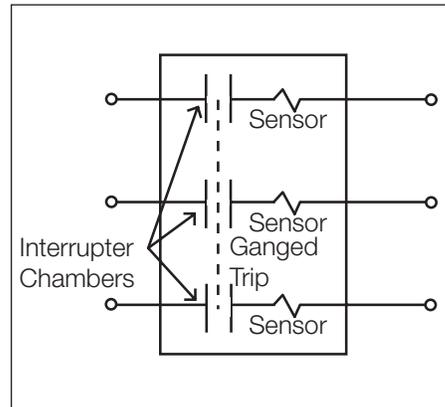

**Figure 2.**  
Three-phase MagneX interrupter, single-phase sense three-phase trip.

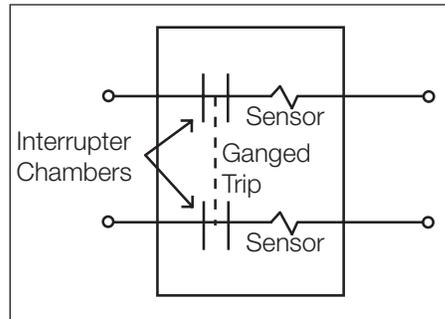

**Figure 3.**  
Two-phase MagneX interrupter.

# Faulted circuit indicators


Eaton offers a wide variety of faulted circuit indicators (FCIs) ranging from basic circuitry models in its Cooper Power series delayed reset style to the more sophisticated circuitry of the test point reset and electrostatic reset types. Eaton's Cooper Power series S.T.A.R.™ faulted circuit indicator product line offers six basic types of FCIs and each unit is tailored to be the most reliable for the intended application. Each type varies by reset method and the type of system it connects to.

Standard S.T.A.R. features include:

- **LO/Hi trip rating selection** – Innovative trip ratings greatly simplify FCI selection application
- **Current transformer sensing design** – For maximum trip accuracy and elimination of false tripping on adjacent cable events
- **Inrush restraint** – Eliminates false tripping by ignoring inrush currents caused by reclosing operations of protective devices on the system. A dead time of 200 ms will activate the inrush restraint feature.
- **Low-pass filter technology** – Prevents false tripping due to capacitive cable discharge
- **Design tested to IEEE Std 495™ standard and manufactured in ISO 9001 facility** – To ensure highest performance and quality


In addition to the above features, Eaton's Cooper Power series PATHFINDER™ FCIs include:

- **Variable trip technology** – Single trip rating for one-size-fits-all application
- **Auto adjusting trip technology** – Detects average load current over time above or below 75 A and adjusts trip rating to 200 A or 800 A automatically.
- **Self adjusting reset restraint** (test point mounted model) – “Learns” your system voltage and won't allow false resetting due to backfeed voltage
- **BLOC™** – Battery life optimization circuitry for maximizing battery life
- **Remote fiber optic cable** (test point mounted model) – Optional remote for convenient remote indication





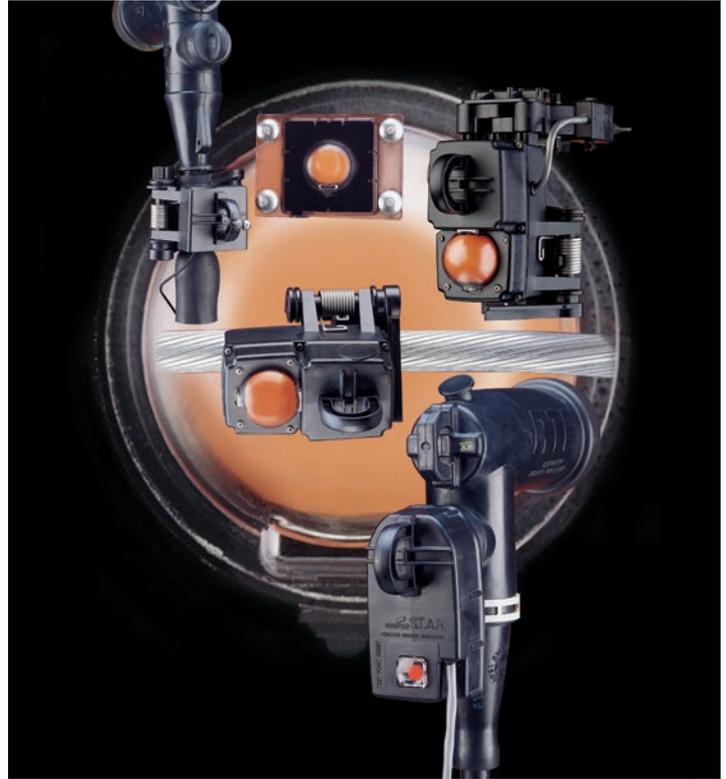


## PATHFINDER test point faulted circuit indicator specification information

- Fault indication on minimum 200 A di/dt within 100 ms (variable trip).
- Response time of 3 rms or less, for coordination with current-limiting fuses (fixed trip).
- Inrush restraint to prevent false tripping due to current inrush conditions.
- Low pass filter specifically tuned to prevent false tripping on high frequency transients, but to allow proper indication on systems using current-limiting fuses.
- Temperature compensation for accurate and reliable performance over a temperature range of -40 °C to +85 °C.
- Reset restraint to prevent false reset due to excessive voltage feedback levels up to 80% of nominal system voltage (STVT).
- Installation using single hotstick.

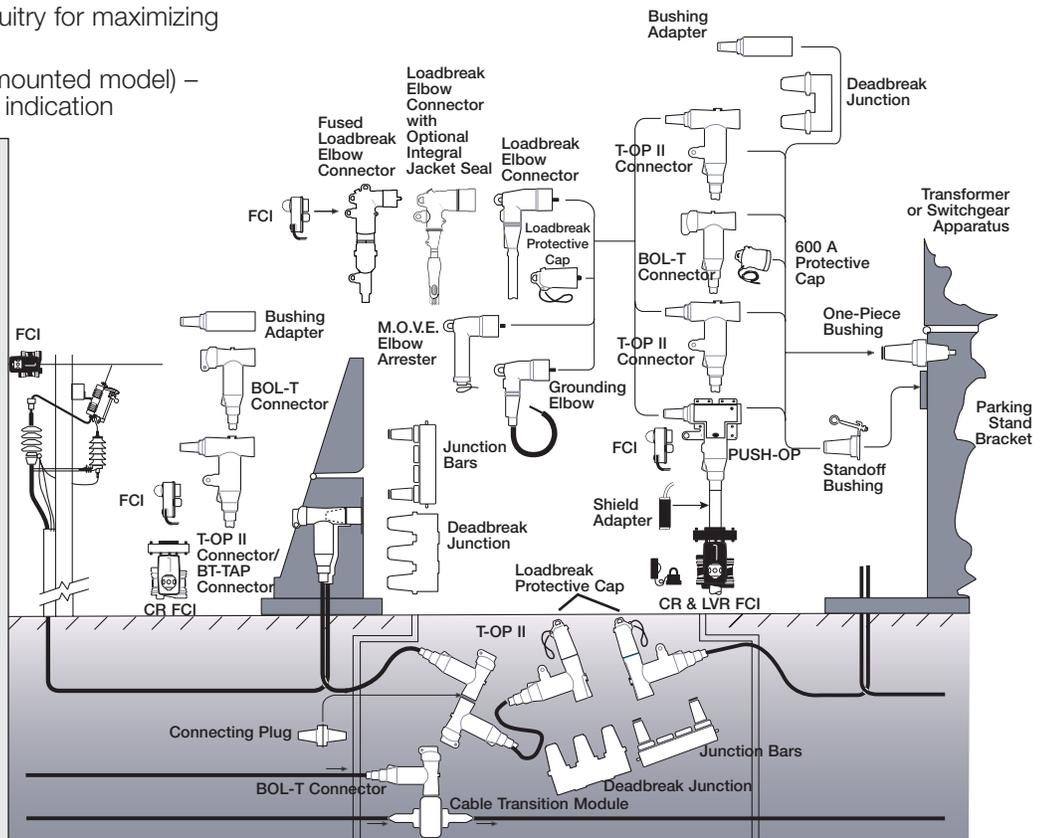

## For 15 kV, 25 kV and 35 kV Class


| Catalog Section   | Description   | Base Part Number | Notes |
|---|---|------------------|-------|
|    | <b>TEST POINT RESET</b>   |                  |       |
|   | Adapter Kit   | STAK             | 4     |
|   | High (HI)-Trip  | STHI             | 1     |
|   | High (HI)-Trip w/Aux. Contact                                     | STHIA            | 1     |
|   | High (HI)-Trip w/Adapter Kit                                      | STHIK            |       |
|   | Low (LO)-Trip   | STLO             | 1     |
|   | Low (LO)-Trip w/Aux. Contact                                      | STLOA            | 1     |
| CA320002EN  | Low (LO)-Trip w/Adapter Kit                                       | STLOK            |       |
|    | <b>PATHFINDER TEST POINT RESET</b>                                |                  |       |
|   | Variable Trip   | STVT             |       |
|   | Variable Trip w/Aux. Contact                                      | STVTA            |       |
|   | Fiber Optic Remote Cable (6 ft.)                                  | SFOC             | 2     |
|   | Reset Tool  | SMRT             | 4     |
|   | Adapter Kit   | STAK             | 4     |
|   | CA320003EN  |                  |       |
|    | <b>LOW VOLTAGE RESET</b>  |                  |       |
|   | High (HI)-Trip  | SLHI             | 3     |
|   | High (HI)-Trip w/Aux. Contact                                     | SLHIA            | 3     |
|   | Low (LO)-Trip   | SLLO             | 3     |
|   | Low (LO)-Trip w/Aux. Contact                                      | SLLOA            | 3     |
| CA320004EN  |   |                  |       |
|    | <b>ELECTROSTATIC RESET</b>  |                  |       |
|   | High (HI)-Trip  | SEHI             |       |
|   | High (HI) Trip with LED (Light Emitting Diode) Indication         | SEHIL            |       |
|   | Low (LO)-Trip   | SELO             |       |
|   | Low (LO) Trip with LED (Light Emitting Diode) Indication          | SELOL            |       |
| CA320005EN  |   |                  |       |
|   | <b>CURRENT RESET</b>  |                  |       |
|   | High (HI)-Trip  | SCHI             | 1     |
|   | Low (LO)-Trip   | SCLO             | 1     |
|   | High (HI) Trip with Auxiliary Contacts                            | SCHIA            | 1     |
|   | Low (LO) Trip with Auxiliary Contacts                             | SCLOA            | 1     |
| CA320008EN  |   |                  |       |
|  | <b>PATHFINDER CURRENT RESET</b>                                   |                  |       |
|   | Variable Trip   | SCVT             | 1     |
| CA320009EN  |   |                  |       |
|  | <b>TEST POINT HOT LINE INDICATOR</b>                              |                  |       |
|   | Hot Line Indicator  | STHL             |       |
|   | Adapter Kit   | STAK             | 4     |
| CA320010EN  |   |                  |       |
|  | <b>PROGRAMMABLE DELAYED RESET</b>                                 |                  |       |
|   | Auto Adjusting Trip, Programmable Reset<br>2, 4, 8, 24-Hour Reset | SDOH             |       |
|   | Reset Tool  | SMRT             | 4     |
| CA320011EN  |   |                  |       |

### Notes:

- To add remote **FISHEYE™** display add an "R" as the last character in the part number, or a "S" for the small remote display.
- SFOC (Star Fiber Optic Cable) standard length is 6 ft. add "09F" for 9 ft. fiber optic display, "12" for 12 ft., "25" for 25 ft.
- To add **universal power supply** (120, 208 or 277 VAC power connection), add a "U" as the last character in the part number.
- Accessories to be ordered separately.

# Faulted circuit indicators

| Type Description           | Typical System Application | Physical Mounting Location   | Voltage/Current Requirements                           |
|----------------------------|----------------------------|--|--|
| Test Point Reset           | Underground                | On the test point of the connector   | Min. 5 kV L-G (2.4 kV for Pathfinder)                  |
| Low-Voltage Reset          | Underground                | On the URD shielded cable below the connector  | A secondary voltage source (min. 105 volts)            |
| Electrostatic Reset        | Overhead                   | On bare or insulated non-shielded cable  | Min. 6.9 kV L-G  |
| Programmable Delayed Reset | Overhead                   | On overhead bare or insulated non-shielded cable   | None (Lithium battery powered with programmable reset) |
| Current Reset              | Underground and Overhead   | On the URD shielded cable below the connector and on overhead bare or insulated non-shielded cable | Min. 2.4 A continuous                                  |

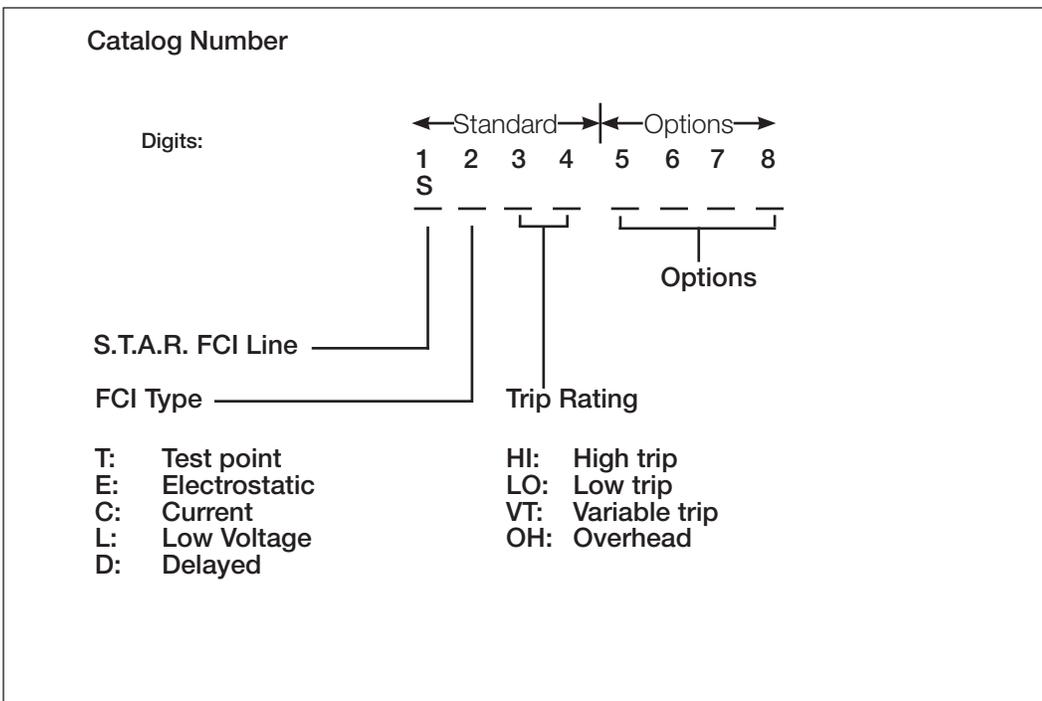

## S.T.A.R. faulted circuit indicators features

|                           | Model/Type                          | Test Point Reset | PATHFINDER Test Point | Low Voltage Reset | Electrostatic Reset | Programmable Delayed Reset | Current Reset | PATHFINDER Current Reset |
|---------------------------|-------------------------------------|------------------|-----------------------|-------------------|---------------------|----------------------------|---------------|--------------------------|
|                           | Base Part Numbers                   | STLO<br>STHI     | STVT                  | SLLO<br>SLHI      | SELO<br>SEHI        | SDOH                       | SCLO<br>SCHI  | SCVT                     |
|                           | Catalog Section                     | CA320002EN       | CA320003EN            | CA320004EN        | CA320005EN          | CA320011EN                 | CA320008EN    | CA320009EN               |
| <b>Application</b>        | Overhead                            |                  |                       |                   | •                   | •                          | •             | •                        |
|                           | Underground/Pad-mounted             | •                | •                     | •                 |                     |                            | •             | •                        |
| <b>Trip Rating</b>        | High/Low Trip Rating                | •                |                       | •                 | •                   |                            | •             |                          |
|                           | Variable Trip Rating (PATHFINDER™)  |                  | •                     |                   |                     |                            |               | •                        |
|                           | Auto Adjusting Trip                 |                  |                       |                   |                     | •                          |               |                          |
| <b>Standard Features</b>  | Inrush Restraint                    | •                | •                     | •                 | •                   | •                          | •             | •                        |
|                           | Temperature Compensation            | •                | •                     | •                 | •                   |                            |               |                          |
|                           | Low Pass Filter                     | •                | •                     | •                 | •                   | •                          | •             | •                        |
|                           | Battery Life Optimization Circuitry |                  | •                     |                   |                     | •                          |               |                          |
|                           | Reset Restraint                     |                  | •                     | •                 |                     |                            |               |                          |
|                           | Single Hot-Stick Installation       | •                | •                     | •                 | •                   | •                          | •             | •                        |
|                           | Automatic Reset                     | •                | •                     | •                 | •                   | •                          | •             | •                        |
|                           | Open-Core CT Design                 | •                | •                     | •                 | •                   | •                          |               |                          |
|                           | Closed-Core CT Design               |                  |                       |                   |                     |                            | •             | •                        |
| <b>Display Type</b>       | LED Display                         |                  | •                     |                   | Optional            | •                          |               |                          |
|                           | FISHEYE Display                     |                  |                       | •                 | •                   |                            | •             | •                        |
|                           | Flag Display                        | •                |                       |                   |                     |                            |               |                          |
| <b>Available Options</b>  | Auxiliary Contacts for SCADA        | •                | •                     | •                 |                     |                            |               | •                        |
|                           | Remote FISHEYE Display              | •                |                       | Standard          |                     |                            | •             | •                        |
|                           | Small Remote Display                | •                |                       |                   |                     |                            | •             | •                        |
|                           | Remote Fiber Optic Display          |                  | •                     |                   |                     |                            |               |                          |
|                           | Manual Testing/Reset Tool           |                  | •                     |                   |                     | •                          |               |                          |
|                           | Test Point Adapter Kit              | •                | •                     |                   |                     |                            |               |                          |
|                           | Universal Power Supply              |                  |                       | •                 |                     |                            |               |                          |
| <b>Power Requirements</b> | Battery Powered                     |                  | •                     |                   |                     | •                          |               |                          |
|                           | Line Powered                        | •                |                       |                   | •                   |                            | •             | •                        |
|                           | Secondary Source                    |                  |                       | •                 |                     |                            |               |                          |
|                           | Externally Replaceable Battery      |                  |                       |                   |                     |                            |               |                          |
| <b>Reset Requirements</b> | 2.4 kV L-G                          |                  | •                     |                   |                     |                            |               |                          |
|                           | 5 kV L-G                            | •                |                       |                   |                     |                            |               |                          |
|                           | 7.2 kV L-G                          |                  |                       |                   | •                   |                            |               |                          |
|                           | 90 VAC                              |                  |                       | •                 |                     |                            |               |                          |
|                           | 2.4 Amps Continuous                 |                  |                       |                   |                     |                            | •             |                          |
|                           | 2.0 Amps Continuous                 |                  |                       |                   |                     |                            |               | •                        |
|                           | Other                               |                  |                       |                   |                     | Programmable               |               |                          |

# Sectionalizing cabinets

Eaton's Cooper Power™ series versatile single- and three-phase SecTER™ sectionalizing terminals are designed as cable sectionalizing centers, or as permanent or temporary transformer pad covers.

The aesthetic low profile design provides unobtrusive installations for sectionalizing, tapping or terminating underground cable.

The top hinged diagonally cut removable cover and cabinet are designed for easy one man opening. Recessed door and low sill provides improved access to interior terminations. A door stop prevents the door from accidentally closing.

TGIC powder coating exceeds ANSI® coating requirements.

Standard Munsell Green 7GY3.29/1.5 twelve gauge mild steel designs with standard stainless steel hardware are available. For highly corrosive environments, stainless steel or aluminum are also available. Continuous seam welding ensures a sturdy smooth cabinet.

Multiple configurations are available. A parking lot design is available on most SecTER cabinets that provides multiple locations for parking standoffs, portable feedthrus, and other cable accessories. A welded-on ground nut is also provided for each phase.

Universal mounting plates are painted light grey for optimum visibility and accept 200 amp or 600/900 amp, two-, three-, or four-position junctions with u-straps and Eaton's Cooper Power series Cleer™ 600 A loadbreak connectors. Standard SecTER designs are available in a variety of sizes to suit typical applications and can also be ordered with junctions factory installed.



## Optional features

- 200 A loadbreak junctions installed
- 600 A deadbreak junctions installed
- Cleer 600 A loadbreak connectors installed
- Available in grey, tan, or brown colors
- Angled mounting plates
- 3/8" copper ground rod installed
- Mild steel base extensions
- Fiberglass ground sleeves

## Ordering information

1. Select size of SecTER cabinet from Table 1 based on junctions required. Refer to figures referenced (shown on pages 4 through 7) to confirm SecTER cabinet configuration meets requirements.
2. Build SecTER catalog number from Table 2 based on size selected from Table 1 and options required.
3. Fiberglass ground sleeves are ordered separately. If ground sleeve is required, select catalog number from Table 3 on page 61.
4. Mild steel base extensions are ordered separately. If base extension is required, select catalog number from Table 4 on page 61.

**Note:** Width and depth dimensions of ground sleeves or base extensions must be matched to SecTER cabinet selected.


"S" = Standard. Recommended for best balance of size (footprint) and operability (frontplate space and standoff pockets) for typical applications.  
 "O" = Optional. Also available if the application requires compromise in size and/or operability.

TABLE 1

| SecTER Cabinet Matrix |                 |       |       |                   |       |       |                           |       |       |                  | Standoff Pocket Placement |        | Figure |
|-----------------------|-----------------|-------|-------|-------------------|-------|-------|---------------------------|-------|-------|------------------|---------------------------|--------|--------|
| Single-Phase          |                 |       |       |                   |       |       |                           |       |       | Below            | In-Line with              |        |        |
| Dimensions            | 200 A, 15 kV    |       |       | 200 A, 25 & 28 kV |       |       | 200 A, 35 kV              |       |       | Mtg. Plates      | Mtg. Plates               |        |        |
|                       | 2-way           | 3-way | 4-way | 2-way             | 3-way | 4-way | 2-way                     | 3-way | 4-way |                  |                           |        |        |
| 30H X 24W X 22D       | O               | O     | O     | O                 | O     | O     |                           |       |       | yes              | no                        | 1      |        |
| 30H X 30W X 22D       | S               | S     | S     | S                 | S     | S     | S                         | S     | S     | yes              | yes                       | 2      |        |
| Single-Phase          |                 |       |       |                   |       |       |                           |       |       | Pocket Placement |                           | Figure |        |
| Dimensions            | 600 A, 15/25 kV |       |       | 600 A, 35 kV      |       |       | Cleer Loadbreak Connector |       |       | Below            | In-Line with              |        |        |
|                       | 2-way           | 3-way | 4-way | 2-way             | 3-way | 4-way | 15 kV                     | 25 kV | 28 kV | Mtg. Plates      | Mtg. Plates               |        |        |
| 30H X 24W X 22D       | O               | O     | O     |                   |       |       |                           |       |       | yes              | no                        | 1      |        |
| 30H X 30W X 22D       | S               | S     | S     | S                 | S     |       | S                         | S     | S     | yes              | yes                       | 2      |        |
| Three-Phase           |                 |       |       |                   |       |       |                           |       |       | Pocket Placement |                           | Figure |        |
| Dimensions            | 200 A, 15 kV    |       |       | 200 A, 25 & 28 kV |       |       | 200 A, 35 kV              |       |       | Below            | In-Line with              |        |        |
|                       | 2-way           | 3-way | 4-way | 2-way             | 3-way | 4-way | 2-way                     | 3-way | 4-way | Mtg. Plates      | Mtg. Plates               |        |        |
| 30H X 48W X 22D       | S               | O     |       | O                 | O     |       |                           |       |       | yes              | no                        | 3      |        |
| 30H X 66W X 22D (A)   | O               | S     |       | S                 | S     |       |                           |       |       | yes              | yes                       | 4      |        |
| 30H X 66W X 22D       | O               | O     | O     | O                 | O     | O     |                           |       |       | yes              | no                        | 5      |        |
| 30H X 84W X 22D       | O               | O     | S     | O                 | O     | S     | S                         | S     | O     | yes              | yes                       | 6      |        |
| 30H X 98W X 30D       | O               | O     | O     | O                 | O     | O     | O                         | O     | S     | yes              | yes                       | 7      |        |
| Three-Phase           |                 |       |       |                   |       |       |                           |       |       | Pocket Placement |                           | Figure |        |
| Dimensions            | 600 A, 15/25 kV |       |       | 600 A, 35 kV      |       |       | Cleer Loadbreak Connector |       |       | Below            | In-Line with              |        |        |
|                       | 2-way           | 3-way | 4-way | 2-way             | 3-way | 4-way | 15 kV                     | 25 kV | 28 kV | Mtg. Plates      | Mtg. Plates               |        |        |
| 30H X 48W X 22D       | O               | O     |       |                   |       |       |                           |       |       | yes              | no                        | 3      |        |
| 30H X 66W X 22D (A)   | S               | O     |       |                   |       |       |                           |       |       | yes              | yes                       | 4      |        |
| 30H X 66W X 22D       | O               | O     | O     |                   |       |       | S                         | S     | S     | yes              | no                        | 5      |        |
| 30H X 84W X 22D       | O               | S     | S     | S                 | S     |       | O                         | O     | O     | yes              | yes                       | 6      |        |
| 30H X 98W X 30D       | O               | O     | O     | O                 | O     | S     | O                         | O     | O     | yes              | yes                       | 7      |        |

TABLE 2

SecTER Catalog Number Selection

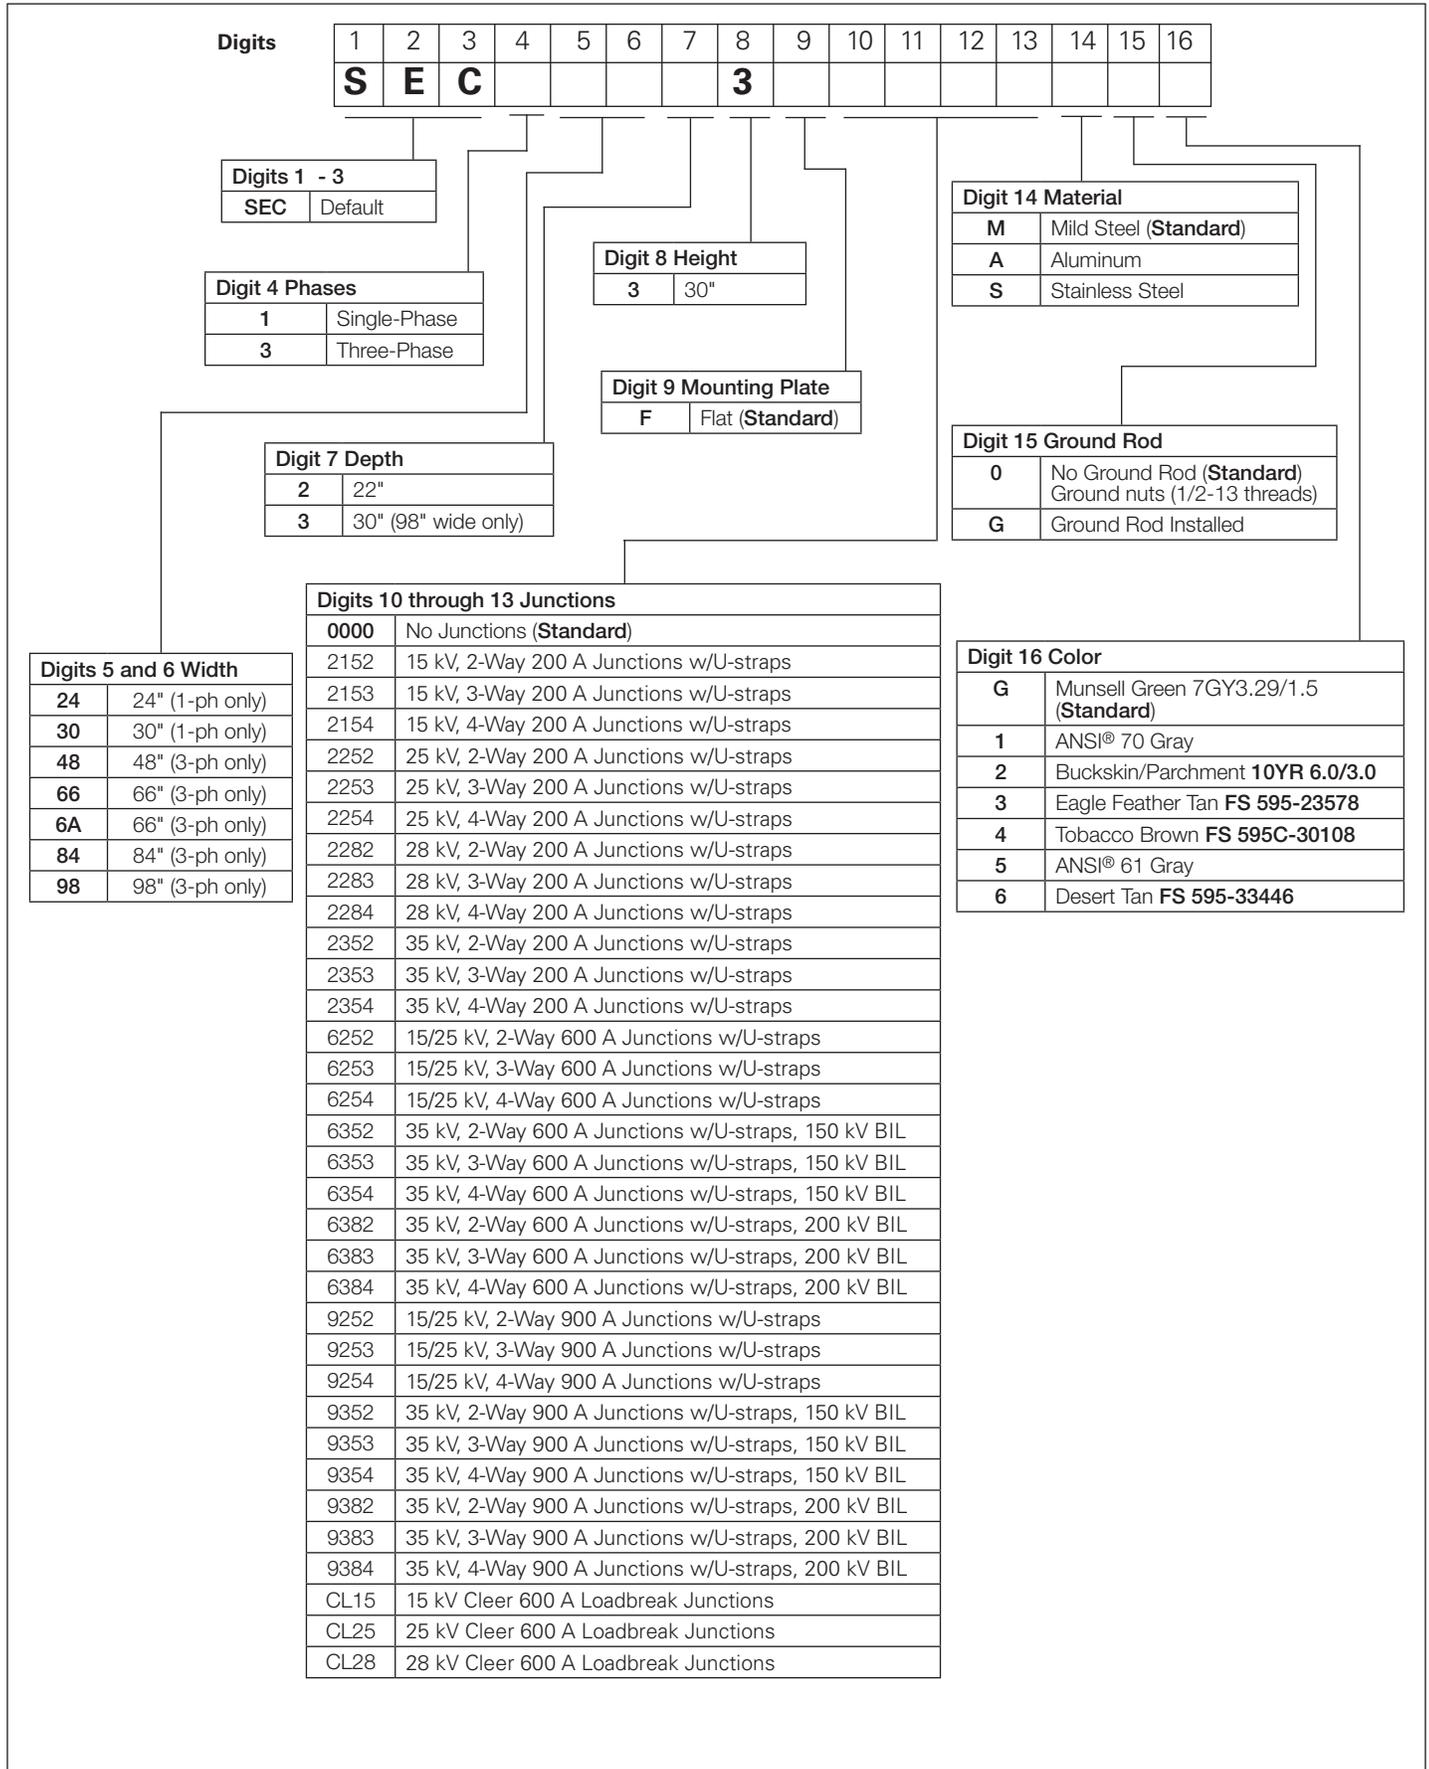

|               |          |          |          |   |   |   |   |          |   |    |    |    |    |    |    |    |
|---------------|----------|----------|----------|---|---|---|---|----------|---|----|----|----|----|----|----|----|
| <b>Digits</b> | 1        | 2        | 3        | 4 | 5 | 6 | 7 | 8        | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|               | <b>S</b> | <b>E</b> | <b>C</b> |   |   |   |   | <b>3</b> |   |    |    |    |    |    |    |    |

|                     |         |
|---------------------|---------|
| <b>Digits 1 - 3</b> |         |
| <b>SEC</b>          | Default |

|                       |              |
|-----------------------|--------------|
| <b>Digit 4 Phases</b> |              |
| <b>1</b>              | Single-Phase |
| <b>3</b>              | Three-Phase  |

|                       |     |
|-----------------------|-----|
| <b>Digit 8 Height</b> |     |
| <b>3</b>              | 30" |

|                               |                 |
|-------------------------------|-----------------|
| <b>Digit 9 Mounting Plate</b> |                 |
| <b>F</b>                      | Flat (Standard) |

|                          |                       |
|--------------------------|-----------------------|
| <b>Digit 14 Material</b> |                       |
| <b>M</b>                 | Mild Steel (Standard) |
| <b>A</b>                 | Aluminum              |
| <b>S</b>                 | Stainless Steel       |

|                      |                     |
|----------------------|---------------------|
| <b>Digit 7 Depth</b> |                     |
| <b>2</b>             | 22"                 |
| <b>3</b>             | 30" (98" wide only) |

|                            |  |
|----------------------------|--|
| <b>Digit 15 Ground Rod</b> |  |
| <b>0</b>                   | No Ground Rod (Standard)<br>Ground nuts (1/2-13 threads) |
| <b>G</b>                   | Ground Rod Installed                                     |

|                                       |   |
|---------------------------------------|---|
| <b>Digits 10 through 13 Junctions</b> |   |
| <b>0000</b>                           | No Junctions (Standard)                             |
| 2152                                  | 15 kV, 2-Way 200 A Junctions w/U-straps             |
| 2153                                  | 15 kV, 3-Way 200 A Junctions w/U-straps             |
| 2154                                  | 15 kV, 4-Way 200 A Junctions w/U-straps             |
| 2252                                  | 25 kV, 2-Way 200 A Junctions w/U-straps             |
| 2253                                  | 25 kV, 3-Way 200 A Junctions w/U-straps             |
| 2254                                  | 25 kV, 4-Way 200 A Junctions w/U-straps             |
| 2282                                  | 28 kV, 2-Way 200 A Junctions w/U-straps             |
| 2283                                  | 28 kV, 3-Way 200 A Junctions w/U-straps             |
| 2284                                  | 28 kV, 4-Way 200 A Junctions w/U-straps             |
| 2352                                  | 35 kV, 2-Way 200 A Junctions w/U-straps             |
| 2353                                  | 35 kV, 3-Way 200 A Junctions w/U-straps             |
| 2354                                  | 35 kV, 4-Way 200 A Junctions w/U-straps             |
| 6252                                  | 15/25 kV, 2-Way 600 A Junctions w/U-straps          |
| 6253                                  | 15/25 kV, 3-Way 600 A Junctions w/U-straps          |
| 6254                                  | 15/25 kV, 4-Way 600 A Junctions w/U-straps          |
| 6352                                  | 35 kV, 2-Way 600 A Junctions w/U-straps, 150 kV BIL |
| 6353                                  | 35 kV, 3-Way 600 A Junctions w/U-straps, 150 kV BIL |
| 6354                                  | 35 kV, 4-Way 600 A Junctions w/U-straps, 150 kV BIL |
| 6382                                  | 35 kV, 2-Way 600 A Junctions w/U-straps, 200 kV BIL |
| 6383                                  | 35 kV, 3-Way 600 A Junctions w/U-straps, 200 kV BIL |
| 6384                                  | 35 kV, 4-Way 600 A Junctions w/U-straps, 200 kV BIL |
| 9252                                  | 15/25 kV, 2-Way 900 A Junctions w/U-straps          |
| 9253                                  | 15/25 kV, 3-Way 900 A Junctions w/U-straps          |
| 9254                                  | 15/25 kV, 4-Way 900 A Junctions w/U-straps          |
| 9352                                  | 35 kV, 2-Way 900 A Junctions w/U-straps, 150 kV BIL |
| 9353                                  | 35 kV, 3-Way 900 A Junctions w/U-straps, 150 kV BIL |
| 9354                                  | 35 kV, 4-Way 900 A Junctions w/U-straps, 150 kV BIL |
| 9382                                  | 35 kV, 2-Way 900 A Junctions w/U-straps, 200 kV BIL |
| 9383                                  | 35 kV, 3-Way 900 A Junctions w/U-straps, 200 kV BIL |
| 9384                                  | 35 kV, 4-Way 900 A Junctions w/U-straps, 200 kV BIL |
| CL15                                  | 15 kV Cleer 600 A Loadbreak Junctions               |
| CL25                                  | 25 kV Cleer 600 A Loadbreak Junctions               |
| CL28                                  | 28 kV Cleer 600 A Loadbreak Junctions               |

|                             |                 |
|-----------------------------|-----------------|
| <b>Digits 5 and 6 Width</b> |                 |
| <b>24</b>                   | 24" (1-ph only) |
| <b>30</b>                   | 30" (1-ph only) |
| <b>48</b>                   | 48" (3-ph only) |
| <b>66</b>                   | 66" (3-ph only) |
| <b>6A</b>                   | 66" (3-ph only) |
| <b>84</b>                   | 84" (3-ph only) |
| <b>98</b>                   | 98" (3-ph only) |

|                       |  |
|-----------------------|--|
| <b>Digit 16 Color</b> |  |
| <b>G</b>              | Munsell Green 7GY3.29/1.5 (Standard)   |
| <b>1</b>              | ANSI® 70 Gray                          |
| <b>2</b>              | Buckskin/Parchment <b>10YR 6.0/3.0</b> |
| <b>3</b>              | Eagle Feather Tan <b>FS 595-23578</b>  |
| <b>4</b>              | Tobacco Brown <b>FS 595C-30108</b>     |
| <b>5</b>              | ANSI® 61 Gray                          |
| <b>6</b>              | Desert Tan <b>FS 595-33446</b>         |

# Sectionalizing cabinets

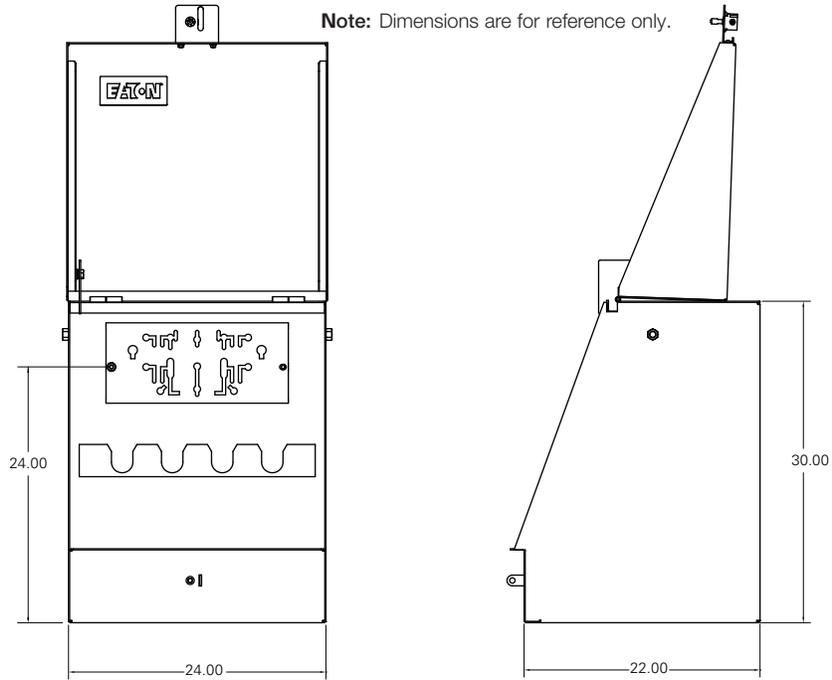


Figure 1. SEC12423F0000M0G SecTER cabinet shown.

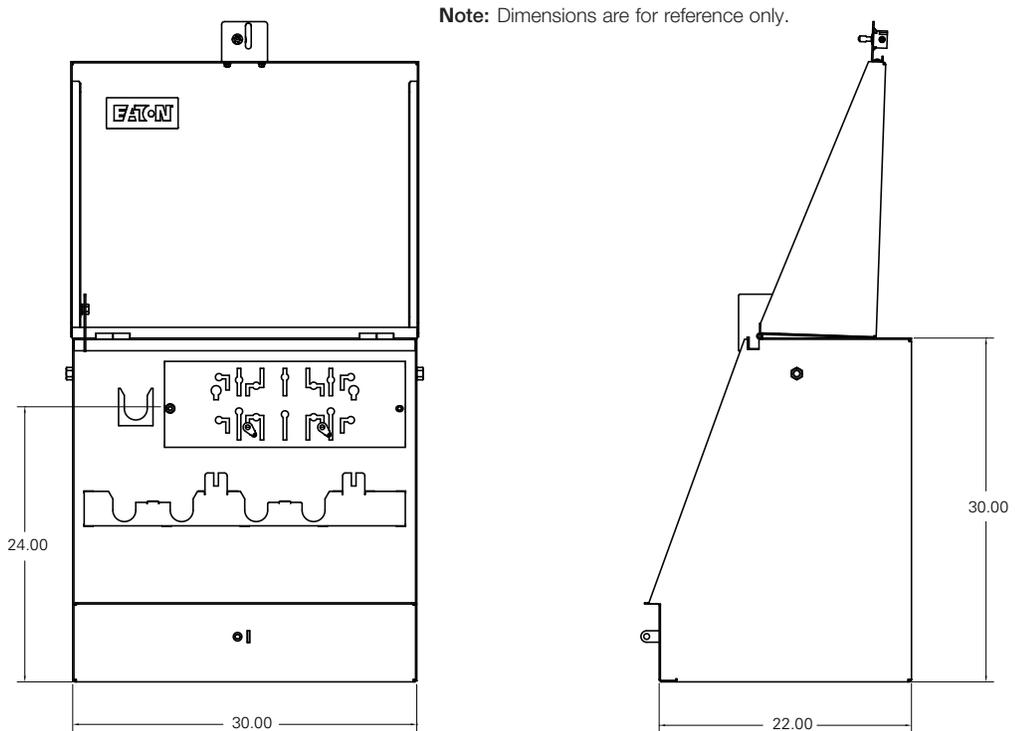


Figure 2. SEC13023F0000M0G SecTER cabinet shown.

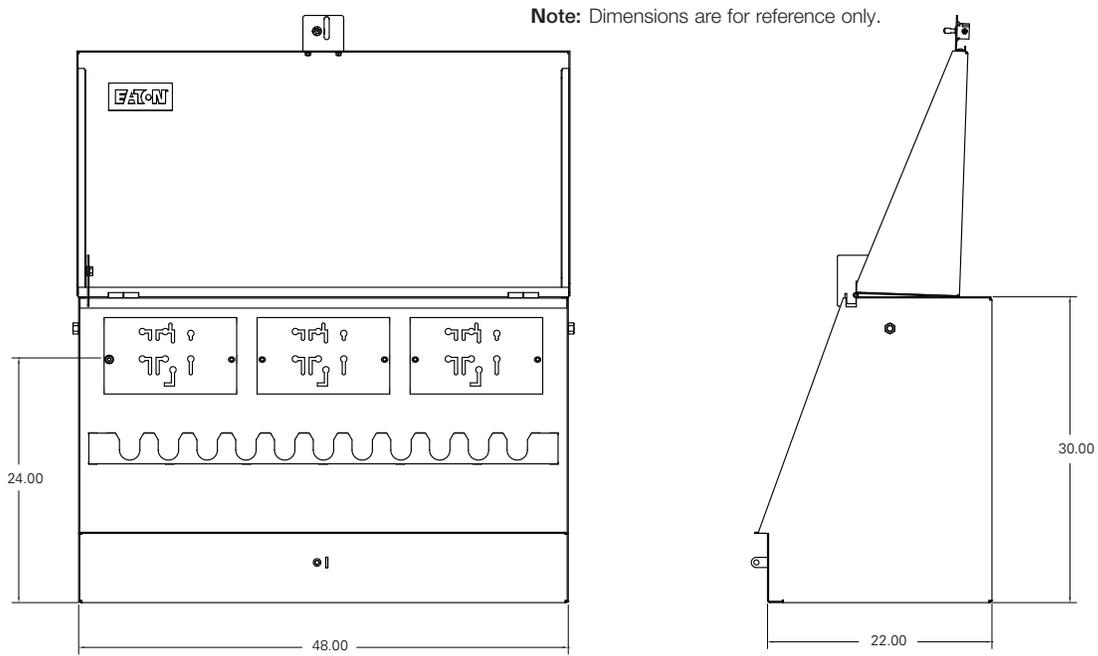


Figure 3. SEC34823F0000M0G SecTER cabinet shown.

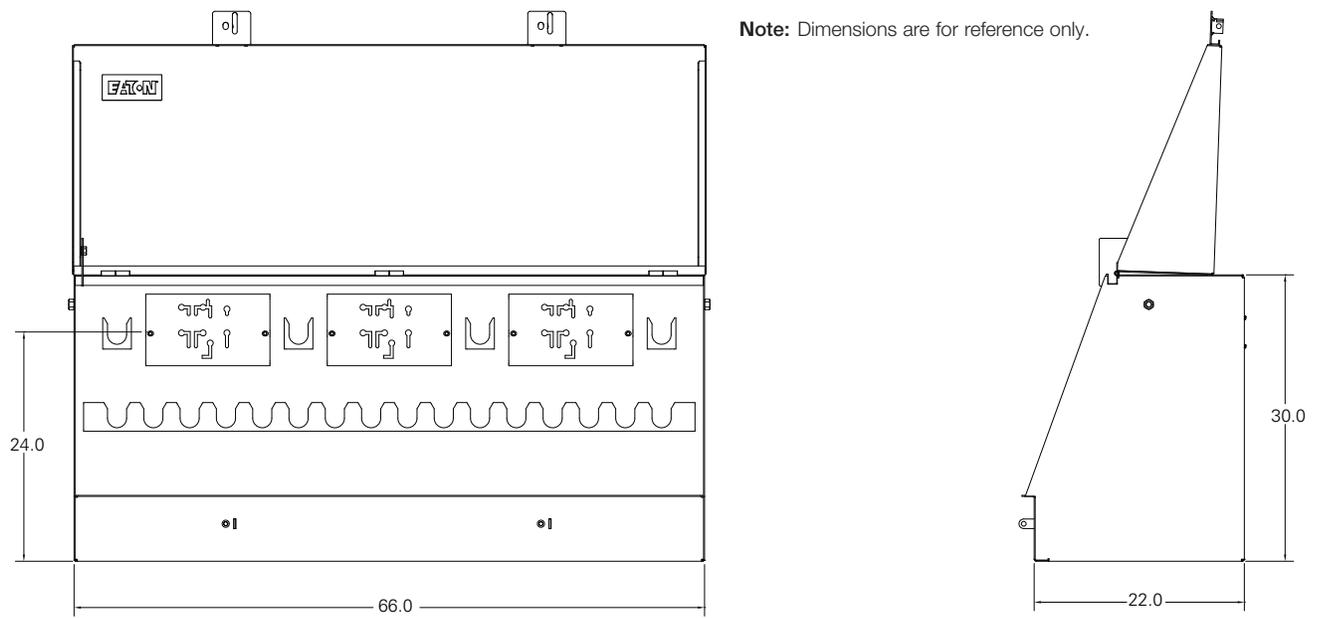


Figure 4. SEC36A23F0000M0G SecTER cabinet shown.

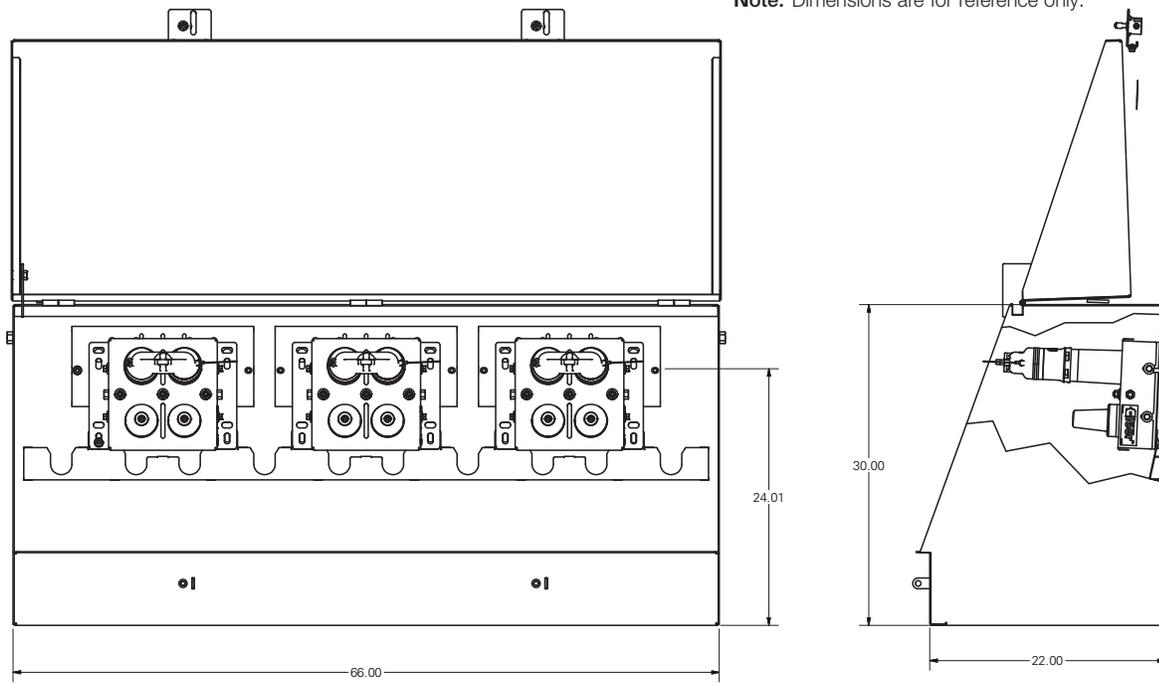


Figure 5. SEC36623F0000M0G SecTER cabinet shown with 600 A Clear loadbreak installed.

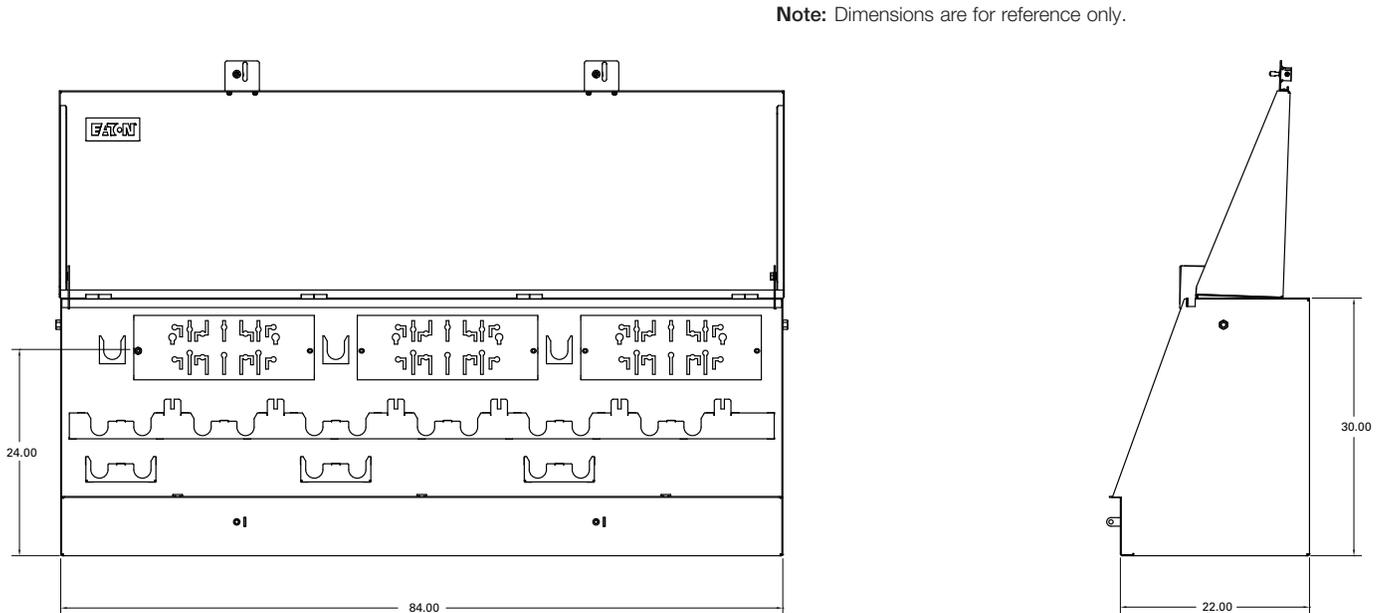


Figure 6. SEC38423F0000M0G SecTER cabinet shown.

Note: Dimensions are for reference only.

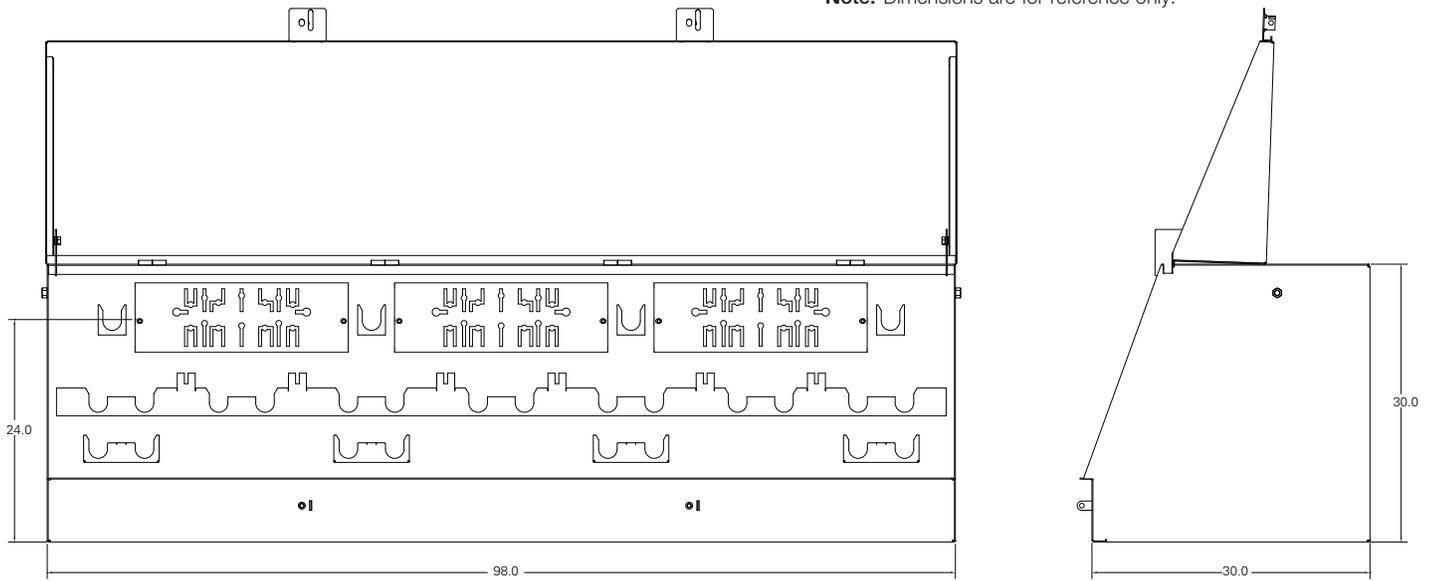


Figure 7. SEC39833F0000M0G SecTER cabinet shown.

### Fiberglass ground sleeves

Lightweight, corrosive free ground sleeves provide ground level mounting base and underground cable compartment, allowing unrestricted movement of terminations.

TABLE 3  
Fiberglass Ground Sleeve Dimensional Information in Inches

| 18" High       |             |       |       |
|----------------|-------------|-------|-------|
| Catalog Number | Height      | Width | Depth |
| GS182422       | 18.0        | 24.0  | 22.0  |
| GS183022       | 18.0        | 30.0  | 22.0  |
| GS184822       | 18.0        | 48.0  | 22.0  |
| GS186622       | 18.0        | 66.0  | 22.0  |
| GS188422       | 18.0        | 84.0  | 22.0  |
| GS189830       | 18.0        | 98.0  | 30.0  |
| 30" High       |             |       |       |
| Catalog Number | Description | Width | Depth |
| GS302422       |             | 24.0  | 22.0  |
| GS303022       |             | 30.0  | 22.0  |
| GS304822       |             | 48.0  | 22.0  |
| GS306622       |             | 66.0  | 22.0  |
| GS308422       |             | 84.0  | 22.0  |
| GS309830       |             | 98.0  | 30.0  |

### Steel base extensions

Mild steel base extensions provide pad mounted above ground cable compartment and can also be used with ground sleeves in applications where raising the SecTER cabinet to a greater height is required.

TABLE 4  
Steel Base Extension Dimensional Information

| 18" High       |        |       |       |
|----------------|--------|-------|-------|
| Catalog Number | Height | Width | Depth |
| SBE182422      | 18.0   | 24.0  | 22.0  |
| SBE183022      | 18.0   | 30.0  | 22.0  |
| SBE184822      | 18.0   | 48.0  | 22.0  |
| SBE186622      | 18.0   | 66.0  | 22.0  |
| SBE188422      | 18.0   | 84.0  | 22.0  |
| SBE189830      | 18.0   | 98.0  | 30.0  |
| 24" High       |        |       |       |
| Catalog Number | Height | Width | Depth |
| SBE242422      | 24.0   | 24.0  | 22.0  |
| SBE243022      | 24.0   | 30.0  | 22.0  |
| SBE244822      | 24.0   | 48.0  | 22.0  |
| SBE246622      | 24.0   | 66.0  | 22.0  |
| SBE248422      | 24.0   | 84.0  | 22.0  |
| SBE249830      | 24.0   | 98.0  | 30.0  |

Note: Width and depth dimensions of ground sleeves or base extensions must be matched to SecTER cabinet selected.

\*To specify stainless steel base extension add "SS" to the end of the catalog number

# Part number index

| Base Part Number | Page   | Base Part Number | Page           |
|------------------|------|------------------|------|------------------|------|------------------|--------|------------------|----------------|
| 0113C            | 42   | 48410            | 40   | 2606754A03       | 45   | 3593040M02M      | 47     | 4001177B53MC     | 47             |
| 0190FC           | 42   | 48900            | 43   | 2606821A01       | 45   | 3593050M02M      | 47     | BLRTP615         | 25, 26         |
| 0213CSS          | 42   | 48900-2          | 43   | 2606823A02       | 45   | 3593060M02M      | 47     | BLRTP625         | 26             |
| 0213CX           | 42   | 49341            | 40   | 2606823A04       | 45   | 3593065M01M      | 47     | BLRTP635         | 25, 26         |
| 0290FCS          | 42   | 49435            | 40   | 2610082P01       | 45   | 3593080M01M      | 47     | BRK469           | 35             |
| 0290FHJ          | 42   | 49437            | 40   | 2625439A16B      | 12   | 3593100M01M      | 47     | BT625            | 23, 24         |
| 0290MCX          | 42   | 100005           | 40   | 2625439A17B      | 12   | 3593125M01M      | 47     | BT635            | 23, 24         |
| 359_ _ _ _M_ _M  | 47   | 100006-4         | 40   | 2637019B02       | 45   | 3594004M83M      | 47     | BTP615           | 23, 24         |
| 0890CSJ          | 42   | 100006-7         | 40   | 2637019B04       | 45   | 3594008M83M      | 47     | BTP625           | 23, 24         |
| 6990FHL          | 42   | 100006-12        | 40   | 2637023B01       | 45   | 3594012M83M      | 47     | BTP635           | 23, 24         |
| 8613CK           | 42   | 100006-15        | 40   | 2637024C01M      | 45   | 3594015M83M      | 47     | BW150F           | 45             |
| 8613FH           | 42   | 100006-16        | 40   | 2637160B01BS     | 12   | 3594020M83M      | 47     | BW150R           | 45             |
| 8613FSK          | 42   | 100006-18        | 40   | 2637160B02BS     | 12   | 3594025M83M      | 47     | CA225A           | 12             |
| 8613TN           | 42   | 100007-1         | 40   | 2637160B03BS     | 12   | 3594030M83M      | 47     | CA225B           | 12             |
| 8690CK           | 42   | 100007-2         | 40   | 2637172B01BS     | 12   | 3594040M83M      | 47     | CA625            | 24, 25, 26, 27 |
| 8690FH           | 42   | 100007-3         | 40   | 2637172B02BS     | 12   | 3594050M83M      | 47     | CA635            | 24, 25, 26, 27 |
| 8690FSK          | 42   | 100007-4         | 40   | 2637172B03BS     | 12   | 3594060M83M      | 47     | CBUC             | 47             |
| 8690TN           | 42   | 100007-6         | 40   | 2637407B03B      | 45   | 3594065M83M      | 47     | CBUC08030C100    | 46             |
| 18415-3          | 43   | 100007-9         | 40   | 2637570A01B      | 12   | 3594080M83M      | 47     | CBUC08040C100    | 46             |
| 18415-8          | 43   | 100007-23        | 40   | 2637585B01       | 45   | 3594100M83M      | 47     | CBUC08050C100    | 46             |
| 19100            | 43   | 100057           | 40   | 2637604C01       | 45   | 3594120M83M      | 47     | CBUC08065C100    | 46             |
| 26958            | 40   | 100075           | 40   | 2637700B01       | 45   | 3594150M83M      | 47     | CBUC08080C100    | 46             |
| 26962-5          | 40   | 100096           | 40   | 2637700B02       | 45   | 3637803B01       | 48, 51 | CBUC08100C100    | 46             |
| 26992CPS         | 40   | 100370CPS        | 40   | 2637904C01       | 45   | 3637803B02       | 48, 51 | CBUC08125C100    | 46             |
| 26993            | 40   | 100399           | 40   | 2638370C01EX     | 14   | 3637803B03       | 48, 51 | CBUC08150D100    | 46             |
| 26994            | 40   | 100400           | 40   | 2638372C01       | 45   | 3637803B05       | 48, 51 | CBUC08165D100    | 46             |
| 30041            | 40   | 100433CPS        | 40   | 2638372C02R      | 45   | 3637803B08       | 48, 51 | CBUC08180D100    | 46             |
| 30042            | 40   | 100434CPS        | 40   | 2638409C06B      | 14   | 3637803B09       | 48, 51 | CBUC08250D100    | 46             |
| 30043            | 40   | 100440           | 40   | 2638640C01       | 45   | 3637803B10       | 48, 51 | CBUC09030C100    | 46             |
| 30084            | 40   | 100455           | 40   | 2638772B03M      | 45   | 3638535A04       | 48     | CBUC09040C100    | 46             |
| 30124            | 40   | 100456           | 40   | 2639081B01B      | 45   | 3638535A05       | 48     | CBUC09050C100    | 46             |
| 30154            | 40   | 100459           | 40   | 2639205B01       | 14   | 3638535A07       | 48     | CBUC09065C100    | 46             |
| 30450            | 40   | 100460           | 40   | 3001861A_ _ _    | 47   | 3638535A08       | 48     | CBUC15030C100    | 46             |
| 30500            | 40   | 100470           | 40   | 3237686C03M      | 39   | 3638535A09       | 50     | CBUC15040C100    | 46             |
| 30554CPS         | 40   | 100471           | 40   | 3237686C06M      | 39   | 3639585A01       | 48     | CBUC15050C100    | 46             |
| 30584-3          | 43   | 100472           | 40   | 3237686C09M      | 39   | 4000353C04       | 47     | CBUC15065C100    | 46             |
| 30584-25         | 43   | 100473           | 40   | 3237686C10M      | 39   | 4000353C06       | 47     | CBUC15080C100    | 46             |
| 30584-30         | 43   | 100474           | 40   | 3237686C12M      | 39   | 4000353C08       | 47     | CBUC15100C100    | 46             |
| 30611CPS         | 40   | 100600CPS        | 40   | 3237686C15M      | 39   | 4000353C10       | 47     | CBUC15125C100    | 46             |
| 30642CPS         | 40   | 100601           | 40   | 3237686C18M      | 39   | 4000353C12       | 47     | CBUC15150D100    | 46             |
| 30744            | 40   | 100602           | 40   | 3237758C09M      | 39   | 4000353C14       | 47     | CBUC15165D100    | 46             |
| 30914            | 40   | 100603-7         | 40   | 3237758C10M      | 39   | 4000353C16       | 47     | CBUC15180D100    | 46             |
| 36181CPS         | 40   | 100603-9         | 40   | 3237758C12M      | 39   | 4000353C17       | 47     | CBUC17030C100    | 46             |
| 36457            | 40   | 100603-11        | 40   | 3237758C15M      | 39   | 4000358C03       | 47     | CBUC17040C100    | 46             |
| 36459            | 40   | 100606           | 40   | 3237758C18M      | 39   | 4000358C05       | 47     | CBUC17050C100    | 46             |
| 36467            | 40   | 100609           | 40   | 3237758C21M      | 39   | 4000358C08       | 47     | CBUC17065C100    | 46             |
| 36472            | 40   | 100613           | 40   | 3238018C03M      | 39   | 4000358C10       | 47     | CBUC23030C100    | 46             |
| 36474            | 40   | 100618           | 40   | 3238018C06M      | 39   | 4000358C12       | 47     | CBUC23040C100    | 46             |
| 36476            | 40   | 100625CPS        | 40   | 3238018C09M      | 39   | 4000358C14       | 47     | CBUC23050C100    | 46             |
| 36478            | 40   | 104742           | 43   | 3238018C10M      | 39   | 4000358C16CB     | 47     | CBUC23065C100    | 46             |
| 36480            | 40   | 104742-2         | 43   | 3238018C12M      | 39   | 4000358C18CB     | 47     | CBUC23080C100    | 46             |
| 36482CPS         | 40   | 118004           | 43   | 3238018C15M      | 39   | 4000361C99FV     | 47     | CBUC23100C100    | 46             |
| 36484            | 40   | 133040           | 43   | 3238018C18M      | 39   | 4000361C99MC     | 47     | CBUC23125D100    | 46             |
| 36486            | 40   | 133040-1         | 43   | 3238019C09M      | 39   | 4000380C06CB     | 47     | CBUC23150D100    | 46             |
| 36488            | 40   | 133040-2         | 43   | 3238019C10M      | 39   | 4000380C08CB     | 47     | CBUC23165D100    | 46             |
| 36490CPS         | 40   | 133045CPS        | 43   | 3238019C12M      | 39   | 4000380C10CB     | 47     | CBUC35150D100    | 46             |
| 36494CPS         | 40   | 133045Z20        | 43   | 3238019C15M      | 39   | 4000380C11CB     | 47     | CBUC38050D100    | 46             |
| 36496            | 40   | 0537980C06       | 45   | 3238019C18M      | 39   | 4000380C12CB     | 47     | CBUC38065D100    | 46             |
| 36498            | 40   | 0537980C07       | 45   | 3238019C21M      | 39   | 4000380C14CB     | 47     | CBUC38080D100    | 46             |
| 36559            | 40   | 0537980C12       | 45   | 3238020C18M      | 39   | 4038108C03       | 47     | CBUC38100D100    | 46             |
| 36828CPS         | 40   | 0537980C22       | 45   | 3238020C21M      | 39   | 4038108C04       | 47     | CBUC38120D100    | 46             |
| 36830CPS         | 40   | 0739658A02       | 45   | 3238020C24M      | 39   | 4038108C05       | 47     | CBUC38140D100    | 46             |
| 36832CPS         | 40   | 2085399A01       | 45   | 3238020C27M      | 39   | 4038108C06       | 47     | CC2C             | 13, 15         |
| 36834CPS         | 40   | 2085399A02       | 45   | 3238020C30M      | 39   | 4038108C07       | 47     | CC2C_S           | 14             |
| 36836            | 40   | 2603393A03       | 12   | 3238020C33M      | 39   | 4038108C09       | 47     | CC2C_T           | 12, 14         |
| 36838            | 40   | 2603973B02R      | 45   | 3238020C36M      | 39   | 4038108C11       | 47     | CC6A_ _ _U       | 26             |
| 40063            | 40   | 2603973B02T      | 45   | 3593004M02M      | 47   | 4038108C12       | 47     | CC6A_ _U         | 24             |
| 40114            | 40   | 2603989B01       | 45   | 3593008M02M      | 47   | 4038361C03CB     | 47     | CC6A_U           | 25, 26         |
| 40151CPS         | 40   | 2604688B01B      | 12   | 3593012M02M      | 47   | 4038361C04CB     | 47     | CC6C_ _T         | 24             |
| 40493CPS         | 40   | 2604688B02B      | 12   | 3593015M02M      | 47   | 4038361C05CB     | 47     | CC6C_T           | 25, 27         |
| 40495CPS         | 40   | 2604688B03B      | 12   | 3593020M02M      | 47   | 4038361C10CB     | 47     | CC6C_ _U         | 24             |
| 40517            | 40   | 2605670A02M      | 12   | 3593025M02M      | 47   | 4038380B03M      | 47     | CC6C_U           | 25             |
|                  |      |                  |      | 3593030M02M      | 47   | 4001177B51MC     | 47     | CS               | 12, 13, 23, 24 |

| Base Part Number | Page       | Base Part Number | Page | Base Part Number | Page   | Base Part Number | Page           | Base Part Number | Page       |
|------------------|------------|------------------|------|------------------|--------|------------------|----------------|------------------|------------|
| CS125UFLTOOL     | 42         | FEF083A040       | 13   | JB135C1W3B       | 31     | LPD625           | 19             | SBE248422        | 61         |
| CTM005A          | 34         | FEF155A006       | 13   | JB135C1W4B       | 31     | LPF215H          | 11             | SBE249830        | 61         |
| CTM009A          | 34         | FEF155A008       | 13   | JB135C2B         | 31     | LPF215U          | 11             | SCHI             | 54         |
| CTM010A          | 34         | FEF155A010       | 13   | JB135C2W         | 31     | LPF215V          | 11             | SCHIA            | 54         |
| CTM011A          | 34         | FEF155A012       | 13   | JB135C2W1B       | 31     | LPF225H          | 11             | SCLO             | 54         |
| CTM012A          | 34         | FEF155A018       | 13   | JB135C2W2B       | 31     | LPF225U          | 11             | SCLOA            | 54         |
| CTM015A          | 34         | FEF155A020       | 13   | JB135C2W3B       | 31     | LPF225V          | 11             | SCVT             | 54         |
| CTM019A          | 34         | GE215-1Y06       | 43   | JB135C3B         | 31     | LPF235H          | 11             | SCVTA            | 54         |
| CTM020A          | 34         | GE215-1Y06-K1    | 43   | JB135C3W         | 31     | LPF235V          | 11             | SDOH             | 53         |
| CTM024A          | 34         | GE215-1Y06-K3    | 43   | JB135C3W1B       | 31     | L RTP615         | 25, 27         | SEHI             | 53         |
| CTM025A          | 34         | GE215-2Y06       | 43   | JB135C3W3B       | 31     | L RTP625         | 25, 27         | SEHIL            | 53         |
| CTM029A          | 34         | GE215-2Y06-K1    | 43   | JB135C4B         | 31     | L RTP635         | 25, 27         | SELO             | 53         |
| CTM030A          | 34         | GE215-2Y06-K3    | 43   | JB135C4W         | 31     | O-62-21F         | 41             | SELOL            | 53         |
| CTM035A          | 35         | GE225-1Y06       | 43   | JB135C4W1B       | 31     | O-62-50F         | 41             | SFOC             | 53         |
| DB635B150        | 45         | GE225-1Y06-K1    | 43   | JB135C5B         | 31     | O-62F            | 41             | SLHI             | 53         |
| DBE635B150P      | 45         | GE225-1Y06-K3    | 43   | JB135C5W         | 31     | O-63-21F         | 41             | SLHIA            | 53         |
| DB635B200        | 45         | GE225-2Y06       | 43   | JB135C6B         | 31     | O-63-50F         | 41             | SLLO             | 53         |
| DB935B150        | 45         | GE225-2Y06-K1    | 43   | JB135C6W         | 31     | O-63F            | 41             | SLLOA            | 53         |
| DB935B200        | 45         | GE225-2Y06-K3    | 43   | JBL25C2W1W       | 32     | O-65-21FB        | 41             | SMHI             | 53         |
| DBA615           | 23         | GE235-1Y06       | 43   | JBL25C4W2B       | 32     | O-65-50FB        | 41             | SMLO             | 53         |
| DBA625           | 23         | GE235-1Y06-K1    | 43   | JBL35C2W1W       | 32     | O-65FB           | 41             | SMRT             | 53         |
| DBA635           | 23         | GE235-2Y06       | 43   | JBL35C4W2B       | 32     | O-68-21FB        | 41             | SP15             | 37         |
| DBE625           | 25         | GE235-2Y06-K1    | 43   | JBS25C2B1W2B     | 33     | O-68-50FB        | 41             | SP25             | 37         |
| DBE635           | 25         | GS182422         | 61   | JBS25C2W3B       | 33     | O-68FB           | 41             | SP35             | 37         |
| DCEA635M27       | 39         | GS183022         | 61   | JBS25C2W3W       | 33     | O-620-21F        | 41             | SRPB             | 53         |
| DCEA635M30       | 39         | GS184822         | 61   | JBS25C3W1B2W     | 33     | O-620-50F        | 41             | SSPL625A1        | 37         |
| DCEA635M33       | 39         | GS186622         | 61   | JBS25C3W1W2B     | 33     | O-620F           | 41             | SSPL625A2        | 37         |
| DCEA635M36       | 39         | GS188422         | 61   | JBS25C3W3W       | 33     | OS50             | 41             | SSPL625A3        | 37         |
| DCP625A          | 25         | GS189830         | 61   | JBS25C4W4W       | 33     | OS-620           | 41             | SSPL625A4        | 37         |
| DCP625C          | 25         | GS302422         | 61   | JBS35C2B1W2B     | 33     | OSM004           | 35             | SSPL635A1        | 37         |
| DCP635A          | 25         | GS303022         | 61   | JBS35C2W3B       | 33     | OTTQ615          | 25             | SSPL635A2        | 37         |
| DCP635C          | 25         | GS304822         | 61   | JBS35C2W3W       | 33     | OTTQ625          | 25             | SSPL635A3        | 37         |
| DE225            | 15         | GS306622         | 61   | JBS35C3W1B2W     | 33     | OTTQ635          | 25             | SSPL635A4        | 37         |
| DE225_T          | 14         | GS308422         | 61   | JBS35C3W1W2B     | 33     | PDBA615          | 23             | SSPLT615A1       | 37         |
| DIP625A          | 25         | GS309830         | 61   | JBS35C3W3W       | 33     | PDBA625          | 23             | SSPLT615A2       | 37         |
| DIP625AS         | 26         | HD625            | 25   | JBS35C4W4W       | 33     | PDBA635          | 23             | SSPLT615A3       | 37         |
| DIP625C          | 25         | HD635            | 25   | JBY325C1W2B      | 32     | PH13-4           | 41             | SSPLT615A4       | 37         |
| DIP635A          | 25         | IBWP225          | 11   | JBY325C1W3B      | 32     | PISB625          | 23             | SSPLT625A1       | 37         |
| DIP635AS         | 26         | ISB215           | 12   | JBY325C3W        | 32     | PISB625HP        | 23             | SSPLT625A2       | 37         |
| DIP635C          | 25         | ISB225           | 12   | JBY335C1W2B      | 32     | PISB635          | 23             | SSPLT625A3       | 37         |
| DIPCAP           | 25         | ISB235           | 12   | JBY335C1W3B      | 32     | PISB635HP        | 23             | SSPLT625A4       | 37         |
| DJ250-2          | 14         | ISB625A          | 23   | JBY335C3W        | 32     | PK215            | 12             | SSPLT635A1       | 37         |
| DJ250-T2         | 14         | ISB625C          | 23   | KP3437322C1M     | 47     | PK225            | 12             | SSPLT635A2       | 37         |
| DJ625A_          | 23         | ISB635A          | 23   | LBI215           | 11     | PK235            | 12             | SSPLT635A3       | 37         |
| DJ625A2          | 27         | ISB635C          | 23   | LBI225           | 11     | PKPB225          | 12             | SSPLT635A4       | 37         |
| DJ625C_          | 23         | JB125C1B1W1B     | 31   | LBITOOL          | 12     | PLE225           | 11, 13         | STAK             | 53, 54     |
| DJ635A_          | 23         | JB125C1B2W1B     | 31   | LCN2CLJ615_ _SQB | 19     | PLEA225N03       | 39             | STHI             | 53         |
| DJ635C_          | 23         | JB125C1B3W1B     | 31   | LCN2DLJ615_ _ILB | 19     | PLEA225N06       | 39             | STHIA            | 53         |
| DLJ615A2         | 19         | JB125C1B4W1B     | 31   | LCN2CLJ625_ _SQB | 19     | PLEA225N09       | 39             | STHIK            | 53         |
| DPC625           | 23         | JB125C1W2B       | 31   | LCN2DLJ625_ _ILB | 19     | PLEA225N10       | 39             | STHL             | 54         |
| DPC625UT         | 23         | JB125C1W3B       | 31   | LCN2DLJ628_ _ILB | 19     | PLEA225N12       | 39             | STLO             | 53         |
| DPC635           | 23         | JB125C1W4B       | 31   | LCN2DLJ628_ _SQB | 19     | PLEA225N15       | 39             | STLOA            | 53         |
| DPC635UT         | 23         | JB125C2B         | 31   | LCN615           | 19     | PLEA225N18       | 39             | STLOK            | 53         |
| DPD250           | 14         | JB125C2W         | 31   | LCN625           | 19     | PLEA225N21       | 39             | STUD635-A        | 25, 45     |
| DPE250           | 14         | JB125C2W1B       | 31   | LCN628           | 19     | PLEJ225          | 11, 13         | STUD635-C        | 25, 45     |
| DPS250           | 14         | JB125C2W2B       | 31   | LE215            | 11, 13 | PLPC225          | 12             | STUD-A           | 25, 26, 45 |
| DRC250           | 14         | JB125C2W3B       | 31   | LE225            | 11, 13 | POP615           | 23, 24         | STUD-C           | 25, 26, 45 |
| DS225            | 15         | JB125C3B         | 31   | LE235            | 11, 13 | POP625           | 23, 24         | STUD-T           | 25, 27, 37 |
| DS225_T          | 14         | JB125C3W         | 31   | LEJ215           | 11, 13 | POP635           | 23, 24         | STUD-U           | 25         |
| DT625            | 25, 26, 27 | JB125C3W1B       | 31   | LEJ225           | 11, 13 | PS625CLEER       | 19             | STVT             | 53         |
| DT635            | 25, 26, 27 | JB125C3W3B       | 31   | LFEP215          | 13     | PS625CLEERDM     | 19             | STVTA            | 53         |
| FECC             | 13         | JB125C4B         | 31   | LFEP215TFEC      | 11     | RH15-10          | 41             | TP615            | 23, 24, 27 |
| FEF083A006       | 13         | JB125C4W         | 31   | LFEP225          | 13     | SA               | 12, 13, 23, 24 | TP625            | 23, 24, 27 |
| FEF083A008       | 13         | JB125C4W1B       | 31   | LFEP225TFEC      | 11     | SBE182422        | 61             | TP635            | 23, 24     |
| FEF083A010       | 13         | JB125C5B         | 31   | LF1215           | 11     | SBE183022        | 61             | TQHD625          | 25         |
| FEF083A012       | 13         | JB125C5W         | 31   | LF1225           | 11     | SBE184822        | 61             | TQHD635          | 25         |
| FEF083A018       | 13         | JB125C6B         | 31   | LJ215C-          | 11     | SBE186622        | 61             | TWRENCH          | 25         |
| FEF083A020       | 13         | JB125C6W         | 31   | LJ225C-          | 11     | SBE188422        | 61             | UOP625           | 23         |
| FEF083A025       | 13         | JB135C1B1W1B     | 31   | LJ235C-          | 11     | SBE189830        | 61             | WH3              | 41         |
| FEF083A030       | 13         | JB135C1B2W1B     | 31   | LPC215           | 11     | SBE242422        | 61             | WS12             | 34         |
|                  |            | JB135C1B3W1B     | 31   | LPC225           | 12     | SBE243022        | 61             | WS1112           | 34         |
|                  |            | JB135C1B4W1B     | 31   | LPC235           | 12     | SBE244822        | 61             | WS1118           | 34         |
|                  |            | JB135C1W2B       | 31   | LPC615           | 19     | SBE246622        | 61             |                  |            |



We make what matters work.\*

**EATON**

*Powering Business Worldwide*




\* Every day, people depend on things like technology, transportation, energy and infrastructure to keep their daily lives on track. But without power, none of it would be possible. That's why companies around the world turn to Eaton. We're dedicated to improving people's lives and the environment with innovative technologies


that help manage power more safely, reliably and sustainably. To meet today's challenges, and tomorrow's. Because this is what really matters. And we're here to make sure it works.

**To learn more go to:  
[Eaton.com/WhatMatters](https://www.eaton.com/WhatMatters)**

**We make what matters work.**

# Product application overhead/underground distribution systems

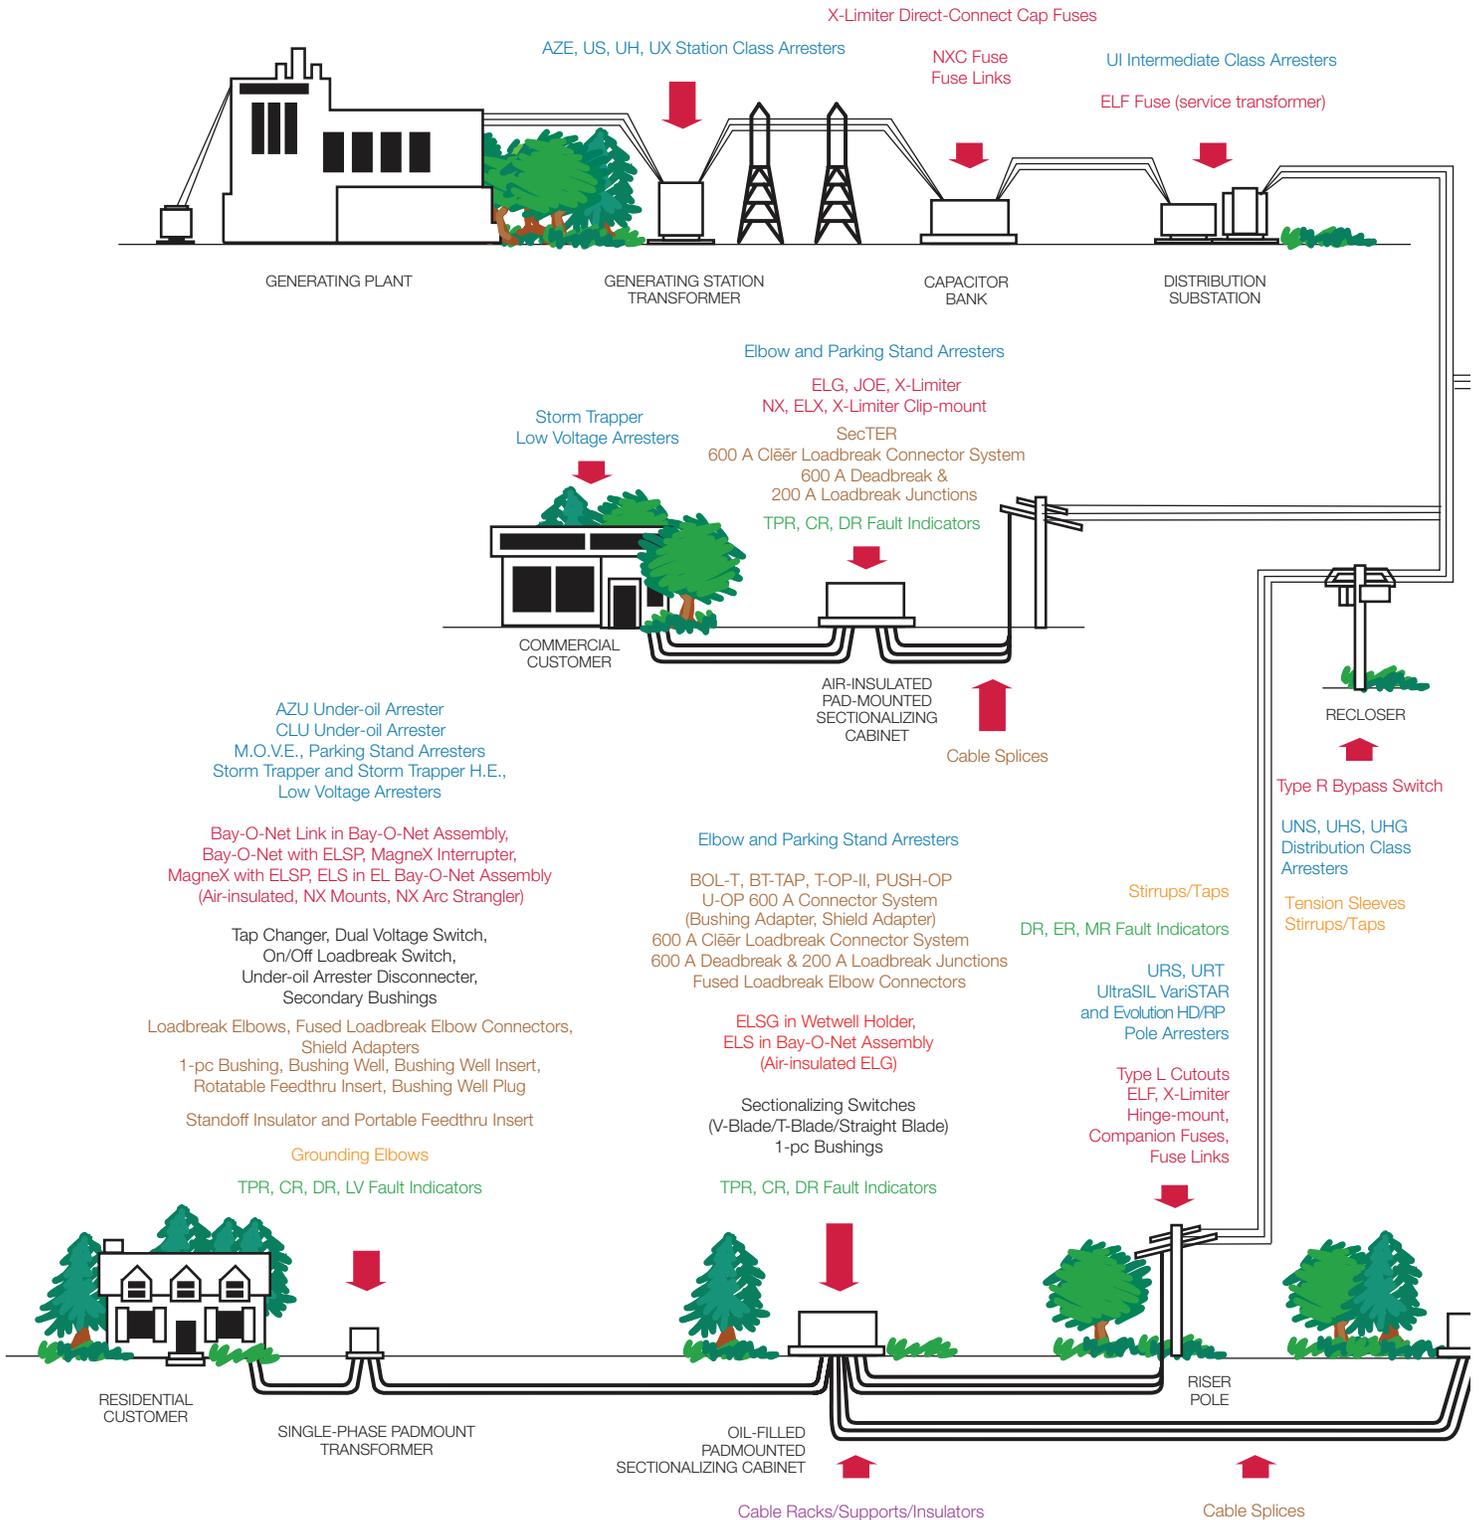

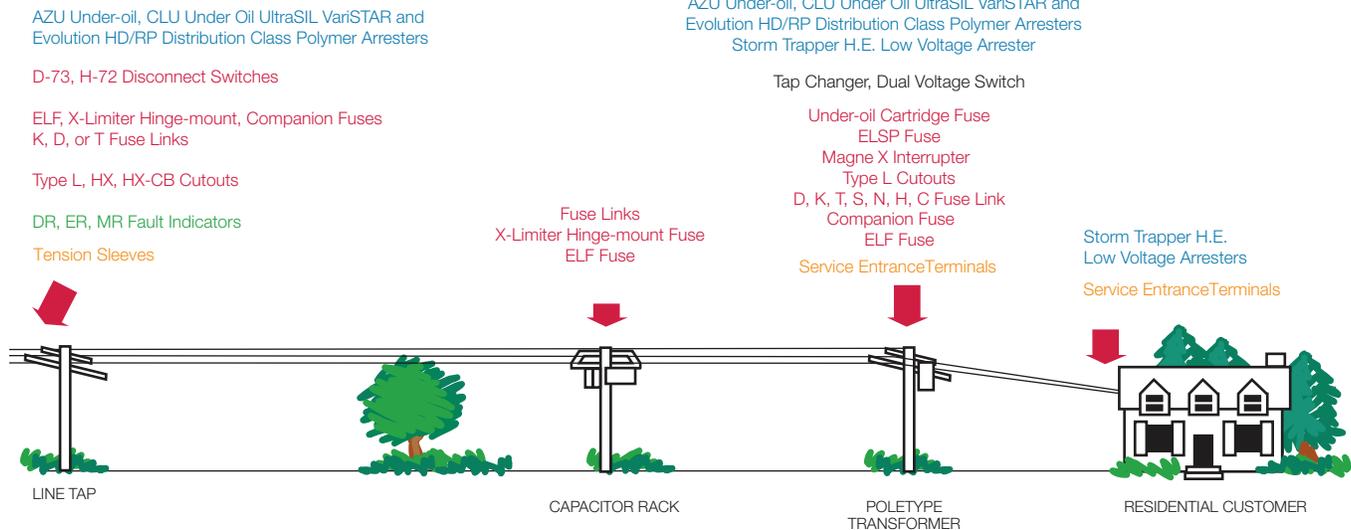

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

**Eaton's Power Systems Division**  
2300 Badger Drive  
Waukesha, WI 53188  
United States  
Eaton.com/cooperpowerseries

© 2019 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. BR100003EN  
May 2019  
Supersedes November 2016

Eaton is a registered trademark

All trademarks are property of their  
respective owners.

For Eaton's Cooper Power series  
product information call  
1-877-277-4636 or visit  
[www.eaton.com/cooperpowerseries](http://www.eaton.com/cooperpowerseries).

Follow us on social media to get the  
latest product and support information.

