



PART NUMBER:
i2753-A-XX-2J

NOTES:
 1) SPC GR-326 GEOMETRIC
 REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100mm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: SINGLEMODE (8.33/125um)	
	<i>1310/1550nm</i>
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.15dB
BACK REFLECTION	≤-55dB ABOVE
BACK REFLECTION (Typical)	≤-65dB ABOVE
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

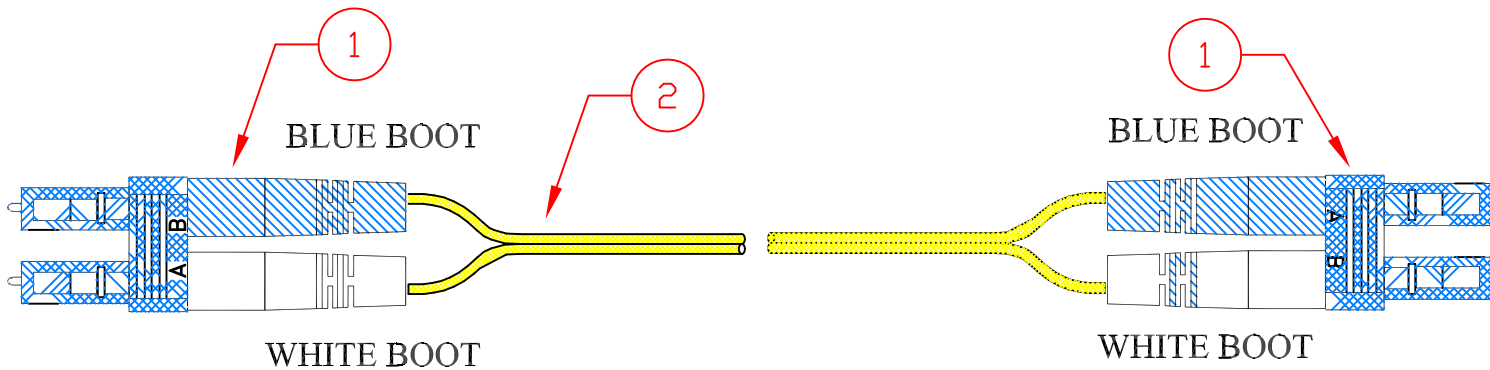

CORNING SMF28 ULTRA OPTICAL FIBER CABLE 8.33/125um ZIPCORD OFNR/OFNP - 2mm

ITEM	QTY.	DESCRIPTION	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF iFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.	DRAWN BY:	DATE:	 iFIBER OPTIX, INC. 14450 CHAMBERS RD. TUSTIN, CA 92780 www.ifiberoptix.com Tel: 714-665-9796 Fax: 714-665-9757	
1		LC/UPC SINGLEMODE DUPLEX 126um CONNECTOR		CHECKED BY:	DATE:		
2		CORNING SINGLEMODE 8.33/125um 2mm		APPROVED BY:	DATE:		
3		N/A		TITLE:			
4		N/A	LC/UPC-LC/UPC SM DX 8.33/125um OFNR 2mm			PART NUMBER: i2753-A-XX-2J	P/N: LEGEND N = INCHES F = FEET M = METER