




Bolts

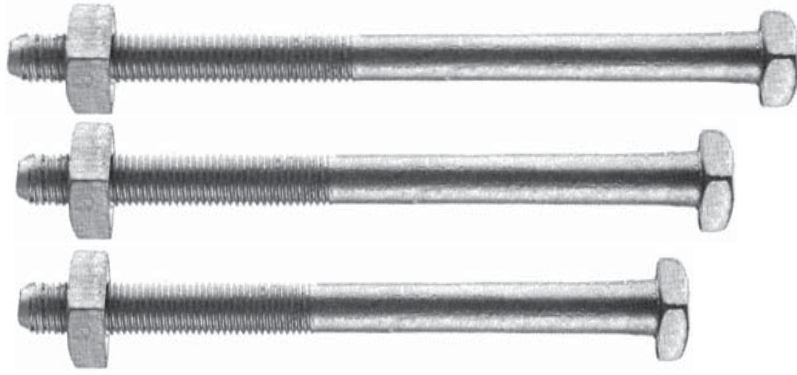

Machine

Features

- Square head and square nut
- Roll threaded
- Bolts 1/2" diameter and larger and 7" length and longer also have cone points which permit driving without damage to threads

Material

Steel hot dip galvanized

3/8" Diameter - Minimum Tensile Strength 4,250 lbs			
Catalog Number	Bolt Length (in)	Thread Length (in)	Weight /100 (lb)
J8603	3	1	13
J8604	4	3	15
J8604-1/2	4 1/2	3	17
J8605	5	3	18
J8606	6	3	21
J8608	8	4	27
J8610	10	4	32

1/2" Diameter - Minimum Tensile Strength 8,500 lbs			
Catalog Number	Bolt Length (in)	Thread Length (in)	Weight /100 (lb)
J8701-1/2	1 1/2	1 1/2	18
J8702	2	1 1/4	20
J8702-1/2	2 1/2	1 1/4	23
J8703	3	1 1/4	25
J8704	4	3	31
J8705	5	3	36
J8706	6	3	41
J8707	7	4	48
J8708	8	4	50
J8709	9	4	57
J8710	10	6	60
J8712	12	6	70
J8714	14	6	79
J8716	16	6	89

5/8" Diameter - Minimum Tensile Strength 13,550 lbs			
Catalog Number	Bolt Length (in)	Thread Length (in)	Weight /100 (lb)
J8801-1/2	1 1/2	1 1/4	30
J8802	2	1 1/2	34
J8802-1/2	2 1/2	1 1/2	38
J8803	3	1 1/2	44
J8804	4	3	50
J8805	5	3	57
J8806	6	3	62
J8807	7	4	72
J8808	8	4	82
J8809	9	4	88
J8810	10	6	94
J8812	12	6	108
J8814	14	6	125
J8816	16	6	136
J8818	18	6	152
J8820	20	6	170
J8822	22	6	184
J8824	24	6	200
J8826	26	6	224
J8828	28	6	242

3/4" Diameter - Minimum Tensile Strength 20,050 lbs			
Catalog Number	Bolt Length (in)	Thread Length (in)	Weight /100 (lb)
J8902	2	1 3/4	57
J8903	3	1 3/4	67
J8906	6	4	101
J8908	8	4	118
J8910	10	6	142
J8912	12	6	162
J8914	14	6	188
J8916	16	6	212
J8918	18	6	228
J8920	20	6	252
J8922	22	6	268
J8924	24	6	296
J8926	26	6	316
J8928	28	6	344

7/8" Diameter - Minimum Tensile Strength 27,700 lbs			
Catalog Number	Bolt Length (in)	Thread Length (in)	Weight /100 (lb)
J9062	12	6	240
J9064	14	6	264
J9066	16	6	288
J9068	18	6	320
J9070	20	6	345
J9072	22	6	380
J9074	24	6	430
J9076	26	6	442