


16,000 lb. Series Guy Strains - Clevis / Clevis

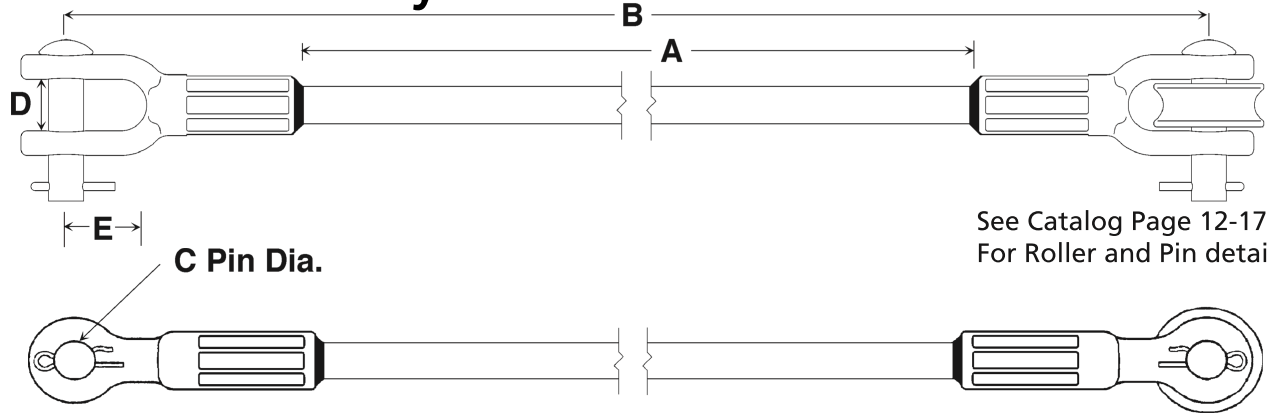

See Catalog Page 12-17
For Roller and Pin details

See Note For Roller Configurations

- C Dimension is 5/8" (16 mm) for 16,000 lbs. series
- D Dimension is 0.9" (23 mm) for 16,000 lbs. series
- E Dimension is 1.4" (36 mm) for 16,000 lbs. series

5/8" dia. Fiberglass rod.

Castings are hot-dip galvanized ductile iron.

RUS Accepted.

Catalog Number	Length A	Length B	Weight (Each)
16,000 lbs. (7258 kg) Minimum Ultimate Strength*			
GS16012CC1	12" (30.5 cm)	20" (50.8 cm)	2.8 lbs. (1.3 kg)
GS16018CC1	18" (45.7 cm)	26" (66.0 cm)	2.9 lbs. (1.3 kg)
GS16024CC1	24" (61.0 cm)	32" (81.3 cm)	3.1 lbs. (1.4 kg)
GS16030CC1	30" (76.2 cm)	38" (96.5 cm)	3.2 lbs. (1.4 kg)
GS16036CC1	36" (91.4 cm)	44" (111.8 cm)	3.3 lbs. (1.5 kg)
GS16042CC1	42" (106.7 cm)	50" (127.0 cm)	3.5 lbs. (1.6 kg)
GS16054CC1	54" (137.2 cm)	62" (157.5 cm)	3.7 lbs. (1.7 kg)
GS16060CC1	60" (152.4 cm)	68" (172.7 cm)	3.8 lbs. (1.7 kg)
GS16078CC1	78" (198.1 cm)	86" (218.4 cm)	4.2 lbs. (1.9 kg)
GS16096CC1	96" (243.8 cm)	104" (264.2 cm)	4.6 lbs. (2.1 kg)
GS16120CC1	120" (304.8 cm)	128" (325.1 cm)	5.1 lbs. (2.3 kg)
GS16144CC1	144" (365.8 cm)	152" (386.1 cm)	5.7 lbs. (2.6 kg)

GS—CC1 series has 1 Roller as detailed in drawing

For 2 Rollers, replace "CC1" in number with "CC2"

For no Rollers, replace "CC1" in number with "CC"

Add "SC" suffix to the end of the catalog number to denote Silicone Coated rod

*Recommended maximum working load is 50% of minimum ultimate ratings listed.