




Product Datasheet

ANDERSON FARGO


VC90R -- Full Tension Compression Splice

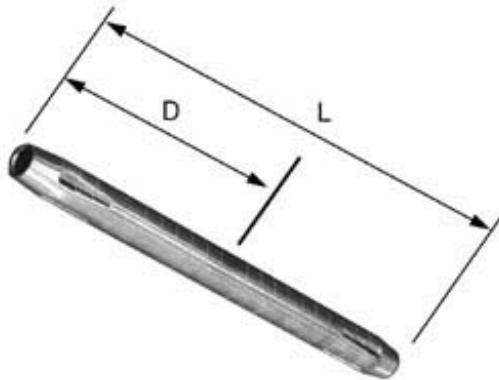

Full Tension VersaCrimp Aluminum Compression Splice


Product Specifications

Splice Type



VERSA-CRIMP®
Compression Splices
(For use with
VersaCrimp and other
Dieless Type Tools)

Versacrimp Compression Series



VC-AR & VC-R Series
Compression Splice
VERSA-CRIMP®
Full Tension
AAC, AAAC &
(ACSR SingleCore) Conductor

PDF Catalog Page

[Click HERE to view the web page.](#)

VersaCrimp Conductor Size Minimum

0.743 in

VersaCrimp Conductor Size Maximum

0.814 in

Material

Aluminum

VersaCrimp Conductor Range

397.5 (18/1), 477 (18/1) ACSR

VersaCrimp Conductor Minimum

.743 in

VersaCrimp Conductor Maximum

.814 in

Dimension D

11.38 in (289 mm)

Dimension L

22.88 in (581 mm)

Length before Compression

22.88 in (581 mm)

Compression Method

VC6-3, VC6FT or VC8, VersaCrimp Tooling ONLY

UL Listed	No
Inhibitor Loaded	Yes
Material Type	Non-Standard
UPC Code	09635933615
Standard Package	20
Standard Package Unit	Each
Min Order Qty	20
Weight / Ea.	1.666 lbs

Notes

For full tension ACSR applications. Installs using VersaCrimp VC6FT or VC8 tool.

Compressed Product Number

VC90R

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.