

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Explosionproof, Dust-Ignitionproof

Furnished with Internal Ground Screw.

NEC/CEC:

Class I, Division 1, Groups C, D

Class I, Division 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7CD, 9EFG

Applications

- Push buttons and selector switches are used in conjunction with contactors or magnetic starters for remote control of motors. They provide circuit control and/or selection.
- Pilot lights provide visual assurance that an electrical function is being performed at a remote or local location.
- Confine arcing of device within the enclosure, preventing ignition of ignitable atmospheres during control operation of motors and other equipment.
- Used in classified areas where flammable vapors, gasses or highly combustible dusts are present.
- For installation in:
 - Chemical plants
 - Petrochemical plants
 - Refineries
 - Other process industries
 - Where corrosive elements are present

Features

- Covers are UL Listed when used on Contender bodies.
- Finish is epoxy powder coat for enhanced corrosion resistance.
- Large backbox for ample wiring room.
- Ground screw installed in bodies for ground continuity.
- Corrosion resistant stainless steel hex head captive screws hold covers to body.
- Factory sealed enclosure eliminates need for adding sealing fittings and compound at each conduit entrance.
- Heavy duty, 10 Amp, 600 Vac.
- Factory sealed pilot lights supplied with jewel/guard assembly and 120 Vac/Vdc, 50/60 Hz, 6 Watt lamp (LED provided as option).
- Dozens of possible combinations of push buttons, pilot lights and selector switches.
- Accurately tapped, tapered hubs for tight rigid joints and ground continuity.
- Stainless steel push button shaft operates within stainless steel bushing assuring long, maintenance free operation.
- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Push button and selector switch contacts are silver cadmium oxide which are "sealed" in lower phenolic chamber isolated from corrosive elements. Assures positive contact and long, trouble free operation.
- Enclosed stainless steel helper spring prevents accidental operation of push button in severe vibration installations.
- All momentary push buttons are supplied with lockout type guards as standard. Hole in guard will accept locks with up to 1/4" hasp. Permits locking of push button to prevent unauthorized operation.
- Clearly marked terminals with brass screws and spade terminals assure quick, easy wiring.

Standard Materials

- Control station body and cover: malleable iron
- SPBB push button: copperfree (4/10 of 1% max.) aluminum upper barrel and phenolic lower barrel with nylon plastic button
- SPBB dust cap push button: neoprene buttons
- SPLS pilot light: copperfree (4/10 of 1% max.) aluminum guard and body assembly; steel clamping ring; and tempered glass jewel



Push Button



Combination Push Button and Pilot Light



Rocker Arm Push Button



Maintained Push Button



Pilot Light



Selector Switch

- SSBA selector switch: copperfree (4/10 of 1% max.) aluminum operator mechanism, nylon cam, and sealed phenolic contact block

Standard Finishes

- Control station body: triple coat—(1) zinc electroplate, (2) chromate, and (3) epoxy powder coat
- SPBB push button, SPLS pilot light and SSBA selector switch: natural finish

APPLETON™

CONTROLS: NEC/CEC EXPLOSIONPROOF CONTROL STATIONS AND SWITCHES

Classified by UL for use in specific combinations with Cooper Crouse-Hinds EDS covers and bodies.

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Explosionproof, Dust-Ignitionproof

UNILETS™ for use with Threaded Metal Conduit. Furnished with Internal Ground Screw.

NEC/CEC:

Class I, Division 1, Groups C, D
Class I, Division 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 3, 7CD, 9EFG

Options

- 1- or 2-gang boxes:
 - For aluminum cover only, add suffix - **A**.
 - For aluminum body and cover, add suffix - **SA**.
- Three position selector switches with modified operation:
 - Momentary contact right position, spring return to center; maintained contact left position. Add suffix - **S634**.
 - Momentary contact left position, spring return to center; maintained contact right position. Add suffix - **S635**.
 - Momentary contact right position, spring return to center; maintained contact left position; alternate contacts. Add suffix - **S636**.
- Selector switch lockout locks two or three position handle in any position. Add suffix - **S349**.
- Momentary push button securing rod, add suffix - **S153**.
- Pilot light jewel/guard assembly. Order by suffixes if color desired is other than red:
 - Amber- **J6**
 - Opal- **J8**
 - Clear - **J10**
 - Blue- **J11**
 - Green- **J3**
- Bodies and covers (1- or 2-gang) in copperfree (4/10 of 1% max.) aluminum. Add suffix - **SA**.
- Securing rod for push button lockout guard, add suffix- **S153**.
- LED pilot lights are available in lieu of incandescent pilot lights. Order by suffixes for desired color as follows:
 - Red- **LED1**
 - Green- **LED3**
 - Amber- **LED6**

NEC/CEC Certifications and Compliances

- UL Standards: UL 508, UL 698, UL 1203
- CSA Standards: C22.2 No. 14
- cULus Listed: E10449, E81751

Related Products

- For Division 1, Group B applications, refer to *EFDB Series*.

Illustrated Features




Securing Rod for Push Button Lockout Guard – available as optional item. Lockout Guard furnished as standard with the Push Button, may also be padlocked. Suffix- **S153**.

SPBB factory sealed push button — standard type and unit with dust cap.



SPBB Design Features

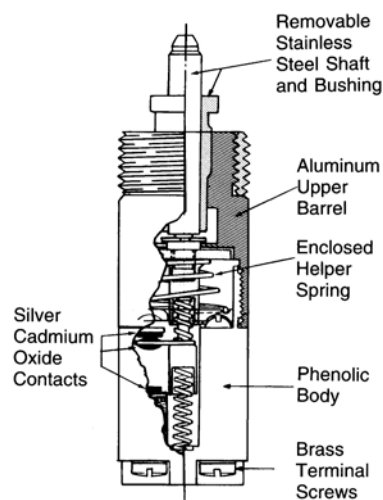

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Explosionproof, Dust-Ignitionproof

UNILETS™ for use with Threaded Metal Conduit. Furnished with Internal Ground Screw.

NEC/CEC:

Class I, Division 1, Groups C, D

Class I, Division 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7CD, 9EFG

Catalog Numbering Guide

EDS	1	2	524	J3	LNPRUNQ	1274	S634	SLNPJORQ
NEC Certified EDS Series Box/ Hub Arrangement: EDS - Dead-End EDSC - Feed-Thru EDKB - 1- 2 Device Cover Only EDKL - 3 Device Cover Only	Hub Size: 1 - 1/2" 2 - 3/4" 3 - 1"		Device for first gang: See Accessories		Special Nameplate for first gang: See Accessories		Options for second gang: See Options	
				Options for first gang: See Options		Device for second gang: See Accessories		Special Nameplate for second gang: See Accessories
	T - Tandem L - Three Device	1 - 1-Gang 2 - 2-Gang						

Full Catalog Number: EDSC12-524-J3-LNPUPQ-1274-S634-SLNPJORQ

Feed-Thru 2-Gang Box with 1/2" Hub:

In Gang #1: One Pilot Light with UP Nameplate

In Gang #2: One 3-Position, 4-Circuit Spring Return from the right Selector Switch with JOG-OFF-RUN Nameplate.

Options

Description	Suffix
Momentary Push Button Securing Rod	S153
Selector Switch Lockout	S349
Spring Return From Right Selector Switch (3 Positions Only)	S634
Spring Return From Left Selector Switch (3 Positions Only)	S635
Spring Return From Right Selector Switch With Alternate Contacts (3 Positions Only)	S636
Change One Red Lens to Green Lens	J3
Change One Red Lens to Opal Lens	J8
Change One Red Lens to Amber Lens	J6
Change One Red Lens to Blue Lens	J11
Change One Red Lens to Clear Lens	J10
Add 220/120 Vac Transformer (J1 Device Only)	S801
Add 277/120 Vac Transformer (J1 Device Only)	S802
Add 440/120 Vac Transformer (J1 Device Only)	S803
Add 550/120 Vac Transformer (J1 Device Only)	S804
Change One Red Pilot to Red LED	LED1
Change One Red Lens to Green LED	LED3
Change One Red Lens to Amber LED	LED6
Add Red Mushroom Head to Momentary Push Button	S805
Add Black Mushroom Head to Momentary Push Button	S806
Add Green Mushroom Head to Momentary Push Button	S807
Locking Guard for Maintained Push Button	S808

APPLETON™

CONTROLS: NEC/CEC EXPLOSIONPROOF CONTROL STATIONS AND SWITCHES

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Explosionproof, Dust-Ignitionproof

UNILETS™ for use with Threaded Metal Conduit. Furnished with Internal Ground Screw.

NEC/CEC:

Class I, Division 1, Groups C, D
Class I, Division 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 3, 7CD, 9EFG

APPLETON™

CONTROLS: NEC/CEC EXPLOSIONPROOF CONTROL STATIONS AND SWITCHES

Devices			
Device Description	Available in 1–G, 2–G Tandem	Available in Three Device	Suffix
One Pilot Light (Red Standard)	Y		524
Two Pilot Lights	Y		561
One Pilot Light and One Momentary Push Button	Y		473
One Pilot Light and Two Momentary Push Buttons	Y	Y	234
One Pilot Light and One Maintained Push Button	Y		701
One Pilot Light and One Dust-Cap Push Button	Y		702
One Pilot Light and One 12 Selector Switch (2 Position, 2 Circuit)	Y		703
One Pilot Light and One 35 Selector Switch (2 Position, 4 Circuit)	Y		704
One Pilot Light and One 102 Selector Switch (3 Position, 2 Circuit)	Y		705
One Pilot Light and One 345 Selector Switch (3 Position, 4 Circuit)	Y		706
One Monetary Push Button	Y		84
Two Monetary Push Buttons	Y		90
Two Side-By-Side Momentary Push Buttons	Y		95
Three Monetary Push Buttons	Y	Y	707
One Momentary Push Button and One Maintained Push Button	Y		708
One Momentary Push Button and One Dust Cap Push Button	Y		709
One Momentary Push Button and One 12 Selector Switch (2 Position, 2 Circuit)	Y		710
One Momentary Push Button and One 35 Selector Switch (2 Position, 4 Circuit)	Y		711
One Momentary Push Button and One 102 Selector Switch (3 Position, 2 Circuit)	Y		712
One Momentary Push Button and One 345 Selector Switch (3 Position, 4 Circuit)	Y		713
One Maintained Push Button (Mushroom Head - Red)	Y		714
Two Maintained Push Button	Y		715
One Maintained and One Dust Cap Push Button	Y		716
One Maintained Push Button and One 12 Selector Switch (2 Position, 2 Circuit)	Y		717
One Maintained Push Button and One 35 Selector Switch (2 Position, 4 Circuit)	Y		718
One Maintained Push Button and One 102 Selector Switch (3 Position, 2 Circuit)	Y		719
One Maintained Push Button and One 345 Selector Switch (3 Position, 4 Circuit)	Y		720
One Dust Cap Push Button	Y		721
Two Dust Cap Push Buttons	Y		722
One Dust Cap and One 12 Selector Switch (2 Position, 2 Circuit)	Y		723
One Dust Cap and One 35 Selector Switch (2 Position, 4 Circuit)	Y		724
One Dust Cap and One 102 Selector Switch (3 Position, 2 Circuit)	Y		725
One Dust Cap and One 345 Selector Switch	Y		726
One 12 Selector Switch (2 Position, 2 Circuit)	Y		271
One 35 Selector Switch (2 Position, 4 Circuit)	Y		272
One 102 Selector Switch (3 Position, 2 Circuit)	Y		273
One 345 Selector Switch (3 Position, 4 Circuit)	Y		274
120 Vac Photocell	Y		727
277 Vac Photocell	Y		728
Three Dust Cap Push Buttons		Y	729
One Momentary and Two Maintained Push Buttons		Y	730
Two Momentary and One Maintained Push Buttons	Y	Y	731
Three Maintained Push Buttons		Y	732
Three Pilot Lights		Y	476
Two Pilot Lights and One Momentary Push Button		Y	733
One Pilot Light and Two Dust Cap Push Buttons		Y	734
Two Pilot Lights and One Dust Cap Push Button		Y	735
One Pilot Light and Two Maintained Push Buttons		Y	736
Two Pilot Lights and One Maintained Push Button		Y	737



Contender™ Series Factory Sealed Control Stations and Pilot Lights

Explosionproof, Dust-Ignitionproof

UNILETS™ for use with Threaded Metal Conduit. Furnished with Internal Ground Screw.

NEC/CEC:

Class I, Division 1, Groups C, D

Class I, Division 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7CD, 9EFG

Nameplates ①

Description	Suffix
Mushroom Head Push Buttons (Maintained and Momentary)	
Start	MNPSTQ
Stop	MNPSPQ
Emergency Stop	MNPESTPQ
Blank	MNPBQ
Pilot Light Nameplates	
Blank	LNPBQ
Forward	LNPFWQ
Jog	LNPJOGQ
Run	LNPRUNQ
Stop	LNPSPQ
Start	LNPSTQ
Down	LNPDOWNQ
Fast	LNPFSTQ
Slow	LNPSLOWQ
Raise	LNPRAISEQ
Lower	LNPOWERQ
Reset	LNPRESETQ
Off	LNPOFFQ
On	LNPONQ
Reverse	LNPREVQ
Close	LNPCLOSEQ
Open	LNPOPENQ
Up	LNPUPQ
Test	LNPTSTQ
Low	LNLOWQ
High	LNPHIGHQ
Two Position Selection Switch Nameplates	
Forward-Reverse	SLNPFQ
Hand—Auto ②	SLNPHAQ
On—Off	SLNPOO
Start—Stop	SLNPSS
Blank	SLNPBQ
Up—Down	SLNPUDQ
Run—Jog	SLNPRJQ
Auto—Hand	SLNPAHQ
Off—Remote	SLNPORQ
Off—On	SLNPOFON

Description	Suffix
Three Position Selection Switch Nameplates	
Forward—Off—Reverse	SLNPFORQ
Hand—Off—Auto	SLNPHOAQ
Run—Off—Jog	SLNPROJQ
Blank	SLNPB3
Reverse—Off—Forward	SLNPROFQ
Auto—Off—Hand	SLNPAOHQ
Hand—Off—Remote	SLNPHORQ
1—Off—2	SLNP102Q
Jog—Off—Run	SLNPJORQ
Stop—Run—Start	SLNPSRSQ
Local—Off—Remote	SLNPLOQ
Jog—Off—Auto	SLNPJOAQ
Momentary Push Buttons	
<i>For Rectangular Weatherboot Style Only (not for round weatherboot style)</i>	
Blank ②	SNPBQ
Forward	SNPFWDQ
Jog	SNPJOGQ
Run	SNPRUNQ
Stop ②	SNPSPQ
Start ②	SNPSTQ
Down	SNPDOWNQ
Fast	SNPFSTQ
Slow	SNPSLOWQ
Raise	SNPRAISEQ
Lower	SNPOWERQ
Reset	SNPRESETQ
Off	SNPOFFQ
On	SNPONQ
Reverse	SNPREVQ
Close	SNPCLOSEQ
Open	SNPOPENQ
Up	SNPUPQ
Test	SNPTSTQ
Low	SNLOWQ
High	SNPHIGHQ

① Custom nameplates are not available.

② Included as standard (no need to use suffix).

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Push Button Stations. Explosionproof, Dust-Ignitionproof

10 Amp, 600 Vac Max. for Heavy Duty Use Momentary Contact. Furnished with Internal Ground Screw.

NEC/CEC:

Class I, Division 1, Groups C, D

Class I, Division 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7CD, 9EFG

APPLETON™

CONTROLS: NEC/CEC EXPLOSIONPROOF CONTROL STATIONS AND SWITCHES

		Hub Size (Inches)	Description	Nameplate Marking	Catalog Number	
					Dead-End	Feed-Thru
1-Gang ①						
	1/2	1 Circuit Universal		Start/Stop	EDS1184	EDSC1184
	3/4				EDS2184	EDSC2184
	1				EDS3184	EDSC3184
	1/2	2 Circuits Universal		Start/Stop	EDS1190	EDSC1190
	3/4				EDS2190	EDSC2190
	1				EDS3190	EDSC3190
Red Mushroom Head — Maintained Contact — Emergency Stop Nameplate						
	1/2	1 Circuit Universal		Emergency Stop	EDS1714	EDSC1714
	3/4				EDS2714	EDSC2714
	1				EDS3714	EDSC3714
2-Gang ①						
	1/2	2 Circuit Universal		Start/Stop	EDS1284	EDSC1284
	3/4				EDS2284	EDSC2284
	1				EDS3284	EDSC3284
	1/2	4 Circuits Universal		Start/Stop	EDS1290	EDSC1290
	3/4				EDS2290	EDSC2290
	1				EDS3290	EDSC3290

① Malleable Iron Body and Cover. For Aluminum Body and Cover, add suffix - SA.

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Combination Push Button and Pilot Light Stations. Explosionproof, Dust-Ignitionproof

10 Amp, 600 Vac Max. for Heavy Duty Use Momentary Contact. Furnished with Internal Ground Screw.

NEC/CEC:

Class I, Division 1, Groups C, D

Class I, Division 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7CD, 9EFG

		Hub Size (Inches)	Description ②	Nameplate Marking	Catalog Number Dead-End Feed-Thru	
1-Gang ①						
	1/2	One Pilot Light			EFS1524	EFSC1524
	3/4				EFS2524	EFSC2524
	1				EFS3524	EFSC3524
	1/2	Two Pilot Lights			EFS1561	EFSC1561
	3/4				EFS2561	EFSC2561
	1				EFS3561	EFSC3561
2-Gang ①						
	1/2	Two Pilot Lights			EFS1624	EFSC1624
	3/4				EFS2624	EFSC2624
	1				EFS3624	EFSC3624
	1/2	Four Pilot Lights			—	EFSC1661
	3/4				EFS2661	EFSC2661
	1				EFS3661	EFSC3661
1-Gang ①						
	1/2	1 Circuit Universal and 1 Pilot Light		Specify	EFD1473	EFDC1473
	3/4				EFD2473	EFDC2473
	1				EFD3473	EFDC3473
	1/2	2 Circuits Universal and 1 Pilot Light			EFD1234	EFDC1234
	3/4				EFD2234	EFDC2234
	1				EFD3234	EFDC3234
2-Gang ①						
	1/2	2 Circuits Universal and 1 Pilot Light		Specify	EFD1471	EFDC1471
	3/4				EFD2471	EFDC2471
	1				EFD3471	EFDC3471
	1/2	2 Circuits Universal and 2 Pilot Lights		Specify	EFD1868	EFDC1868
	3/4				EFD2868	EFDC2868
	1				EFD3868	EFDC3868

① Malleable Iron Body and Cover. For Aluminum Body and Cover, add suffix - SA.

② Pilot Lights furnished with 6 Watt, 120 Vac 6S6 lamp and Red Jewel - for other colors, add color suffix for each pilot light: Amber - J6, Blue - J11, Clear - J10, Green - J3, Opal - J8.

Visit our website at www.emerson.com or contact us at (800) 621-1506.

© January 2021

APPLETON™

CONTROLS: NEC/CEC EXPLOSIONPROOF CONTROL STATIONS AND SWITCHES

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Selector Switches. Explosionproof, Dust-Ignitionproof

10 Amp, 600 Vac Max. for Heavy Duty Use Momentary Contact. Furnished with Internal Ground Screw.

NEC/CEC:


Class I, Division 1, Groups C, D
Class I, Division 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 3, 7CD, 9EFG

APPLETON™

CONTROLS: NEC/CEC EXPLOSIONPROOF CONTROL STATIONS AND SWITCHES

Selector Switches	Hub Size (Inches)	Description	Left	Diagram Center	Right	Catalog Number Dead-End	Number Feed-Thru
2 Position Selector Switches — 1-Gang ① ③ — Maintained Contact							
	1/2	2 Position, 2 Circuit		None		EDS11271	EDSC11271
	3/4					EDS21271	EDSC21271
	1					EDS31271	EDSC31271
	1/2	2 Position, 4 Circuits		None		EDS11272	EDSC11272
	3/4					EDS21272	EDSC21272
	1					EDS31272	EDSC31272
Nameplate: Hand—Auto							
3 Position Selector Switches — 1-Gang ① ③ — Maintained Contact							
	1/2	3 Position, 2 Circuit				EDS11273	EDSC11273
	3/4					EDS21273	EDSC21273
	1					EDS31273	EDSC31273
	1/2	3 Position, 4 Circuits				EDS11274	EDSC11274
	3/4					EDS21274	EDSC21274
	1					EDS31274	EDSC31274
Nameplate: Hand—Off—Auto							
	Thread Size (In., NPSM)	Description	Left	Diagram Center	Right	Switch Catalog Number	
						Assembly Only	Assembly w/Cover

EDKB Selector Switch Operator/Switch Assembly ② ③ — Maintained Contact



Nameplate: Hand—Auto



Nameplate: Hand—Off—Auto

2 Position

1/2	2 Position, 2 Circuit		None		SSBA1-2Q	EDKB-12
1/2	2 Position, 4 Circuits		None		SSBA2-2Q	EDKB-35

3 Position

1/2	3 Position, 2 Circuit				SSBA1-3Q	EDKB-102
1/2	3 Position, 4 Circuit				SSBA2-3Q	EDKB-345

EDKB Selector Switch Operator/Switch Assembly ② — Modified Operations — 3 Position

Momentary contact right position. Spring return to center. Maintained contact left position.

Note: Standard legend plate reads Hand/Off/Auto

1/2	3 Position, 2 Circuit				SSBAS-1-3	EDKB-102-S634
1/2	3 Position, 4 Circuits				SSBAS-2-3	EDKB-345-S634

Momentary contact left position. Spring return to center. Maintained contact right position.

Note: Standard legend plate reads Auto/Off/Hand

1/2	3 Position, 2 Circuit				SSBASL-1-3	EDKB-102-S635
1/2	3 Position, 4 Circuits				SSBASL-2-3	EDKB-345-S635

Momentary contact right position. Spring return to center. Maintained contact left position.

Note: Standard legend plate reads Stop/Run/Start

1/2	3 Position, 4 Circuits				SSBASRA-2-3	EDKB-345-S636
-----	------------------------	---	---	---	-------------	---------------

① Malleable Iron Body and Cover. For Aluminum Body and Cover, add suffix - SA.

② For Aluminum Cover only, add suffix - A.

③ Supplied as standard with maintained contact selector switches. Specify catalog number from nameplate listings if other than standard nameplate is desired.

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Explosionproof, Dust-Ignitionproof

10 Amp, 600 Vac Max. for Heavy Duty Use Momentary Contact. Furnished with Internal Ground Screw.

NEC/CEC:

Class I, Division 1, Groups C, D

Class I, Division 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7CD, 9EFG

Selector Switches Nameplates ①

Two Position Nameplates			Three Position Nameplates	
 Two Position	Forward—Reverse	SLNP-FRQ	Forward—Off—Reverse	SLNP-FORQ
	Hand—Auto	SLNP-HAQ	Hand—Off—Auto	SLNP-HOAQ
	On—Off	SLNP-OO	Run—Off—Jog	SLNP-ROJQ
	Start—Stop	SLNP-SS	Blank	SLNP-B3
	Blank	SLNP-BQ	Reverse—Off—Forward	SLNP-ROFQ
 Three Position	Up—Down	SLNP-UDQ	Auto—Off—Hand	SLNP-AOHQ
	Run—Job	SLNP-RJQ	Hand—Off—Remote	SLNP-HORQ
	Auto—Hand	SLNP-AHQ	1—Off—2	SLNP-102Q
	Off—Remote	SLNP-ORQ	Jog—Off—Run	SLNP-JORQ
	Local Remote	SLNP-LRQ	Stop—Run—Start	SLNP-SRSQ
	Off—On	SLNP-OFON	Local—Off—Remote	SLNP-LORQ
			Jog—Off—Auto	SLNP-JOAQ

Selector Switch Locking Devices — Permit Locking In Any Position

Description	Catalog Number
 Two or Three Positions	SBL-3-Q

① Custom nameplates are not available.

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Push Button. With Rocker Arm Handle. Explosionproof, Dust-Ignitionproof

10 Amp, 600 Vac Max. for Heavy Duty Use Momentary Contact. Furnished with Internal Ground Screw.

NEC/CEC:

Class I, Division 1, Groups C, D
Class I, Division 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 3, 7CD, 9EFG

Rocker Arm Handle

		Hub Size (Inches)	Description	Contact Arrangement	Nameplate Marking	Catalog Number ①	
						Dead-End	Feed-Thru
1-Gang — Malleable Iron Body and Cover ②							
		1/2	1 Circuit Universal		Specify	EDS1596	EDSC1596
		3/4				EDS2596	EDSC2596
		1				EDS3596	EDSC3596
1 Circuit	2 Circuits	1/2	2 Circuits Universal		Specify	EDS1194	EDSC1194
		3/4				EDS2194	EDSC2194
		1				EDS3194	EDSC3194
2-Gang — Malleable Iron Body and Cover ②							
		1/2	2 Circuits Universal		Specify	—	EDSC1696
		3/4				EDS2696	EDSC2696
		1				EDS3696	EDSC3696
2 Circuits	4 Circuits	1/2	4 Circuits Universal		Specify	—	EDSC1294
		3/4				EDS2294	EDSC2294
		1				EDS3294	EDSC3294

Single Push Button

		Hub Size (Inches)	Description	Contact Arrangement	Catalog Number ①	
					Dead-End	Feed-Thru
1-Gang						
		1/2	2 Circuits Universal Momentary		EDS1192	EDSC1192
		3/4			EDS2192	EDSC2192
		1			EDS3192	EDSC3192
Nameplate: Start/Stop Momentary	Nameplate: Emergency Stop Maintained Mushroom Head	1/2	2 Circuits Universal Red Maintained		EDS1192UM1	EDSC1192UM1
		3/4			EDS2192UM1	EDSC2192UM1
		1			EDS3192UM1	EDSC3192UM1

Cover Assemblies ②

		Description	Contact Arrangement	Nameplate Marking	Catalog Number Cover With Device
		1 Circuit Universal		Specify	EDKB-RU1
		2 Circuits Universal		Specify	EDKB-RU2
		1 Circuit Universal		Specify	EDKB-U1L
		1 Circuit Universal		Specify	EDKB-UM1L
		2 Circuits Universal		Specify	EDKB-U2L
		2 Circuit Universal		Specify	EDKB-DPB
		2 Circuits Universal (Maintained)		Specify	EDKB-DPBM

① Malleable Iron Body and Cover. For Aluminum Body and Cover, add suffix - SA.

② For Aluminum Cover only, add suffix - A.


Contender™ Series Factory Sealed Control Stations and Pilot Lights

For Contender™ Bodies

NEC/CEC:

Class I, Division 1, Groups C, D
Class I, Division 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III

Covers

		Description	Contact Arrangement	Nameplate Marking	Catalog Number ①
		Complete with Push Button — Factory Sealed — Momentary Contact <i>For use on standard EDS bodies (furnished with 4 stainless steel captive bolts)</i>			
		1 Circuit Universal		Start/Stop	EDKB-U1
		2 Circuit Universal		Start/Stop	EDKB-U2
		Complete with Mushroom Head Push Button — Factory Sealed — Maintained Contact <i>For use on standard EDS bodies</i>			
		1 Circuit Universal (Red)		Emergency Stop	EDKB-UM1
		2 Circuit Universal (Red)		Specify	EDKB-UM2
		Complete with Pilot Lights — Factory Sealed — Momentary Contact <i>6 Watt 120 Vac, Type 6S6 Lamp. For use on standard EDS bodies (furnished with 4 stainless steel captive bolts)</i>			
		One pilot light (red jewel ②) and two universal push buttons		Specify	EDKB-J1U2
		One pilot light (red jewel ②) and one universal push button		Specify	EDKB-J1U1
		One pilot light (red jewel ②) and one universal push button—dust cap		Specify	EDKB-J1DU1
		One pilot light (red jewel ②)		Specify	EDKB-J1
		Two pilot lights (red jewel ②)		Specify	EDKB-J2
		Complete with Pilot Lights and Push Buttons — Factory Sealed <i>For use on standard EDS bodies (furnished with 8 stainless steel captive bolts)</i>			
		3 Circuits Universal		Start/Stop	EDKL-U3
		Three Pilot Lights (red jewels ②)			EDKL-J3
		One Pilot Light (red jewel ②) and two universal circuits		Specify	EDKL-J1U2
		Two Pilot Lights (red jewels ②) and one universal circuit		Specify	EDKL-J2U1

① For Aluminum Cover only, add suffix - A.

② For other colors, add color suffix for each pilot light: Amber—JGBA, Blue—JGBB, Clear—JGBC, Green—JGBG, Opal—JGBO.

Contender™ Series Factory Sealed Control Stations and Pilot Lights

For Contender™ Bodies Only

NEC/CEC:

Class I, Division 1, Groups C, D
 Class I, Division 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III

Covers ② Only — for use on standard Contender bodies

Supplied with 4 stainless steel captive bolts ③.

		Description	Catalog Number ①
		Push Button and Pilot Light Covers — 3/4” Tapped Openings	
EDSK-1J	EDSK-2J	One opening: one push button or one pilot light	EDSK-1J
		Two openings: two push buttons, two pilot lights, or one of each	EDSK-2J
		Three openings: three device, three push buttons or three pilot lights, or combination of push button(s) and pilot light(s)	EDSKL-3PB ③
	EDSKL-3PB		
		Push Button or Selector Switch Cover — 1/2” Tapped Openings	
		Two openings: selector switch or two push buttons (side by side)	EDSK-2SP
		Push Button, Pilot Light or Selector Switch Covers — 3/4” top and 1/2” Bottom Tapped Openings	
EDSK-1JSS	EDSK-B	One top and two bottom openings: one pilot light, two push buttons (side by side); one pilot light, one selector switch.	EDSK-1JSS
		Blank	EDSK-B
		Nameplate Mounting Bracket	
		<i>Mount bracket between cover screws and cover. Do not mount bracket between ground joint flame path between cover and backbox.</i>	
		Bracket with blank silver/black nameplate	NPBRKT-CONT
		To order bracket with control station, add suffix -NPBRKT to end of catalog number.	
		To order engraved nameplates, add desired markings after catalog number. Maximum of 2 lines with 12 characters (including spaces) per line.	

① For Aluminum Cover only, add suffix - A.

② Must be used with Contender Series backboxes.


③ Catalog number EDSKL-3PB supplied with 8 stainless steel non-captive bolts.

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Replacement Parts and Accessories

NEC/CEC:

Class I, Division 1, Groups C, D
 Class I, Division 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III

	Description	Contact Arrangement	Catalog Number
Push Button — Factory Sealed — Momentary Contact			
 SPBB-U1-Q	10 Amp 600 Vac Heavy Duty 1/2" thread size (NPSM). Furnished with 1/2" to 3/4" enlarger, Weather Boot, Guard, Start, Stop and Blank Nameplates.		
	Single Push Button	Universal	 SPBB-U1-Q
 SPBB-U2DBL	Double Push Button	Universal	 SPBB-U2DBL
Push Button — Red Mushroom Head — Factory Sealed — Maintained Contact			
 	10 Amp 600 Vac Heavy Duty 1/2" thread size (NPSM). Furnished with 1/2" to 3/4" enlarger and Emergency Stop Nameplate (guard not furnished).		
	Single Push Button	Universal	 SMPB-U1-Q
Rectangular Button with Weather Boot			
 	Furnished with Start, Stop and Blank Nameplates.		NBN-WB
Nameplates for Rectangular Push Buttons			
 SNP-OFF-Q	Blank	SNP-B-Q	Off SNP-OFF-Q
	Forward	SNP-FWD-Q	On SNP-ON-Q
 SNP-ON-Q	Jog	SNP-JOG-Q	Reverse SNP-REV-Q
	Run	SNP-RUN-Q	Open SNP-OPEN-Q
	Stop	SNP-SP-Q	Close SNP-CLOSE-Q
	Start	SNP-ST-Q	Up SNP-UP-Q
	Down	SNP-DOWN-Q	Test SNP-TEST-Q
	Fast	SNP-FAST-Q	Low SNP-LOW-Q
	Slow	SNP-SLOW-Q	High SNP-HIGH-Q
	Raise	SNP-RAISE-Q	
	Lower	SNP-LOWER-Q	
	Reset	SNP-RESET-Q	
Push Button Replacement Locking Guards — Glass Reinforced Polypropylene — Gasketed			
 Maintained Mushroom Head Switch Guard	Has hole for 1/4" hasp.		
 Single Guard	Single Guard (Maintained Mushroom Head Switch)		SMPB-LG
	Single Guard		NPB-LG1
 Double Guard	Double Guard		NPB-LG2
	Single Guard (No Lockout Holes)		NPB-LG1-LL
	Double Guard (No Lockout Holes)		NPB-LG2-LL
Push Button Securing Rod with Chain — Stainless Steel			
 	For use with Single Guard Only		NBL-SR
Mushroom Head Button with Weather Boot for Use with Momentary Contact — Gasketed			
 	Black		NMRB-BL
	Green		NMRB-GR
	Red		NMRB-RE

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Replacement Parts and Accessories

NEC/CEC:

Class I, Division 1, Groups C, D
 Class I, Division 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III

APPLETON™

CONTROLS: NEC/CEC EXPLOSIONPROOF CONTROL STATIONS AND SWITCHES


Description		Catalog Number
Mushroom Head Push Button		
  MNPESTPQ	For Use with Mushroom Head Button — Maintained Contact – Solid-Colored Nonmetallic Red	NMRBM-RE
Nameplates For Mushroom Head Push Button For Momentary and Maintained		
	Start	MNPSTQ
	Stop	MNPSPQ
	Emergency Stop	MNPESTPQ
	Blank	MNPBQ
Pilot Light — Factory Sealed		
 Pilot Light	 Chamber Only	
Incandescent		
<i>Furnished with 6S6 120 Vac incandescent lamp, jewel and guard. Has 457 mm (18") long, type SFF-2 pigtail leads; +150 °C (+302 °F). Body has 3/4" straight thread (NPSM)</i>		
	With Red Jewel	SPLSREB
	With Green Jewel	SPLSGRB
	With Amber Jewel	SPLSAMB
	With Blue Jewel	SPLSBLB
	With Clear Jewel	SPLSCLB
	With Opal Jewel	SPLSOPB
LED		
<i>Furnished with candelabra base 120 Vac LED, jewel and guard. Has 457 mm (18") long, type SFF-2 pigtail leads; +150 °C (+302 °F). Body has 3/4" straight thread (NPSM).</i>		
	With Red LED, Clear Jewel	SPLNSREB
	With Green LED, Clear Jewel	SPLNSGRB
	With Amber LED, Clear Jewel	SPLNSAMB
	Chamber Only (Same as above, less jewel, guard and lamp)	SPLSSCB
Pilot Light Jewel/Guard Assembly		
		
	Amber Jewel/Guard	JGBNA
	Blue Jewel/Guard	JGBNB
	Clear Jewel/Guard	JGBNC
	Green Jewel/Guard	JGBNG
	Opal Jewel/Guard	JGBNO
	Red Jewel/Guard	JGBNR
Replacement Bulbs		
 EPL-B6W	 EPLLEDR	
Clear Bulbs		
Furnished with candelabra base. 6 Watt, 120 Vac Type 6S6		
LED Replacements		
Furnished with candelabra base. 120 Vac, 10 mA		
	Red LED	EPLLEDR
	Green LED	EPLLEDG
	Amber LED	EPLLEDA

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Replacement Parts and Accessories

NEC/CEC:

Class I, Division 1, Groups C, D
 Class I, Division 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III

	Primary Vac	Lamp Vac	Suffix
Transformer			
 Add Suffix as listed below. Transformer clamps directly to pilot light barrel. Only one pilot light transformer assembly per one gang body.			
	220	120	S801
	277	120	S802
	440	120	S803
	550	120	S804

	Description	Catalog Number
Nameplates for Pilot Light		
 LNPRUNQ	Blank	LNPBQ
	Forward	LNPFWDQ
	Jog	LNPJOGQ
	Run	LNPRUNQ
	Stop	LNPSQ
	Start	LNPSTQ
	Down	LNPDOWNQ
	Fast	LNPFASQ
	Slow	LNPSLOWQ
	Raise	LNPRASEQ
	Lower	LNPLOWERQ
	Reset	LNPRESETQ
	Off	LNPOFFQ
	On	LNPNQ
	Reverse	LNPREVQ
	Close	LNPCLOSEQ
	Open	LNPOPENQ
	Up	LNPUPQ
	Test	LNPTSTQ
	Low	LNPLWQ
	High	LNPHIGHQ

APPLETON™

CONTROLS: NEC/CEC EXPLOSIONPROOF CONTROL STATIONS AND SWITCHES

Contender™ Series Factory Sealed Control Stations and Pilot Lights

Mounting Bodies. Explosionproof, Dust-Ignitionproof

NEC/CEC:

Class I, Division 1, Groups C, D
 Class I, Division 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III

		Catalog Number		
Type	Hub Size (Inches)	Malleable Iron	Aluminum	
1-Gang				
	Dead-End	1/2	EDS171	EDS171-SA
		3/4	EDS271	EDS271-SA
		1	EDS371	EDS371-SA
	Feed-Thru	1/2	EDSC171	EDSC171-SA
		3/4	EDSC271	EDSC271-SA
		1	EDSC371	EDSC371-SA
2-Gang				
	Dead-End	1/2	EDS172	EDS172-SA
		3/4	EDS272	EDS272-SA
		1	EDS372	EDS372-SA
	Feed-Thru	1/2	EDSC172	EDSC172-SA
		3/4	EDSC272	EDSC272-SA
		1	EDSC372	EDSC372-SA
3-Device				
	Dead-End	1/2	EDS147	EDS147-SA
		3/4	EDS247	EDS247-SA
		1	EDS347	EDS347-SA
	Feed-Thru	1/2	EDSC147	EDSC147-SA
		3/4	EDSC247	EDSC247-SA
		1	EDSC347	EDSC347-SA
Tandem ①				
	Dead-End	1/2	EDS177	EDS177-SA
		3/4	EDS277	EDS277-SA
		1	EDS377	EDS377-SA
	Feed-Thru	1/2	EDSC177	EDSC177-SA
		3/4	EDSC277	EDSC277-SA
		1	EDSC377	EDSC377-SA

① For tandem bodies, external seals must be installed within 1.5 meters (5 feet) of each conduit entrance for Class I, Groups C and D.

Contender™ Series Factory Sealed Control Stations and Pilot Lights

NEC/CEC:

Class I, Division 1, Groups C, D


Class I, Division 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G


Class III

Mounting Body Dimensions in Millimeters (Inches)


1-Gang




2-Gang




1- and 2-Gang Side View




3-Device

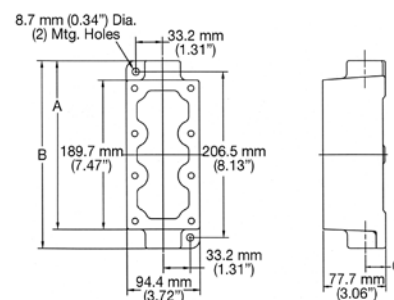


Tandem

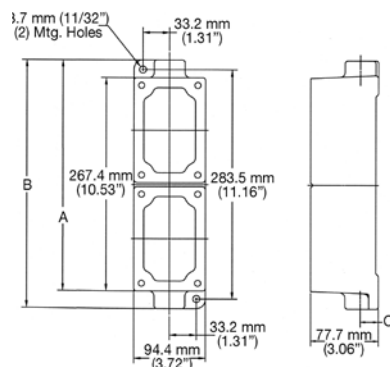

NPBRKT Nameplate Mounting Bracket

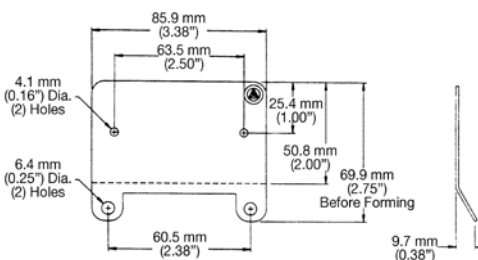

Secure bracket under cover screws of box. Torque cover screws to 35" - lbs.



Unilet Type	Hub Size (Inches)	Dimensions in Millimeters (Inches)		
		A	B	C
1-Gang	1/2	153.9 (6.06)	173.0 (6.81)	19.1 (0.75)
	3/4	153.9 (6.06)	173.0 (6.81)	22.4 (0.88)
	1	156.7 (6.17)	179.6 (7.03)	25.4 (1.00)
2-Gang	1/2	153.9 (6.06)	173.0 (6.81)	22.4 (0.88)
	3/4	153.9 (6.06)	173.0 (6.81)	22.4 (0.88)
	1	156.7 (6.17)	179.6 (7.03)	25.4 (1.00)
3-Device	1/2	211.8 (8.34)	233.4 (9.19)	25.4 (1.00)
	3/4	211.8 (8.34)	233.4 (9.19)	25.4 (1.00)
	1	211.8 (8.34)	233.4 (9.19)	25.4 (1.00)
Tandem	1/2	287.3 (11.31)	309.1 (12.09)	22.4 (0.88)
	3/4	287.3 (11.31)	309.1 (12.09)	22.4 (0.88)
	1	290.6 (11.44)	312.7 (12.31)	25.4 (1.00)


Contender™ Series Factory Sealed Control Stations and Pilot Lights

NEC/CEC:


Class I, Division 1, Groups C, D
Class I, Division 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III

Dimensions in Millimeters (Inches)


1- and 2-Gang Combination Pilot Light and Push Button

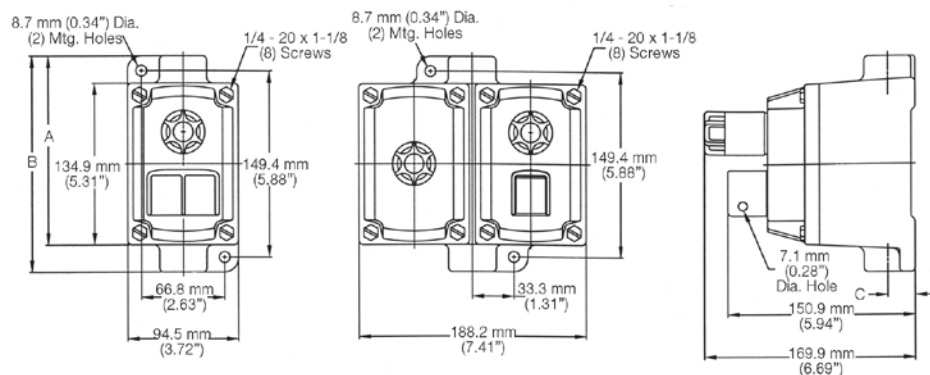

1-Gang Dust Cap Push Button and Maintained Push Button

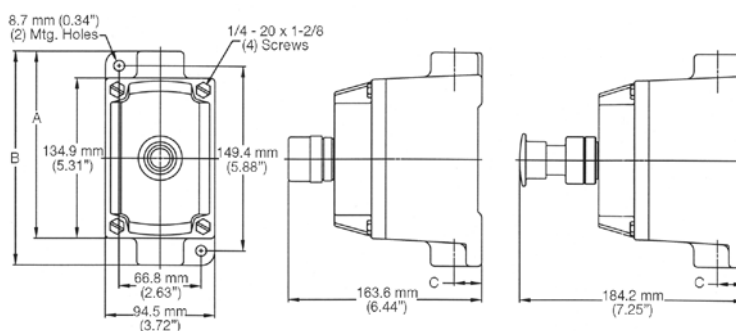

1- and 2-Gang Rocker Arm Push Button

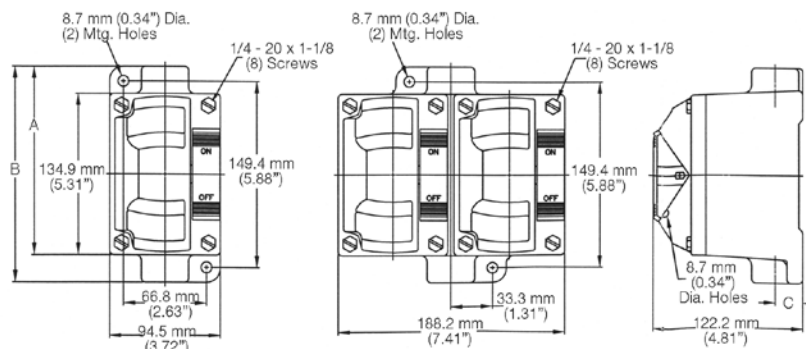

Unilet Type	Hub Size (Inches)	Dimensions in Millimeters (Inches)		
		A	B	C
1-Gang	1/2	153.9 (6.06)	173.0 (6.81)	19.1 (0.75)
	3/4	153.9 (6.06)	165.4 (6.51)	22.4 (0.88)
	1	156.7 (6.17)	179.6 (7.03)	25.4 (1.00)
2-Gang	1/2 and 3/4	153.9 (6.06)	165.4 (6.51)	22.4 (0.88)
	1	156.7 (6.17)	179.6 (7.03)	25.4 (1.00)