

Catalog Home

Product Datasheet	ANDERSON FARGO	
GL1355A Automatic Splice		
Automatic Splice, 10,000 Lb, for AAC, AAAC, ACSR, Dia. Range 0.94 - 0.976 in.		
Product Specifications		
Splice Type	Automatic Splices	
Automatic Splice Series	GL-400 Series Automatic Splice Aluminum Full Tension AAC, AAAC & ACSR Conductor Single Layer Al Strand Conductor	
PDF Catalog Page	Click HERE to view the web page.	
Conductor Type	AAC, AAAC, ACSR	
Conductor Diameter (Minimum)	0.94 in	
Conductor Diameter (Maximum)	0.976 in	
Automatic Conductor Range	700-715 AAC	
Material	Aluminum	
Gripper Material	Aluminum Alloy	
Minimum Conductor Diameter	0.94 in	
Maximum Conductor Diameter	0.976 in	
Outside Diameter	.940976 in (23.80 - 24.80 mm)	
Dimension A Dimension B	16 in (400 mm) 2.0 in (50 mm)	
UL Listed	2.0 III (50 IIIII)	
Inhibitor Loaded	Yes	
Color Code	Natural	
Material Type	Standard	
UPC Code	09635931165	
Standard Package	10	
Standard Package Unit	Each	
Januara rackage offic	245.1	

Min Order Qty	10
Weight / Ea.	1.862 lbs

Notes

Maximum Design Rating 10,000 Lb./44.5 kN, Consult Factory for conductor sizes not listed.


Features

Individually bagged to seal out dirt before use.

Compressed Product Number

GL1355A

Ref Dimension A & B

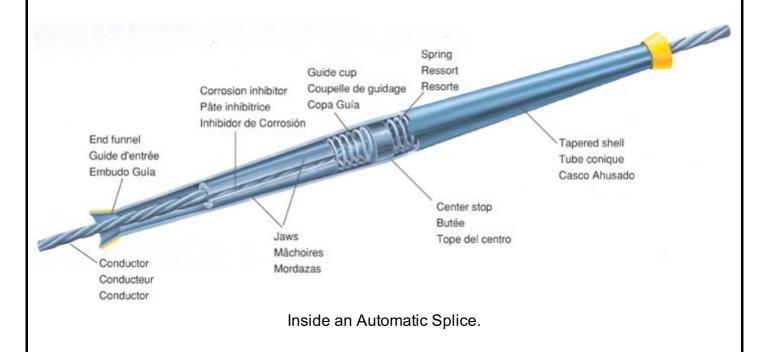

Catalog Home



Warranty Info | **Trademarks** | **Terms of Use**

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.