



[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

GD409A -- Aluminum Automatic Dead End



Aluminum Automatic Dead End, AAC, AAAC, ACSR Conductor .505 - .563" (12.83 -15.11 mm), Flex Bail

Product Specifications

Category Image



Automatic Deadends

Copper and Aluminum
AAC, AAAC, ACAR, ACSR,
Copper & Copperweld®
Conductor

Series Image (Automatic)



GD-400 Series

Automatic Dead End

Flex Bail

**AAC, AAAC & ACSR
Conductor**

PDF Catalog Page

[Click HERE to view the web page.](#)

Bail Option

Flex Bail

Type

Automatic

Material

Aluminum

Inhibitor Loaded

Yes

Shell Material

High Strength Aluminum Alloy

Bail Material

Stainless Steel

Assembly Rating (Ultimate)

95% Conductor RBS

Dimension A

17.6 in

Dimension B

9 in

Dimension C

2.0 in (50 mm)

Diameter Range

.505 - .563 in (12.83 - 15.11 mm)

Color Code

Pink

Conductor Range Minimum - Maximum

AAC 4/0 str (7) Thru AAC 4/0 str (19)
ACSR 134.6 kcmil (12/7) Thru ACSR 4/0 (6/1)

Minimum Conductor Diameter

0.505

Maximum Conductor Diameter

0.563


Weight / Ea.	0.98 lbs
Standard Package	25
UPC Code	09635930878

Notes

Add "N" suffix for Neoprene coated bail.

Compressed Product Number

GD409A

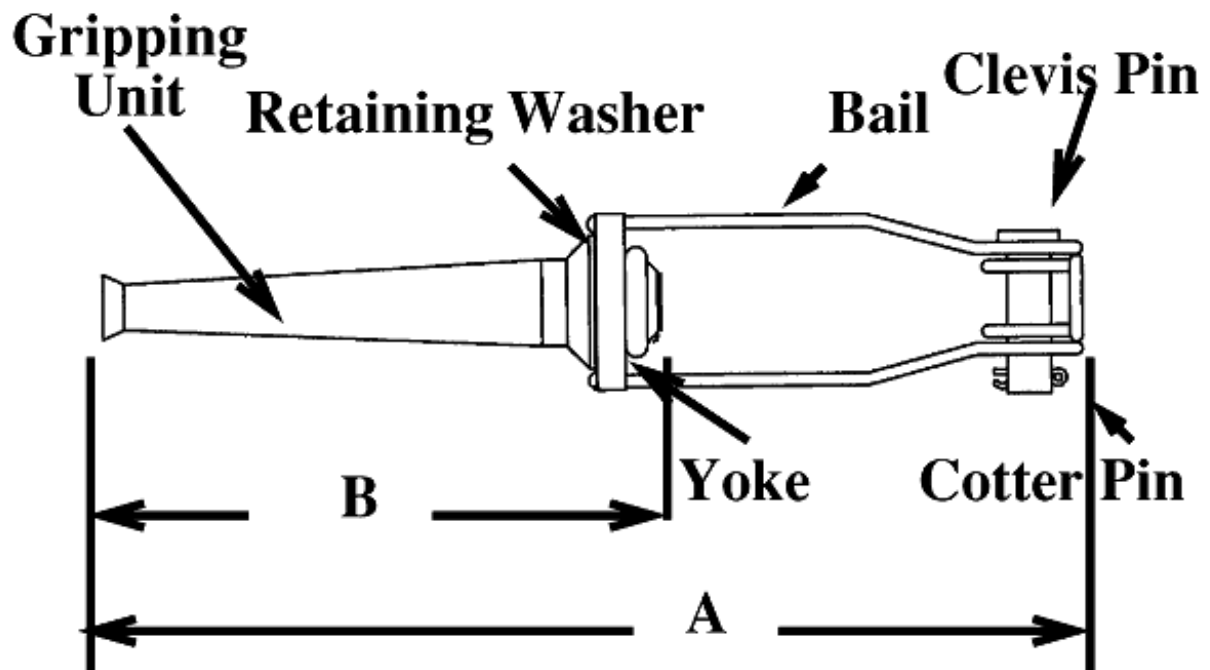

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.