



**POWER
SYSTEMS, INC.**

In the world of power transmission and distribution, look to Hubbell.

**Interactive
eCatalog**

[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

BSD68N -- Strain Clamp, Quadrant, Heavy Duty



Strain Clamp, Quadrant, Heavy Duty, Bronze, Conductor Range 0.3 - 0.68 in,
Fitting: None

Product Specifications

Category Image



**Bolted
Deadends**

Aluminum & Bronze

Quadrant

Aluminum & Copper
Conductor

Series Image (Quadrant)



BSD/BSDS Series

Quadrant Dead End

Bolted, Bronze

Copper & Copperweld®
Conductor

PDF Catalog Page

[Click HERE to view the web page.](#)

Fitting Type

None

Style

BSD - Strain Clamp, Quadrant, Heavy Duty

Type

Bolted

Material

Bronze

Fitting Catalog No.

NONE

Voltage Application

Std

Body Material

Aluminum Bronze Alloy

Keeper Material

Electrical Bronze


Cotter Pin Material

#302 Stainless Steel

Hardware Material	Galvanized Steel
Ultimate Body Strength	25,000 lb (11,340 kg)
U-Bolts	4
Bolt Size	.50 in (12.70 mm)
Dimension C	9.5 in (241.3 mm)
Dimension K	1.63 in (33.34 mm)
Dimension L	11 in (279.40 mm)
Dimension W	3/4 in (19.05 mm)
Pin Diameter	0.625 in (15.88 mm)
Clevis Opening	.750 in (19.05 mm)
Conductor Range Minimum - Maximum	Cu 1/0 sol Thru Cu 350 kcmil (19)
Minimum Conductor Diameter	0.3
Maximum Conductor Diameter	0.68
Weight / Ea.	8.53 lbs
Standard Package	1
UPC Code	09635929277

Compressed Product Number

BSD68N

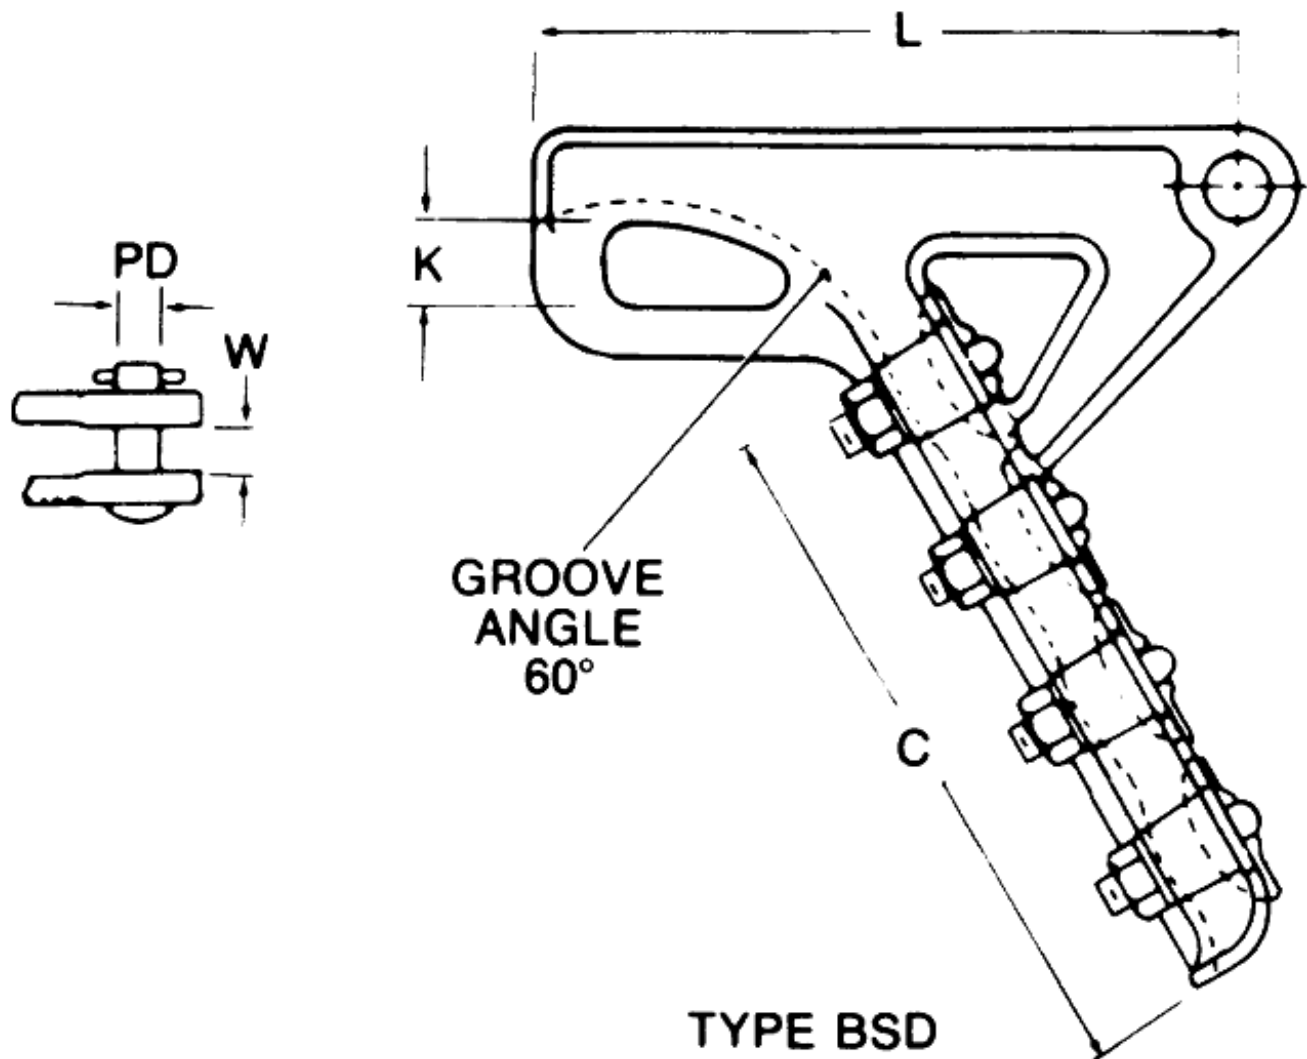

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.