

# elastimold Product Specifications

**Issue Date:** 10/29/2012 Page: 1 of 2 PSS-K650J4 File:

15/25kV

600A Deadbreak 4-Way Junction

K650J4



#### Features:

- 15/25kV, 600 Amp Deadbreak 4-Way Junction
- Fully shielded, fully submersible molded rubber housing
- 100% peroxide-cured construction includes insulation and conductive **EPDM** materials
- Provides mating for Elastimold® 600 A Series Elbow connectors
- **Stainless Steel Mounting Bracket**

## K650J4 **Deadbreak 4-Way** Junction

## Applications:

ELASTIMOLD® junctions are designed for subsurface, vault or padmount applications and can be used for sectionalizing, looping, tapping, and equipment bypass. Junctions are designed to mate with other ELASTIMOLD® products including:

- K655 Elbow Connector
- K655BE Bushing Extender
- 655BEA3 Bushing Adapter

ELASTIMOLD® junctions are equipped with a stainless steel mounting bracket and back plate suitable for mounting on a flat surface.

### Ratings:

Meets ANSI/IEEE Standard 386, Latest Revision

#### For 15kV Voltage Class:

8.3kV Max Phase-to-Ground - Operating Voltage 14.4kV Max Phase-to-Phase

95kV BIL - Impulse Withstand (1.2 x 50 microsecond wave)

34kV AC - One minute withstand

53kV DC - 15 minutes withstand

11kV AC - Corona Extinction @ 3pC sensitivity

600 Amp - Continuous

25kA Sym - 10 Cycles Momentary

#### For 28kV Voltage Class:

16.2kV Max Phase-to-Ground - Operating Voltage

28kV Max Phase-to-Phase

140kV BIL – Impulse Withstand (1.2 x 50

microsecond wave)

45kV AC - One minute withstand

84kV DC - 15 minutes withstand

21.5kV AC - Corona Extinction @ 3pC sensitivity

600 Amp - Continuous

25kA Sym - 10 Cycles Momentary





## **Product Specifications**

 Issue Date:
 10/29/2012


 Page:
 2 of 2

 File:
 PSS-K650J4

15/25kV

600A Deadbreak 4-Way Junction

K650J4

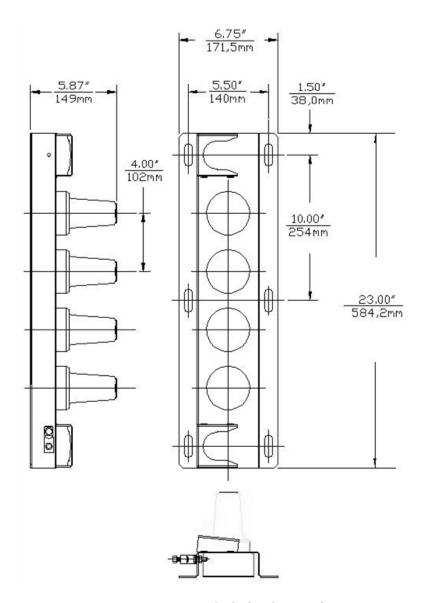

#### Each kit contains the following:

Basic molded junction
 Mounting Hardware
 Tube, lubricant
 Installation instruction
 Protective Cap
 K650J4
 600J4-6
 82-08
 IS-0207
 650PPC-01

#### **Ordering Instructions:**

Specify **K650J4** for 15/25kV, 600 Amp, 4-way Deadbreak Junction.

Add "-5" at the end of the catalog number for Junctions with "U" style mounting straps only.

Add "-6" at the end of the catalog number for mounting bracket and back plate only.

