


16,000 lb. Series Guy Strains - Clevis / Eye

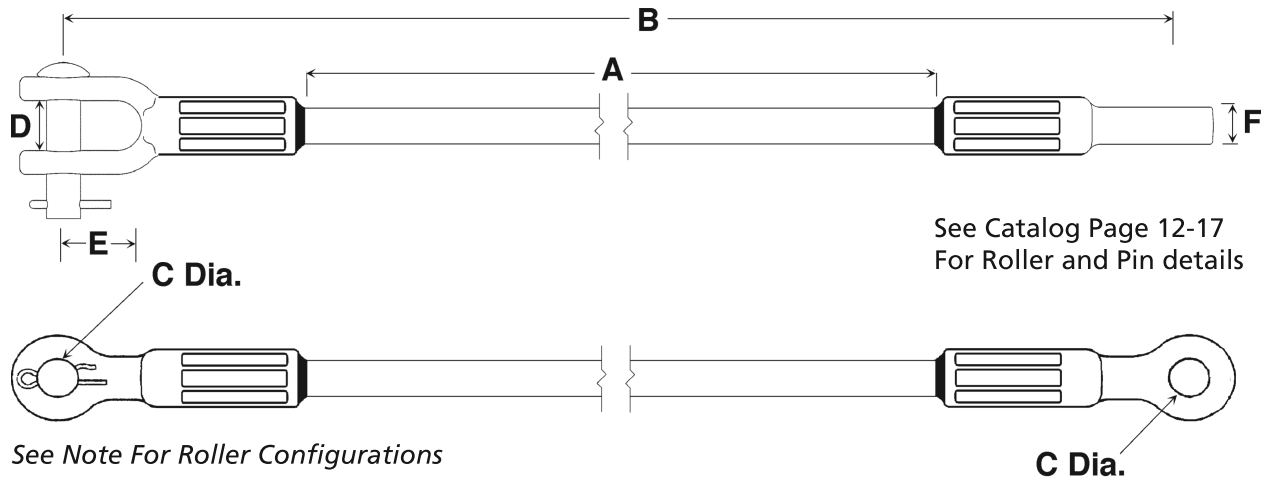

See Catalog Page 12-17
For Roller and Pin details

See Note For Roller Configurations

C Dimension is 5/8" (16 mm)
D Dimension is 0.9" (23 mm)
E Dimension is 1.4" (36 mm)

5/8" dia. Fiberglass rod.

Castings are hot-dip galvanized ductile iron.

RUS Accepted.

Catalog Number	Length A	Length B	Width F	Weight (Each)
16,000 lbs. (7258 kg) Minimum Ultimate Strength*				
GS16012CE	12" (30.5 cm)	19.8" (50.3 cm)	0.625" (16 mm)	2.8 lbs. (1.3 kg)
GS16018CE	18" (45.7 cm)	25.8" (65.5 cm)	0.625" (16 mm)	2.9 lbs. (1.3 kg)
GS16024CE	24" (61.0 cm)	31.8" (80.8 cm)	0.625" (16 mm)	3.1 lbs. (1.4 kg)
GS16030CE	30" (76.2 cm)	37.8" (96.0 cm)	0.625" (16 mm)	3.2 lbs. (1.4 kg)
GS16036CE	36" (91.4 cm)	43.8" (111.3 cm)	0.625" (16 mm)	3.3 lbs. (1.5 kg)
GS16054CE	54" (137.2 cm)	61.8" (157.0 cm)	0.625" (16 mm)	3.7 lbs. (1.7 kg)
GS16060CE	60" (152.4 cm)	67.8" (172.2 cm)	0.625" (16 mm)	3.8 lbs. (1.7 kg)
GS16078CE	78" (198.1 cm)	85.8" (217.9 cm)	0.625" (16 mm)	4.2 lbs. (1.9 kg)
GS16120CE	120" (304.8 cm)	127.8" (324.6 cm)	0.625" (16 mm)	5.1 lbs. (2.3 kg)
GS16144CE	144" (365.8 cm)	151.8" (385.6 cm)	0.625" (16 mm)	5.7 lbs. (2.6 kg)

GS—CE series has No Roller as detailed in drawing

For 1 Roller, replace "CE" in number with "CE1"

Add "SC" suffix to the end of the catalog number to denote Silicone Coated rod

*Recommended maximum working load is 50% of minimum ultimate ratings listed.

