

# Product data sheet

## Characteristics

# 140DDI36400

discrete input module Modicon Quantum - 96 I - 24 V DC

Product availability : Stock - Normally stocked in distribution facility

Price\* : 2860.06 USD



### Main

Range of product	Modicon Quantum automation platform
Product or component type	Low voltage dc discrete input modules
Discrete input number	96

### Complementary

Group of channels	6
Logic input	Positive (sink)
Discrete input voltage	24 V DC
Input voltage limits	19.2...30 V
Voltage state 1 guaranteed	15...30 V DC
Voltage state 0 guaranteed	5 V DC
Current state 1 guaranteed	$\geq 2.5$ mA
Current state 0 guaranteed	$\geq 0.7$ mA
Addressing requirement	6 words
Input impedance	6700 Ohm
Absolute maximum input	30 V continuous 50 V decaying pulse
Response time	$\leq 2$ ms from state 0 to state 1 $\leq 3$ ms from state 1 to state 0
Power dissipation	1.35 W + (0.13 x number of points on)
Isolation between group	500 Vrms for 1 minute
Local signalling	1 LED green bus communication is present (Active) 1 LED red external fault detected (F) 96 LEDs green input status
Marking	CE
Bus current requirement	$< 270$ mA
Module format	Standard

Product weight	0.66 lb(US) (0.3 kg)
----------------	----------------------

## Environment

Standards	CSA C22.2 No 142 UL 508
Product certifications	FM Class 1 Division 2 C-Tick
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	9.14 V/yd (10 V/m) 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

## Ordering and shipping details

Category	18155 - QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	00785901403784
Nbr. of units in pkg.	1
Package weight(Lbs)	2.21
Returnability	N
Country of origin	CN

## Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1008 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available
Product end of life instructions	Available

## Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

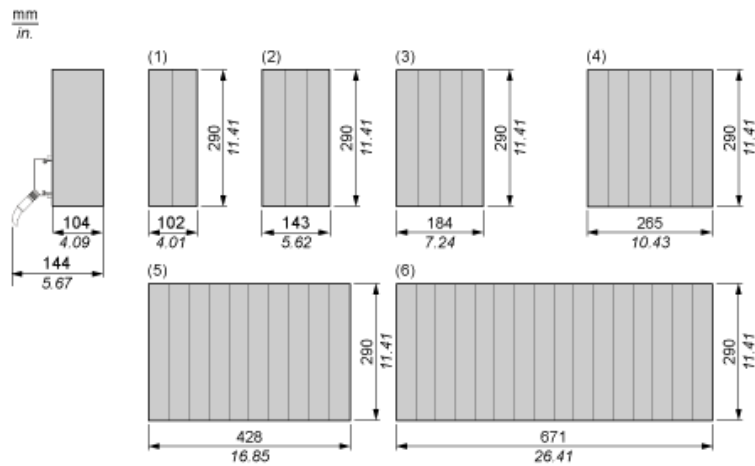

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

24 Vdc 6x16 Input Module

6 Groups of 16 Inputs A...F (6 x HE 10 Connectors)

