



[Catalog Home](#)

Product Datasheet



ANDERSON FARGO

LC1155 -- Connector, Parallel Groove



Two U-Bolt Bronze Parallel Groove Connector

Product Specifications

<p>Category Image</p>	 <p>Mechanical Connectors (Bronze) Bronze Parallel Groove and Split Bolt Connectors Connector For CU to CU connections</p>
<p>Series Image (BR Mech)</p>	 <p>LC-1100 Series Bronze 2 U-Bolt Parallel Groove Connector For CU to CU Connections</p>
<p>Material</p>	<p>Bronze</p>
<p>PDF Catalog Page</p>	<p>Click HERE to view the web page.</p>
<p>Plating</p>	<p>No</p>
<p>Inhibitor</p>	<p>No</p>
<p>...</p>	<p>Cu 350 kcmil (19), Cu 350 kcmil (37), Cu 400 kcmil (19), Cu 400 kcmil (37), Cu 450 kcmil (37), Cu 500 kcmil (19), Cu 500 kcmil (37), Cu 3/0 sol w/Armor Rods, Cu 2/0 str (7) w/Armor Rods, Cu 2/0 str (19) w/Armor Rods, Cu</p>

Run Conductor Size and Type	4/0 sol w/Armor Rods, Cu 3/0 str (7) w/Armor Rods, Cu 3/0 str (19) w/Armor Rods, Cu 4/0 sol, Cu 3/0 str (7), Cu 3/0 str (19), Cu 4/0 str (7), Cu 4/0 str (19), Cu 2 sol w/Armor Rods, Cu 1 sol w/Armor Rods, Cu 2 str (7) w/Armor Rods, Cu 250 kcmil (19), Cu 250 kcmil (37), Cu 300 kcmil (19), Cu 300 kcmil (37), Cu 1/0 sol w/Armor Rods, Cu 1 str (7) w/Armor Rods, Cu 1 str (19) w/Armor Rods, Cu 2/0 sol w/Armor Rods, Cu 1/0 str (7) w/Armor Rods, Cu 1/0 str (19) w/Armor Rods
Tap Conductor Size and Type	Cu 4/0 sol, Cu 3/0 str (7), Cu 3/0 str (19), Cu 4/0 str (7), Cu 4/0 str (19), Cu 250 kcmil (19), Cu 250 kcmil (37), Cu 300 kcmil (19), Cu 300 kcmil (37), Cu 350 kcmil (19), Cu 350 kcmil (37), Cu 400 kcmil (19), Cu 400 kcmil (37), Cu 2 sol w/Armor Rods, Cu 1 sol w/Armor Rods, Cu 2 str (7) w/Armor Rods, Cu 1/0 sol w/Armor Rods, Cu 1 str (7) w/Armor Rods, Cu 1 str (19) w/Armor Rods, Cu 2/0 sol w/Armor Rods, Cu 1/0 str (7) w/Armor Rods, Cu 1/0 str (19) w/Armor Rods, Cu 3/0 sol w/Armor Rods, Cu 2/0 str (7) w/Armor Rods, Cu 2/0 str (19) w/Armor Rods, Cu 450 kcmil (37), Cu 500 kcmil (19), Cu 500 kcmil (37), Cu 4/0 sol w/Armor Rods, Cu 3/0 str (7) w/Armor Rods, Cu 3/0 str (19) w/Armor Rods
Run Conductor Minimum Size	0.460 in
Run Conductor Maximum Size	.813 in
Tap Conductor Minimum Size	.46 in
Tap Conductor Maximum Size	.813 in
Run Conductor Type	CU
Tap Conductor Type	CU
Style	Two U-Bolt
Cover Available	No
UL Listed	No
Body Material	Bronze Alloy
Body and Keeper Material	Bronze Alloy
Body Members Material	Bronze Alloy
Body Halves Material	Bronze Alloy
Bolt Material	Silicon Bronze
Bottom Member Material	Bronze Alloy
Hardware Material	Silicon Bronze
Dimension H	4.00 in (102 mm)
Dimension J	0.50 in (13 mm)
Dimension L	3.38 in (86 mm)
Dimension W	2.62 in (67 mm)
Bolt Size	0.50 in (13 mm)
Bolt Head	U-Bolt
Bolt Diameter	0.50 in (13 mm)

Material Type	Non-Standard
UPC Code	09635931946
Standard Package	25
Standard Package Unit	Each
Min Order Qty	25
Weight / Ea.	2.352 lbs

Notes


For CU to CU splice/Tap connections

Features

Hardware may also be stainless steel (SS).

Compressed Product Number

LC1155

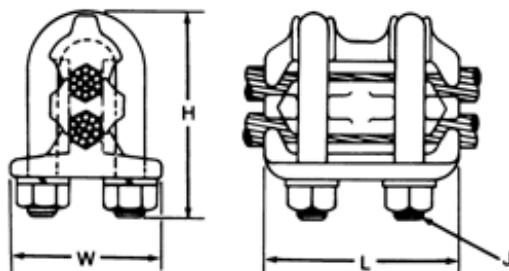

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.