

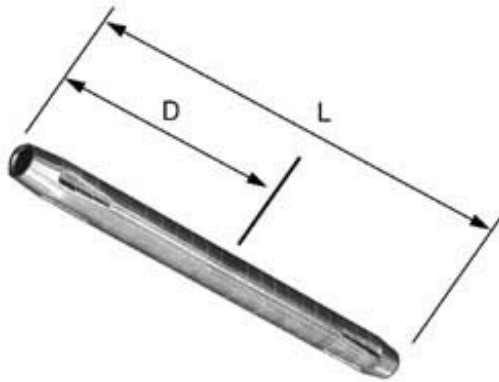


[Catalog Home](#)

Product Datasheet

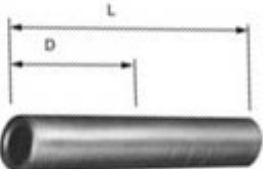
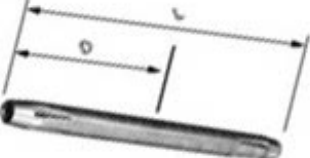
ANDERSON FARGO

VC36R -- Full Tension Compression Splice



Full Tension VersaCrimp Aluminum Compression Splice

Product Specifications

<p>Splice Type</p>	 <p>VERSA-CRIMP® Compression Splices (For use with VersaCrimp and other Dieless Type Tools)</p>
<p>Versacrimp Compression Series</p>	 <p>VC-AR & VC-R Series Compression Splice VERSA-CRIMP® Full Tension AAC, AAAC & (ACSR SingleCore) Conductor</p>
<p>PDF Catalog Page</p>	<p>Click HERE to view the web page.</p>
<p>VersaCrimp Conductor Size Minimum</p>	<p>0.232 in</p>
<p>VersaCrimp Conductor Size Maximum</p>	<p>0.325 in</p>
<p>Material</p>	<p>Aluminum</p>
<p>VersaCrimp Conductor Range</p>	<p>#4 (7,19) - #2 (7) AAC, #4 (7/1, 6/1), #2 (7/1, 6/1) ACSR, 77.47 (7), 123.3 (7) 5005 or AAAC</p>
<p>VersaCrimp Conductor Minimum</p>	<p>.232 in</p>
<p>VersaCrimp Conductor Maximum</p>	<p>.325 in</p>
<p>Dimension D</p>	<p>6.50 in (165 mm)</p>
<p>Dimension L</p>	<p>13.12 in (333 mm)</p>

Length before Compression	13.12 in (333 mm)
Compression Method	VC6-3 or VC6FT, VersaCrimp Tooling ONLY
UL Listed	No
Inhibitor Loaded	Yes
Material Type	Non-Standard
UPC Code	09635933545
Standard Package	25
Standard Package Unit	Each
Min Order Qty	25
Weight / Ea.	0.314 lbs

Notes

For full tension ACC, ACSR, 5005 or AAAC applications. Installs using all VersaCrimp VC6 tools.

Features

One Piece design eliminates cutting strands on ACSR.

Compressed Product Number

VC36R

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.