




Product Datasheet

ANDERSON FARGO


VC61R -- Full Tension Compression Splice

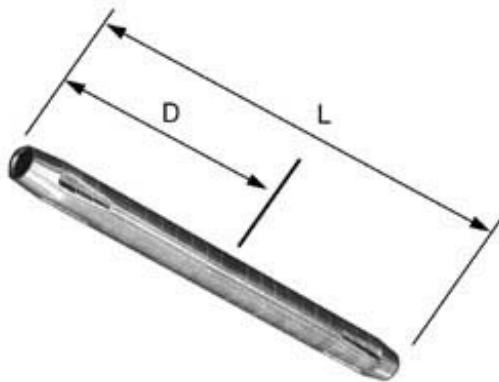

Full Tension VersaCrimp Aluminum Compression Splice


Product Specifications

Splice Type



VERSA-CRIMP®
Compression Splices
(For use with
VersaCrimp and other
Dieless Type Tools)

**Versacrimp Compression
Series**



VC-AR & VC-R Series
Compression Splice
VERSA-CRIMP®
Full Tension
AAC, AAAC &
(ACSR SingleCore) Conductor

PDF Catalog Page

[Click HERE to view the web page.](#)

**VersaCrimp Conductor
Size Minimum**

0.368 in

**VersaCrimp Conductor
Size Maximum**

0.563 in

Material

Aluminum

**VersaCrimp Conductor
Range**

1/0 (19, 7), 2/0 (7), 3/0 (7), 4/0 (7) AAC, 1/0 (6/1), 2/0 (6/1), 3/0 (6/1), 4/0 (6/1) ACSR, 155.4 (7), 195.7 (7), 246.9 (7) 5005 or AAAC

**VersaCrimp Conductor
Minimum**

.368 in

**VersaCrimp Conductor
Maximum**

.563 in

Dimension D

9.75 in (248 mm)

Dimension L	19.88 in (505 mm)
Length before Compression	19.88 in (505 mm)
Compression Method	VC6-3 or VC6FT, VersaCrimp Tooling ONLY
UL Listed	No
Inhibitor Loaded	Yes
Material Type	Non-Standard
UPC Code	09635933561
Standard Package	20
Standard Package Unit	Each
Min Order Qty	20
Weight / Ea.	1.078 lbs

Notes

For full tension ACC, ACSR, 5005 or AAAC applications. Installs using all VersaCrimp VC6 tools.

Features

One Piece design eliminates cutting strands on ACSR.

Compressed Product Number

VC61R

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.