




**Product Datasheet**

**ANDERSON FARGO**


**VC80R -- Full Tension Compression Splice**

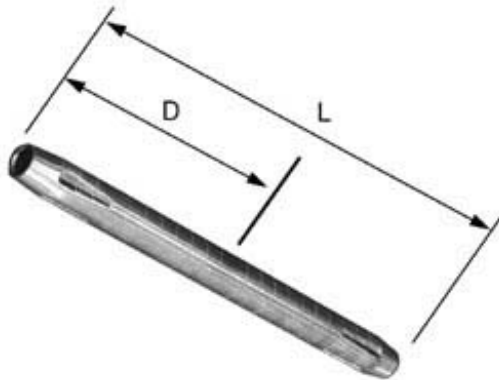

Full Tension VersaCrimp Aluminum Compression Splice


**Product Specifications**

**Splice Type**



**VERSA-CRIMP®**  
**Compression Splices**  
(For use with  
VersaCrimp and other  
Dieless Type Tools)

**Versacrimp Compression Series**



**VC-AR & VC-R Series**  
**Compression Splice**  
**VERSA-CRIMP®**  
Full Tension  
AAC, AAAC &  
(ACSR SingleCore) Conductor

**PDF Catalog Page**

[Click HERE to view the web page.](#)

**VersaCrimp Conductor Size  
Minimum**

0.522 in

**VersaCrimp Conductor Size  
Maximum**

0.743 in

**Material**

Aluminum

**VersaCrimp Conductor Range**

4/0 (6/1), 266.8 (18/1), 336.4 (18/1), 397.5 (18/1) ACSR, 4/0 (7), 226.8 (19,7) 336.4 (19), 397.5 (19) AAC

**VersaCrimp Conductor  
Minimum**

.522 in

**VersaCrimp Conductor  
Maximum**

.743 in

**Dimension D**

11.38 in (289 mm)

<b>Dimension L</b>	22.88 in (581 mm)
<b>Length before Compression</b>	22.88 in (581 mm)
<b>Compression Method</b>	VC6-3 or VC6FT, VersaCrimp Tooling ONLY
<b>UL Listed</b>	No
<b>Inhibitor Loaded</b>	Yes
<b>Material Type</b>	Non-Standard
<b>UPC Code</b>	09635933602
<b>Standard Package</b>	20
<b>Standard Package Unit</b>	Each
<b>Min Order Qty</b>	20
<b>Weight / Ea.</b>	1.568 lbs

### Notes

For full tension ACC and ACSR applications. Installs using VersaCrimp VC6FT or VC8 tool.

### Features

One Piece design eliminates cutting strands on ACSR.

### Compressed Product Number

VC80R

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.