

Price\* : 2042.41 USD



## Main

Range of product	Modicon Quantum automation platform
Product or component type	TTL discrete output module
Discrete output number	32

## Complementary

Group of channels	4 groups of 8 channels
Discrete output type	Positive (sink) TTL
Addressing requirement	2 output words
Discrete output voltage	5 V DC
Voltage state 1 guaranteed	$\leq 0.2$ V
[Us] rated supply voltage	4...5.5 V DC
Absolute maximum output	15 V for 0.0013 s decaying voltage pulse DC
Internal pullup resistor	440 Ohm
Maximum load current	$\leq 2.4$ A per module $\leq 600$ mA each group $\leq 75$ mA each point
Surge current	750 A 0.5 ms between each point
Response time	$\leq 250$ $\mu$ s at state 0 to state 1 resistive $\leq 250$ $\mu$ s at state 1 to state 0 resistive
Protection type	Internal by fuse Output protection by transient voltage suppression
Fault indication	Loss of field power Blown fuse
Power dissipation	4 W
Supply current	0.4 A
Isolation between group	500 Vrms for 1 minute
Marking	CE
Local signalling	1 LED green bus communication is present (Active)

	1 LED red external fault detected (F) 32 LEDs green input status
Bus current requirement	350 mA
Current consumption	2800 mA 5 V DC
Module format	Standard
Product weight	0.99 lb(US) (0.45 kg)


## Environment

Product certifications	GOST RMRS FM Class 1 Division 2 C-Tick
Standards	CSA C22.2 No 142 UL 508
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	9.14 V/yd (10 V/m) 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

## Ordering and shipping details

Category	18155 - QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	00785901013983
Nbr. of units in pkg.	1
Package weight(Lbs)	0.9599999999999996
Returnability	N
Country of origin	CN

## Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0901 - Schneider Electric declaration of conformity  <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available
Product end of life instructions	Available

## Contractual warranty

Warranty period	18 months
-----------------	-----------

## Racks for Modules Mounting

### Dimensions of Modules and Racks

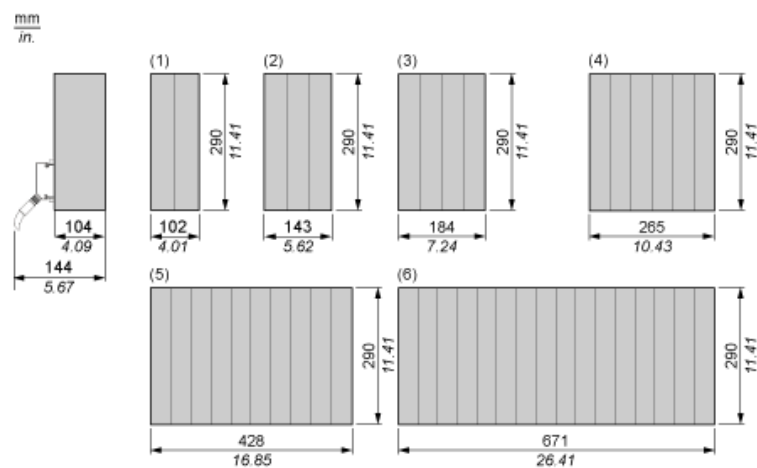

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

5 Vdc Discrete Output Sink Module

Wiring Diagram

