

Interactive @Catalog >

Catalog Home

Product Datasheet ANDERSON FARGO

GD448 -- Aluminum Automatic Dead End



Weight / Ea.


Aluminum Automatic Dead End, AAC, AAAC, ACSR Conductor .450 - .530" (11.43 - 13.46 mm), Clevis Bail

13.46 mm), Clevis Bail	
Product Specifications	
Category Image	Automatic Deadends Copper and Aluminum AAC, AAAC, ACAR, ACSR, Copper & Copperweld® Conductor
Series Image (Automatic)	GD-44 Series Automatic Dead End Clevis Bail AAC, AAAC & ACSR Conductor
PDF Catalog Page	Click HERE to view the web page.
Bail Option	Clevis Bail
Туре	Automatic
Material	Aluminum
Inhibitor Loaded	Yes
Shell Material	High Strength Aluminum Alloy
Bail Material	Galvanized Steel
Clevis Pin Material	Galvanized Steel
Cotter Pin Material	Stainless Steel
Assembly Rating (Ultimate)	95% Conductor RBS
Dimension A	18.9 in
Dimension B	10 in
Diameter Range	.450530 in (11.43 - 13.46 mm)
Color Code	Black
Conductor Range Minimum - Maximum	AAC 3/0 str (7) Thru AAC 4/0 str (19) AAAC 3/0 str(7) ACSR 101.8 kcmil (12/7) Thru ACSR 134.6 kcmil (12/7)
Minimum Conductor Diameter	0.45
Maximum Conductor Diameter	0.53

Standard Package	10
UPC Code	09635930907

Compressed Product Number

GD448

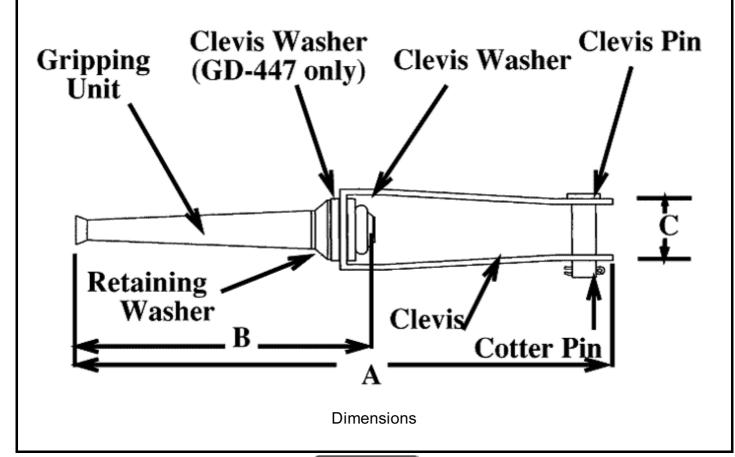

Catalog Home



Warranty Info | **Trademarks** | **Terms of Use**

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.