




[Catalog Home](#)

Product Datasheet

ANDERSON FARGO


PT4425 -- Terminal, Pin AL to CU

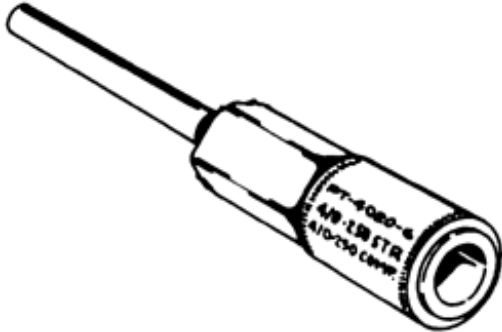

Bi-Metallic Pin Terminals for Joining Aluminum Conductors to Copper Equipment

Product Specifications

Series Image (Lugs)



PT Series

Aluminum Compression Terminal

Al to CU pigtail

VERSAtile (die and VC tools)

Material

Aluminum Body, Tin Plated Copper Rod

PDF Catalog Page

[Click HERE to view the web page.](#)

Plating

No

Inhibitor

Yes

Application

Standard Barrel Crimp Length

Pin Length

2.5 in

VersaCrimp Conductor Size Minimum

.146 in

VersaCrimp Conductor Size Maximum

.258 in

Die Type Tooling Crimp Conductor Size Minimum

.204 in

Die Type Tooling Conductor Size Maximum

.258 in

Lug Conductor Type

AAAC, AAC, ACAR, ACSR, Compact

Crimp Method

VERSAtile (accommodates conventional and Anderson tools)

UL Listed

No

Dimension A

4 sol (0.204 in)

Dimension C

1.0 in (25 mm)

Dimension L

2.5 in (63.5 mm)

UPC Code

09635932398

Standard Package

50

Standard Package Unit

Each

Min Order Qty

50

Weight / Ea.

0.098 lbs

Material Type

Standard

Notes


Color Code Blue. Sleeve connector is factory compressed over knurled surface of tinned annealed copper rod. When used with die type compression tools, use with maximum size conductor only.

Features

Provides a compatible bi-metallic transition for joining aluminum conductor to copper based transformer or other equipment terminals. Prefilled with rubber compatible electrical joint compound and plugged.

Compressed Product Number

PT4425

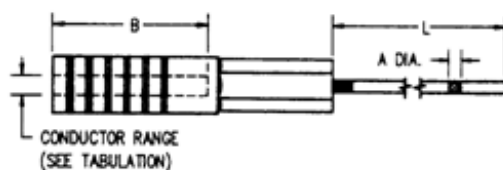

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.