




Catalog Home

Product Datasheet

ANDERSON FARGO


PT201025 -- Terminal, Pin AL to CU

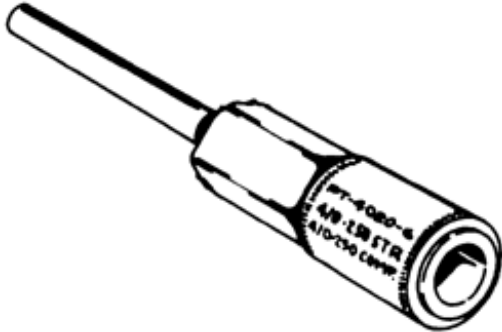

Bi-Metallic Pin Terminals for Joining Aluminum Conductors to Copper Equipment

Product Specifications

Series Image (Lugs)



PT Series

Aluminum Compression Terminal
Al to CU pigtail
VERSAtile (die and VC tools)

Material	Aluminum Body, Tin Plated Copper Rod
PDF Catalog Page	Click HERE to view the web page.
Plating	No
Inhibitor	Yes
Pin Length	2.5 in
VersaCrimp Conductor Size Minimum	.232 in
VersaCrimp Conductor Size Maximum	.448 in
Die Type Tooling Crimp Conductor Size Minimum	.414 in
Die Type Tooling Conductor Size Maximum	.448 in
Lug Conductor Type	AAAC, AAC, ACAR, ACSR, Compact
Crimp Method	VERSAtile (accommodates conventional and Anderson tools)
UL Listed	No
Dimension A	1/0 sol (0.325 in)
Dimension C	1.875 in (48 mm)
Dimension L	2.5 in (63.5 mm)
UPC Code	09635932383
Standard Package	100
Standard Package Unit	Each
Min Order Qty	100
Weight / Ea.	0.333 lbs
Material Type	Non-Standard

Notes


Color Code Gray. Sleeve connector is factory compressed over knurled surface of tinned annealed copper rod. When used with die type compression tools, use with maximum size conductor only.

Features

Provides a compatible bi-metallic transition for joining aluminum conductor to copper based transformer or other equipment terminals. Prefilled with rubber compatible electrical joint compound and plugged.

Compressed Product Number

PT201025

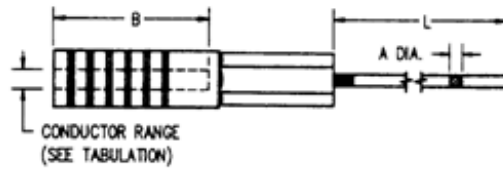

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.