




Product Datasheet

ANDERSON FARGO


VCJS36R -- Partial Tension Compression Splice

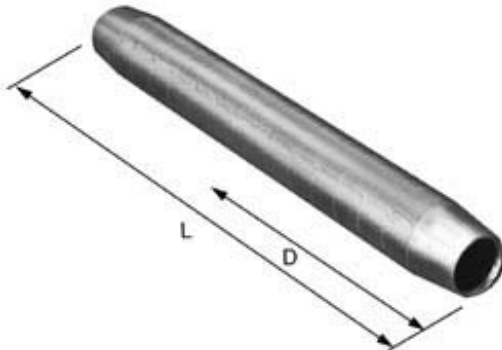

Partial Tension VersaCrimp Aluminum Compression Splice

Product Specifications

Splice Type



**VERSA-CRIMP®
Compression Splices**

(For use with
VersaCrimp and other
Dieless Type Tools)

Versacrimp Compression Series



**VCJS-R Series
Compression Splice
VERSA-CRIMP®
Partial Tension
AAC or AAAC Conductor**

PDF Catalog Page

[Click HERE to view the web page.](#)

VersaCrimp Conductor Size Minimum

0.184 in

VersaCrimp Conductor Size Maximum

0.325 in

Material

Aluminum

VersaCrimp Conductor Range

#6 (6/1) - #2 (7/1), (6/1) ACSR, #6 (7) - #2 (19,7) AAC

VersaCrimp Conductor Minimum

.184 in

VersaCrimp Conductor Maximum

.325 in

Dimension D

2.25 in (57 mm)

Dimension L

4.62 in (118 mm)

Length before Compression

4.62 in (118 mm)

Compression Method

VC6 (all), VersaCrimp Tooling ONLY

UL Listed	No
Inhibitor Loaded	Yes
Material Type	Non-Standard
UPC Code	09635933674
Standard Package	25
Standard Package Unit	Each
Min Order Qty	25
Weight / Ea.	0.098 lbs

Notes

For AL, compact, 5005, 6201 and ACAR partial tension (40% rating) conductor jumper splicing.

Features

For use with VC6 (all) tools.

Compressed Product Number

VCJS36R

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.