



[Catalog Home](#)



Product Datasheet

ANDERSON FARGO

BSC100N -- Deadend





Product Specifications

<p>Category Image</p>	 <p>Bolted Deadends Aluminum & Bronze Straight Line Aluminum & Copper Conductor</p>
<p>Series Image (Bolted)</p>	 <p>BSC/BSCG Series Straight Line Dead End Bolted, Bronze Copper & Copperweld® Conductor</p>
<p>PDF Catalog Page</p>	<p>Click HERE to view the web page.</p>
<p>Fitting Type</p>	<p>None</p>
<p>Style</p>	<p>BSC - Deanend, Straight line, Straight Seat</p>
<p>Type</p>	<p>Bolted</p>
<p>Material</p>	<p>Bronze</p>
<p>Fitting Catalog No.</p>	<p>NONE</p>
<p>Ultimate Body Strength</p>	<p>10,000 lb (4,536 kg)</p>
<p>U-Bolts</p>	<p>3</p>
<p>Bolt Size</p>	<p>.50 in (12.70 mm)</p>
<p>Dimension L</p>	<p>13.13 in (333.38 mm)</p>
<p>Dimension W</p>	<p>.81 in (20.64 mm)</p>
<p>Conductor Range Minimum - Maximum</p>	<p>Cu 500 kcmil (19) Thru Cu 1000 kcmil (61)</p>
<p>Minimum Conductor Diameter</p>	<p>0.81</p>
<p>Maximum Conductor Diameter</p>	<p>1.25</p>
<p>Weight / Ea.</p>	<p>6.76 lbs</p>
<p>Standard Package</p>	<p>6</p>
<p>UPC Code</p>	<p>09635929259</p>

Compressed Product Number

BSC100N

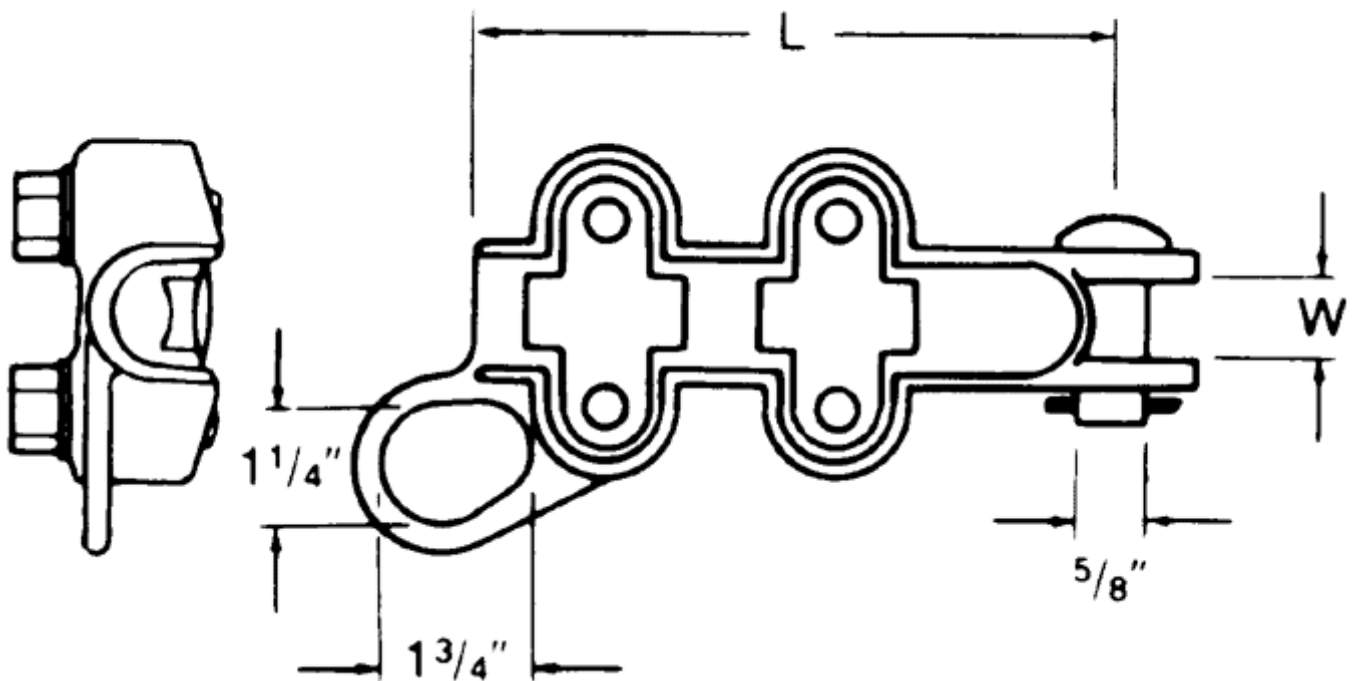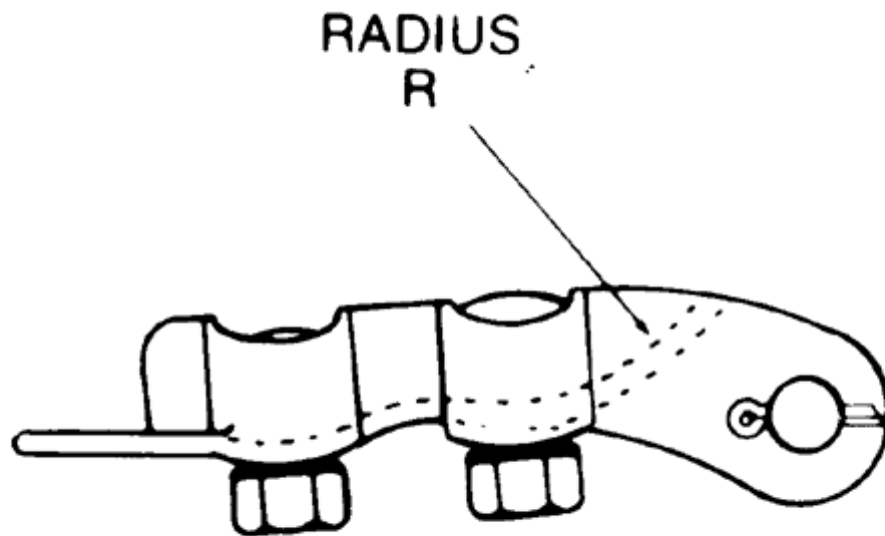

Dimensions

[Catalog Home](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.