




Product Datasheet

ANDERSON FARGO


VCJS50R -- Partial Tension Compression Splice

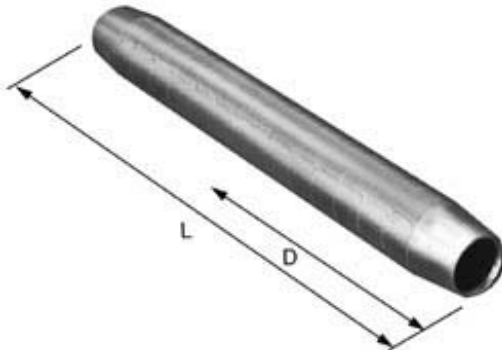

Partial Tension VersaCrimp Aluminum Compression Splice

Product Specifications

Splice Type



VERSA-CRIMP®
Compression Splices
(For use with
VersaCrimp and other
Dieless Type Tools)

Versacrimp Compression Series



VCJS-R Series
Compression Splice
VERSA-CRIMP®
Partial Tension
AAC or AAAC Conductor

PDF Catalog Page

[Click HERE to view the web page.](#)

VersaCrimp Conductor Size Minimum

0.292 in

VersaCrimp Conductor Size Maximum

0.447 in

Material

Aluminum

VersaCrimp Conductor Range

#2 (19,7) - 2/0 (19,7) AAC, #2 (7/1, 6/1) - 2/0 (6/1) ACSR

VersaCrimp Conductor Minimum

.292 in

VersaCrimp Conductor Maximum

.447 in

Dimension D

2.94 in (75 mm)

Dimension L

6.00 in (152 mm)

Length before Compression

6.0 in (152 mm)

Compression Method

VC6 (all), VersaCrimp Tooling ONLY

UL Listed	No
Inhibitor Loaded	Yes
Material Type	Non-Standard
UPC Code	09635933675
Standard Package	25
Standard Package Unit	Each
Min Order Qty	25
Weight / Ea.	0.294 lbs

Notes

For AL, compact, 5005, 6201 and ACAR partial tension (40% rating) conductor jumper splicing.

Features

For use with VC6 (all) tools.

Compressed Product Number

VCJS50R

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.