

3771

Brand Features

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

Item Description

50 Amp, 250 Volt DC/600 Volt AC, Non-NEMA, 2P, 3W, Black & White Locking Flush Mount Receptacle, Industrial Grade, Grounding - BLACK



Color:  Black

UPC Code: 07847780438

Country Of Origin: Mexico

NEMA:
Non-NEMA



Technical Information

Electrical Specifications

Dielectric Voltage: Withstands 2000V per UL498

Current Limiting: Full Rated Current

Temperature Rise: Max 30°C temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

Grounding: Grounding

Amperage: 50 A

Voltage: 250 VAC

Pole: 2

Wire: 3

Dielectric Voltage Withstand: 2000V minimum per UL 498

Maximum Working Voltage: 250V DC/600V AC as rated

Current Interrupting: Certified for current interrupting at full rated current

Environmental Specifications

Flammability: Rated V-0 per UL 94

Operating Temperature: -40°C to 75°C

Environment: Dry

Material Specifications

Face Material: Nylon

Base Material: Nylon

Line Contacts: Brass

Terminal Screws: Brass

Grounding Screw: Brass

Yoke: Brass

Clamp Nuts: Brass

Face Module: Reinforced Nylon

Body & Contract Carrier: Reinforced Nylon

Shroud: .062inch thick Nickel Plated Steel

Back Cover: Reinforced Nylon

Mounting Strap: Single piece SS 302/304

Mounting Screws: SS 302/304

Assembly Rivets: SS 302/304

Connector Contact - Spring: 0.041inch thick Brass

Connector Contact - Binding Plate: 0.100inch thick Brass

Contact Rivet: Brass

Box Terminal: 0.062inch thick Copper

Terminal Set Screw: SS 302/304

Color: Black

Mechanical Specifications

Terminal ID: X, W, Y, Z and Green for ground

Terminal Accom.: #10min to #6max AWG Solid or Stranded Wire (Stranded Wire for Ground only)

Product ID: Ratings and Catalogue No. molded into face

Product Features

Termination: Back & Side

Face Material: Nylon

Base Material: Nylon

NEMA: Non-NEMA

Strap Material: Brass

Standards and Certifications: UL

Warranty: Lifetime Limited

Color: Black

Device Type: Locking Receptacle

Brand: Black and White

Standards and Certifications

NEMA: WD-6

ANSI: C-73

UL498: File E13399

UL Fed Spec WC-596: File E13399



CSA C22.2 No. 42: File 152105

UL 498: File E13399

NOM: 057

RoHS: Compliant

Warranty: Lifetime Limited

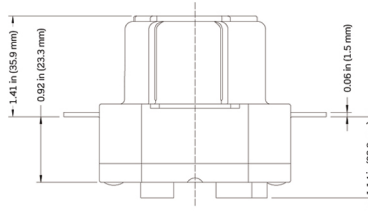

SPECIFICATION SUBMITTAL

| | | | |
|----------------------|--|----------------------|----------------------|
| JOB NAME: | | CATALOG NUMBERS: | |
| <input type="text"/> | | <input type="text"/> | <input type="text"/> |
| JOB NUMBER: | | <input type="text"/> | <input type="text"/> |

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

