

## 3769

### Brand Features

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

### Item Description

50 Amp, 250 Volt DC/600 Volt AC, Non-NEMA, 3P, 4W, Black & White Locking Flush Mount Receptacle, Industrial Grade, Grounding - BLACK



Color:  Black

UPC Code: 07847780444

Country Of Origin: Mexico

NEMA:  
Non-NEMA



## Technical Information

### Electrical Specifications

**Dielectric Voltage:** Withstands 2000V per UL498

**Current Limiting:** Full Rated Current

**Temperature Rise:** Max 30°C temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

**Grounding:** Grounding

**Amperage:** 50 A

**Voltage:** 250 VAC

**Pole:** 3

**Wire:** 4

**Dielectric Voltage Withstand:** 2000V minimum per UL 498

**Maximum Working Voltage:** 250V DC/600V AC as rated

**Current Interrupting:** Certified for current interrupting at full rated current

### Environmental Specifications

**Flammability:** Rated V-0 per UL 94

**Operating Temperature:** -40°C to 75°C

**Environment:** Dry

### Material Specifications

**Face Material:** Nylon

**Base Material:** Nylon

**Line Contacts:** Brass

**Terminal Screws:** Brass

**Grounding Screw:** Brass

**Yoke:** Brass

**Clamp Nuts:** Brass

**Face Module:** Reinforced Nylon

**Body & Contract Carrier:** Reinforced Nylon

**Shroud:** .062inch thick Nickel Plated Steel

**Back Cover:** Reinforced Nylon

**Mounting Strap:** Single piece SS 302/304

**Mounting Screws:** SS 302/304

**Assembly Rivets:** SS 302/304

**Connector Contact - Spring:** 0.041inch thick Brass

**Connector Contact - Binding Plate:** 0.100inch thick Brass

**Contact Rivet:** Brass

**Box Terminal:** 0.062inch thick Copper

**Terminal Set Screw:** SS 302/304

**Color:** Black

### Mechanical Specifications

**Terminal ID:** X, W, Y, Z and Green for ground

**Terminal Accom.:** #10min to #6max AWG Solid or Stranded Wire (Stranded Wire for Ground only)

**Product ID:** Ratings and Catalogue No. molded into face

### Product Features

**Termination:** Back & Side

**Face Material:** Nylon

**Base Material:** Nylon

**NEMA:** Non-NEMA

**Strap Material:** Nickel-Plated Brass

**Standards and Certifications:** UL

**Warranty:** Lifetime Limited

**Color:** Black

**Device Type:** Locking Receptacle

**Brand:** Black and White

### Standards and Certifications

**NEMA:** WD-6

**ANSI:** C-73

**UL498:** File E13399

**UL Fed Spec WC-596:** File E13399



**CSA C22.2 No. 42:** File 152105

**UL 498:** File E13399

**NOM:** 057

**RoHS:** Compliant

**Warranty:** Lifetime Limited

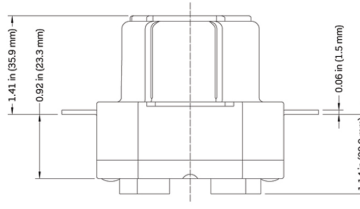

**SPECIFICATION SUBMITTAL**

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

