

# Aluminum Multi-Tap Adaptor Lugs Dual Rated - (Pole Type Transformer Lugs)

## TYPE PTT

### Features

- Connector manufactured from high strength 6061-T6 aluminum alloy
- Stud manufactured from electrolytic pure copper rod
- Two conductor ports
- Range taking
- Left or Right handed
- Clear Plated

### Benefits

- Suitable for use with either copper or aluminum conductors
- Provides maximum conductivity and can be used on equipment with copper or aluminum connectors
- Allows parallel conductors to be connected to equipment supplied with single conductor terminals
- A wide range of conductor sizes can be used in each connector
- Provides ease of installation
- Provides low contact resistance

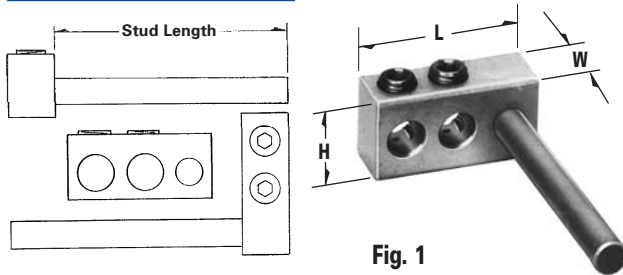


Fig. 1

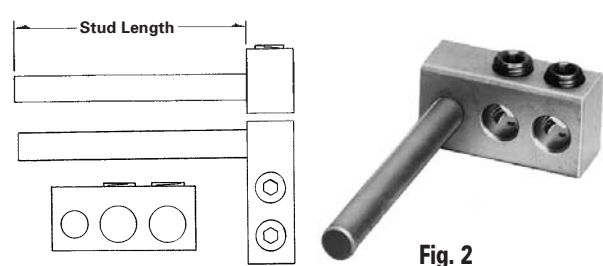


Fig. 2

| Catalog Number | Figure Number | Wire Range  | Number of Conductors | Copper Stud Diameter | Stud Length | Hex Size | Dimensions |      |      | Recommended Torque-Inch Lbs. |
|----------------|---------------|-------------|----------------------|----------------------|-------------|----------|------------|------|------|------------------------------|
|                |               |             |                      |                      |             |          | L          | W    | H    |                              |
| PTT-2R-0-Z     | 1             | 1/0-14      | 2                    | 3/8                  | 3"          | 3/16     | 1.87       | .75  | 1.00 | 200                          |
| PTT-2L-0-Z     | 2             | 1/0-14      | 2                    | 3/8                  | 3"          | 3/16     | 1.87       | .75  | 1.00 | 200                          |
| PTT-2R-250-Z   | 1             | 250kcmil-10 | 2                    | 1/2                  | 4"          | 5/16     | 2.39       | .90  | 1.12 | 300                          |
| PTT-2L-250-Z   | 2             | 250kcmil-10 | 2                    | 1/2                  | 4"          | 5/16     | 2.39       | .90  | 1.12 | 300                          |
| PTT-2R-350-Z   | 1             | 350kcmil-10 | 2                    | 5/8                  | 4"          | 5/16     | 3.25       | 1.25 | 1.25 | 350                          |
| PTT-2L-350-Z   | 2             | 350kcmil-10 | 2                    | 5/8                  | 4"          | 5/16     | 3.25       | 1.25 | 1.25 | 350                          |

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)  
DE-OX Inhibitor is recommended for all aluminum terminations.

