


KNOCKOUTS							
SYMBOL	A	B	C	D	E	F	G
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

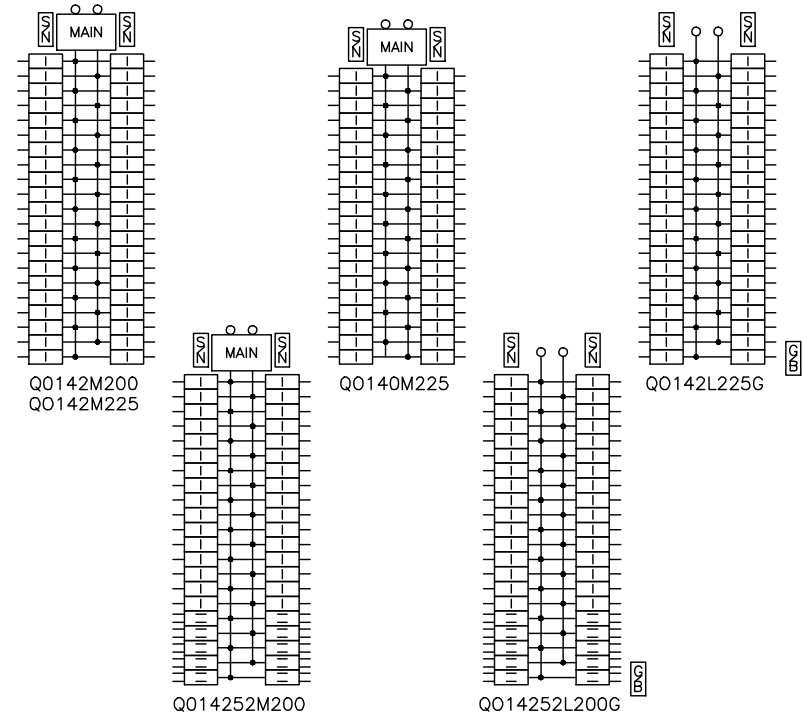

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBER	MAXIMUM SYSTEM VOLTAGE	MAINS AMPERE RATING	SPACES	MAXIMUM NUMBER OF SINGLE POLE CIRCUITS	MAIN WIRE SIZE AWG AL/CU
Q0140M225	120/240VAC 1Ø 3W	225	40	40	#4-300
Q0142L225G		225	42	42	
Q0142M200		200	42	42	#4-300
Q0142M225		225	42	42	#4-300
Q014252L200G		200	42	52	#4-300
Q014252M200		200	42	42	52

NOTES:
FINISH - GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.
UL LISTED - FILE E-6294
NEUTRALS - INSULATED, GROUNDABLE.
LOAD CENTERS WITH "G" IN CATALOG NUMBER INCLUDE A FIELD INSTALLABLE EQUIPMENT GROUND BAR KIT.

QP LOAD CENTERS
GENERAL PURPOSE NEMA TYPE 1 ENCLOSURE
INDOOR



DWG# 3009
NO.