
-NOTES-

- HOT DIP GALVANIZED PER ASTM A-153. LEAD AND EXTENSION SECTION LENGTHS ARE NOMINAL, EXPECT SOME MINOR VARIANCE, CLEVIS BOLTS, 1° DIAMETER X 5° LONG HEX HEAD PER SAE J429 GRADE 2. MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY
- CONTROL FOR ALL MATERIALS AND MANUFACTURING PROCESSES.
 ALL WELDING TO BE DONE BY VELDERS CERTIFIED UNDER SECTION 5
- OF THE AWS CODE D1. 1.
- ADD USA SUFFIX TO CATALOG NUMBER FOR BUY AMERICA ITEMS. PURCHASERS OF BUY AMERICA ITEMS WILL BE PROVIDED A DATED CERTIFICATE OF COMPLIANCE TO SPECIFIC BUY AMERICA PROVISION IF REQUESTED AT THE TIME OF ORDER, CONTACT HUBBELL POWER SYSTEMS CUSTOMER SERVICE FOR DETAILS,

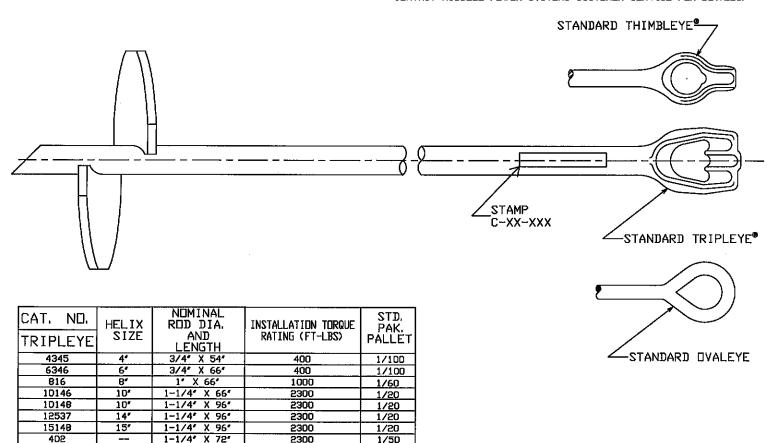

1/25

CATALOG NUMBERS 4345, 6346, AND 816 MAY BE ORDERED WITH A FORGED THIMBLEYE ROD AND OVAALEYE RATHER THAN THE STANDARD TRIPLEYE. TO ORDER A THIMBLEYE ROD SIMPLY ADD "1" TO THE SUFFIX OF THE CATALOG NUMBER. EXAMPLE CATALOG NO. 63461, TO ORDER A DVALEYE ROD SIMPLY ADD "OR" TO THE SUFFIX OF THE CATALOG NUMBER. EXAMPLE: CATALOG NO. 8160R. STAMP INFORMATION C DENOTES CHANCE, 'XX' DENOTES HELIX DIA, 'XXX' DENOTES NOMINAL ROD LENGTH EXAMPLE: C-10-66 FOR CAT, NO. 10146

1" X 66"

T108-0054

8"

CHANCE. NO WRENCH SCREW ANCHOR & EXTENSION C |SA4345 SEE CHART DO NOT BOALE DRY BY DUALLS DAYE 11/18/87 SHEET 1 DF 1