



[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

GD409AZ -- Aluminum Automatic Dead End



Aluminum Automatic Dead End, AAC, AAAC, ACSR Conductor .505 - .563" (12.83 -15.11 mm), Z Bail

Product Specifications

Category Image



Automatic Deadends

Copper and Aluminum
AAC, AAAC, ACAR, ACSR,
Copper & Copperweld®
Conductor

Series Image (Automatic)



GD-44Z Series

Automatic Dead End

Z Bail

**AAC, AAAC & ACSR
Conductor**

PDF Catalog Page

[Click HERE to view the web page.](#)

Bail Option

Z Bail

Type

Automatic

Material

Aluminum

Inhibitor Loaded

Yes

Shell Material

High Strength Aluminum Alloy

Bail Material

Stainless Steel

Clevis Pin Material

Galvanized Steel

Cotter Pin Material

Stainless Steel

Assembly Rating (Ultimate)

95% Conductor RBS

Dimension A

17.2 in

Dimension B

9 in

Diameter Range

.505 - .563 in (12.83 - 15.11 mm)

Color Code

Pink

Conductor Range Minimum - Maximum

AAC 4/0 str (7) Thru AAC 4/0 str (19)
ACSR 134.6 kcmil (12/7) Thru ACSR 4/0 (6/1)

Minimum Conductor Diameter

0.505


Maximum Conductor Diameter

0.563

Weight / Ea.	1.37 lbs
Standard Package	10
UPC Code	09635930880

Compressed Product Number

GD409AZ

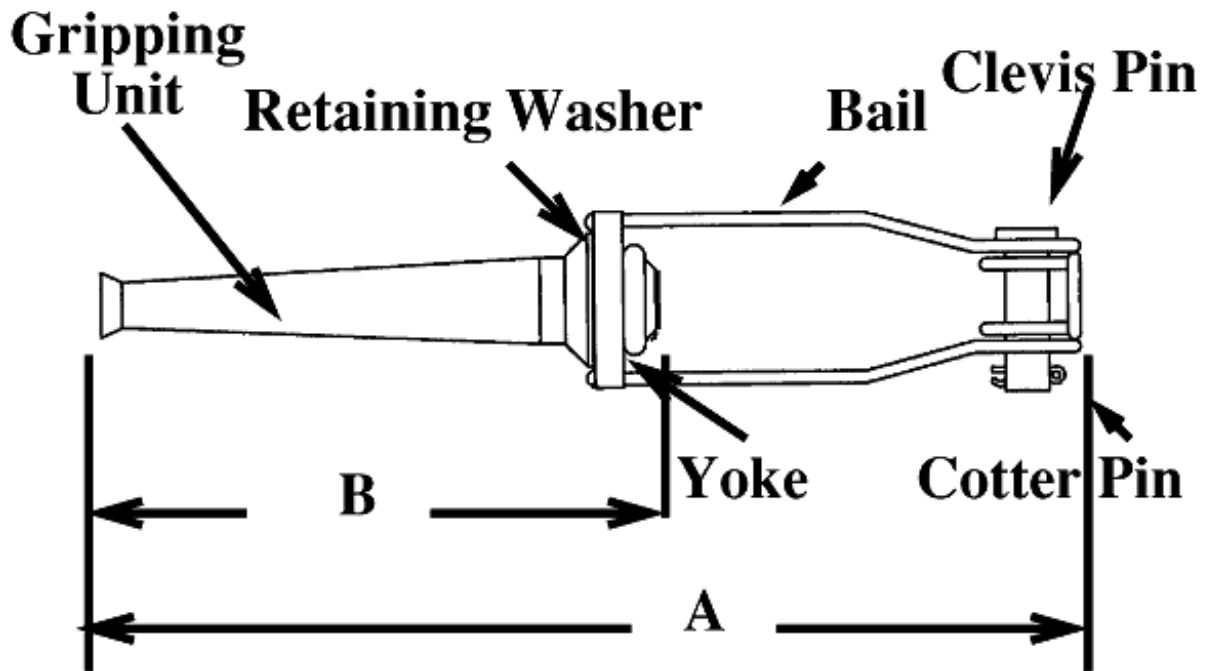

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.